ELMARK HOLDING SE



CATALOGUE 2021

7 YEARS WARRANTY

ELMARK®

The Brand of Electricity



EUROPEAN MANUFACTURER

DIVERSIFIED PORTFOLIO

INTERNATIONAL INSURANCE

CERTIFIED QUALITY

WHAT MAKES US DIFFERENT?

ELMARK is European trusted brand for LV electrical automation and supplies, indoor and outdoor luminaires. Our diversified portfolio offers an effective path to fast growth, we answer to our existing customers' needs and at the same time we have the opportunity to establish new markets. We have more than 20 years of experience in providing high performance solutions across a range of different sectors such as residential, hospitality and recreation, office, industry, road and cityscape.

Our well-balanced portfolio ensures excellent market coverage with outstanding quality. We have built trust and creditability with our partners as ELMARK enjoys the recognition of INTERTEK for safe and reliable products, manufactured in accordance with the European safety requirements and quality standards.

ELMARK showcases and maintains product safety and performance, we provide 7 years worldwide warranty as confidence in our production quality.

For more than 15 years partnership with ALLIANZ, Germany we do not have a single claim for the International insurance which guarantees coverage of damages that may occur as a result of any act or omission relating to ELMARK products. We always stay in tune with the environment, safety standards and comfort demand.

Our research and development department currently works on new features and technologies important for the future, that will generate benefits to all our partners, such as smart buildings solutions tailored to clients personal needs and comfort. We constantly develop our product portfolio into a meaningful, differentiated and winning asset. Thanks to continuous improvement and developments we successfully leverage our core competences of lighting and electrical under one roof.

2000 — ELMARK Brand was born

2002 — Dynamic expansion on Bulgarian market

2003 — NEW company in ROMANIA

2004 — Starts production of Low Voltage Electrical Equipment



PRODUCTION FACILITIES

ELMARK Production Complex consists of a manufacturing plant and testing centres for both low- voltage electrical and lighting solutions. We successfully combine automated technology with experience to meet quality highest standards, ensure high efficiency and add value to our clients.

The Complex together with the adjacent warehouse facilities occupy a total area of 10,000 m2, strategically located in Bulgaria, nearby the Black Sea where it benefits from its proximity to major transport links and direct access to European market.

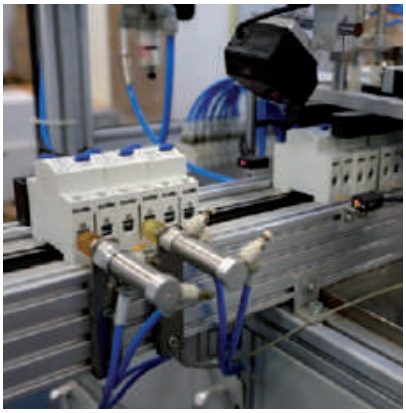



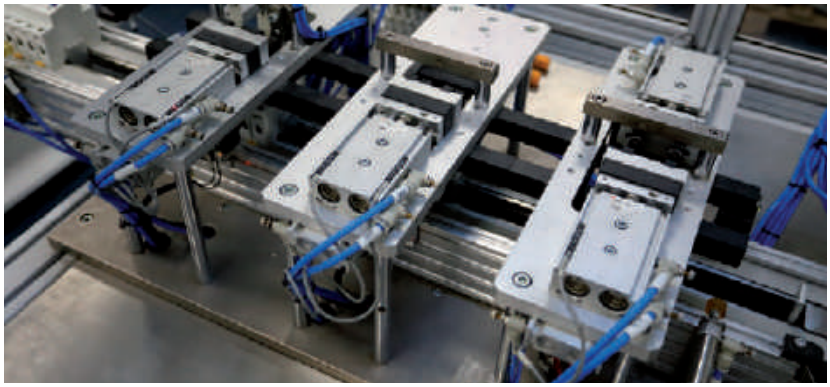

2005	2006	2007	2008	2009
NEW company in SERBIA	ELMARK Holding AD has been established	Moves to a new Headquarter of 3500 sq.m	NEW Logistic centre of 5000 sq.m	NEW company in CROATIA

HEADQUARTER



COMMERCIAL BENEFITS

ELMARK offers its customers unrivalled combination of products at competitive prices.

We are proud with our widespread international network of highly-valued business partners in over 50 countries. Understanding our clients' requirements stays at the centre of our business cooperation. We apply proven industry and market concepts and training for both business-to-business and business-to-consumer companies.

We focus to build strong and lasting relationships and maintain friendly communication with our partners. All of our customers are provided with a dedicated account manager to deliver the highest level of customer service.

- PROFIT MIX
- TRAINING
- MARKETING SUPPORT
- DEDICATED ACCOUNT MANAGER
- AFTERSALES SUPPORT
- LONG TERM PARTNERSHIP

2010	2011	2012	2013	2014
NEW Production line for LED Lighting	NEW company in GREECE and BOSNIA AND HERZEGOVINA	NEW company in HUNGARY	Intertek: S Mark NEW Automatic Testing Equipment for LV & Lighting Lab	NEW company in SLOVENIA

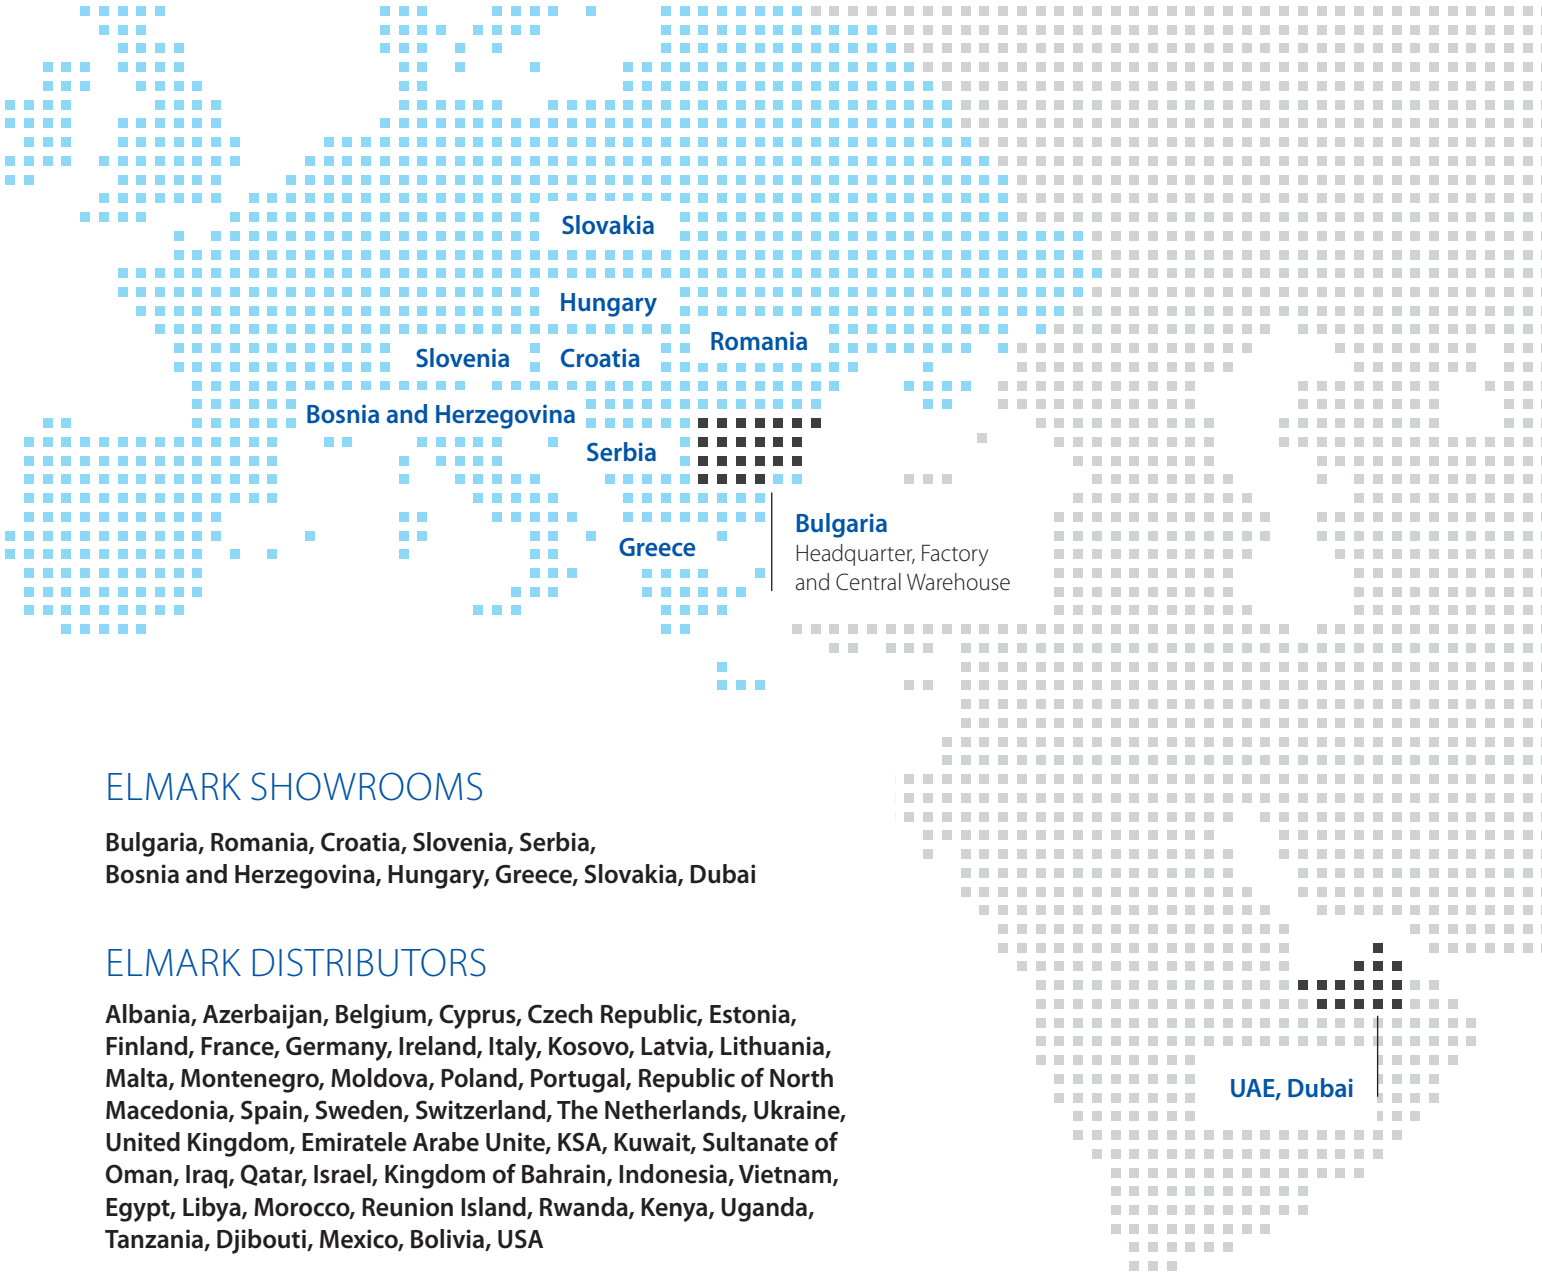

ELMARK SHOWROOMS

Bulgaria, Romania, Croatia, Slovenia, Serbia, Bosnia and Herzegovina, Hungary, Greece, Slovakia, Dubai

ELMARK DISTRIBUTORS

Albania, Azerbaijan, Belgium, Cyprus, Czech Republic, Estonia, Finland, France, Germany, Ireland, Italy, Kosovo, Latvia, Lithuania, Malta, Montenegro, Moldova, Poland, Portugal, Republic of North Macedonia, Spain, Sweden, Switzerland, The Netherlands, Ukraine, United Kingdom, Emiratele Arabe Unite, KSA, Kuwait, Sultanate of Oman, Iraq, Qatar, Israel, Kingdom of Bahrain, Indonesia, Vietnam, Egypt, Libya, Morocco, Reunion Island, Rwanda, Kenya, Uganda, Tanzania, Djibouti, Mexico, Bolivia, USA

OUR VISION

ELMARK aims to be your trusted partner that offers the balance of high quality, efficiency and comfort.

MISSION

ELMARK is focused to ensure high reliability and cost effective solutions to all consumers. We keep improving our components and products, productivity, quality control, added value, and cost reduction in order to offer market-aligned solutions worldwide.

OUR VALUES

Ethical / Respectful / Team Player / Dedicated / Caring / Sustainable / Flexible

2015 — Middle East-Sales and Logistics Branch and Test Centre in Dubai Silicon Oasis, UAE

2016 — NEW company in SLOVAKIA

2017 — NEW product line Decorative Lighting

2018 — Building Second Logistic Centre of 4000 sq.m, Retail Franchise

2018 — ELMARK DIGITAL, E-Business Platform, Mobile Application, Check & Order System

TECHNICAL SUPPORT AND CONSULTING

We operate from 10 different locations across the globe to ensure flexible approach to every project worldwide. Our experienced engineers and advisors have a proven ability to provide technical expertise on different projects from small private clients to large-scale market centres. We ensure viable and sustainable product solutions as well as clear and useful advice.

Our ELMARK library offers a variety of technical documents to provide guidance on standards, safety, usage and installation. Each product dossier contains certificates, Data Sheet with product specification, test reports, Photometric Data (IES) Files that help professionals select products and systems that are most appropriate for their requirements.



LOGISTICS AND SUPPLY CHAIN

Successful inventory management plays a key role for our growth strategy. ELMARK keeps in stock more than 10 000 finished products to answer customer demand and reduce the lead time. Our customized ERP, WMS and digital business solutions increase our organization productivity and visibility at all levels. Flexibility and cost-effective operations helps us increase speed, improve competitiveness and maintain customer satisfaction. ELMARK fleet of vehicles and trusted logistic partners provide fast and reliable delivery solutions.



FLEXIBLE SUPPLY CHAIN

STOCK AVAILABILITIES

MOBILE CHECK & ORDER APP

ECOMMERCE DATABASE

EXTENDED WARRANTY UP TO 7 YEARS

The production of ELMARK products is closely supervised by qualified engineers to guarantee high quality level. We warrant that our products are manufactured in accordance with all applicable European standards and are free from defects in materials and workmanship.

We are proud with **ALLIANZ GERMANY** recognition for the lack of claims for **15 consecutive years** in regard of insurance "Product liability" for **1 500 000 EUR**. ELMARK guarantees professional production and products durability and offers its clients the possibility to receive an Extended Warranty for all ELMARK products that have been purchased.

Extended warranty package:

- total **7 years full warranty** for products in **Automation**
- total **5 years full warranty** for products in **Electrical materials**
- total **5 years full warranty** for products in **LED Lighting**
- total **5 years full warranty** for products in **Decor lighting**



Register your purchase *at www.elmarkholding.eu and get up to* ***7 years extended warranty*** *for ELMARK products.*



For more information read the General Terms and Conditions

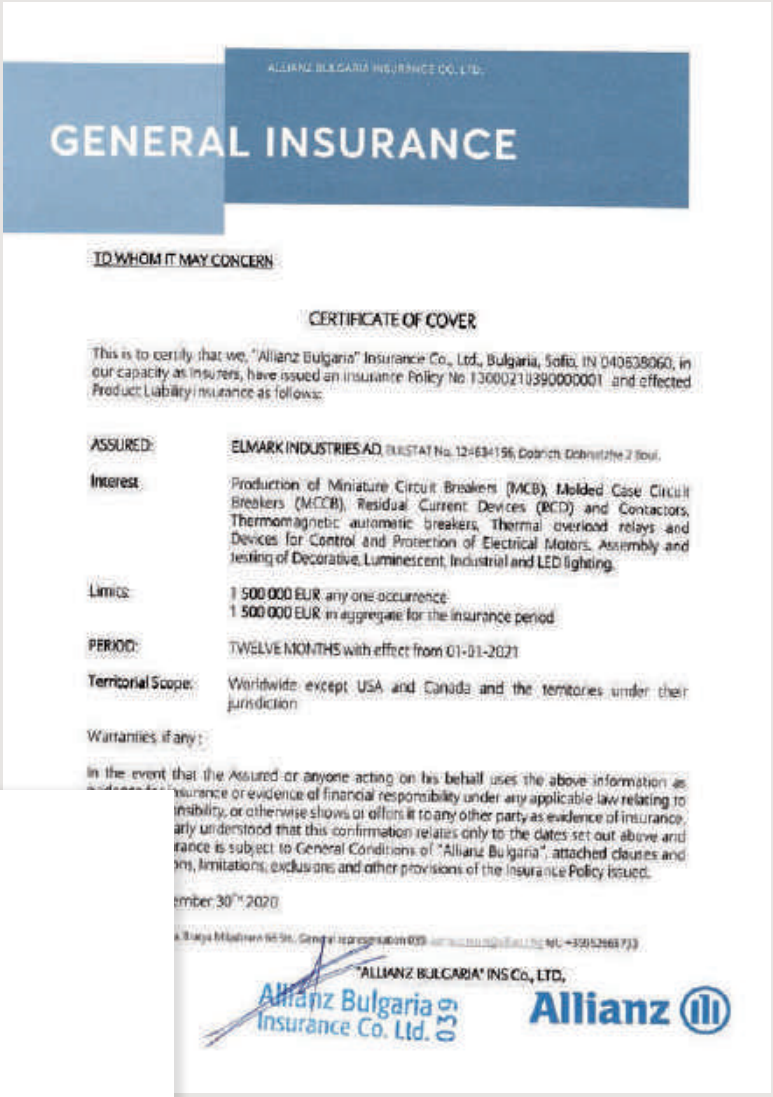

ALLIANZ BULGARIA INSURANCE CO. LTD.

GENERAL INSURANCE

TO WHOM IT MAY CONCERN

CERTIFICATE OF COVER

This is to certify that we, "Allianz Bulgaria" Insurance Co., Ltd., Bulgaria, Sofia, IN 040638060, in our capacity as insurers, have issued an insurance Policy No 1300021039000000001 and effected Product Liability insurance as follows:

ASSURED:	ELMARK INDUSTRIES AD, BULSTAT No. 124634156, Dobrich, Dobrichka 2 Boul.
Interest:	Production of Miniature Circuit Breakers (MCB), Molded Case Circuit Breakers (MCCB), Residual Current Devices (RCD) and Contactors, Thermomagnetic automatic breakers, Thermal overload relays and Devices for Control and Protection of Electrical Motors. Assembly and testing of Decorative, Luminescent, Industrial and LED lighting.
Limits:	1 500 000 EUR any one occurrence 1 500 000 EUR in aggregate for the insurance period
PERIOD:	TWELVE MONTHS with effect from 01-01-2021
Territorial Scope:	Worldwide except USA and Canada and the territories under their jurisdiction

Warranties if any:

In the event that the Assured or anyone acting on his behalf uses the above information as [illegible] insurance or evidence of financial responsibility under any applicable law relating to [illegible] insibility, or otherwise shows or offers it to any other party as evidence of insurance, [illegible] arly understood that this confirmation relates only to the dates set out above and [illegible] rance is subject to General Conditions of "Allianz Bulgaria", attached clauses and [illegible] ons, limitations, exclusions and other provisions of the Insurance Policy issued.

[illegible] mber 30th 2020

[illegible]

"ALLIANZ BULGARIA" INS Co., LTD.

Allianz Bulgaria Insurance Co. Ltd.

Allianz

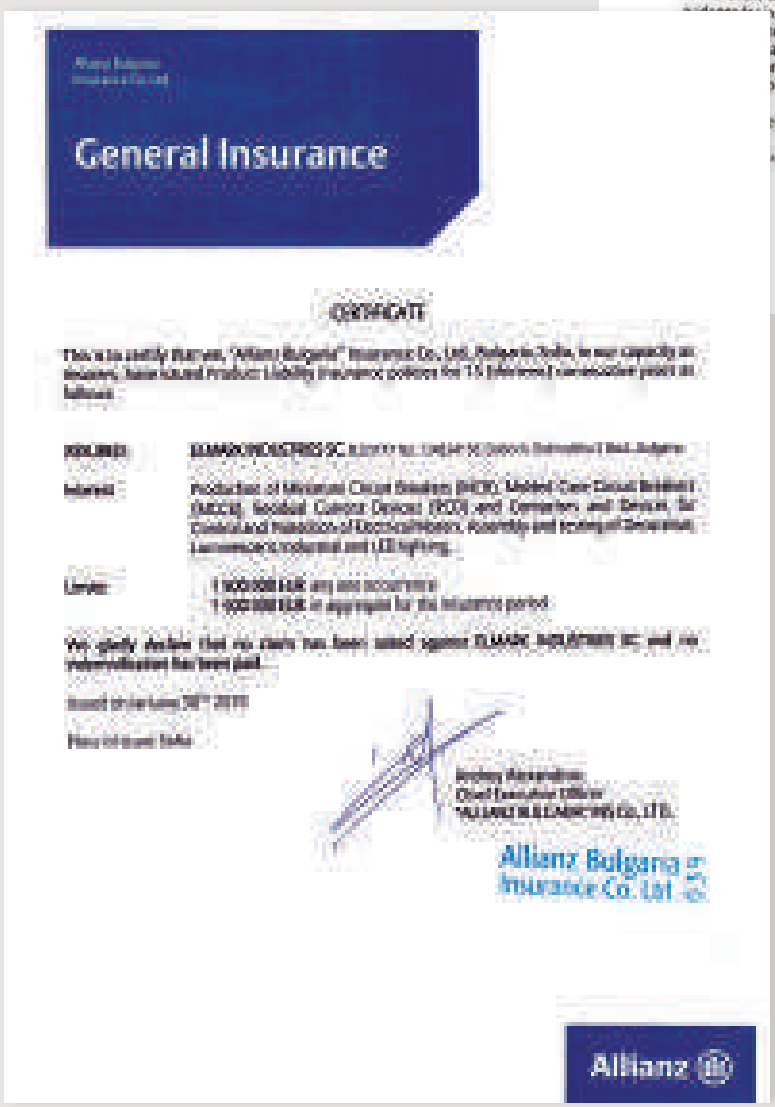

General Insurance

CERTIFICATE

This is to certify that we, "Allianz Bulgaria" Insurance Co., Ltd., Bulgaria, Sofia, in our capacity as insurers, have issued Product Liability insurance policies for 14 [illegible] consecutive years as follows:

ASSURED:	ELMARK INDUSTRIES SC, [illegible]
Interest:	Production of Miniature Circuit Breakers (MCB), Molded Case Circuit Breakers (MCCB), Residual Current Devices (RCD) and Contactors, and Devices for Control and Protection of Electrical Motors. Assembly and testing of Decorative, Luminescent, Industrial and LED lighting.
Limits:	[illegible] any one occurrence [illegible] in aggregate for the insurance period

We gladly declare that no claim has been raised against ELMARK INDUSTRIES SC and no indemnification has been paid.

Issued on the [illegible] 2019

Place of issue: Sofia

[illegible]
Chief Executive Officer
"ALLIANZ BULGARIA" INS Co., LTD.

Allianz Bulgaria Insurance Co. Ltd.

Allianz

Allianz Bulgaria Insurance Co. Ltd. declares that no claim has been raised against ELMARK INDUSTRIES SC and no indemnification has been paid for 14 consecutive years.


Bureau Veritas Certification
ELMARK INDUSTRIES AD
ISO 9001:2015

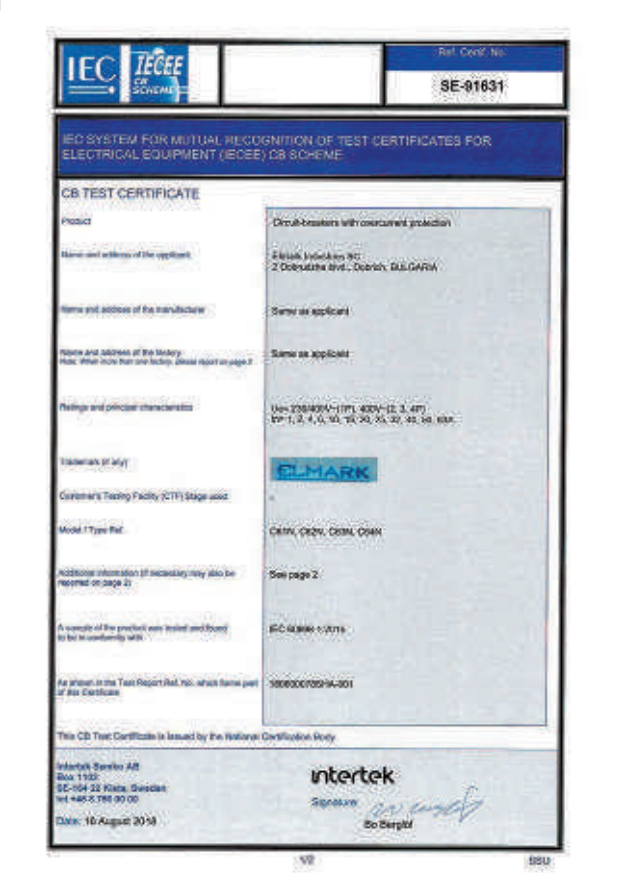

IEC IECEE CB SCHEME

Ref. Certif. No.
SE-91631

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	Circuit-breakers with overcurrent protection
Name and address of the applicant	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
Name and address of the manufacturer	Same as applicant
Name and address of the factory Note: When more than one factory, please report on page 2	Same as applicant
Ratings and principal characteristics	Ue=230/400V~(1P), 400V~(2, 3, 4P) In= 1, 2, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Trademark (if any)	ELMARK
Customer's Testing Facility (CTF) Stage used	-
Model / Type Ref.	C61N, C62N, C63N, C64N
Additional information (if necessary may also be reported on page 2)	See page 2
A sample of the product was tested and found to be in conformity with	IEC 60898-1:2015
As shown in the Test Report Ref. No. which forms part of this Certificate	1808007859A-001

This CB Test Certificate is issued by the National Certification Body

Intertek Semko AB
Box 1103
SE-164 22 Kista, Sweden
tel +46 8 750 00 00

Date: 10 August 2018

intertek
Signature:
Bo Bergöf

V2 SSU

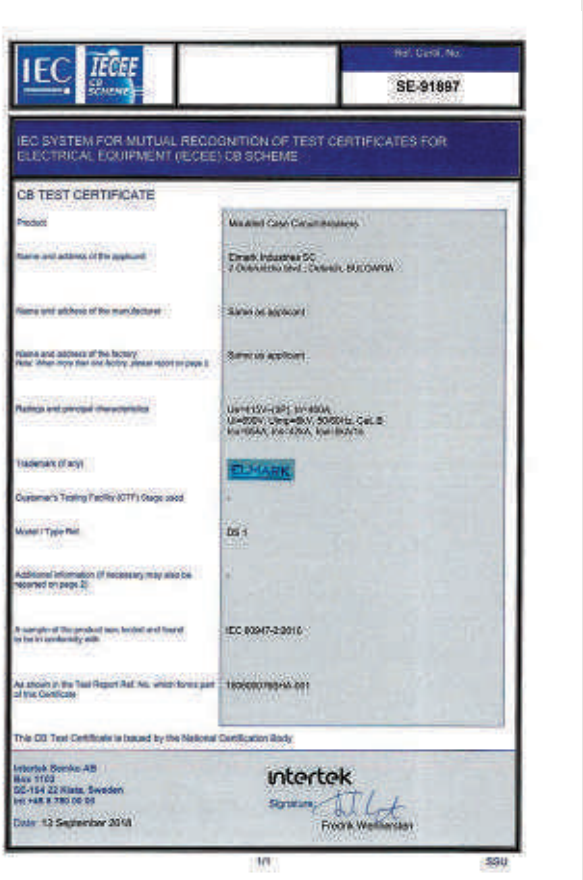

IEC IECEE CB SCHEME

Ref. Certif. No.
SE-91697

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	Moulded Case Circuit-Breakers
Name and address of the applicant	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
Name and address of the manufacturer	Same as applicant
Name and address of the factory Note: When more than one factory, please report on page 2	Same as applicant
Ratings and principal characteristics	Ue=415V~(3P), In=400A Ui=800V, Uimp=8kV, 50/60Hz, Cat. B Icu=85kA, Ics=42kA, Icw=8kA/1s
Trademark (if any)	ELMARK
Customer's Testing Facility (CTF) Stage used	-
Model / Type Ref.	DS 1
Additional information (if necessary may also be reported on page 2)	-
A sample of the product was tested and found to be in conformity with	IEC 60947-2:2016
As shown in the Test Report Ref. No. which forms part of this Certificate	1808007859A-001

This CB Test Certificate is issued by the National Certification Body

Intertek Semko AB
Box 1103
SE-164 22 Kista, Sweden
tel +46 8 750 00 00

Date: 13 September 2018

intertek
Signature:
Fredrik Wennerstam

1/1 SSU



Intertek

Certificate

Intertek for European Product Safety

Reference No. 1814406

Circuit-breakers with overcurrent protection

Type designation	C61N, C62N, C63N, C64N
Certificate holder	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
The product complies with the standard(s)	EN 60898-1:2003+A1+A11+A12 +A13
Date of expiry	10 August 2023
EU Directive information	According to the principle of presumption of conformity, this certificate constitutes support for an EC Declaration of Conformity and CE marking according to the Low Voltage Directive 2014/35/EU.

Additional information in Appendix

Certification Body	Intertek Semko AB, Product Certification	Place	Kista - Stockholm
Signed	Bo Bergöf	Date	10 August 2018 Page 1 of 3

This certificate is issued in accordance with the terms and conditions set out in the Appendix



Intertek

Certificate

Intertek for European Product Safety

Reference No. 1813947

Moulded Case Circuit-Breakers

Type designation	DS 1
Certificate holder	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
The product complies with the standard(s)	EN 60947-2:2017
Date of expiry	13 September 2023
EU Directive information	According to the principle of presumption of conformity, this certificate constitutes support for an EC Declaration of Conformity and CE marking according to the Low Voltage Directive 2014/35/EU.

Additional information in Appendix

Certification Body	Intertek Semko AB, Product Certification	Place	Kista - Stockholm
Signed	Fredrik Wennerstam	Date	13 September 2018 Page 1 of 3

This certificate is issued in accordance with the terms and conditions set out in the Appendix

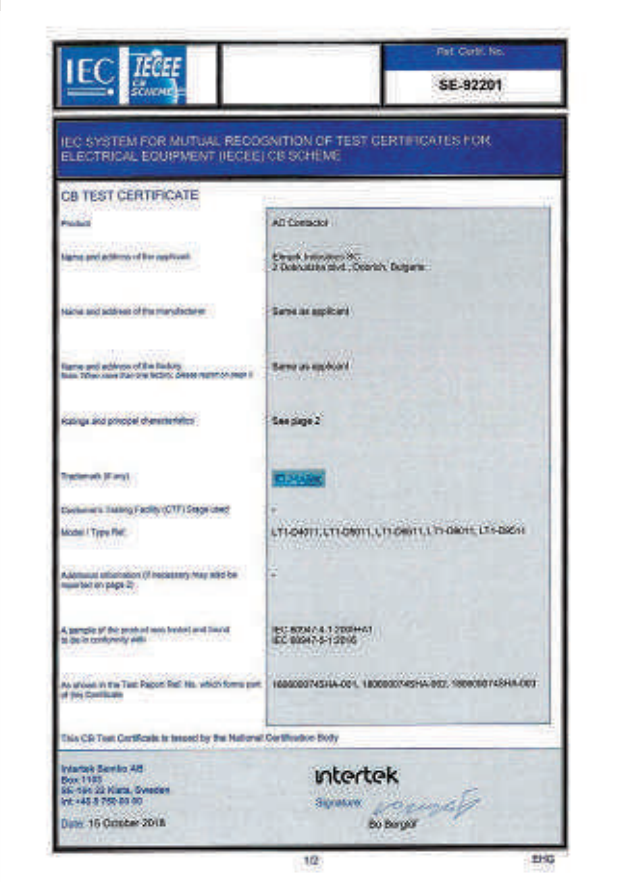

IEC IECEE CB SCHEME

Ref. Certif. No.
SE-92201

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	AC Contactor
Name and address of the applicant	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, Bulgaria
Name and address of the manufacturer	Same as applicant
Name and address of the factory	Same as applicant
Ratings and principal characteristics	See page 2
Trademark (if any)	ELMARK
Customer's Testing Facility (CTF) Stage used	-
Model / Type Ref.	LT1-D4011, LT1-D5011, LT1-D6511, LT1-D8011, LT1-D9511
Additional information (if necessary may also be reported on page 2)	-
A sample of the product was tested and found to be in conformity with	IEC 60947-4-1:2009+A1 IEC 60947-5-1:2016
As shown in the Test Report Ref. No. which forms part of this Certificate	1808000745HA-001, 1808000745HA-002, 1808000745HA-003

This CB Test Certificate is issued by the National Certification Body

Intertek Semko AB
Box 1103
SE-164 22 Kista, Sweden
tel: +46 8 750 00 00

intertek
Signature:
Bo Bergöf

Date: 15 October 2018

1/2 EHG

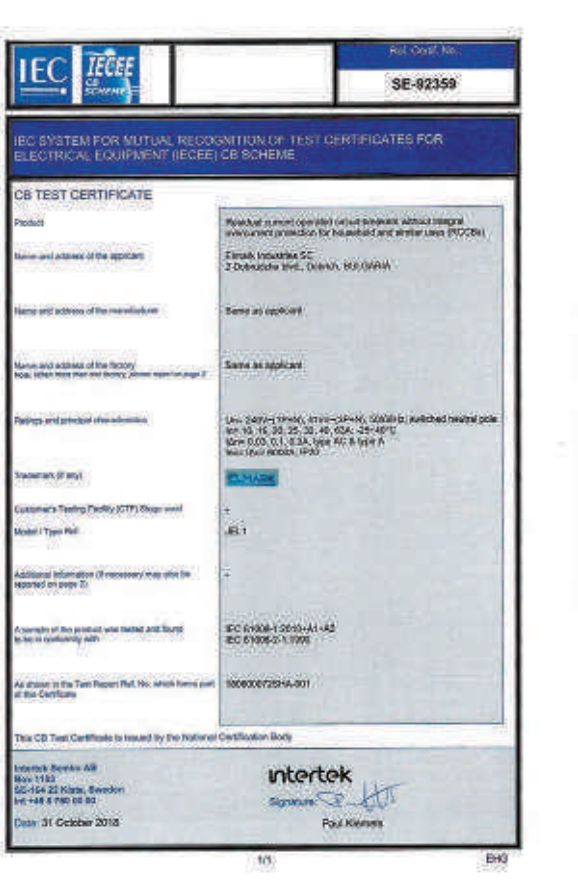

IEC IECEE CB SCHEME

Ref. Certif. No.
SE-92359

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

CB TEST CERTIFICATE

Product	Residual current operated circuit-breakers without integral overcurrent protection for household and similar uses (RCCBs)
Name and address of the applicant	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
Name and address of the manufacturer	Same as applicant
Name and address of the factory	Same as applicant
Ratings and principal characteristics	Un= 240V~(1P+N), 415V~(3P+N), 50/60Hz; switched neutral pole; In= 16, 25, 32, 40, 63A; -25/+40°C; Idn= 0.03, 0.1, 0.3A, type AC & type A; Imax (test) 6000A; IP20
Trademark (if any)	ELMARK
Customer's Testing Facility (CTF) Stage used	-
Model / Type Ref.	JEL1
Additional information (if necessary may also be reported on page 2)	-
A sample of the product was tested and found to be in conformity with	IEC 61008-1:2010+A1+A2 IEC 61008-2-1:1990
As shown in the Test Report Ref. No. which forms part of this Certificate	1808000725HA-001

This CB Test Certificate is issued by the National Certification Body

Intertek Semko AB
Box 1103
SE-164 22 Kista, Sweden
tel: +46 8 750 00 00

intertek
Signature:
Paul Klemes

Date: 31 October 2018

1/1 EHG



intertek
Total Quality Assured

Certificate

for European Product Safety

Intertek

Reference No.: 1817719

AC Contactor

Type designation	LT1-D4011, LT1-D5011, LT1-D6511, LT1-D8011, LT1-D9511
Certificate holder	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
The product complies with the standard(s)	EN 60947-4-1:2010+A1 EN 60947-5-1:2017
Date of expiry	15 October 2023
EU Directive information	According to the principle of presumption of conformity, this certificate constitutes support for an EC Declaration of Conformity and CE marking according to the Low Voltage Directive 2014/35/EU.

Additional information in Appendix.

Certification Body	Intertek Semko AB, Product Certification	Place	Kista - Stockholm
Signed	Bo Bergöf	Date	15 October 2018

Page 1 of 2

This certificate is issued in accordance with the terms and conditions set out in the Appendix.



intertek
Total Quality Assured

Certificate

for European Product Safety

Intertek

Reference No.: 1817803

Residual current operated circuit-breakers without integral overcurrent protection for household and similar uses (RCCBs)

Type designation	JEL1
Certificate holder	Elmark Industries SC 2 Dobrudzha blvd., Dobrich, BULGARIA
The product complies with the standard(s)	EN 61008-2-1:1994+A11 EN 61008-1:2012+A1+A2+A11+A12
Date of expiry	31 October 2023
EU Directive information	According to the principle of presumption of conformity, this certificate constitutes support for an EC Declaration of Conformity and CE marking according to the Low Voltage Directive 2014/35/EU.

Additional information in Appendix.

Certification Body	Intertek Semko AB, Product Certification	Place	Kista - Stockholm
Signed	Helen Gustafsson	Date	31 October 2018

Page 1 of 2

This certificate is issued in accordance with the terms and conditions set out in the Appendix.

AUTOMATION



C40N-4,5kA
MCB
PAGE 39



C60N-6kA
MCB
PAGE 45



C100L-10kA
MCB
PAGE 47



VOLTAGE RELAY
DEVICES FOR MCB
PAGE 54



NT00
HIGH POWER DEVICE
PAGE 59



RT18
HIGH POWER DEVICE
PAGE 62



ISS
SWITCH DISCONNECTOR
PAGE 64



ISS2
SWITCH DISCONNECTOR
PAGE 66



EQ2M
MANUAL SWITCHING
PAGE 67



DS1 MAX
MCCB
PAGE 68



DW1
ACB
PAGE 82



EQ1
CHANGE-OVER SWITCH
PAGE 83



JEL1
RCD
PAGE 85



JEL5
RCBO
PAGE 88



SPD
SURGE ARRESTERS
PAGE 93



LT1-D
CONTACTORS
PAGE 97



CJ19-43
CONTACTORS
PAGE 101



LT4-D
CONTACTORS
PAGE 102



LT01
AUXILIARY CONTACTS
PAGE 103



K20
MODULE CONTACTORS
PAGE 104



LT2-E
OVERLOAD RELAYS
PAGE 106



TM2
THERMOM. BREAKER
PAGE 108



LT5-D
STARTERS
PAGE 113



STAR/DELTA
STARTERS
PAGE 114



ELM 2000+
INVERTERS
PAGE 117



ELM 2500
SOFT STARTERS
PAGE 120



HY-RPCF
COSΦ REGULATORS
PAGE 123



500W SET
SOLAR POWER
PAGE 124



ULTRACELL 100Ah
BATTERIES
PAGE 127



HALF CUT CELL
SOLAR PANEL
PAGE 129



RAILS
MOUNTING STRUCTURE
PAGE 131



INVERTERS
SOLAR SYSTEMS
PAGE 148



ELECTRICAL
GASOLINE GENERATORS
PAGE 156



TM 181
TIMERS
PAGE 158



EL-PMT-1
TIMERS
PAGE 159



EL-SDT-1
TIMERS
PAGE 162



CE2J
DIGITAL COUNTERS
PAGE 165



MES TYPE
TRANSFORMERS
PAGE 168



EVT5
TRANSFORMERS
PAGE 170



ELM60.2
RELAYS
PAGE 171



ELM90.22
RELAYS BASES
PAGE 172



EL-ED16R
MEASUREMENT DEVICES
PAGE 176



DD4F-S01
KWH METERS
PAGE 179



AMPERE METER
ANALOGUE METERS
PAGE 180



CSA
LIMIT SWITCHES
PAGE 181



EL-CM
SENSORS
PAGE 188



DR-45
POWER SUPPLIES
PAGE 190



LW26-GS
ROTARY SWITCHES
PAGE 193



EL-2211T
BUTTONS
PAGE 197



AD56-22-W
LED INDICATORS
PAGE 198



ASW-13
SWITCHES
PAGE 202



ELD-G-DIN
BUTTONS LED INDICATORS
PAGE 203



EL1-B174
BUTTONS
PAGE 204



MBP
TELPHER CONTROL
PAGE 205



LTE1101J
WARNING LIGHTS
PAGE 206



MS290
SIRENS
PAGE 207

INSTALLATION



HT-013
INDUSTRIAL PLUGS IP44
PAGE 208



HTN 2141
INDUSTRIAL PLUGS IP67
PAGE 213



EC69025
INDUSTRIAL BOARDS
PAGE 217



EC69025
ASSEMBLED BOARDS
PAGE 219



JXF
METAL BOARDS
PAGE 225



ATTIS
PLASTIC BOXES
PAGE 228



PP SERIES
ABS PLASTIC BOARDS
PAGE 232



GTL
NONISOLATED TUBES
PAGE 236



SVS
ISOLATED TERMINALS
PAGE 238



PLASTIC TRUNKING
INSTALATION SYSTEMS
PAGE 242



PLASTIC TRUNKING
AIR CONDITIONING
PAGE 248



DOUBLECOAT
FLEXIBLE PIPE
PAGE 249



PVC INSULATED
STEEL SPIRALS
PAGE 251



SELF-EXTIGUISHING
CONDUIT & ACCESORIES
PAGE 251



CABLE TRAY
METAL TRAYS & ACCESORIES
PAGE 256



EARTHING ROD
LIGHTING PROTECTION
PAGE 258



EARTHING STRIP
LIGHTING PROTECTION
PAGE 260



ALUMINUM CONDUCTOR
LIGHTING PROTECTION
PAGE 260



EARTHING ACCESSOIRES
LIGHTING PROTECTION
PAGE 261



EC350
FLUSH MOUNTING BOXES
PAGE 264



CONSOLE BOX Ø65
CONSOLE BOXES
PAGE 265



B10
WATERPROOF BOXES
PAGE 269



B 9/T
WATERPROOF BOXES
PAGE 270



DIN
MOUNTING RAIL
PAGE 271



LTU2UK
TERMINALS
PAGE 273



PVC INSULATING
TAPES
PAGE 280



GL
HEAT SHRINKAGE TUBES
PAGE 282



MT-8
CABLE TIE HOLDER
PAGE 285



HANGING E27
LAMP HOLDERS
PAGE 289



ST41
SENSORS
PAGE 291

CABLES AND MULTIPLUGS



MAK - 3
CABLE REELS
PAGE 296



4 HOLES WITH KEY
MULTIPLUGS
PAGE 297



CLIP
MULTIPLUGS
PAGE 300



NYY
POWER CABLES
PAGE 305



H03VV-F
INSIDE POWER CABLES
PAGE 309



NYM
CONDUCTORS
PAGE 315



H05RR-F
RUBBER CABLES
PAGE 317



UTP
COMMUNICATION CABLES
PAGE 319

TOOLS



DRILL EL-D11
ELECTRICAL TOOLS
PAGE 323



ANGLE GRINDER EL-AG01
ELECTRICAL TOOLS
PAGE 324



DRILL DRIVER EL-CD51
CORDLESS TOOLS
PAGE 328



ANGLE GRINDER EL-CAD52
CORDLESS TOOLS
PAGE 329



BATTERY CHARGER
CORDLESS TOOLS
PAGE 329



EM890G
DIGITAL MULTIMETERS
PAGE 330



INFRARED
TEMPERATURE METERS
PAGE 335



EL-1805
VOLTAGE TESTER
PAGE 337



CRIMPING
HAND TOOLS
PAGE 339



CRIMPING
HYDRAULIC TOOLS
PAGE 341



INSULATED 1000V
HAND TOOLS
PAGE 344



NON-INSULATED
HAND TOOLS
PAGE 348



PLASTIC
CUTTER KNIFES
PAGE 358



CHROME PLATING
TAPE MEASURE
PAGE 361



CUTTING
DISCS
PAGE 362



CROSS HEAD
DRILLS
PAGE 365



WORK GLOVES
SAFETY ACCESSORIES
PAGE 369



PLASTIC ORGANIZER
TOOLS BOXES
PAGE 371



AA & AAA
BATTERIES
PAGE 372



ZOOM FLASHLIGHT
WORKS & HOBBY LIGHTS
PAGE 374



SCREWS
FIXINGS & FASTENERS
PAGE 377



ANCHORS
FIXINGS & FASTENERS
PAGE 384



PLUGS
FIXINGS & FASTENERS
PAGE 387



STEEL STRAP
FIXINGS & FASTENERS
PAGE 392



GRAPHITE MASTIC
FIXINGS & FASTENERS
PAGE 393



BITUM SEALANT
FIXINGS & FASTENERS
PAGE 396

VENTILATION



ALS SILENT
DOMESTIC AXIAL FANS
PAGE 403



PAS
INDUSTRIAL FANS
PAGE 407



HPIWF3
INDUSTRIAL FANS
PAGE 409



AIR CONDUIT ALUMINUM
ACCESSORIES FOR FANS
PAGE 410



END GRILLE
ACCESSORIES FOR FANS
PAGE 412



REVISION OPENING PVC
ACCESSORIES FOR FANS
PAGE 415

ELECTRIC WATER HEATERS



BILIGHT
WATER HEATER
PAGE 417



BELLISLIMO
WATER HEATER
PAGE 419



MODECO CLOUD
WATER HEATER
PAGE 421



COMPACT
WATER HEATER
PAGE 423

HEATING APPLIANCES



PANEL COVECTORS
HEATING APPLIANCES
PAGE 425



FAN HEATERS
HEATING APPLIANCES
PAGE 427



BATHROOM HEATERS
HEATING APPLIANCES
PAGE 428

SMART HOME CONTROL



4 ZONES SWITCH
SMART HOME CONTROL
PAGE 432



RF DIMMER SWITCH
SMART HOME CONTROL
PAGE 438



WIFI SMART SOCKET
SMART HOME CONTROL
PAGE 439



WIFI 4 CHANEL SWITCH
SMART HOME CONTROL
PAGE 442



Wi-Fi SMART CAMERA
SMART HOME CONTROL
PAGE 449



INFRARED ALARM SENSOR
SMART HOME CONTROL
PAGE 450



VIDEO DOOR PHONE
SMART HOME CONTROL
PAGE 451

DOORBELLS



DOORBELL
WIRELESS DOORBELLS
PAGE 454



DOORBELL WITH SENSOR
WIRELESS DOORBELLS
PAGE 458



BELL TRANSFORMER
WIRELESS DOORBELLS
PAGE 459

SWITCHES AND SOCKETS



CITY SERIES
SWITCHES & SOCKETS
PAGE 462



LECCE SERIES
SWITCHES & SOCKETS
PAGE 470



RHYME SERIES
SWITCHES & SOCKETS
PAGE 485



WATER HEATER SWITCH
SWITCHES
PAGE 490



WATERPROOF
SWITCHES & SOCKETS
PAGE 493

DECORATIVE LIGHTING



MARCELLA
MODERN
PAGE 497



SENSO
MODERN
PAGE 501



HENDRIX
MODERN
PAGE 505



ELIZABETH
LUX
PAGE 515



CAROL
LUX
PAGE 516



CARMEN
LUX
PAGE 519



AMBIX
LUX
PAGE 535



IZZY
LUX
PAGE 543



EDDY BLACK
LUX
PAGE 551



TWIST
LUX
PAGE 553



DALISS
CRYSTAL
PAGE 555



BLESSY
CRYSTAL
PAGE 558



VERA
CRYSTAL
PAGE 559



VICTORIA
CRYSTAL
PAGE 562



MISHELLE
CRYSTAL
PAGE 563



CINEMA
DESIGN
PAGE 574



OLENA
DESIGN
PAGE 576



ELLARIA
DESIGN
PAGE 578



SALLY
DESIGN
PAGE 582



ROXIE
DESIGN
PAGE 585



JARS
DESIGN
PAGE 590



SHUTTLE
DESIGN
PAGE 596



KERRY
DESIGN
PAGE 607



ALMA
DESIGN
PAGE 612



YVONNE
DESIGN
PAGE 624



LUNA
DESIGN
PAGE 625



PHIL
DESIGN
PAGE 626



WOODY
DESIGN
PAGE 628



BAMBOO
DESIGN
PAGE 631



ALEGRA
DESIGN
PAGE 632



JACKSON
VINTAGE
PAGE 640



LUTON
VINTAGE
PAGE 644



ROPE
VINTAGE
PAGE 646


ROPE
VINTAGE
PAGE 648


SAILOR
VINTAGE
PAGE 661


MARIEL
CLASSIC
PAGE 663


AMANDA
CLASSIC
PAGE 664


LAURA
CLASSIC
PAGE 667


STACY
CLASSIC
PAGE 676


JUDY
CLASSIC
PAGE 685


JANIS
CLASSIC
PAGE 691


HANNA
CLASSIC
PAGE 692


SENSOR
CLASSIC
PAGE 697


MAX
TABLE & FLOOR LAMPS
PAGE 701


CLARA
TABLE & FLOOR LAMPS
PAGE 702


JOHN
TABLE & FLOOR LAMPS
PAGE 704


TOMY
TABLE & FLOOR LAMPS
PAGE 708


CARMEN
TABLE & FLOOR LAMPS
PAGE 709


MAYA
TABLE & FLOOR LAMPS
PAGE 711



DUNCAN
TABLE & FLOOR LAMPS
PAGE 713



DIMMABLE TABLE LAMP
TABLE & FLOOR LAMPS
PAGE 715



ELINOR
TABLE & FLOOR LAMPS
PAGE 716



LUKE
TABLE & FLOOR LAMPS
PAGE 717



MICKEY BLUE
SPOTLIGHTS
PAGE 721



MICKEY WHITE
SPOTLIGHTS
PAGE 723



JIM
SPOTLIGHTS
PAGE 734



PICASSO
SPOTLIGHTS
PAGE 741

INDOOR LIGHTING

TETRAGON IP20
LED PANELS
PAGE 743



TETRAGON IP44
LED PANELS
PAGE 745



LED PANEL ROUND IP20
LED PANELS
PAGE 746



LED PANEL ROUND IP44
LED PANELS
PAGE 750



SUPER SLIM WITH CLIPS
LED PANELS
PAGE 753

LED PANEL ROUND OM
LED PANELS
PAGE 754



COLOUR TEMP. ADJUSTABLE
LED PANELS
PAGE 757



INDIRECT DOWNLIGHTS
LED PANELS
PAGE 758



LED PANEL SQUARE
LED PANELS
PAGE 759

LED PANEL SQUARE OM
LED PANELS
PAGE 760



GLASS PANEL ROUND
LED PANELS
PAGE 763

RECESSED FIXTURE
LED FIXTURE
PAGE 765



IVOR
LED PANELS
PAGE 766



LUCE
LED FIXTURE
PAGE 768



MALIA
LED FIXTURE
PAGE 772



DONUT
LED FIXTURE
PAGE 773



TRACY SUPER SLIM
LED FIXTURE
PAGE 775



LED WALL LIGHT IP65
LED FIXTURE
PAGE 778



SENSOR CABINET LAMP
LED FIXTURE
PAGE 779



ELR627
DOWNLIGHT
PAGE 782



SA-045
DOWNLIGHT
PAGE 789



GYPSUM DOWNLIGHTS
DOWNLIGHT
PAGE 792



BOUTIQUES MINI
DOWNLIGHT
PAGE 794



SA-71
DOWNLIGHT
PAGE 795



DEEP RECESSED IP44
DOWNLIGHT
PAGE 805



SKY TLR
DOWNLIGHT
PAGE 811



DL-044 SQUARE
DOWNLIGHT
PAGE 812



FLCOM COB
DOWNLIGHT
PAGE 815



FRANCA 90
DOWNLIGHT
PAGE 817



FOUR POLES MAGNETIC
TRACK LIGHTING
PAGE 821



FOUR POLES MAGNETIC
TRACK LIGHTING
PAGE 823



FOUR POLES 48V TRACK
TRACK LIGHTING
PAGE 824



2/4 LINES SKY TLR
TRACK LIGHTING
PAGE 826



2/4 LINES SKY TFL
TRACK LIGHTING
PAGE 829



2/4 LINES CINEMA SKY
TRACK LIGHTING
PAGE 832



SKY FIXTURES TLBM
TRACK LIGHTING
PAGE 834



TRITON
LUMINAIRES
PAGE 839



LED MOD FIXTURE
LUMINAIRES
PAGE 841



ACOUSTIC HIGH POWER LED
LUMINAIRES
PAGE 845



ACOUSTIC LED RINGS
LUMINAIRES
PAGE 846



LED RINGS
LUMINAIRES
PAGE 847



LED PROFILES S48
LUMINAIRES
PAGE 849



LED PROFILES S77
LUMINAIRES
PAGE 854



RAINBOW LED SMD
LUMINAIRES
PAGE 855



LENA-V BM/
LUMINAIRES
PAGE 860



XL101
EMERGENCY LIGHTS
PAGE 874



XL3114
EMERGENCY LIGHTS
PAGE 876



TRITON
BATHROOM
PAGE 878



LED MIRROR LIGHT
BATHROOM
PAGE 880



LED PANEL ROUND IP44
BATHROOM
PAGE 882



WATERPROOF LED PANEL
BATHROOM
PAGE 884



ELR627
BATHROOM
PAGE 886

OUTDOOR LIGHTING



BELT LIGHT
GARDEN
PAGE 889



JOSH
GARDEN
PAGE 891



ERIK
GARDEN
PAGE 894



GOLIA
GARDEN
PAGE 900



ANNA
GARDEN
PAGE 902



GLOBE 250
GARDEN
PAGE 904



GRF506 LED
GARDEN
PAGE 909



GABRI
GARDEN
PAGE 911



CARLO DECO
GARDEN
PAGE 913



CARLO
GARDEN
PAGE 914



SAURO
GARDEN
PAGE 916



GRF965
GARDEN
PAGE 919



PMMA OPAL
GARDEN
PAGE 922



NINA 150
GARDEN
PAGE 923



LETI 100GR
GARDEN
PAGE 924



LED WALL FIXTURES
GARDEN
PAGE 927



LORENZA 190
GARDEN
PAGE 928



GRF9617 LED
GARDEN
PAGE 932



WALL LAMP
GARDEN
PAGE 933



STUCCHI
GARDEN
PAGE 936

BRICE
GARDEN
PAGE 940



LED BULKHEAD LAMP
GARDEN
PAGE 941



LIVIA 160
FACADE AND GROUND
PAGE 945



MARTA 90-2
FACADE AND GROUND
PAGE 948



STREAM
FACADE AND GROUND
PAGE 953



SOLAR LED WALL LIGHTS
FACADE AND GROUND
PAGE 954



SOLAR FIXTURE & SENSOR
FACADE AND GROUND
PAGE 955



MINI TOMMY EL
FACADE AND GROUND
PAGE 958



SOLAR TORCH LIGHT
FACADE AND GROUND
PAGE 961



SOLAR GROUND LIGHT
FACADE AND GROUND
PAGE 963



SOLAR WALL
FACADE AND GROUND
PAGE 966



ALDO
FACADE AND GROUND
PAGE 967



CECI
FACADE AND GROUND
PAGE 970



WADE FIXTURE IP65
LUMINAIRES
PAGE 974



BELLA SMD2835
LUMINAIRES
PAGE 976



BELLA LED T8
LUMINAIRES
PAGE 980



HELIOS SMD
FLOODLIGHTS
PAGE 983



STADIUM FLOOD LIGHTS
FLOODLIGHTS
PAGE 989



SIRIUS SMD
FLOODLIGHTS
PAGE 990



LED WORK FLOODLIGHTS
FLOODLIGHTS
PAGE 992



MADRID SMD
ROAD LIGHTS
PAGE 995



SOLAR LED & SENSOR
ROAD LIGHTS
PAGE 999



FESTA SMD
HIGH BAYS
PAGE 1001



VIENA SMD
HIGH BAYS
PAGE 1002

LAMPS AND COMPONENTS



LED VINTAGE LAMP
LAMPS
PAGE 1011



LED VINTAGE LAMP
LAMPS
PAGE 1014



LED VINTAGE LAMP
LAMPS
PAGE 1016



LED CANDLE C37
LAMPS
PAGE 1019



LED PEAR A60
LAMPS
PAGE 1023



MOSQUITO LED 6W IP20
LAMPS
PAGE 1025



HIGH POWER LED LAMP
LAMPS
PAGE 1028



LED MOULD
LAMPS
PAGE 1030



LED COLOR
LAMPS
PAGE 1031



LEDSMD GU10
LAMPS
PAGE 1035



HALF SPIRAL
LAMPS
PAGE 1040



FRESH LIGHT LED TUBE
LAMPS
PAGE 1049



LED TUBE T8
LAMPS
PAGE 1051



LED 300 12V DC IP20
LED STRIPS & PROFILES
PAGE 1056



LED 300 RGBW
LED STRIPS & PROFILES
PAGE 1060



LED 600 24V DC - IP65
LED STRIPS & PROFILES
PAGE 1062



COB LED STRIPS
LED STRIPS & PROFILES
PAGE 1065



LED MODULES
LED STRIPS & PROFILES
PAGE 1068



LED NEON FLEX
LED STRIPS & PROFILES
PAGE 1070



FLEXIBLE AL. PROFILE
LED STRIPS & PROFILES
PAGE 1072



PROFILES FOR DRYWALL
LED STRIPS & PROFILES
PAGE 1073



SET24DC DRIVERS IP20
ACCESSORIES
PAGE 1084



SETDC 12V/24V DRIVERS IP66
ACCESSORIES
PAGE 1085



HANGING LAMP HOLDER
ACCESSORIES
PAGE 1092

LED FURNITURE & DESIGN



PEPPER
LED FURNITURE
PAGE 1099



OSLO
LED FURNITURE
PAGE 1100



BOCCA
LED FURNITURE
PAGE 1111



MALLORCA
LED FURNITURE
PAGE 1117



LAGOS
LED FURNITURE
PAGE 1121



BERMUDA
LED FURNITURE
PAGE 1125



VARNA
LED FURNITURE
PAGE 1126



BORNEO
LED FURNITURE
PAGE 1132



SALERNO
LED FURNITURE
PAGE 1135



GENEVA
LED FURNITURE
PAGE 1140



LUGANO
LED FURNITURE
PAGE 1152



ELECTRICAL



C4XN
- number of poles (1,2,3)
- breaking capacity in (kA)
- tripping curve C

C X
- rated current in (A)
- tripping curve C

Documents corresponding to the product:
Standard EN60898-1
EN60947-2







Dimensions (mm)

C	D1	D2	D3	H1
5	40	65	72	78
H2	W1	W2	W3	W4
45	18	36	54	72

MINIATURE CIRCUIT BREAKERS (MCB) C40N

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

FUNCTIONS:
- protection of the electrical circuits from overload or short circuits of the outer circuit
- it can be used as a device for commutation and control of electrical circuits
- in combination with auxiliary devices it allows remote control, commutation or indication of the protected circuit
- for mounting in residential and industrial buildings
- for mounting at a distance from the transformer post from 150 to 850 m
- allows protection of consumers generating short circuit currents up to 4500 A

TECHNICAL DATA:
- Rated voltage: 230/400V; 50/60Hz
- Breaking capacity (cycle O-CO) in accordance with standard EN 60 898-1: 4500A
- Rated breaking capacity Ics= 75% Icu
- Isolating voltage:≥2000V
- Electrical wear resistance (number of cycles): 4000
- Mechanical (number of cycles): 20000
- Class of current limiting:3
- IP code: IP>20
- Tripping:
  - C – the maximum current release breaks between 5 and 10 In; used to protect main power supply cables and conventional consumers
- Joining terminal: flat (tunnel) screw terminal with composition 1.5 coldly draw-plated plane Q235– A
- Plastic box – not keeping the burning material nylon PA66, UV rays wear resistance
- Box permitivity strength: >18MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C / 3s



- Maximum current release containing:
  - copper coil - composition: pure copper T2 type
  - resistance: from 0.6 to 180m
  - welding effort: <150 000 N/mm
  - bimetal plate – composition: 5J158 to TB180 depending on the current
  - thickness: 0.6mm (up to 40A) and 0.8mm (up to 63A)
  - magnetic core – composition: coldly draw-plated metal wire (1Gr18Ni9)
  - thickness: 1.15 to 2.24µm
  - drawing effort: from 200 to 400N/mm
  - contact head of the movable contact – composition: silver graphite CAg(5)
  - dimension 3x3x0.8 (up to 40A) and 4x4x0.8 (up to 63A)
  - static contact – composition: pure copper T2Y2
  - composition of the contact head: silver graphite CAg(5)
- Power supply (conducting)
  - power supply busbar 1P63, 2P63, 3P63
  - rigid conductors up to 25 mm
  - flexible conductors up to 16 mm
- Tightening moment:1.33Nm

MOUNTING:
- vertical
- DIN-rail
- for mounting in housing or industrial environment without serious interference
- ambient temperature: -5°C to + 65°C±2° C

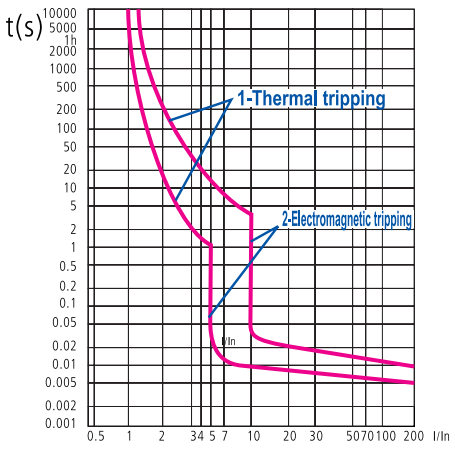

C type



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
C41N / 2A	1P	2	4.5	1.0	12/240	B	**41660C**
C41N / 4A	1P	4	4.5	1.0	12/240	B	**41661C**
C41N / 6A	1P	6	4.5	1.0	12/240	B	**41651C**
C41N / 10A	1P	10	4.5	1.5	12/240	B	**41652C**
C41N / 16A	1P	16	4.5	2.5	12/240	B	**41653C**
C41N / 20A	1P	20	4.5	2.5	12/240	B	**41654C**
C41N / 25A	1P	25	4.5	4.0	12/240	B	**41655C**
C41N / 32A	1P	32	4.5	6.0	12/240	B	**41656C**
C41N / 40A	1P	40	4.5	10.0	12/240	B	**41657C**
C41N / 50A	1P	50	4.5	10.0	12/240	B	**41658C**
C41N / 63A	1P	63	4.5	10.0	12/240	B	**41659C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
C42N / 6A	2P	6	4.5	1.0	6/120	B	**41670C**
C42N / 10A	2P	10	4.5	1.5	6/120	B	**41671C**
C42N / 16A	2P	16	4.5	2.5	6/120	B	**41672C**
C42N / 20A	2P	20	4.5	2.5	6/120	B	**41673C**
C42N / 25A	2P	25	4.5	4.0	6/120	B	**41674C**
C42N / 32A	2P	32	4.5	6.0	6/120	B	**41675C**
C42N / 40A	2P	40	4.5	10.0	6/120	B	**41676C**
C42N / 50A	2P	50	4.5	10.0	6/120	B	**41677C**
C42N / 63A	2P	63	4.5	10.0	6/120	B	**41678C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
C43N / 6A	3P	6	4.5	1.0	4/80	B	**41641C**
C43N / 10A	3P	10	4.5	1.5	4/80	B	**41642C**
C43N / 16A	3P	16	4.5	2.5	4/80	B	**41643C**
C43N / 20A	3P	20	4.5	2.5	4/80	B	**41644C**
C43N / 25A	3P	25	4.5	4.0	4/80	B	**41645C**
C43N / 32A	3P	32	4.5	6.0	4/80	B	**41646C**
C43N / 40A	3P	40	4.5	10.0	4/80	B	**41647C**
C43N / 50A	3P	50	4.5	10.0	4/80	B	**41648C**
C43N / 63A	3P	63	4.5	10.0	4/80	B	**41649C**

C6XN
- number of poles (1,2,3,4)
- breaking capacity in (kA)
- tripping curve C
- **C X** — rated current in (A)
- tripping curve C,B

Documents corresponding to the product:
Standard EN60898-1







Dimensions (mm)

C	D1	D2	D3	H1
5	50	65	72	81
H2	W1	W2	W3	W4
45	18	36	54	72

MINIATURE CIRCUIT BREAKERS (MCB) C60N

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

FUNCTIONS:
- protection of the electrical circuits from overload or short circuits of the outer circuit
- it can be used as a device for commutation and control of electrical circuits
- in combination with auxiliary devices it allows remote control, commutation or indication of the protected circuit
- for mounting in industrial buildings with high contamination level of the electric systems
- for mounting at a distance from the transformer post from 150 to 850 m
- allows protection of consumers generating short circuit currents up to 6000 A

TECHNICAL DATA:
- Rated voltage: 230/400V; 50/60Hz
- Breaking capacity (cycle O-CO) in accordance with standard EN 60 898-1: 6000A
- Rated breaking capacity Ics= 75% Icu
- Isolating voltage:≥2000V
- Electrical wear resistance (number of cycles): 8000
- Mechanical (number of cycles): 50000
- Class of current limiting: 3
- IP code: IP>20
- Tripping curve:
  - B – the maximum current release breaks between 3 and 5 In; used to protect long circuits and generators
  - C – the maximum current release breaks between 5 and 10 In; used to protect main power supply cables and conventional consumers
- Joining terminal: Combined screw clamp made of 1.5 cold extruded Q235-A material with additional coating
- Plastic box – nylon glass filled FR material
- Status indicator
- Box permitivity strength: >18MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C / 3s
- Heat resistance of internal non-electrical components: 850°C / 10 s
- Maximum current release containing:
  - coil: solenoid
  - resistance: from 0.6 to 180m
  - welding effort: <150 000 N/mm
  - bimetal plate – composition: 5J158 to TB180 depending on the current
  - thickness: 0.6mm (up to 40A) and 0.8mm (up to 63A)
  - thickness: 1.15 to 2.24µm
  - drawing effort: from 200 to 400N/mm
  - contact head of the movable contact – composition: silver graphite CAg(5)
  - dimension 3x3x0.8 (up to 40A) and 4x4x0.8 (up to 63A)
  - static contact – composition: pure copper T2Y2
  - composition of the contact head: silver graphite CAg(5)
- Power supply (conducting)
  - power supply busbar 1P63, 2P63, 3P63
  - rigid conductors up to 25 mm
  - flexible conductors up to 16 mm
- Tightening moment: 1.33Nm

MOUNTING:
- vertical
- DIN-rail
- for mounting in housing or industrial environment without serious interference
- ambient temperature: -5°C to + 65°C±2° C

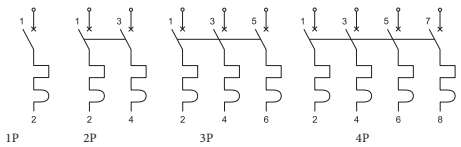

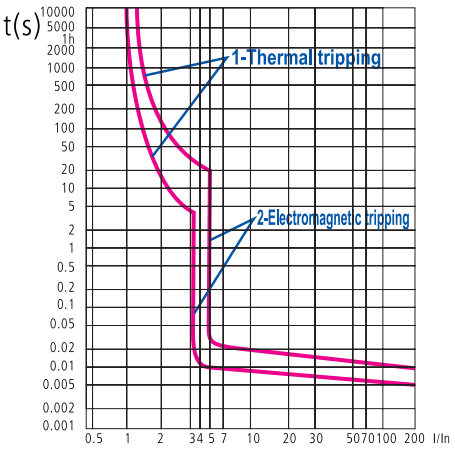

B type

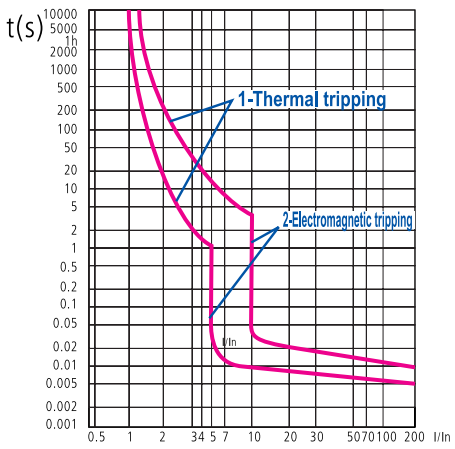

C type

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C61N / 1A	1P	1	6	1.0	12/240	B	**41100C**	**41501C**
C61N / 2A	1P	2	6	1.0	12/240	B	**41102C**	**41502C**
C61N / 4A	1P	4	6	1.0	12/240	B	**41104C**	**41504C**
C61N / 6A	1P	6	6	1.0	12/240	B	**41106C**	**41506C**
C61N / 10A	1P	10	6	1.5	12/240	B	**41110C**	**41510C**
C61N / 16A	1P	16	6	2.5	12/240	B	**41116C**	**41516C**
C61N / 20A	1P	20	6	2.5	12/240	B	**41120C**	**41520C**
C61N / 25A	1P	25	6	4.0	12/240	B	**41125C**	**41525C**
C61N / 32A	1P	32	6	6.0	12/240	B	**41132C**	**41532C**
C61N / 40A	1P	40	6	10.0	12/240	B	**41140C**	**41540C**
C61N / 50A	1P	50	6	10.0	12/240	B	**41150C**	**41550C**
C61N / 63A	1P	63	6	10.0	12/240	B	**41163C**	**41563C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C62N / 2A	2P	2	6	1.0	6/120	B	**C**	**41602C**
C62N / 4A	2P	4	6	1.0	6/120	B	**41204C**	**41604C**
C62N / 6A	2P	6	6	1.0	6/120	B	**41206C**	**41606C**
C62N / 10A	2P	10	6	1.5	6/120	B	**41210C**	**41610C**
C62N / 16A	2P	16	6	2.5	6/120	B	**41216C**	**41616C**
C62N / 20A	2P	20	6	2.5	6/120	B	**41220C**	**41620C**
C62N / 25A	2P	25	6	4.0	6/120	B	**41225C**	**41625C**
C62N / 32A	2P	32	6	6.0	6/120	B	**41232C**	**41632C**
C62N / 40A	2P	40	6	10.0	6/120	B	**41240C**	**41640C**
C62N / 50A	2P	50	6	10.0	6/120	B	**41250C**	**41650C**
C62N / 63A	2P	63	6	10.0	6/120	B	**41263C**	**41663C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C63N / 2A	3P	2	6	1.0	4/80	B	**41302C**	**41702C**
C63N / 4A	3P	4	6	1.0	4/80	B	**41304C**	**41704C**
C63N / 6A	3P	6	6	1.0	4/80	B	**41306C**	**41706C**
C63N / 10A	3P	10	6	1.5	4/80	B	**41310C**	**41710C**
C63N / 16A	3P	16	6	2.5	4/80	B	**41316C**	**41716C**
C63N / 20A	3P	20	6	2.5	4/80	B	**41320C**	**41720C**
C63N / 25A	3P	25	6	4.0	4/80	B	**41325C**	**41725C**
C63N / 32A	3P	32	6	6.0	4/80	B	**41332C**	**41732C**
C63N / 40A	3P	40	6	10.0	4/80	B	**41340C**	**41740C**
C63N / 50A	3P	50	6	10.0	4/80	B	**41350C**	**41750C**
C63N / 63A	3P	63	6	10.0	4/80	B	**41363C**	**41763C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C64N / 2A	4P	2	6	1.0	3/60	B	**41402C**	**41802C**
C64N / 4A	4P	4	6	1.0	3/60	B	**41404C**	**41804C**
C64N / 6A	4P	6	6	1.0	3/60	B	**41406C**	**41806C**
C64N / 10A	4P	10	6	1.5	3/60	B	**41410C**	**41810C**
C64N / 16A	4P	16	6	2.5	3/60	B	**41416C**	**41816C**
C64N / 20A	4P	20	6	2.5	3/60	B	**41420C**	**41820C**
C64N / 25A	4P	25	6	4.0	3/60	B	**41425C**	**41825C**
C64N / 32A	4P	32	6	6.0	3/60	B	**41432C**	**41832C**
C64N / 40A	4P	40	6	10.0	3/60	B	**41440C**	**41840C**
C64N / 50A	4P	50	6	10.0	3/60	B	**41450C**	**41850C**
C64N / 63A	4P	63	6	10.0	3/60	B	**41463C**	**41863C**

C10XL
- number of poles (1,2,3)
- breaking capacity in (kA)
- tripping curve B, C

C X
- rated current in (A)
- tripping curve C, B

Documents corresponding to the product:
Standard EN60898-1
EN60947-2



MINIATURE CIRCUIT BREAKERS (MCB) C100L

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

FUNCTIONS:
- protection of the electrical circuits from overload or short circuits of the outer circuit
- it can be used as a device for commutation and control of electrical circuits
- in combination with auxiliary devices it allows remote control, commutation or indication of the protected circuit

TECHNICAL DATA:
- Rated voltage: 230/400V; 50/60Hz
- Breaking capacity (cycle O-CO) in accordance with standard EN 60 898-1: 10000A
- Rated breaking capacity Ics= 75% Icu
- Isolating volatage:≥2000V, 1 min at impulse wave 1.2/50μs
- Electrical wear resistance (number of cycles):≥4000
- Mechanical wear resistance (number of cycles): ≥20000
- Class of current limiting:3
- IP code: IP>20
- Tripping curve: C

MOUNTING:
- vertical
- DIN-rail
- possibility for labeling





Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm²)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C101L/6A	1P	6	10	1.0	12 / 240	B	**41101C**	**41101C/B**
C101L/10A	1P	10	10	1.5	12 / 240	B	**41103C**	**41103C/B**
C101L/16A	1P	16	10	2.5	12 / 240	B	**41105C**	**41105C/B**
C101L/20A	1P	20	10	2.5	12 / 240	B	**41107C**	**41107C/B**
C101L/25A	1P	25	10	4.0	12 / 240	B	**41108C**	**41108C/B**
C101L/32A	1P	32	10	6.0	12 / 240	B	**41109C**	**41109C/B**
C101L/40A	1P	40	10	10.0	12 / 240	B	**41111C**	**41111C/B**
C101L/50A	1P	50	10	10.0	12 / 240	B	**41112C**	**41112C/B**
C101L/63A	1P	63	10	16.0	12 / 240	B	**41113C**	**41113C/B**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm²)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C102L/6A	2P	6	10	1.0	6/120	B	**41201C**	**41201C/B**
C102L/10A	2P	10	10	1.5	6/120	B	**41203C**	**41203C/B**
C102L/16A	2P	16	10	2.5	6/120	B	**41205C**	**41205C/B**
C102L/20A	2P	20	10	2.5	6/120	B	**41207C**	**41207C/B**
C102L/25A	2P	25	10	4.0	6/120	B	**41208C**	**41208C/B**
C102L/32A	2P	32	10	6.0	6/120	B	**41209C**	**41209C/B**
C102L/40A	2P	40	10	10.0	6/120	B	**41211C**	**41211C/B**
C102L/50A	2P	50	10	10.0	6/120	B	**41212C**	**41212C/B**
C102L/63A	2P	63	10	16.0	6/120	B	**41213C**	**41213C/B**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C103L/6A	3P	6	10	1.0	4 / 80	B	**41301C**	**41301C/B**
C103L/10A	3P	10	10	1.5	4 / 80	B	**41303C**	**41303C/B**
C103L/16A	3P	16	10	2.5	4 / 80	B	**41305C**	**41305C/B**
C103L/20A	3P	20	10	2.5	4 / 80	B	**41307C**	**41307C/B**
C103L/25A	3P	25	10	4.0	4 / 80	B	**41308C**	**41308C/B**
C103L/32A	3P	32	10	6.0	4 / 80	B	**41309C**	**41309C/B**
C103L/40A	3P	40	10	10.0	4 / 80	B	**41311C**	**41311C/B**
C103L/50A	3P	50	10	10.0	4 / 80	B	**41312C**	**41312C/B**
C103L/63A	3P	63	10	16.0	4 / 80	B	**41313C**	**41313C/B**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C	Catalogue number Curve B
C104L/6A	4P	6	10	1.0	3/60	B	**41401C**	**41401C/B**
C104L/10A	4P	10	10	1.5	3/60	B	**41403C**	**41403C/B**
C104L/16A	4P	16	10	2.5	3/60	B	**41405C**	**41405C/B**
C104L/20A	4P	20	10	2.5	3/60	B	**41407C**	**41407C/B**
C104L/25A	4P	25	10	4.0	3/60	B	**41408C**	**41408C/B**
C104L/32A	4P	32	10	6.0	3/60	B	**41409C**	**41409C/B**
C104L/40A	4P	40	10	10.0	3/60	B	**41411C**	**41411C/B**
C104L/50A	4P	50	10	10.0	3/60	B	**41412C**	**41412C/B**
C104L/63A	4P	63	10	16.0	3/60	B	**41413C**	**41413C/B**

MINIATURE CIRCUIT BREAKERS DP1N (1P + E)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



FUNCTIONS:
- protection of the electrical circuits from overload or short circuit of the outer circuit
- it can be used as a device for commutation and control of electrical circuits
- it breaks simultaneously the lead and the neutral conductor as the heat protection is only at the lead conductor

TECHNICAL DATA:
- Rated voltage: 230V; 50/60Hz
- Breaking capacity (cycle O-CO) in accordance with standard EN 60 898-1: 4500 A
- Rated breaking capacity Ics = 50% Icu
- Insulating voltage: ≥2000V
- Tripping curve: C – the maximum current release breaks between 5 and 10 In; used to protect main power supply
- cables and conventional consumers

CONNECTING:
- Joining terminal: flat (tunnel) screw terminal
- Power supply (conducting):
  - power supply busbar DP1N
  - flexible or rigid conductor
- Mounting: on DIN-rail

Type	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
DP1N / 6	6	4.5	1.0	12 / 240	B	**41006**
DP1N / 10	10	4.5	1.5	12 / 240	B	**41010**
DP1N / 16	16	4.5	2.5	12 / 240	B	**41016**
DP1N / 20	20	4.5	2.5	12 / 240	B	**41020**
DP1N / 25	25	4.5	4.0	12 / 240	B	**41025**
DP1N / 32	32	4.5	6.0	12 / 240	B	**41032**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

C100M constructive series
number of poles (1;2;3;4)

D X rated current
tripping curve C, D, B

Documents corresponding to the product:
Standard EN60898-1
EN 60947-2







Dimensions (mm)

C	D1	D2	D3	H1
5	50	65	74	45
H2	W1	W2	W3	W4
81	27	54	81	108

MINIATURE CIRCUIT BREAKERS (MCB) C100M

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

FUNCTIONS:
- protection of the electrical circuits from overload or short circuits of the outer circuit
- it can be used as a device for commutation and control of electrical circuits
- in combination with auxiliary devices it allows remote control, commutation or indication of the protected circuit

TECHNICAL DATA:
- Rated voltage: 230/400V; 50/60Hz
- Breaking capacity (cycle O-CO) in accordance with standard EN 60 898-1: 10000A
- Rated breaking capacity Ics= 75% Icu
- Isolating volatage:≥2000V
- Electrical wear resistance (number of cycles):≥4000
- Mechanical wear resistance (number of cycles):≥20000
- Class of current limiting:3
- IP code: IP>20
- Tripping curve: C,D
- Joining terminal: flat (tunnel) screw terminal with composition 1.5 coldly draw-plated plane Q235 – A
- Plastic box – not keeping the burning material nylon PA66, UV rays wear resistance
- Box permitivity strength: >18MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C / 3s
- Maximum current release containing:
  - copper coil - composition: pure copper T2 type
  - resistance: from 148 to 230m
  - welding effort: <400 N/
  - bimetal plate – composition: TB180/0.5
  - thickness: 0.8mm
  - magnetic core – composition: coldly draw-plated metal wire (1Gr18Ni9)
  - thickness: 1.15 to 2.24µm
  - drawing effort: 20N/mm^2
  - contact head of the movable contact – composition: silver graphite CAg(5)
  - dimension 6x6x1
  - static contact – composition: pure copper T2Y2
  - composition of the contact head: silver graphite CAg(5)
- Power supply (conducting)
  - power supply busbar
  - rigid conductors up to 50
  - flexible conductors up to 35
- Tightening moment:1.33Nm

MOUNTING:
- vertical
- DIN-rail
- possibility for labeling
- for mounting in industrial environment
- ambient temperature: -5°C to + 65°C±2° C

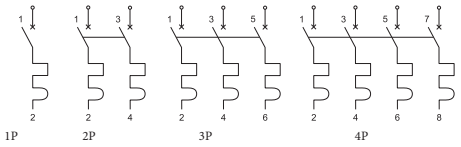

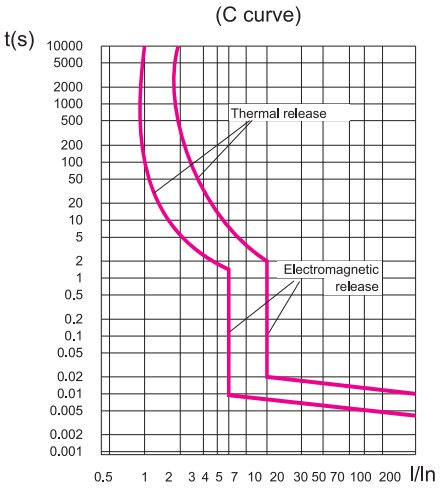

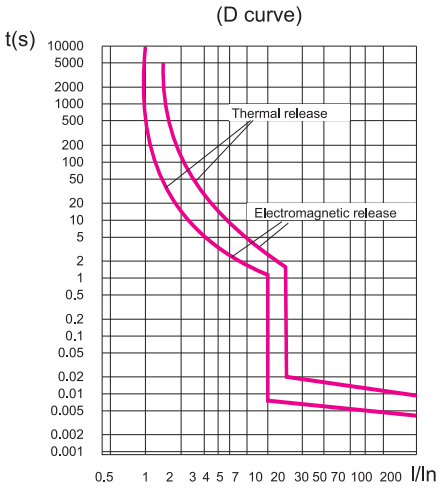

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Packing/Box (pcs)	Product category	Catalogue number Curve B	Catalogue number Curve C	Catalogue number Curve D
C100M	1P	80	10	9 / 180	B	**41180B**	**41180**	**41180D**
C100M	1P	100	10	9 / 180	B	**41190B**	**41190**	**41190D**
C100M	1P	125	10	9 / 180	B	**41195B**	**41195**	**41195D**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Packing/Box (pcs)	Product category	Catalogue number Curve B	Catalogue number Curve C	Catalogue number Curve D
C100M	2P	80	10	6 / 120	B	**41282**	**41280**	**41281**
C100M	2P	100	10	6 / 120	B	**41292**	**41290**	**41291**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Packing/Box (pcs)	Product category	Catalogue number Curve B	Catalogue number Curve C	Catalogue number Curve D
C100M	3P	80	10	4 / 60	B	**41382**	**41380**	**41381**
C100M	3P	100	10	4 / 60	B	**41392**	**41390**	**41391**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Packing/Box (pcs)	Product category	Catalogue number Curve B	Catalogue number Curve C	Catalogue number Curve D
C100M	4P	80	10	3 / 60	B	**41482**	**41480**	**41481**
C100M	4P	100	10	3 / 60	B	**41492**	**41490**	**41491**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

C6XDC
- number of poles (1,2)
- breaking capacity in (kA)
- tripping curve C
- **C X** — rated current in (A)
- tripping curve C

Documents corresponding to the product:
Standard EN60898-1
EN60898-2



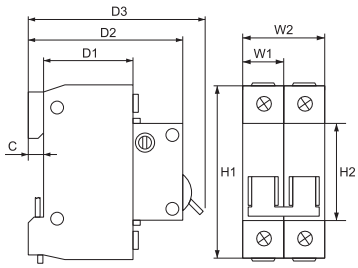

Dimensions (mm)

C	D1	D2	D3
5	49	65	72
H1	H2	W1	W2
78	45	18	36

MINIATURE CIRCUIT BREAKERS (MCB) C60DC

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

FUNCTIONS:
- for lowering constant current voltaic arc and use of the breaker at constant current consumer protection
- protection of the electrical circuits from overload or short circuit of the outer circuit at alternating current and constant current power supply circuits
- for commutation and control of electrical circuits
- in combination with auxiliary alternating current devices for remote control, commutation or indication of the protected circuit
- for mounting in industrial buildings
- for protection of consumers generating short circuit currents to 6000 A at alternating current power supply

TECHNICAL DATA:
- Rated voltage: 240V; AC/DC
- Breaking capacity (cycle O -CO) in accordance with standard EN 60 898- 1: 6000A
- Rated breaking capacity Ics=75% Icu
- Insulating voltage: ≥2000V
- Electrical wear resistance (number of cycles): ≥4000
- Mechanical wear resistance (number of cycles): ≥20000
- Class of current limiting: 3
- IP code: IP>20
- Tripping curve: C – the maximum current release breaks between 5 and 10 In; used to protect power supply cables and conventional consumers
- Joining terminal: flat (tunnel) screw terminal with composition 1.5 coldly draw-plated plane Q235– A
- Plastic box – nylon glass filled FR material
- Box permitivity strength: >18MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C / 3s
- Maximum current release containing:
  - Coil: solenoid
  - resistance: from 0.6 to 180m
  - welding effort: <150 000 N/mm
  - bimetal plate – composition: 5J158 to TB180 according to the current
  - thickness: 0.6mm (up to 40A) and 0.8mm (up to 63A)
  - thickness: 1.15 to 2.24µm
  - drawing effort: from 200 to 400N/mm
  - contact head of the movable contact – composition: silver graphite CAg(5)
  - dimension 3x3x0.8 (up to 40A) and 4x4x0.8 (up to 63A)
  - static contact – composition: pure copper T2Y2
  - composition of the contact head: silver graphite CAg(5)
  - metal magnetic plate for lowering the constant current arc
- Conducting:
  - power supply busbar 1P63, 2P63
  - rigid conductors up to 25 mm
  - flexible conductors up to 16 mm
- Tightening moment: 1.33Nm

MOUNTING
- vertical
- DIN-rail
- for mounting in housing or industrial environment without serious current interference
- Ambient temperature: -5°C to + 65°C±2° C



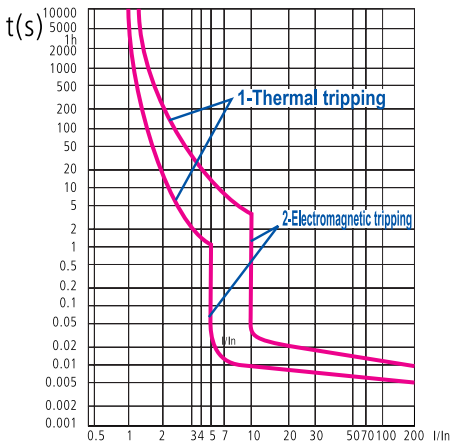

C type



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
C61DC / 1A	1P	1	6	1.0	12/240	B	**41164C**
C61DC / 2A	1P	2	6	1.0	12/240	B	**41165C**
C61DC / 4A	1P	4	6	1.0	12/240	B	**41166C**
C61DC / 6A	1P	6	6	1.0	12/240	B	**41167C**
C61DC / 10A	1P	10	6	1.5	12/240	B	**41168C**
C61DC / 16A	1P	16	6	2.5	12/240	B	**41169C**
C61DC / 20A	1P	20	6	2.5	12/240	B	**41170C**
C61DC / 25A	1P	25	6	4.0	12/240	B	**41171C**
C61DC / 32A	1P	32	6	6.0	12/240	B	**41172C**
C61DC / 40A	1P	40	6	10.0	12/240	B	**41173C**
C61DC / 50A	1P	50	6	10.0	12/240	B	**41174C**
C61DC / 63A	1P	63	6	10.0	12/240	B	**41175C**



Type	Number of poles	Rated current In (A)	Breaking capacity (kA)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number Curve C
C62DC / 2A	2P	2	6	1.0	6/120	B	**41176C**
C62DC / 4A	2P	4	6	1.0	6/120	B	**41177C**
C62DC / 6A	2P	6	6	1.0	6/120	B	**41178C**
C62DC / 10A	2P	10	6	1.5	6/120	B	**41179C**
C62DC / 16A	2P	16	6	2.5	6/120	B	**41181C**
C62DC / 20A	2P	20	6	2.5	6/120	B	**41182C**
C62DC / 25A	2P	25	6	4.0	6/120	B	**41183C**

Documents corresponding to the product:
EN 60255-1; IEC60947-5-1

SINGLE POLE MONITORING VOLTAGE RELAY MN1

7+0 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty



FUNCTIONS:
- Protect electrical equipment from over & under voltage
- Voltage measurement accuracy <1%
- Relay status is indicated by LED

TECHNICAL CHARACTERISTICS:
- Rated voltage: 220V AC; 50/60Hz
- Hysteresis: 0-20% adjustable
- Time dalay: 0.1-10s adjustable
- Reset time: 0.2 sec max
- Current ratting: 3A/AC-15
- Mechanical life: $1X10^7$
- Electrical life: $1X10^5$
- Ambiente temperature: -10C°/+55C°
- Dimensions: 90x18x64mm
- Mounting: on DIN rail

Type	Rated voltage	Hysteresis	Packing/Box (pcs)	Product category	Catalogue number
ELMARK MN1	220V AC	0-20% adjustable	12 / 240	B	**41900**

Documents corresponding to the product:
EN 60255-1; IEC60947-5-1

THREE POLE MONITORING VOLTAGE RELAY MN3

7+0 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty



FUNCTIONS:
- Protect electrical equipment from over & under voltage
- Voltage measurement accuracy <1%
- Relay status is indicated by LED

TECHNICAL CHARACTERISTICS:
- Rated voltage: 415V AC; 50/60Hz
- Hysteresis: 0-20% adjustable
- Time dalay: 0.1-10s adjustable
- Reset time: 0.2 sec max
- Current ratting: 3A/AC-15
- Mechanical life: $1X10^7$
- Electrical life: $1X10^5$
- Ambiente temperature: -10C°/+55C°
- Dimensions: 90x18x64mm
- Mounting: on DIN rail

Type	Rated voltage	Hysteresis	Packing/Box (pcs)	Product category	Catalogue number
ELMARK MN3	415V AC	0-20% adjustable	12 / 240	B	**41927**

SINGLE-PHASE DIGITAL VOLTAGE AND CURRENT PROTECTOR

3+2 standard +extended 5 YEAR TOTAL WARRANTY



FUNCTIONS:
- Under-voltage protection
- Over-voltage protection
- Over-current protection

TECHNICAL CHARACTERISTICS:
- Operated voltage range: 80-400V AC; 50/60Hz (Single-phase)
- Rated current: 63A
- Over-voltage protection value: 230-300V AC
- Under-voltage protection value: 140-230VAC
- Over-current protection value: 1-63A
- Voltage power off time: 0-400s
- Current power off time: 0-30s
- Voltage range setting step: 1V
- Time range setting step: 1s
- Power consumption: ≤ 1.5W
- Mechanical life: 100 000
- Relative humidity: 45-90% Rh
- Altitude: up to 2000m
- Pollution level: 2 class
- Dimensions: 36x80x66mm
- Mounting: on DIN rail

FACTORY SETTING:
- Over-voltage trip value: 270V
- Under-voltage trip value: 170V
- Over-current trip value: 63A
- Voltage power off time: 2s
- Starting delay time: 2s
- Current power off time: 2s

Type	Rated voltage	Over-voltage protection range	Under-voltage protection range	Over-current protection range	Packing/ Box (pcs)	Product category	Catalogue number
ELMARK MN4	220V AC	230-300V AC	140-230V AC	1-63A	1/100	B	**41906**

THREE-PHASE DIGITAL VOLTAGE AND CURRENT PROTECTOR

3+2 standard +extended 5 YEAR TOTAL WARRANTY



FUNCTIONS:
- Under-voltage protection
- Over-voltage protection
- Over-current protection

TECHNICAL CHARACTERISTICS:
- Operated voltage range: 140-500V AC; 50/60Hz (Three-phase)
- Rated current: 63A
- Over-voltage protection value: 390-500V AC
- Under-voltage protection value: 140-370VAC
- Over-current protection value: 1-63A
- Voltage power off time: 0-400s
- Current power off time: 0-30s
- Voltage range setting step: 1V
- Time range setting step: 1s
- Power consumption: ≤ 1.5W
- Mechanical life: 100 000
- Relative humidity: 45-90% Rh
- Altitude: up to 2000m
- Pollution level: 2 class
- Dimensions: 72x80x66mm
- Mounting: on DIN rail

FACTORY SETTING:
- Over-voltage trip value: 420V
- Under-voltage trip value: 210V
- Over-current trip value: 63A
- Voltage power off time: 2s
- Starting delay time: 2s
- Current power off time: 2s

Type	Rated voltage	Over-voltage protection range	Under-voltage protection range	Over-current protection range	Packing/ Box (pcs)	Product category	Catalogue number
ELMARK MN4	400V AC	390-500V AC	140-370V AC	1-63A	1/50	B	**41907**

Type designation:
MN - constructive series
number of poles - 1
Documents corresponding to the product:
Standard EN60898-1

COMBINED VOLTAGE CIRCUIT-BREAKER MN2

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



UNTIL SUPPLY LAST

FUNCTIONS:
- when the voltage is reduced below 170V operation is initiated and the automatic switch is turned off
- when the voltage is increased above 280V operation is initiated and the automatic switch is turned off
- allows manual turning on of the switch after powering is restored
- indication of the position of the device

TECHNICAL CHARACTERISTICS:
- Rated voltage: 230V; 50/60Hz
- Insulation voltage: ≥2000V
- IP code: IP>20

CONNECTION METHOD:
- Double connector: flat (tunnel) screw connector
- Conductors: flexible up to 1.5mm^2
- Tightening moment of the screw: 1.33Nm

MOUNTING:
- vertical, by means of two pins attached to the rivets of the circuit-breaker, while the operating mechanism is connected to the switching off mechanism of the circuit breaker after the sealing lid is demounted

Type	Rated voltage	Type breaker	Packing/Box (pcs)	Product category	Catalogue number
ELMARK MN 2 60	230V	C60	12 / 240	F	**41909**

SHUNT RELEASE MX

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



FUNCTIONS:
- remote circuit breaker switching off at voltage feed
- allows manual switching on of the breaker at voltage recovery
- indication of the device's location

TECHNICAL DATA:
- Rated voltage: 230V; 50/60Hz
- Isolating voltage: ≥2000V
- IP code: IP>20

CONNECTING:
- Joining terminal: flat (tunnel) screw terminal
- Conductors: flexible up to 1.5mm^2
- Tightening moment: 1.33Nm
- The power supply of the release is accomplished at the outlet of the breaker

MOUNTING:
- vertical, clamps with two pins to the breaker's rivets and the executive mechanism is joined up to the switching mechanism of the breaker after dismounting the seal cover

Type	Rated voltage	Type breaker	Packing/Box (pcs)	Product category	Catalogue number
ELMARK MX 60	230V	C60	12 / 240	B	**41902C**

AUXILIARY CONTACT OF

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



FUNCTIONS:
- at circuit breaker switching off it sends a signal to the control or signalization system
- indication of the location of the auxiliary contact and the breaker

TECHNICAL DATA:
- Rated voltage: 230V
- Isolating voltage: ≥2000V
- IP code: IP>20

CONNECTING:
- Joining terminal: flat (tunnel) screw terminal
- Power supply (conducting): - flexible conductors up to 1.5mm

MOUNTING:
- vertical, clamps with two pins to breaker's rivets, and the executive mechanism is joined up to the switching mechanism of the breaker after dismounting the seal cover

Type	Rated voltage	Type breaker	Packing/Box (pcs)	Product category	Catalogue number
ELMARK OF 60	230V	C60	12 / 240	B	**41901C**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60269-1





BASES FOR HIGH POWER SAFETY DEVICES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The series bases for high power safety device is manufactured of permitivity alloy with mounted contact jaws of electrolytic copper supplied with special springs for contact compression and easy fuse links taking out. All current leading parts are connected to inlet outlet terminals with bolts; the terminals also end with bolts, to which the power supply conductors are connected. The bases are offered in five type sizes corresponding to the five types of fuse links.
Remark : Fuse bases SIST are made of resin / **Remark :** Fuse bases SISP are made of porcelain

Base type	Overall dimensions (mm)							
	A1	A2	A3	B1	B2	C1	C2	Ød
SIST00	25	100	120	-	30	25	60	7.5
SIST 0	25	150	170	-	30	37	72	7.5
SIST1	25	175	200	30	58	38	84	10.5
SIST2	25	200	225	30	60	38	100	10.5
SIST3	25	210	250	30	60	40	105	10.5



Base type	Fuse link type	Rated current (A)	Rated voltage Un (V)	Weight (gr)	Packing / Box (pcs)	Product category	Catalogue number
SIST00	NT 00	up to 160	600	193	5 / 120	B	**12001**



Base type	Fuse link type	Rated current (A)	Rated voltage Un (V)	Weight (gr)	Packing / Box (pcs)	Product category	Catalogue number
SIST0	NT 0	up to 160	600	295	3 / 54	B	**12010**



Base type	Fuse link type	Rated current (A)	Rated voltage Un (V)	Weight (gr)	Packing / Box (pcs)	Product category	Catalogue number
SIST1	NT 1	up to 250	600	550	3 / 36	B	**12100**



Base type	Fuse link type	Rated current (A)	Rated voltage Un (V)	Weight (gr)	Packing / Box (pcs)	Product category	Catalogue number
SIST2	NT 2	up to 400	600	770	1 / 20	B	**12200**



Base type	Fuse link type	Rated current (A)	Rated voltage Un (V)	Weight (gr)	Packing / Box (pcs)	Product category	Catalogue number
SIST3	NT 3	up to 630	600	965	1 / 20	B	**12300**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60269-1
EN 60269-2





FUSE LINKS FOR HIGH POWER SAFETY DEVICE

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The series fuse links for high power safety devices is designed for short circuit protection. They are distinguished with high speed of operation and high reliability. The element is a ceramic (porcelain) body filled with fine quartz sand for voltaic arc lowering. In the ceramic body is mounted a fusible, specially profiled wafer connecting the current leading terminals. These terminals are manufactured of copper alloy with special nickel coating and have the form of knives to provide more contact surface. The fuse links correspond to "gL – gG" class which means that they are with common function and normal response time.
NH Fuses

TWO OPERATING CLASSES OF NH FUSES ARE AVAILABLE:
- Operating class gL/gG – general purpose, line protection, slow acting

TECHNICAL DATA:
- Rated voltage: 500V
- Rated short circuit current: 120 kA
- IP code: IP 00
- Ambient temperature: -5 to +65°C
- Altitude: up to 2000m

Base type	Overall dimensions (mm)				
	A	B	C	D	H
NT00	78	40	15	29	56.5
NT 0	125	68	15	29	56.5
NT1	135	68	21	48	62
NT 2	150	68	27	58	72
NT 3	150	68	33	67	84.5
NT00C	78	40	15	21	56,5
NT1C	135	68	21	29	62
NT2C	150	68	33	48	84,5



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT00	16	500,600	3 / 90	B	**10001**
NT00	25	500,600	3 / 90	B	**10002**
NT00	32	500,600	3 / 90	B	**10003**
NT00	40	500,600	3 / 90	B	**10004**
NT00	50	500,600	3 / 90	B	**10005**
NT00	63	500,600	3 / 90	B	**10006**
NT00	80	500,600	3 / 90	B	**10008**
NT00	100	500,600	3 / 90	B	**10009**
NT00	125	500,600	3 / 90	B	**10012**
NT00	160	500,600	3 / 90	B	**10016**



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT0	16	500,600	3 / 90	B	**10015**
NT0	25	500,600	3 / 90	B	**10025**
NT0	32	500,600	3 / 90	B	**10032**
NT0	40	500,600	3 / 90	B	**10040**
NT0	50	500,600	3 / 90	B	**10050**
NT0	63	500,600	3 / 90	B	**10063**
NT0	80	500,600	3 / 90	B	**10080**
NT0	100	500,600	3 / 90	B	**10090**
NT0	125	500,600	3 / 90	B	**10092**
NT0	160	500,600	3 / 90	B	**10096**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT1	80	500,600	3 / 36	B	**10108**
NT1	100	500,600	3 / 36	B	**10110**
NT1	125	500,600	3 / 36	B	**10112**
NT1	160	500,600	3 / 36	B	**10116**
NT1	200	500,600	3 / 36	B	**10120**
NT1	225	500,600	3 / 36	B	**10122**
NT1	250	500,600	3 / 36	B	**10125**



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT2	160	500,600	1 / 24	B	**10216**
NT2	200	500,600	1 / 24	B	**10220**
NT2	250	500,600	1 / 24	B	**10225**
NT2	315	500,600	1 / 24	B	**10231**
NT2	400	500,600	1 / 24	B	**10240**



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT3	500	500,600	1 / 24	B	**10350**
NT3	630	500,600	1 / 24	B	**10363**



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT00C	16	500,600	3/120	B	**10001C**
NT00C	25	500,600	3/120	B	**10002C**
NT00C	32	500,600	3/120	B	**10003C**
NT00C	40	500,600	3/120	B	**10004C**
NT00C	50	500,600	3/120	B	**10005C**
NT00C	63	500,600	3/120	B	**10006C**
NT00C	80	500,600	3/120	B	**10008C**
NT00C	100	500,600	3/120	B	**10009C**



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT1C	80	500,600	3/54	B	**10108C**
NT1C	100	500,600	3/54	B	**10110C**
NT1C	125	500,600	3/54	B	**10112C**
NT1C	160	500,600	3/54	B	**10116C**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	In (A)	Un (V)	Packing / Box (pcs)	Product category	Catalogue number
NT2C	160	500,600	1/30	B	**10216C**
NT2C	200	500,600	1/30	B	**10220C**
NT2C	250	500,600	1/30	B	**10225C**

Documents corresponding to the product:
Standard EN 60947-1; EN 60947-3

ISOLATING SWITCHES

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Designed in two types – horizontal and vertical. They represent a combination of low voltage isolating switch and high power safety devices mounted in a common plastic corpus. They are used for low voltage distribution boards and complete transformer substations (CTS) where visible circuit distribution is necessary. They provide safety and convenience at fuse links change. The plastic corpus increases the IP code and the plastic lid provides simultaneous circuits switching on/off. The lid allows easy removing which is additional measure at repairs. The vertical isolating switches are mounted directly to the power supply rails which enables the exploitation and improves the safety of the staff.

TECHNICAL DATA:
- Rated voltage: 500V
- Rated short circuit current: according to the mounted fuse links
- Number of poles: 3
- Impulse voltage wear resistance: 8kV
- Mechanical wear resistance: 3000 cycles
- IP code: IP 40
- Plastic: UV rays wear resistance
- Ambient temperature: -5 to +65°C
- Altitude: up to 2000m

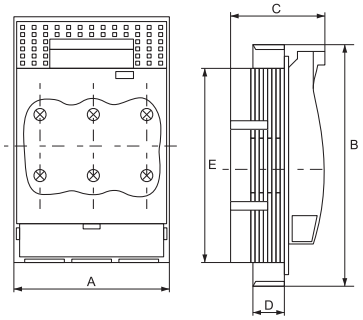

Base type	Overall dimensions (mm)				
	A	B	C	D	E
THB -160	105	160	85	45	100
THB - 250	185	220	111	66	180
THB - 400	210	260	130	88	205
THB - 630	256	270	140	94.5	245

Type	In (A)	Un (V)	Fuse link size	Packing / Box (pcs)	Product category	Catalogue number
THB	160	500, 660	NT00	1 / 18	B	**44801**
THB	250	500, 660	NT1	1 / 6	B	**44802**
THB	400	500, 660	NT2	1 /4	B	**44803**
THB	630	500, 660	NT3	1/4	B	**44804**

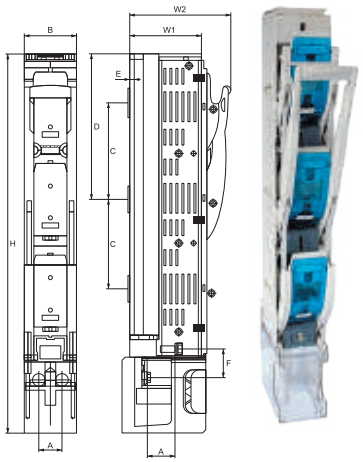

Overall dimensions (mm)

A	B	C	D	E	F	G	H	W1	W2
50	99	185	290	2	57	58	746	146	195

Type	In (A)	Un (V)	Fuse link size	Packing / Box (pcs)	Product category	Catalogue number
HG2B	160	500, 660	NT00	1 /4	B	**44805**
HG2B	250	500, 660	NT1	1 /4	B	**44806**
HG2B	400	500, 660	NT2	1 /4	B	**44807**
HG2B	630	500, 660	NT3	1 /4	B	**44808**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60269-2;
IEC269-2









SWITCH DISCONNECTORS RT18

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The series of switch disconnectors are developed for short-circuit protection. They have a high speed of start and high reliability. They have a plastic body of non-flammable plastics adapted for mounting on a DIN rail, where a porcelain round plug, which is filled with fine quartz sand for extinguishing the electric arc. LED indicator is mounted on the front panel to show fuse link condition. In this ceramic body is mounted melting, specifically profiled plate, which connects the input power terminals. These terminals are produced from copper alloy with especially laid nickel layer and contact with the projecting bolts from the plastic body. There are offered two types of insertions according to the degree of quick operation: normally quickly operating ones – class "gG". Suitable for DC system.

TECHNICAL DATA:
- Rated voltage: 500V
- Insulation voltage: >2500V
- Rated current on short-circuit: 100 κA
- Direct mounting to the load
- Two insulated points to the load
- IP code: IP 44
- Cross-section of the supply conductors: up to 35mm^2
- Environmental temperature: -5° to +65°C
- Utization category: AC - 20B; DC - 20B
- Altitude: up to 2000m

Overall dimensions

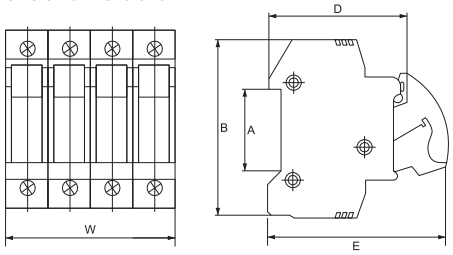

Base type	Number of poles	Rated current (A)	Type of the fuse	Base dimensions (mm)				Packing / Box (pcs)	Product category	Catalogue number
				A	B	W	E			
1PRT18 - 32x	1P	32	xxG1038	37	82	18	78	12 / 240	B	**10RT1831**
1NRT18 - 32x	1P+N	32	xxG1038	37	82	36	78	6 / 120	B	**10RT18311**
2PRT18 - 32x	2P	32	xxG1038	37	82	36	78	6 / 120	B	**10RT1832**
3PRT18 - 32x	3P	32	xxG1038	37	82	54	78	4 / 80	B	**10RT1833**
3NRT18 - 32x	3P+N	32	xxG1038	37	82	72	78	3 / 60	B	**10RT18331**
1PRT18 - 63x	1P	63	xxG1451	37	105	27	110	6 / 108	B	**10RT1861**
1NRT18 - 63x	1P+N	63	xxG1451	37	105	54	110	6 / 108	B	**10RT18611**
2PRT18 - 63x	2P	63	xxG1451	37	105	54	110	6 / 108	B	**10RT1862**
3PRT18 - 63x	3P	63	xxG1451	37	105	81	110	6 / 108	B	**10RT1863**
3NRT18 - 63x	3P+N	63	xxG1451	37	105	108	110	6 / 108	B	**10RT18631**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

FUSE FOR SWITCH DISCONNECTORS RT18



RT18 Type

Type of the fuse class gG	Voltage (V)	Rated current (A)	Size of the fuse A x ØB x C	Packing / Box (pcs)	Product category	Catalogue number
01G1038	500	1	38xØ10.3x10mm	10 / 2000	B	**10G10381**
02G1038	500	2	38xØ10.3x10mm	10 / 2000	B	**10G10382**
04G1038	500	4	38xØ10.3x10mm	10 / 2000	B	**10G10384**
06G1038	500	6	38xØ10.3x10mm	10 / 2000	B	**10G10386**
10G1038	500	10	38xØ10.3x10mm	10 / 2000	B	**10G103810**
16G1038	500	16	38xØ10.3x10mm	10 / 2000	B	**10G103816**
20G1038	500	20	38xØ10.3x10mm	10 / 2000	B	**10G103820**
25G1038	500	25	38xØ10.3x10mm	10 / 2000	B	**10G103825**
32G1038	500	32	38xØ10.3x10mm	10 / 2000	B	**10G103832**
40G1451	500	40	51xØ14.3x12mm	10 / 500	B	**10G145140**
50G1451	500	50	51xØ14.3x12mm	10 / 500	B	**10G145150**
63G1451	500	63	51xØ14.3x12mm	10 / 500	B	**10G145163**

FUSE FOR SWITCH DISCONNECTORS EL-D02



EL-D02 Type

UNTIL SUPPLY LAST

Type of the fuse class gG	Voltage (V)	Rated current (A)	Size of the fuse A x ØB x C	Product category	Catalogue number
RO 26/32 2A	500	2	Ø11x 36mm	F	10R0232
RO 26/32 4A	500	4	Ø11x 36mm	F	10R0234
RO 26/32 6A	500	6	Ø11x 36mm	F	10R0236
RO 26/32 10A	500	10	Ø11x 36mm	F	10R0240
RO 26/32 16A	500	16	Ø11x 36mm	F	10R0246
RO 26/32 20A	500	20	Ø15x 36mm	F	10R0248
RO 26/63 40A	500	40	Ø15x 36mm	F	10R0640
RO 26/63 50A	500	50	Ø15x 36mm	F	10R0650

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-3 and IEC947-3

SWITCH DISCONNECTORS ISS FROM 20A TO 125A SERIES

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty



FUNCTIONS:
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits
- can be used as a main breaker
- it has no protective function
-

TECHNICAL DATA:
- Rated voltage: 230/400V; 50/60Hz
- Joining terminal: flat (tunnel) screw terminal
- Connecting: power supply busbar, rigid or flexible conductors
- Tightening moment: 1.33Nm
- Isolating voltage: ≥500V
- Electrical wear resistance (number of cycles): ≥10000
- Mechanical wear resistance (number of cycles): ≥20000
- IP code: IP>20
- Mounting: DIN-rail
- Plastic material of UV rays
- Ambient temperature: -20°C + 65°C

Dimensions (mm)

H1	H2	D1	D2	D3
81	45	50	65	76
W1	W2	W3	W3	
17,5	35	52,5	70	







Type	Number of poles	Rated current In (A)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number
ISS	1P	40	10	12 / 240	B	**41914**
ISS	1P	63	16	12 / 240	B	**41911**
ISS	1P	80	25	12 / 240	B	**41912**
ISS	1P	100	35	12 / 240	B	**41913**
ISS	1p	125	50	12 / 240	B	**41916**





Type	Number of poles	Rated current In (A)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number
ISS	2P	40	10	6 / 120	B	**41924**
ISS	2P	63	16	6 / 120	B	**41921**
ISS	2P	80	25	6 / 120	B	**41922**
ISS	2P	100	35	6 / 120	B	**41923**
ISS	2p	125	50	6 / 120	B	**41925**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





Type	Number of poles	Rated current In (A)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number
ISS	3P	20	2.5	4/80	B	**41935**
ISS	3P	32	6.0	4/80	B	**41936**
ISS	3P	40	10	4 / 80	B	**41934**
ISS	3P	63	16	4 / 80	B	**41931**
ISS	3P	80	25	4 / 80	B	**41932**
ISS	3P	100	35	4 / 80	B	**41933**
ISS	3p	125	50	4 / 80	B	**41937**





Type	Number of poles	Rated current In (A)	Recommended conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number
ISS	4P	40	10	3 / 60	B	**41944**
ISS	4P	63	16	3 / 60	B	**41941**
ISS	4P	80	25	3 / 60	B	**41942**
ISS	4P	100	35	3 / 60	B	**41943**
ISS	4p	125	50	3 / 60	B	**41945**

PADLOCK ADAPTOR FOR MCB



An adaptor makes it possible to block the operating lever whether switched ON or OF

Type	Product category	Catalogue number
Padlock adaptor for MCB	B	**41904**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DOCUMENTS CORRESPONDING TO THE PRODUCT:
Standard EN 60947-1
EN 60947-3 and IEC 60947-6

SWITCH DISCONNECTORS ISS2 FROM 125A TO 800A

5+2 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty

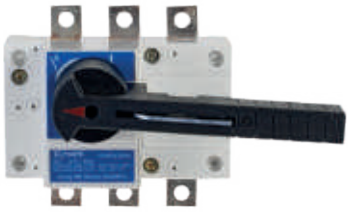

The series three- and four-pole load switch disconnectors ISS2 xxx are produced for mounting in main electrical boards for disconnection of the circuits, switching on of generators because of the fact they are not affected by the frequency variations. High mechanical strength and resistance to circulation. Simple and secure management.

FUNCTIONS:
- switching on and off of electrical circuits under load
- disconnection of electrical circuits
- used as main circuit-breaker
- resistant to high voltages, to short circuits in the protected circuit
- it has no protective function

TECHNICAL FEATURES:
- Rated voltage: not higher than 660V; 50/60Hz
- Double connector: screw connection
- Connection: solid or flexible conductors
- Insulation voltage: ≥1000V
- Resistance to impulse voltage: 8000V
- Electrical endurance (number of cycles): ≥5 000
- Mechanical endurance (number of cycles): ≥10 000
- IP code: IP>20
- Mounting method: to a surface by means of bolts
- Plastic resistant to UV raysPlastic resistant to UV rays
- Ambient temperature: -20°÷65°C

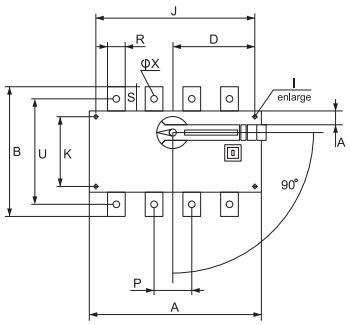



Type	Dimensions (mm)											
	A	B	C	D	E	J	J1	K	R	S	T	Y
ISS2-125/3	140	135	125	27	73	120	120	65	20	25	3.5	25
ISS2-125/4	170	135	125	27	73	150	150	65	20	25	3.5	25
ISS2-160/3	140	135	125	27	73	120	120	65	20	25	3.5	25
ISS2-160/4	170	135	125	27	73	150	150	65	20	25	3.5	25
ISS2-250/3	180	170	138	35	86	160	160	90	25	30	3.5	25
ISS2-250/4	230	170	138	35	86	210	210	90	25	30	3.5	25
ISS2-400/3	230	240	165	50	110	210	210	140	32	40	5	37
ISS2-400/4	295	240	165	50	110	275	275	140	32	40	5	37
ISS2-630/3	230	260	165	50	110	210	210	140	40	50	6	37
ISS2-630/4	295	260	165	50	110	275	275	140	40	50	6	37
ISS2-800/3	378	312	240	50	140	353	353	175	60	56	8	48
ISS2-800/4	498	312	240	50	140	473	473	175	60	56	8	48

Type	Rated current In (A)	Maximum breaking capacity Icu (A)	Tightening moment (Nm)	Packing/Box (pcs)	Product category	Catalogue number three-pole	Catalogue number four-pole
ISS2-125in	**125**	**1250**	**6.5**	**1 / 12**	**B**	**41951**	**41961**
ISS2-125out	**125**	**1250**	**6.5**	**1 / 12**	**B**	**41952**	**41962**
ISS2-160in	**160**	**1250**	**6.5**	**1 / 12**	**B**	**41953**	**41963**
ISS2-160out	**160**	**1250**	**6.5**	**1 / 12**	**B**	**41954**	**41964**
ISS2-250in	**250**	**2000**	**10**	**1 / 6**	**B**	**41955**	**41965**
ISS2-250out	**250**	**2000**	**10**	**1 / 6**	**B**	**41956**	**41966**
ISS2-400in	**400**	**3200**	**14.5**	**1 / 2**	**B**	**41957**	**41967**
ISS2-630in	**630**	**4000**	**14.5**	**1 / 2**	**B**	**41958**	**41968**
ISS2-800in	**800**	**1000**	**27**	**1 / 2**	**B**	**41959**	**41969**

Note: ISS2-xxx in – load circuit-breaker for mounting in the interior of a board
ISS2 -xxx out – load circuit-breaker with an extended lever for mounting on the front panel of the board

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DOCUMENTS CORRESPONDING TO THE PRODUCT:
Standard EN 60947-1
EN 60947-3 and IEC 60947-6

MANUAL SWITCHING TO RESERVE SERIES EQ 2M FROM FROM 160A TO 800A

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty



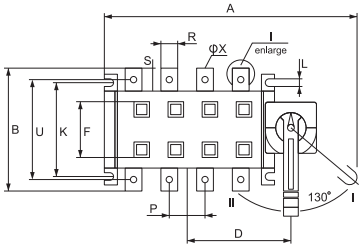



The series three- and four-pole load isolating switch EQ 2 M xxx are produced for mounting in main electrical boards for disconnection of the circuits, manual switching between two power supplies or switching ON of generators because of the fact they are not affected by the frequency variations. High mechanical strength and resistance to circulation. Simple and secure management.

FUNCTIONS:

- switching on and off of low voltage electrical circuits under load
- disconnection of the electrical circuit from one of the power supplies, while providing immediately switching to the other
- used as main switch
- resistant to high voltages, to short circuits in the protected circuit
- it has no protective function

TECHNICAL CHARACTERISTICS:

- Rated voltage: not higher than 690V; 50/60Hz
- Double connector: screw connection
- Connection: hard or flexible conductors
- Insulation voltage: ≥1000V
- Resistance to impulse voltage: 8000V
- Electrical endurance (number of cycles): ≥5 000
- Mechanical endurance (number of cycles): ≥10 000
- IP code: IP>20
- Mounting method: to a surface by means of bolts
- Plastic resistant to UV rays
- Ambient temperature: -20°÷65°C
- Small size
- Indication which of the two supplies is operating

Type	Dimensions (mm)												
	A	B	C	D	E	J	J1	K	R	S	T	Y	Y1
EQ2M-160/3	270	135	212	89	150	120	65	95	20	25	3.5	55	25
EQ2M-160/4	300	135	212	104	150	150	65	95	20	25	3.5	55	25
EQ2M-250/3	307	170	260	110	180	160	65	115	25	30	3.5	70	25
EQ2M-250/4	357	170	260	135	180	210	65	115	25	30	3.5	70	25
EQ2M-400/3	372	240	297	150	236	210	77	180	32	40	5	83	37
EQ2M-400/4	432	240	297	180	236	275	77	180	32	40	5	83	37
EQ2M-630/3	372	240	297	150	236	210	77	180	40	50	6	83	37
EQ2M-630/4	432	240	297	180	236	275	77	180	40	50	6	83	37
EQ2M-8003	372	240	297	150	236	210	77	180	60	56	8	83	48
EQ2M-800/4	432	240	297	180	236	275	77	180	60	56	8	83	48

Type	Rated current In (A)	Maximum breaking capacity Icu (A)	Tightening moment (Nm)	Packing/Box (pcs)	Product category	Catalogue number three-pole	Catalogue number four-pole
EQ2M-160	160	1250	6.5	1 / 4	B	**44641**	**44641P**
EQ2M-250	250	2000	10	1 / 2	B	**44642**	**44642P**
EQ2M-400	400	3200	14.5	1 / 2	B	**44643**	**44643P**
EQ2M-630	630	4000	14.5	1 / 2	B	**44644**	**44644P**
EQ2M-800	800	1000	27	1 / 2	B	**44645**	**44645P**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2

HIGH BREAKING CAPACITY LEVEL MOULDED CASE CIRCUIT BREAKERS (MCCB) DS1 MAX FROM 63A... 800A

7+0 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty



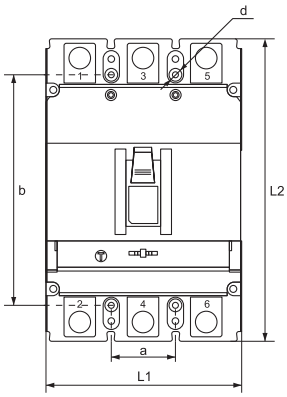

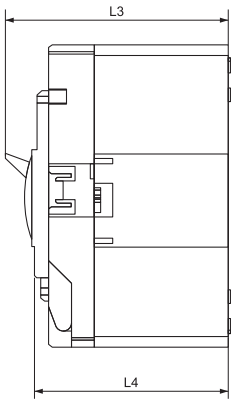

FUNCTIONS:
- high breaking capacity level
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- can be used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics control: manual
- possibility for auxiliary devices mounting for automation

TECHNICAL DATA:
- Rated operating voltage: 415/690V; 50/60Hz
- Isolating voltage: 2000V
- Surge voltage wear resistance: ≥8000V
- Connecting:
  - rigid or flexible conductors
  - front conductors joining
  - possibility for mounting to lengthening terminal
- Plastic elements
  - not keeping the burning material nylon PA66
  - box permitivity strength: >16MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C
- Static contacts – alloy: pure copper T2Y2
  - acontact head: silver graphite CAg(5)
  - athickness: depends on the current
- Tightening moment: 1.33Nm
- Electrical wear resistance (number of cycles): ≥10000
- Mechanical wear resistance (number of cycles): ≥20000
- IP code: IP>20
- Mounting:
  - joining with bolts
  - mounting position: vertical
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -20°/65°C.

Type	Overall dimensions (mm)						
	L1	L2	L3	L4	a	b	d
DS1 MAX 125/63 3P M	92	150	110	92	30	129	4.5
DS1 MAX 125/80 3PM	92	150	110	92	30	129	4.5
DS1 MAX 125/100 3P M	92	150	110	92	30	129	4.5
DS1 MAX 125/125 3P M	92	150	110	92	30	129	4.5
DS1 MAX 250/160 3P M	92	165	110	90	35	126	4.5
DS1 MAX 250/200 3P M	107	165	110	90	35	126	4.5
DS1 MAX 250/250 3P H	107	165	110	90	35	126	4.5
DS1 MAX 400/400 3P H	150	257	146	106	44	194	7
DS1 MAX 630/630 3P H	182	270	155	116	116	200	7
DS1 MAX 800/800 3P H	210	28	155	116	70	243	7
DS1 MAX 125/63 4P M	122	150	110	92	60	129	4.5
DS1 MAX 125/80 4PM	122	150	110	92	60	129	4.5
DS1 MAX 125/100 4P M	122	150	110	92	60	129	4.5
DS1 MAX 125/125 4P M	122	150	110	92	60	129	4.5
DS1 MAX 250/160 4P M	142	165	110	90	70	126	4.5
DS1 MAX 250/200 4P M	142	165	110	90	70	126	4.5
DS1 MAX 250/250 4P H	142	165	110	90	70	126	4.5
DS1 MAX 400/400 4P H	198	257	146	106	44	194	7
DS1 MAX 630/630 4P H	240	270	155	116	116	200	7
DS1 MAX 800/800 4P H	280	280	155	116	70	243	7

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjusment (A)	Packing/ box	Product category	Catalogue number three-poles	Catalogue number four-poles
			415V	690V					
DS1 MAX - 125	63	36	50	20	50,4-63	1/16	B	**44163MM**	**444163MM**
DS1 MAX - 125	80	36	50	20	64-80	1/16	B	**44164MM**	**444164MM**
DS1 MAX - 125	100	36	50	20	80-100	1/16	B	**44165MM**	**444165MM**
DS1 MAX - 125	125	36	50	20	100-125	1/16	B	**44166MM**	**444166MM**
DS1 MAX - 250	160	36	50	20	128-160	1/6	B	**44160MM**	**444160MM**
DS1 MAX - 250	200	36	50	20	160-200	1/6	B	**44200MM**	**444200MM**
DS1 MAX - 250	250	42	65	25	200-250	1/6	B	**44250MH**	**444250MH**
DS1 MAX - 400	400	50	85	30	320-400	1/3	B	**44401MH**	**444401MH**
DS1 MAX - 630	630	50	85	30	504-630	1/2	B	**44630MH**	**444630MH**
DS1 MAX - 800	800	65	100	50	640-800	1/2	B	**44800MH**	**444800MH**

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2

HIGH BREAKING CAPACITY LEVEL MOULDED CASE CIRCUIT BREAKERS (MCCB) DS1 MAX TO 800A-ELECTRONIC TYPE

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty









FUNCTIONS:
- high breaking capacity level
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- can be used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics
- control: manual
- possibilities for electrical module parameters adjustment through direct modules (combination of keys) thus providing accurate protection from overload and short circuit
- simultaneous protection of the three phases
- possibility for auxiliary devices mounting for automation
- contactor for TT test 15V DC

TECHNICAL DATA:
- Rated operating voltage: 415/690V; 50/60Hz
- Isolating voltage: 2000V
- Surge voltage wear resistance: ≥8000V
- Joining terminal: flat (tunnel) screw terminal
- Connecting:
  - rigid or flexible conductors
  - front conductors joining
  - possibility for mounting to lengthening terminal
- Electrical wear resistance (number of cycles):≥ 10000
- Mechanical wear resistance (number of cycles):≥ 20000
- IP code: IP>20
- Abnormal heating wear resistance and fire of the outer parts: 960°C
- Mounting:
  - joining with bolts
  - mounting position: vertical
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -20°÷65°C

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjusment (A)	Packing/ box	Product category	Catalogue number three-poles	Catalogue number four-poles
			415V	690V					
DS1 MAX - 400E	400	50	85	30	200-400	1/3	B	**44940MH**	**444940MH**
DS1 MAX - 630E	630	50	85	30	400-630	1/2	B	**44963MH**	**444963MH**
DS1 MAX - 800E	800	65	100	50	630-800	1/2	B	**44980MH**	**444980MH**

Tripping characteristic:
Ir1(A) Over-load long time delay tripping current
Ir1 adjustment, according to the different rated current of MCCB.
t1(s) Long time delay tripping time t1 adjustment.
Ir2(XIr1) Short circuit short time delay tripping time Ir2 adjustment.
t2(s) Short time delay tripping time t2 adjustment.
Ir3(XIr1) Short circuit instantaneous tripping current Ir3 adjustment.
Ir0(XIr1) Pre-alarm tripping current Ir0 adjustment.

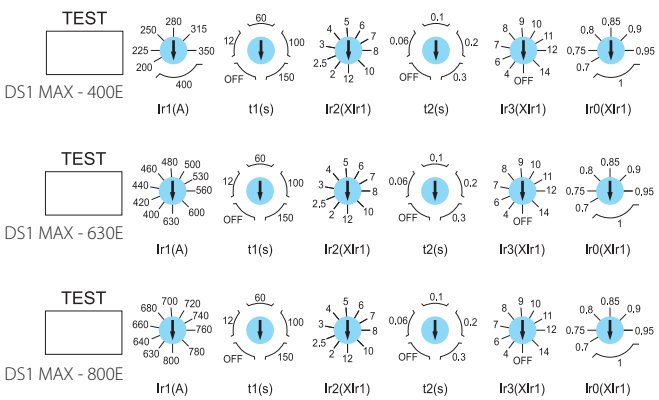

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2



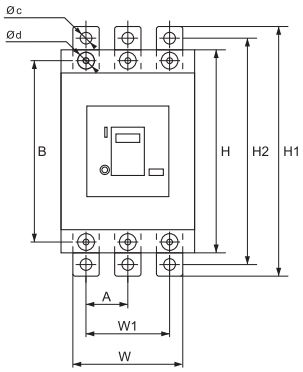



MOULDED CASE CIRCUIT BREAKERS (MCCB) DS1 SERIES FROM 40A TO 1250A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTIONS:
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- can be used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics
- control: manual
- possibility for auxiliary devices mounting for automation

TECHNICAL DATA:
- Rated operating voltage: 415/690V; 50/60Hz
- Isolating voltage: 2000V
- Surge voltage wear resistance: ≥8000V
- Joining terminal: flat (tunnel) screw terminal for the breakers up to 160A and a bolt connection for the breakers from 250A to 1600A
- Connecting:
  - rigid or flexible conductors
  - front conductors joining
  - possibility for mounting to lengthening terminal
- Plastic elements
  - not keeping the burning material nylon PA66
  - box permitivity strength: >16MV/m
- Abnormal heating wear resistance and fire of the outer parts: 960°C
- Static contacts – alloy: pure copper T2Y2
  - contact head: silver graphite CAg(5)
  - thickness: depends on the current
- Tightening moment: 1.33Nm
- Electrical wear resistance (number of cycles):≥10000
- Mechanical wear resistance (number of cycles):≥20000
- IP code: IP>20
- Mounting:
  - joining with bolts
  - mounting position: vertical
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -20°÷65°C

Type	Overall dimensions (mm)				Installation dimensions (mm)						
	W	H	D	H1	D1	A	B	W1	H2	Ø d	Ø e
DS1-125/3P	76.2	120	70		90	25	100	50		4	
DS1-160/3P	90	120	70		93	30	100	60		5	
DS1-250/3P	105	170	104	238	143.5	35	139	70	210	6	8.5
DS1-400/3P	140	257	104	316	144	44	214	87.5	285	6	11
DS1-630/3P	210	275	104	310	172	70	230	140	280	6	11
DS1-800/3P	210	275	104	347	172	70	230	140	307	6	16
DS1-1600/3P	210	410	140	410	210	70	300	140	350	10	12
DS1-125/4P	110	120	70		90	25	100	50		4	
DS1-160/4P	120	120	70		93	30	100	60		5	
DS1-250/4P	140	170	104	238	143.5	35	139	70	210	6	8.5
DS1-400/4P	184	257	104	316	144	44	214	87.5	285	6	11
DS1-630/4P	280	275	104	310	172	70	230	140	280	6	11
DS1-800/4P	280	275	104	347	172	70	230	140	307	6	16
DS1-1600/4P	280	410	140	410	210	70	300	140	350	10	12

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjustment (A)	Section of the conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number tree-poles
			415V	690V					
DS1-125	40	16	35	10	fixed	16	1 / 20	F	**44040**
DS1-125	50	16	35	10	fixed	16	1 / 20	F	**44050**
DS1-125	100	16	35	10	fixed	35	1 / 20	F	**44090**

UNTIL SUPPLY LAST



UNTIL SUPPLY **LAST**

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjustment (A)	Section of the conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number tree-poles
			415V	690V					
DS1 - 160	80	22	35	15	56 - 80	25	1 / 20	F	**44164**
DS1 - 160	100	22	35	15	70 - 100	50	1 / 20	F	**44165**



UNTIL SUPPLY **LAST**

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjustment (A)	Section of the conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number tree-poles
			415V	690V					
DS1 - 630	500	65	75	25	fixed	185	1 / 2	F	**44500**



UNTIL SUPPLY **LAST**

Type	Rated current In (A)	Max. breaking capacity (kA) Icu	Operating breaking capacity (kA)Ics	Section of the power supply conductor (mm^2)	Protection from overload	Packing/Box (pcs)	Product category	Catalogue number
DS1 - 1250	1000	85	65	240	fixed	1 / 1	F	**44000**
DS1 - 1250	1250	85	65	240	fixed	1 / 1	F	**44502**

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2

MOULDED CASE CIRCUIT BREAKER (MCCB) DS2 SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTIONS:
- no auxiliaries available for this type of MCCB
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- can be used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics
- control: manual

TECHNICAL DATA:
- Rated operating voltage: 400V; 50/60Hz
- Isolating voltage: 690V
- Surge voltage wear resistance: ≥6000V
- Joining terminal: flat (tunnel) screw terminal
- Connecting:
  - rigid or flexible conductors
  - front conductors joining
  - possibility for mounting to lengthening terminal
- Electrical wear resistance (number of cycles):≥6000
- Mechanical wear resistance (number of cycles):≥10000
- IP code: IP>20
- Mounting:
  - joining with bolts
  - mounting position: vertical
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -20°÷55°C





Type	Overall dimensions (mm)			
	W	L	H	H1
DS2-63	76	135	73,5	90,5
DS2-500	180	270	111,5	160
DS2-630	180	270	111,5	160
DS2-800	210	274,3	109	145,8

Type	Rated current In (A)	Max. breaking capacity (kA) Icu	Operating breaking capacity (кA) Ics	Recommended conductor (mm^2)	Protection from overload	Packing/Box (pcs)	Product category	Catalogue number tree-poles
DS2-63	63	18	12	16	fixed	1/12	F	**44006**
DS2-800	800	65	48	240	fixed	1/1	F	**44008**

UNTIL SUPPLY LAST

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2



MOULDED CASE CIRCUIT BREAKERS (MCCB) DS1 TO 1600A-ELECTRONIC TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTIONS:
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- can be used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics
- control: manual
- possibilities for electrical module parameters adjustment through direct modules (combination of keys) thus providing accurate protection from overload and short circuit
- simultaneous protection of the three phases
- possibility for auxiliary devices mounting for automation
- contactor for TT test 15V DC

TECHNICAL DATA:
- Rated operating voltage: 415/690V; 50/60Hz
- Isolating voltage: 2000V
- Surge voltage wear resistance: ≥8000V
- Joining terminal: flat (tunnel) screw terminal
- Connecting:
  - rigid or flexible conductors
  - front conductors joining
  - possibility for mounting to lengthening terminal
- Electrical wear resistance (number of cycles):≥10000
- Mechanical wear resistance (number of cycles):≥20000
- IP code: IP>20
- Abnormal heating wear resistance and fire of the outer parts: 960°C
- Mounting:
  - joining with bolts
  - mounting position: vertical
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -20°÷65°C

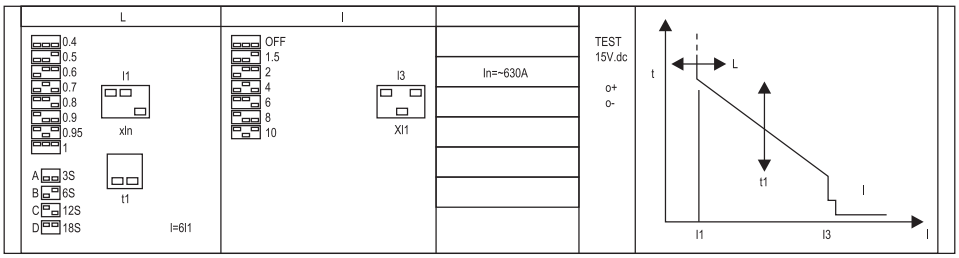

PROTECTING FUNCTIONS:
Function L – step adjustment for protection against overload. Adjustment of the operating current I1=0.4+1xIn with discreet coefficients as the value can be 0.4; 0.5; 0.6; 0.7; 0.8; 0.9; 0.95 and 1
Time delay adjustment t1 of the protection against overload – step adjustment with four values A-3s; B-6s; C-12s; D-18s when current is I=6I1. The diagram of the current curves is presented on fig.1
Adjustment of the transitory protection current against short circuit I3=X x I1 where X can take discreet value OFF; 1.5; 2; 4; 6; 8; 10

Type	Rated current In (A)	Operating breaking capacity (kA) Ics	Maximum breaking capacity (kA) Icu		Thermal current adjustment (A)	Section of the conductor (mm^2)	Packing/Box (pcs)	Product category	Catalogue number tree-poles
			415V	690V					
DS1 - 630E	630	65	75	25	252 - 630	240	1 / 2	F	**44963**
DS1 - 1250E	1000	85	100	65	400 - 1000	240	1 / 1	F	**44999**
DS1 - 1250E	1250	85	100	65	500 - 1250	240	1 / 1	F	**44925**
DS1 - 1600E	1600	85	100	65	640 - 1600	240	1 / 1	F	**44960**

UNTIL SUPPLY LAST





SHUNT RELEASE (MX)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The device is used for remote control of breakers as at voltage signal it starts operating and switches off the breaker to which it is mounted

TECHNICAL DATA:
- rated operating voltage: 230/400V 50/60Hz
- electromagnetic coil 100VA for breakers up to 400A
- electromagnetic coil 150VA for breakers 630-800A
- available joining conductors

MOUNTING:
Mounted in a special jack after cover dismounting

CONNECTING:
Connected with the operative system through the provided conductors

UNTIL SUPPLY LAST *Until Supply Last- 3 year standard+0 year extended warranty

DS1-ELECTRONIC TYPE WITH MOUNTED MX

Type	Product category	Catalogue number 400V	230V
DS1 630/3300*	F	**44455**	

DS1 MAX-ELECTRONIC TYPE WITH MOUNTED MX

Type	Product category	Catalogue number 400V	230V
DS1 MAX 400/3300	B	**444511M**	**44452M**
DS1 MAX 630/3300	B	**44455M**	**44456M**
DS1 MAX 800/3300	B	**44459M**	**44460M**

DS1-THERMOMAGNETIC TYPE WITH MOUNTED MX

Type	Product category	Catalogue number 400V	230V
DS1 125/40*	F	**44317**	**44318**
DS1 125/50*	F	**44321**	**44322**
DS1 125/100*	F	**44336**	**44337**
DS1 160/100*	F	**44463**	**44464**
DS1 630/500*	F	**44359**	**44360**

DS1 MAX-THERMOMAGNETIC TYPE WITH MOUNTED MX

Type	Product category	Catalogue number 400V	230V
DS1 MAX 125/63	B	**44326M**	**44327M**
DS1 MAX 125/80	B	**44331M**	**44332M**
DS1 MAX 125/100	B	**44336M**	**44337M**
DS1 MAX 125/125	B	**44340M**	**44341M**
DS1 MAX 250/160	B	**44333M**	**44344M**
DS1 MAX 250/200	B	**44347M**	**44348M**
DS1 MAX 250/250	B	**44351M**	**44352M**
DS1 MAX 400/400	B	**44355M**	**44356M**
DS1 MAX 630/630	B	**44363M**	**44364M**
DS1 MAX 800/800	B	**44367M**	**44368M**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

UNDER VOLTAGE RELEASE (MN)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



MN for DS1 - 125-160

The device switches off and/or does not allow the switching on of the breaker to which it is mounted at power breakdown or voltage decrease under certain limits

TECHNICAL DATA:
- operating voltage: 230/400V 50Hz
- electromagnetic coil 6VA for breakers up to 400A
- electromagnetic coil 10VA for breakers 630-800A
- available joining conductors
- switches off at voltage decrease under 75% of the operating

MOUNTING:
Mounted in a special jack after cover dismounting
Note: The breakers are offered with mounted accessory

CONNECTING:
Connected with the operative system through the provided conductors



MN for DS1 - 250-800

UNTIL SUPPLY LAST

*Until Supply Last - 3 year standard+0 year extended warranty



DS1-ELECTRONIC TYPE WITH MOUNTED MN

Type	Product category	Catalogue number 400V	Catalogue number 230V
DS1 630/3300*	F	**44487**	**44488**

DS1 MAX-ELECTRONIC TYPE WITH MOUNTED MN

Type	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 400/3300	B	**44483M**	**44484M**
DS1 MAX 630/3300	B	**44487M**	**44488M**
DS1 MAX 800/3300	B	**44491M**	**44492M**

DS1-THERMOMAGNETIC TYPE WITH MOUNTED MN

Type	Product category	Catalogue number 400V	Catalogue number 230V
DS1 125/40*	F	**44383**	**44384**
DS1 125/50*	F	**44387**	**44388**
DS1 125/100*	F	**44399**	**44402**
DS1 160/100*	F	**44475**	**44476**
DS1 630/500*	F	**44427**	**44428**

DS1 MAX-THERMOMAGNETIC TYPE WITH MOUNTED MN

Type	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 125/63	B	**44391M**	**44392M**
DS1 MAX 125/80	B	**44395M**	**44396M**
DS1 MAX 125/100	B	**44399M**	**44402M**
DS1 MAX 125/125	B	**44407M**	**44408M**
DS1 MAX 250/160	B	**44411M**	**44412M**
DS1 MAX 250/200	B	**44415M**	**44416M**
DS1 MAX 250/250	B	**44419M**	**44420M**
DS1 MAX 400/400	B	**44423M**	**44424M**
DS1 MAX 630/630	B	**44431M**	**44432M**
DS1 MAX 800/800	B	**44435M**	**44436M**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-2



AUXILIARY CONTACT (OF)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

According to the way of mounting the auxiliary devices can be divided into two groups:
- internal devices – accessories for whose mounting it is necessary to dismount the cover of the breakers and fix them in specially designed jacks
- external devices – they are mounted right on the top cover of the breaker

INTERNAL DEVICES

AUXILIARY CONTACT (OF)
The device changes its condition conformably to the breaker's condition; it has a NO and a NC contactor.

UNTIL SUPPLY LAST

TECHNICAL DATA:
- for breakers up to 160A operating current through the auxiliary contact: 3A
- for breakers from 250 to 800A operating current through the auxiliary contact: 6A
- available joining conductors
- labeling of the cables

MOUNTING:
Mounted in a special jack after cover dismounting
NOTE:
The breakers are offered with mounted accessory
CONNECTING:
Connected with the operative system through the provided conductors

*Until Supply Last - 3 year standard+0 year extended warranty



DS1-THERMOMAGNETIC TYPE WITHMOUNTED OF

Type	Product category	Catalogue number
DS1 125/40*	F	**44301**
DS1 125/50*	F	**44302**
DS1 125/100*	F	**44305**
DS1 630/500*	F	**44311**

DS1 MAX-THERMOMAGNETIC TYPE WITH MOUNTED OF

Type	Product category	Catalogue number
DS1 MAX 125/63	B	**44303M**
DS1 MAX 125/80	B	**44304M**
DS1 MAX 125/100	B	**44305M**
DS1 MAX 125/125	B	**44306M**
DS1 MAX 250/160	B	**44307M**
DS1 MAX 250/200	B	**44308M**
DS1 MAX 250/250	B	**44309M**
DS1 MAX 400/400	B	**44310M**
DS1 MAX 630/630	B	**44312M**
DS1 MAX 800/800	B	**44313M**

DS1 -ELECTRONIC TYPE WITH MOUNTED MX+OF

	Product category	Catalogue number 400V
DS1 630/3300*	F	**44457**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.







MCCB WITH AUXILIARY DEVICES MOUNTED (MX+OF) AND (MN+OF)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

UNTIL SUPPLY LAST *Until Supply Last- 3 year standard+0 year extended warranty

DS1-THERMOMAGNETIC TYPE WITH MOUNTED MX+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 125/40*	F	**44319**	**44320**
DS1 125/50*	F	**44323**	**44324**
DS1 125/100*	F	**44338**	**44339**
DS1 160/100*	F	**44465**	**44466**
DS1 630/500*	F	**44361**	

DS1 MAX-THERMOMAGNETIC TYPE WITH MOUNTED MN+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 125/63	B	**44393M**	**44394M**
DS1 MAX 125/80	B	**44397M**	**44398M**
DS1 MAX 125/100	B	**44405M**	**44406M**
DS1 MAX 125/125	B	**44409M**	**44410M**
DS1 MAX 250/160	B	**44413M**	**44414M**
DS1 MAX 250/200	B	**44417M**	**44418M**
DS1 MAX 250/250	B	**44421M**	**44422M**
DS1 MAX 400/400	B	**44425M**	**44426M**
DS1 MAX 630/630	B	**44433M**	**44434M**
DS1 MAX 800/800	B	**44437M**	**44438M**

DS1 MAX-ELECTRONIC TYPE WITH MOUNTED MN+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 400/3300	B	**44485M**	**44486M**
DS1 MAX 630/3300	B	**44489M**	**44490M**
DS1 MAX 800/3300	B	**44493M**	**44494M**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DS1 MAX-ELECTRONIC TYPE WITH MOUNTED MX+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 400/3300	B	**44453M**	**44454M**
DS1 MAX 630/3300	B	**44457M**	**44458M**
DS1 MAX 800/3300	B	**44461M**	**44462M**

DS1 MAX- THERMOMAGNETIC TYPE WITH MOUNTED MX+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 MAX 125/63	B	**44328M**	**44330M**
DS1 MAX 125/80	B	**44334M**	**44335M**
DS1 MAX 125/100	B	**44338M**	**44339M**
DS1 MAX 125/125	B	**44342M**	**44343M**
DS1 MAX 250/160	B	**44345M**	**44346M**
DS1 MAX 250/200	B	**44349M**	**44350M**
DS1 MAX 250/250	B	**44353M**	**44354M**
DS1 MAX 400/400	B	**44357M**	**44358M**
DS1 MAX 630/630	B	**44365M**	**44366M**
DS1 MAX 800/800	B	**44369M**	**44370M**

DS1-THERMOMAGNETIC TYPE WITH MOUNTED MN+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 125/40	F	**44385**	**44386**
DS1 125/50	F	**44389**	**44390**
DS1 125/100	F	**44405**	**44406**
DS1 125/125	F	**44409**	**44410**
DS1 160/100	F	**44477**	**44478**
DS1 630/500	F	**44429**	**44430**

UNTIL SUPPLY **LAST**

DS1-ELECTRONIC TYPE WITH MOUNTED MN+OF

	Product category	Catalogue number 400V	Catalogue number 230V
DS1 630/3300	F	**44489**	**44490**

UNTIL SUPPLY **LAST**



REMOTE CONTROL (MANUAL)

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

Description:
The device switches off/on the breaker to which manual operative rotary mechanism is mounted
- two operating positions of the executive mechanism fixed at 90°C

Mounting:
The base is mounted with bolts right on the cover (scheme 1 mounting), and the handle is mounted at the door of the distribution box, using an extension axis it is joined to the base

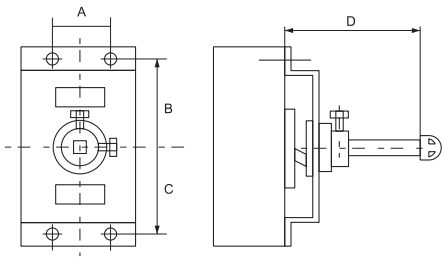

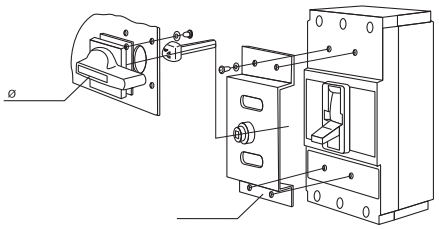

REMOTE CONTROL FOR MCCB, DS1

Type of the breaker	Dimensions (mm)					Packing/Box (pcs)	Product category	Catalogue number
	A	B	C	Dmin	Dmax			
DS1 125A*	25	50	50	65	115	1	F	**44967**
DS1 160A*	30	50	50	65	115	1	F	**44968**
DS1 250A*	35	70	70	80	130	1	F	**44969**
DS1 400A*	45	107	107	85	105	1	F	**44970**
DS1 630A*	70	119	119	110	110	1	F	**44971**
DS1 800A*	70	119	119	110	110	1	F	**44972**

*3 year standard+0 year extended warranty

UNTIL SUPPLY LAST

REMOTE CONTROL FOR MCCB, DS1 MAX

Type of the breaker	Dimensions (mm)					Packing/Box (pcs)	Product category	Catalogue number
	A	B	C	Dmin	Dmax			
DS1 MAX 63A	25	50	50	65	115	1	B	**44966M**
DS1 MAX 125A	25	50	50	65	115	1	B	**44967M**
DS1 MAX 250A	35	70	70	80	130	1	B	**44969M**
DS1 MAX 400A	45	107	107	85	105	1	B	**44970M**
DS1 MAX 630/800A	70	119	119	110	110	1	B	**44972M**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DS1 - 125-160

REMOTE CONTROL (ELECTRICAL)

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

Description:
The device switches off/on the breaker to which manual operative rotary mechanism is mounted
- two operating positions of the executive mechanism fixed at 90°C

Mounting:
The base is mounted with bolts right on the cover (scheme 1 mounting), and the handle is mounted at the door of the distribution box, using an extension axis it is joined to the base



DS1 - 250-800

ELECTRICAL REMOTE CONTROL FOR MCCB DS1

Type of the breaker	Dimensions (mm)					Packing/Box (pcs)	Product category	Catalogue number Operating voltage (V)	
	A	A1	B	B1	H			230V	400V
DS1 125	103.5	110	30	90	92	1	F	**44912**	**44907**
DS1 160	103.5	110	35	90	92	1	F	**44913**	**44908**
DS1 250	139	-	132	-	105	1	F	**44914**	**44909**
DS1 400	226	-	132	-	132	1	F	**44915**	**44910**
DS1 630	226	-	132	-	132	1	F		**44911**
DS1 800	226	-	132	-	132	1	F		**44911**

*3 year standard+0 year extended warranty

UNTIL SUPPLY LAST



DS1 MAX - 63-250

ELECTRICAL REMOTE CONTROL FOR MCCB DS1 MAX

Type of the breaker	Dimensions (mm)					Packing/Box (pcs)	Product category	Catalogue number Operating voltage (V)	
	L1	B	B	H	H1			230V	400V
DS1 MAX 63A	116	90	50	77	12,5	1	B	**44917M**	**44906M**
DS1 MAX 125A	116	90	50	77	12,5	1	B	**44912M**	**44907M**
DS1 MAX 250A	116	90	70	77	15	1	B	**44914M**	**44909M**
DS1 MAX 400A	176	130	107	115	27	1	B	**44915M**	**44910M**
DS1 MAX 630A	176	130	119	115	31	1	B	**44916M**	**44911M**
DS1 MAX 630A	176	130	119	115	31	1	B	**44916M**	**44911M**

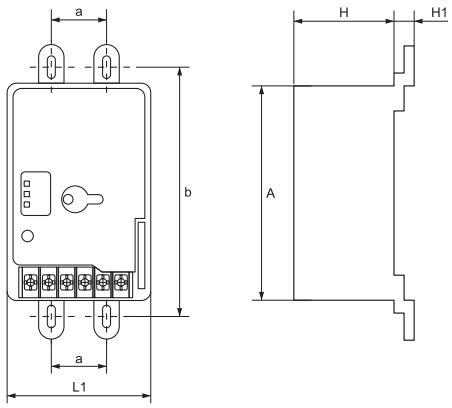

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TERMINAL PLATES FOR MCCB - DS1 AND DS1 MAX TYPE

Straight copper electro-tinned extensions enabling cable connection outside the switch terminals and providing excellent contact with the switch terminal base. Terminal extensions with different cross section are available depending on the switch rated power.

MOUNTING:
Extensions are directly bolt mounted to the switch terminal base.

TERMINAL PLATES FOR MCCB - DS1

Type	Product category	Rated current (A)	Catalogue number 3pcs/set
TP 125	F	125	**31125**
TP 160	F	160	**31160**
TP 250	F	250	**31250**
TP 400	F	400	**31400**
TP 630	F	630	**31630**
TP 800	F	800	**31850**

UNTIL SUPPLY LAST

TERMINAL PLATES FOR MCCB - DS1 MAX

Type	Product category	Rated current (A)	Catalogue number 3pcs/set	Catalogue number 4pcs/set
TP 125 MAX	B	125	**31125M**	-
TP 250 MAX	B	250	**31250M**	-
TP 400 MAX	B	400	**31400M**	**314400M**
TP 630 MAX	B	630	**31630M**	**314630M**
TP 800 MAX	B	800	**31850M**	**314850M**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1; EN 60947-2

MOULDED CASE CIRCUIT BREAKER(MCCB) DW1 SERIES

5+2 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty



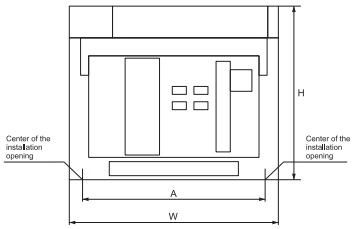

The DW1 series is an intelligent type circuit breaker used to control and protect low voltage electrical distribution network. Possibility to set the parameters of the circuit protection, built in under voltage release, remote control, earth protection and load monitoring.

FUNCTIONS:
- switching on/off heavy loaded electrical circuits
- breaking of electrical circuits and control of powerful consumers
- used as a main breaker in housing or industrial distributing installations
- endures high currents of short circuit in the protected circuit
- remarkable with high reliability of current characteristics
- motor control
- mounted auxiliary devices for automation - under voltage release, earth protection, intelligent controlling block with a possibility for a choice of the protected function

TECHNICAL DATA:
- Rated operating voltage: 690V; 50/60Hz
- Isolating voltage: 690V
- Surge voltage wear resistance: 2kV
- Joining terminal: bolt connection with 4 bolts to the power supply railConnecting:
  - copper rails
  - busway connection – at the back
- Electrical wear resistance (number of cycles): ≥2000
- Mechanical wear resistance (number of cycles): ≥9000
- IP code: IP54
- Mounting:
  - clamping with bolts
  - mounting position: vertical gradient – maximum 5°
- Plastic material of UV rays and non-flammable
- Test button
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

BASIC PROTECTIVE FUNCTIONS:
- Overload protection with long time delay
- Short circuit protection with short time delay, time inversion limit
- Short circuit protection with short time delay, time fixed limit
- Instantaneous short circuit protection
- Earth protection function
- Full stability function
- "Overload alarm" function
- Test function
- Auto diagnostics function

A commutation type of breakers with RS 485 connection for duplex transmission of all function parameters, adjustment and data can also be produced at client's order and delivery terms agreement.

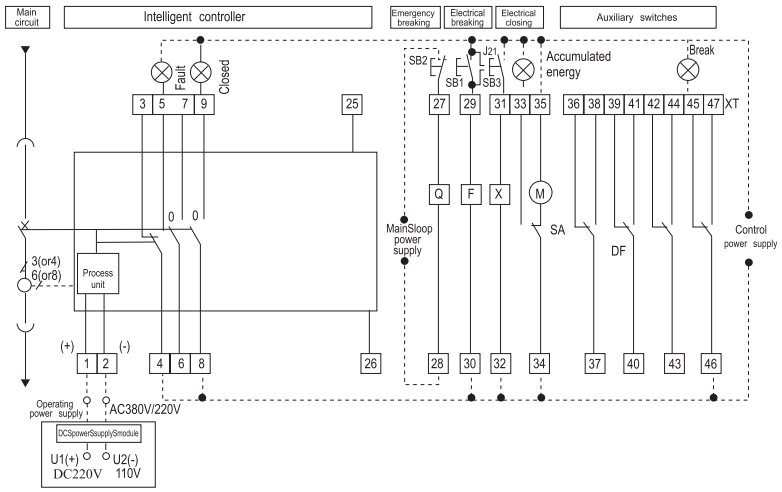

Type	Dimensions		
	A	H	W
DW1-2000 FIXED	362	402	373
DW1-3200 FIXED	422	402	363
DW1-2000 DRAW-OUT	375	432	461
DW1-3200 DRAW-OUT	435	432	494
DW1-4000 DRAW-OUT	550	432	494
DW1-6300 DRAW-OUT	813	452	504

Type	Rated current In (A)	Rated voltage Un (V)	Breaking capacity (kA)		Electrical wear resistance (number of cycles)	Mechanical wear resistance (number of cycles)	Packing/Box (pcs)	Product category	Catalogue number
			400 V	690 V					
DW1-2000 FIXED	1600	AC400V	80	50	2000	9000	1/1	B	**44208**
DW1-2000 FIXED	2000	AC400V	80	50	2000	9000	1/1	B	**44209**
DW1-3200 FIXED	2500	AC400V	100	65	2000	9000	1/1	B	**44255**
DW1-3200 FIXED	3200	AC400V	100	65	2000	9000	1/1	B	**44329**
DW1-2000 DRAW-OUT	1600	AC400V	80	50	2000	9000	1/1	B	**44208DO**
DW1-2000 DRAW-OUT	2000	AC400V	80	50	2000	9000	1/1	B	**44209DO**
DW1-3200 DRAW-OUT	2500	AC400V	100	65	2000	9000	1/1	B	**44255DO**
DW1-3200 DRAW-OUT	3200	AC400V	100	70	2000	9000	1/1	B	**44329DO**
DW1-4000 DRAW-OUT	3600	AC400V	100	75	2000	9000	1/1	B	**44436DO**
DW1-4000 DRAW-OUT	4000	AC400V	100	75	2000	9000	1/1	B	**44440DO**
DW1-6300 DRAW-OUT	5000	AC400V	120	75	2000	9000	1/1	B	**44650DO**
DW1-6300 DRAW-OUT	6300	AC400V	120	75	2000	9000	1/1	B	**44663DO**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
EN 60947-1
EN 60947-2; EN 60947-6-1









DUAL POWER CHANGE-OVER SWITCH EQ1 SERIES (ATS)

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

The system for dual power change-over switch EQ1 is designed to provide continuous power supply and two electrical sources automatic switch in case of failure or deviation from the set parameters. It switches only when the three phases of the second power supply source are available. The system for dual power change-over switch consists of two molded case circuit breakers mounted on a metal frame connected with common operating mechanism and controlled by a command device that controls the system parameters' correspondence.

FUNCTIONS:
- Switching on/off heavy loaded electrical circuits at main power supply discrepancy
- Switching to dual power change-over at power supply phase lack
- with option to connect to fire alarm controller. In case of fire, the ATS switches off both power supply sources
- Breaking of electrical circuits and control of powerful consumers
- Used as a main breaker in housing or industrial distributing installations supplied with a generator or a second power supply source (hospitals, post offices, military sites, control rooms)
- Remarkable with high reliability of current characteristics
- Control: motor
- Controls the following circuit parameters:
  - presence of the three phases
  - the phase voltage to be in the set limits
  - overload
  - short circuit at the outlet

TECHNICAL DATA:
- Rated operating voltage: 690V; 50/60Hz
- Surge voltage wear resistance: ≥6000V
- Joining terminal: bolt connection with 4 bolts to the power supply rail
- Connecting:
  - copper rails
  - flexible or rigid conductors
- Electrical wear resistance (number of cycles): ≥2000
- Mechanical wear resistance (number of cycles): ≥6000
- IP code: IP21
- Mounting:
  - clamping with bolts
  - mounting position: vertical gradient, maximum 5°
- Plastic material of the breakers of UV rays and non-flammable
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

BASIC FUNCTIONS OF THE CONTROL DEVICE:
- Overload protection
- Instantaneous short circuit protection
- Under phase protection
- Undervoltage protection
- Possibility for setting the change-over time between the two sources – min 3s
- Possibility for automatic switch-over to the main power supply source after restoring its parameters

The system for dual power change-over switch is offered in two types:
- with display (control device) mounted on the mounting plate (integrated type)
- with separated control display

Type of the breaker	Overall dimensions (mm)				
	A	B	C	D	H
EQ1 - 100	405	365	230	250	<170
EQ1 - 225	450	410	230	250	<190
EQ1 - 400	570	510	300	330	<200
EQ1 - 630	680	620	300	330	<250
EQ1 - 800	750	690	300	330	<250

Type	Rated current In (A)	Max. breaking capacity (kA) Icu	Operating breaking capacity (kA) Ics	Section of the power supply conductor (mm^2)	Electrical wear resistance (number of cycles)	Mechanical wear resistance (number of cycles)	Packing / Box (pcs)	Product category	Catalogue number
EQ1 - 100	100	50	35	35	2000	6000	1 / 1	B	**44100**
EQ1 - 225	225	50	35	70	2000	6000	1 / 1	B	**44225**
EQ1 - 400	400	100	65	180	2000	6000	1 / 1	B	**44403**
EQ1 - 630	630	100	65	240	1000	3000	1 / 1	B	**44633**
EQ1 - 800	800	100	65	240	1000	3000	1 / 1	B	**44833**
EQ1 - 100*	100	50	35	35	2000	6000	1 / 1	B	**44101**
EQ1 - 225*	225	50	35	70	2000	6000	1 / 1	B	**44226**
EQ1 - 400*	400	100	65	180	2000	6000	1 / 1	B	**44404**
EQ1 - 630*	630	100	65	240	1000	3000	1 / 1	B	**44634**
EQ1 - 800*	800	100	65	240	1000	3000	1 / 1	B	**44834**

Note: *Dual power change-over switch with separated control display

Documents corresponding to the product:
EN 61008-1
EN 61008-2; EN 60947-1



TYPE AC FOR AC CURRENT

ELECTRO-MAGNETIC RESIDUAL CURRENT DEVICES (RCD) JEL1

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The residual current device works with no extra power supply to the operating mechanism. It compares the magnitude of the currents through the neutral and phase conductors. The conductors are coiled on toroid and together with the secondary winding form a measurement transformer. The power conductors are coiled in such a way that the magnetic fields generated at electrical current flow through them are mutually neutralized. At failure in the insulation of some of the conductors or at presence of a person under voltage, the system is misbalanced and the magnetic fields can not be neutralized. This residual field generates in the secondary current winding, called current leakage. The device breaks when the value of this current exceeds the limit value of the residual current breaker.

FUNCTIONS:
- switching off heavy-loaded electrical circuits at insulation damage of the conductors to the consumers
- switching off heavy-loaded electrical circuits at presence of a person under voltage
- used to protect not only particular consumers/ circuits, but also the whole panel
- remarkable with high reliability of current characteristics
- control: manual switching on and automatic switching off at exit failure

TECHNICAL DATA:
- Rated operating voltage: 230/400V; 50/60 Hz
- Rated current: according to the table
- Responsiveness: 30; 100; 300; 500mA
- Time delay until break: <0.1s at I Δ n and <0.04s at 2I Δ n
- Surge voltage wear resistance: ≥2000V
- Short circuit current wear resistance: 4500A, 6000A
- Joining terminal: flat (tunnel) screw terminal made of 1.5 coldly draw-plated plane Q235A
- Type of the plastic:
  - material: self-extinguishing nylon PA66
  - permitivity strength: >18MV/m
- Contact head: silver graphite CAg(5)
- Static contact: pure copper T2Y2 type
- Electrical wear resistance (number of cycles):≥5000
- Mechanical wear resistance (number of cycles):≥10000
- IP code: IP>20
- Indication for operating (switched on) position
- Plastic material of the breakers of UV rays and non-flammable
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

CONNECTING:
- power supply busbar (only for bipolar)
- flexible or rigid conductors with corresponding section

MOUNTING:
- on DIN-rail
- mounting position: vertical

The residual current device is mounted in the distribution box, and after the device the neutral conductor and the earthing conductor must not be connected together. In order to work accurately, the device must have three- or five-conductor grid with separate protective conductor (PE) (e.g. earthing system TN-S or TT with three or five conductors). The corpus of the consumer depending on the grid type must be connected either to the protective conductor or be earthed. (Fig.1)





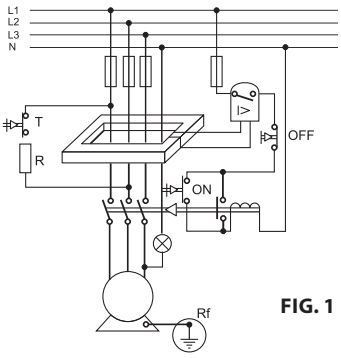

FIG. 1

Dimensions (mm)

W1	W2	H	H1	H2	D1	D2
35	70	81	35	45	50	72

CONNECTING SCHEME

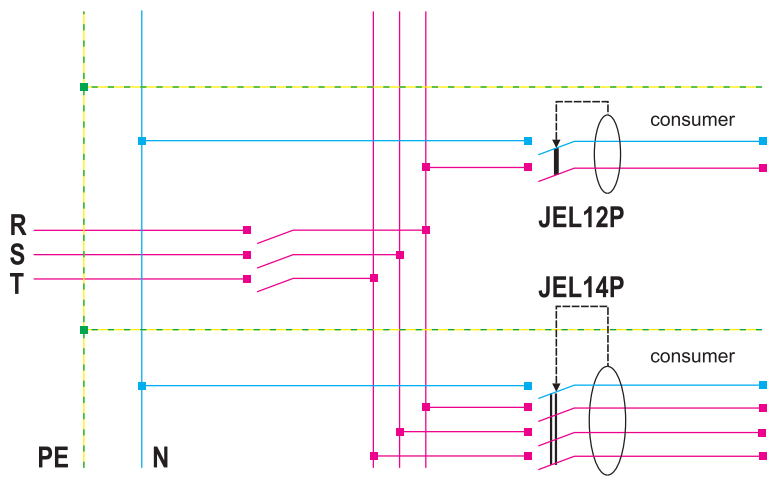

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELECTRO-MAGNETIC RESIDUAL CURRENT DEVICES (RCD) JEL1 AND JEF

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



TYPE AC FOR AC CURRENT

Residual current devices JEL 1, 6kA - Type AC - alternating fault currents sensible. Impulse withstand voltage 2000VAC

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 1	2P	6	10.0	1 / 60	B	**40210**	**40212**	**40213**	**40214**
JEL 1	2P	6	16.0	1 / 60	B	**40216**	**40217**	**40218**	**40219**
JEL 1	2P	6	20.0	1 / 60	B	**40292**	**40293**	**40294**	**40295**
JEL 1	2P	6	25.0	1 / 60	B	**40221**	**40222**	**40223**	**40224**
JEL 1	2P	6	32.0	1 / 60	B	**40231**	**40232**	**40233**	**40234**
JEL 1	2P	6	40.0	1 / 60	B	**40241**	**40242**	**40243**	**40244**
JEL 1	2P	6	63.0	1 / 60	B	**40261**	**40262**	**40263**	**40264**
JEL 1	2P	6	80.0	1 / 60	B	**40281**	**40282**	**40283**	**40284**
JEL 1	2P	6	100.0	1 / 60	B	**40291**	**40296**	**40297**	**40298**



TYPE AC FOR AC CURRENT

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 1	4P	6	10.0	1 / 30	B	**40410**	**40412**	**40413**	**40414**
JEL 1	4P	6	16.0	1 / 30	B	**40416**	**40417**	**40418**	**40419**
JEL 1	4P	6	20.0	1 / 30	B	**40492**	**40493**	**40494**	**40495**
JEL 1	4P	6	25.0	1 / 30	B	**40421**	**40422**	**40423**	**40424**
JEL 1	4P	6	32.0	1 / 30	B	**40431**	**40432**	**40433**	**40434**
JEL 1	4P	6	40.0	1 / 30	B	**40441**	**40442**	**40443**	**40444**
JEL 1	4P	6	63.0	1 / 30	B	**40461**	**40462**	**40463**	**40464**
JEL 1	4P	6	80.0	1 / 30	B	**40481**	**40482**	**40483**	**40484**
JEL 1	4P	6	100.0	1 / 30	B	**40491**	**40496**	**40497**	**40498**



TYPE AC FOR AC CURRENT

UNTIL SUPPLY LAST

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Leakage current I Δ n (mA)	Catalogue number
JEF*	2P	4.5	10	1/60	F	**300**	**40713JEF**
JEF*	2P	4.5	10	1/60	F	**30**	**40710JEF**
JEF*	2P	4.5	16	1/60	F	**300**	**40718JEF**
JEF*	2P	4.5	20	1/60	F	**300**	**40794JEF**
JEF*	2P	4.5	25	1/60	F	**300**	**40723JEF**
JEF*	2P	4.5	32	1/60	F	**300**	**40733JEF**
JEF*	2P	4.5	63	1/60	F	**300**	**40763JEF**

*3 year standard+0 year extended warranty

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
EN 61008-1
EN 61008-2; EN 60947-1

ELECTRO-MAGNETIC RESIDUAL CURRENT DEVICES (RCD) JEL1A

7+0 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty



TYPE A FOR AC/DC CURRENT

These are Residual Current Devices (RCDs) JEL 1A with enhanced sensibility and fast - operating protection devices applicable in circuits with harmonic or direct pulsating current component presence.

FUNCTIONS:
- switching off electrical circuits on load at conductor insulation breaking to the consumer
- switching off electrical circuits on load at direct and indirect contact
- switching off electrical circuits on load at alternating earth fault currents during consequent light impact
- switching off consumers at harmonic presence due to luminescent lights
- switching off consumers in DC circuits at fault currents presence
- mechanical indicator for ON position

TECHNICAL DATA:
- Rated operating voltage: 230/400V; 50 Hz
- Rated current: according to the table
- Responsiveness: 30; 100; 300; 500mA
- Time delay until break: <0.1s at I Δ n and <0.04s at 2I Δ n
- Short circuit current wear resistance: 6000A
- Electrical wear resistance (number of cycles):≥5000
- Mechanical wear resistance (number of cycles):≥10000
- IP code: IP>20

CONNECTING:
- power supply busbar (only for bipolar)
- flexible or rigid conductors with corresponding section

MOUNTING:
- on DIN-rail
- mounting position: vertical



TYPE A FOR AC/DC CURRENT

Residual current devices JEL 1A, 6kA - Type A - alternating and pulsating direct fault currents sensible Impulse withstand voltage 2000VAC/ 400VDC

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 1A	2P	6	10.0	1 / 60	B	**40510**	**40512**	**40513**	**40514**
JEL 1A	2P	6	16.0	1 / 60	B	**40516**	**40517**	**40518**	**40519**
JEL 1A	2P	6	20.0	1 / 60	B	**40592**	**40593**	**40594**	**40595**
JEL 1A	2P	6	25.0	1 / 60	B	**40521**	**40522**	**40523**	**40524**
JEL 1A	2P	6	32.0	1 / 60	B	**40531**	**40532**	**40533**	**40534**
JEL 1A	2P	6	40.0	1 / 60	B	**40541**	**40542**	**40543**	**40544**
JEL 1A	2P	6	63.0	1 / 60	B	**40561**	**40562**	**40563**	**40564**
JEL 1A	2P	6	80.0	1 / 60	B	**40581**	**40582**	**40583**	**40584**
JEL 1A	2P	6	100.0	1 / 60	B	**40591**	**40596**	**40597**	**40598**



TYPE A FOR AC/DC CURRENT

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 1A	4P	6	10.0	1 / 30	B	**40610**	**40612**	**40613**	**40614**
JEL 1A	4P	6	16.0	1 / 30	B	**40616**	**40617**	**40618**	**40619**
JEL 1A	4P	6	20.0	1 / 30	B	**40692**	**40693**	**40694**	**40695**
JEL 1A	4P	6	25.0	1 / 30	B	**40621**	**40622**	**40623**	**40624**
JEL 1A	4P	6	32.0	1 / 30	B	**40631**	**40632**	**40633**	**40634**
JEL 1A	4P	6	40.0	1 / 30	B	**40641**	**40642**	**40643**	**40644**
JEL 1A	4P	6	63.0	1 / 30	B	**40661**	**40662**	**40663**	**40664**
JEL 1A	4P	6	80.0	1 / 30	B	**40681**	**40682**	**40683**	**40684**
JEL 1A	4P	6	100.0	1 / 30	B	**40691**	**40696**	**40697**	**40698**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELECTRO-MAGNETIC RESIDUAL CURRENT DEVICES (RCD) JEL2

3+0 standard +extended 3 YEAR TOTAL WARRANTY



TYPE AC FOR AC CURRENT

UNTIL SUPPLY LAST

Residual current devices JEL2, 4,5kA - Type AC - alternating fault currents sensible. Impulse withstand voltage 2000VAC

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 2	2P	4,5	10.0	1 / 60	F				
JEL 2	2P	4,5	16.0	1 / 60	F	**40716**		**40718**	
JEL 2	2P	4,5	32.0	1 / 60	F				
JEL 2	2P	4,5	40.0	1 / 60	F			**40743**	**40744**
JEL 2	2P	4,5	63.0	1 / 60	F	**40761**		**40763**	



UNTIL SUPPLY LAST

TYPE AC FOR AC CURRENT

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 2	4P	4,5	16.0	1 / 30	F				
JEL 2	4P	4,5	40.0	1 / 30	F				**40844**
JEL 2	4P	4,5	63.0	1 / 30	F			**40863**	**40864**

ELECTRO-MAGNETIC RESIDUAL CURRENT DEVICES (RCD) JEL2 SIGMA

3+0 standard +extended 3 YEAR TOTAL WARRANTY



TYPE AC FOR AC CURRENT

Type	Number of poles	Breaking capacity (kA)	Rated current In (A)	Packing/Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL 2 SIGMA	2P	6	10.0	1 / 30	F			**40213S**	
JEL 2 SIGMA	2P	6	16.0	1 / 30	F				
JEL 2 SIGMA	2P	6	20.0	1 / 30	F	**40292S**		**40294S**	**40295S**
JEL 2 SIGMA	2P	6	25.0	1 / 30	F			**40223S**	
JEL 2 SIGMA	2P	6	40.0	1 / 30	F		**40242S**		
JEL 2 SIGMA	2P	6	63.0	1 / 30	F		**40262S**	**40263S**	
JEL 2 SIGMA	4P	6	20.0	1 / 30	F	**40492S**		**40494S**	
JEL 2 SIGMA	4P	6	25.0	1 / 30	F			**40423S**	
JEL 2 SIGMA	4P	6	32.0	1 / 30	F		**40432S**		
JEL 2 SIGMA	4P	6	40.0	1 / 30	F			**40443S**	
JEL 2 SIGMA	4P	6	63.0	1 / 30	F				**40464S**

UNTIL SUPPLY LAST

Documents corresponding to the product:
EN 61 009-1; EN 61009-2;



TYPE AC FOR AC CURRENT









TYPE AC FOR AC CURRENT

ELECTRO-MAGNETIC RESIDUAL CURRENT OPERATED CIRCUIT BREAKER (RCBO)- JEL5

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

DESCRIPTION OF THE OPERATING SYSTEM:
It is a combination of automatic circuit breaker and residual current electromagnetic device. It combines the properties of the two elements. The circuit breaker reacts at short circuit or overload in the protected circuit, and the electromagnetic residual current device - at failure in the conductors' insulation. It compares the magnitude of the currents through the neutral and phase conductors. The conductors are coiled on toroid and together with the secondary winding form a measurement transformer. The power conductors are coiled in such a way that the magnetic fields generated at electrical current flow through them are mutually neutralized. At failure in the insulation of some of the conductors or at presence of a person under voltage, the system is misbalanced and the magnetic fields can not be neutralized. This residual magnetic field generates in the secondary current winding, called current leakage. When the value of this current exceeds the limit value of the residual current breaker the device breaks and the residual current device switches off from the power supply grid. The device operates without any extra power supply to the electromagnetic residual current and is not influenced by voltage varying or decreasing.

FUNCTIONS:
- switching off heavy-loaded electrical circuits at short circuit or overload
- switching off heavy-loaded electrical circuits at insulation damage of the conductors to the consumers
- switching off heavy-loaded electrical circuits at presence of a person and animals under voltage
- used to protect not only particular consumers/circuits, but also the whole panel
- remarkable with high reliability of current characteristics
- control: manual switching on and automatic switching off at failure in the insulation after the breaker

TECHNICAL DATA:
- Rated operating voltage: 230V 50 Hz
- Circuit breaker rated current: according to the table
- Residual current responsiveness: 30; 100; 300; 500mA
- Time delay until break:
  - of the residual current device: <0.1s at I Δ n and <0.04s at 2I Δ n
  - of the circuit breaker: <0.1s
- Circuit breaker tripping curve: C
- Surge voltage wear resistance:≥2000V
- Breaking capacity: 10000
- Joining terminal: flat (tunnel) screw terminal made of 1.5 coldly draw-plated plane Q235A
- Type of the plastic:
  - material: self-extinguishing nylon PA66
  - dielectrical strength: >18MV/m
- Contact head: silver graphite CAg(5)
- Static contact: pure copper T2Y2 type
- Electrical wear resistance (number of cycles):≥5000
- Mechanical wear resistance (number of cycles):≥10000
- IP code: IP>20
- Indication for operating (switched on) position
- Breakers plastic material of UV rays and non-flammable
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

CONNECTING:
- flexible or rigid conductors with corresponding section

MOUNTING:
- on DIN-rail
- mounting position: vertical

The residual current device is mounted in the distribution box, and after the device the neutral conductor and the earthing conductor must not be connected together. In order to work accurately, the device must have three- or five-conductor grid with separate operating neutral conductor (N) and separate protecting conductor (PE) (e.g. earthing system TN-S or TT with three or five conductors).

Dimensions (mm)

W1	H	C1	C2	D1	D2
35	81	35	45	50	72

Combined electromagnetic residual current device and circuit breaker 2P 6kA

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number			
						Leakage current I Δ n (mA)			
						30	100	300	500
JEL5	2p	6	10	1 / 60	B	**40010**	**40011**	**40013**	**40015**
JEL5	2p	6	16	1 / 60	B	**40016**	**40017**	**40018**	**40019**
JEL5	2p	6	25	1 / 60	B	**40025**	**40021**	**40023**	**40026**
JEL5	2p	6	32	1 / 60	B	**40032**	**40031**	**40033**	**40035**
JEL5	2p	6	40	1 / 60	B	**40040**	**40041**	**40043**	**40045**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
EN 61 009-1; EN 61009-2;

ELECTRONIC RESIDUAL CURRENT OPERATED CIRCUIT BREAKER (RCBO)

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty



TYPE AC FOR AC CURRENT





DESCRIPTION OF THE OPERATING SYSTEM:
It is a combination of automatic circuit breaker and residual current electromagnetic device. It combines part of the properties of the two elements. The circuit breaker reacts at short circuit in the protected circuit, and the electromagnetic residual current device - at failure in the conductors' insulation. It compares the rate of the currents through the conductors in an electronic comparator. The residual current device operates normally at voltage feed. The voltage is needed for the comparator's energizing – a semi-conductor element with constantly set leakage current rate. This rate is compared with the actual rate. When the margin of the comparison is neutral, the residual current device does not operate, but at failure in the protected circuit insulation when it exceeds the set margin it operates and switches off the protection. For the normal operation of the residual current device, the power supplying circuit voltage must be over 170V and there must be no time variation.

FUNCTIONS:
- switching off heavy-loaded electrical circuits at short circuit or overload
- switching off heavy-loaded electrical circuits at insulation damage of the conductors to the consumers
- switching off heavy-loaded electrical circuits at presence of a person under voltage
- used to protect not only particular consumers/ circuits, but also the whole panel
- remarkable with high reliability of current characteristics
- control: manual switching on and automatic switching off at exit failure

TECHNICAL DATA:
- Rated operating voltage: 230/400V 50 Hz
- Circuit breaker rated current: according to the table
- Residual current responsiveness: 30; 100; 300; 500mA
- Time delay until break:
  - of the residual current device: <0.1s at I Δ n and <0.04s at 2I Δ n
  - of the circuit breaker: <0.1s
- Circuit breaker tripping curve: C
- Surge voltage wear resistance:≥2000V
- Breaking capacity: 4500A; 6000A; 10000A
- Joining terminal: flat (tunnel) screw terminal
- Electrical wear resistance (number of cycles):≥500
- Mechanical wear resistance (number of cycles):≥2000
- IP code: IP>20
- Indication for operating (switched on) position

CONNECTING:
- power supply busbar (for two- or three polar)
- flexible or rigid conductors with corresponding section

MOUNTING:
- on DIN-rail
- mounting position: vertical
- Breakers plastic material of UV rays and non-flammable
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

The residual current device is mounted in the distribution box, and after the device the neutral conductor and the earthing conductor must not be connected together. In order to work accurately, the device must have separate conductors for operational neutral conductor (N) and protective conductor (e.g. earthing system TN-S or TT with three or five conductors).

Dimensions (mm)

W1	H	C1	C2	D1	D2
35	81	35	45	50	72

Combined electronic residual current device with circuit breaker 2P, 6кA

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number
						Leakage current I Δ n (mA)
						30
JEL 4 C10	2p	6	10	1 / 60	B	**40211E**
JEL 4 C16	2p	6	16	1 / 60	B	**40215E**
JEL 4 C20	2p	6	20	1 / 60	B	**40225E**
JEL 4 C25	2p	6	25	1 / 60	B	**40240E**
JEL 4 C32	2p	6	32	1 / 60	B	**40265E**
JEL 4 C40	2p	6	40	1 / 60	B	**40274E**



TYPE AC FOR AC CURRENT

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TYPE AC FOR AC CURRENT

Combined electronic residual current device with circuit breaker 2P, 6kA

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number Leakage current I Δ n (mA) 30
JEL 4 C10	2p	6	10	1 / 60	B	**40211CE**
JEL 4 C16	2p	6	16	1 / 60	B	**40215CE**
JEL 4 C20	2p	6	20	1 / 60	B	**40225CE**
JEL 4 C25	2p	6	25	1 / 60	B	**40240CE**
JEL 4 C32	2p	6	32	1 / 60	B	**40265CE**
JEL 4 C40	2p	6	40	1 / 60	B	**40274CE**



TYPE AC FOR AC CURRENT

ELECTRONIC RESIDUAL CURRENT OPERATED CIRCUIT BREAKER (RCBO) JEL3

7+0 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty

Combined electronic residual current device with circuit breaker 2P, 10kA

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing/Box (pcs)	Leakage current I Δ n (mA)	Product category	Catalogue number curve B	Catalogue number curve C
JEL 3 C6	1p+N	10	6	5/100	30	B	**40906B**	**40906**
JEL 3 C10	1p+N	10	10	5/100	30	B	**40910B**	**40910**
JEL 3 C16	1p+N	10	16	5/100	30	B	**40916B**	**40916**
JEL 3 C20	1p+N	10	20	5/100	30	B	**40920B**	**40920**
JEL 3 C25	1p+N	10	25	5/100	30	B	**40925B**	**40925**
JEL 3 C32	1p+N	10	32	5/100	30	B	**40932B**	**40932**
JEL 3 C40	1p+N	10	40	5/100	30	B	**40940B**	**40940**



TYPE AC FOR AC CURRENT

Combined electronic residual current device with circuit breaker 2P, 6kA

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing/Box (pcs)	Leakage current I Δ n (mA)	Product category	Catalogue number curve B	Catalogue number curve C
JEL 3 B6	1p+N	6	6	5/100	30	B	**40956B**	**40956C**
JEL 3 B10	1p+N	6	10	5/100	30	B	**40960B**	**40960C**
JEL 3 B16	1p+N	6	16	5/100	30	B	**40966B**	**40966C**
JEL 3 B20	1p+N	6	20	5/100	30	B	**40970B**	**40970C**
JEL 3 B25	1p+N	6	25	5/100	30	B	**40975B**	**40975C**
JEL 3 B32	1p+N	6	32	5/100	30	B	**40982B**	**40982C**
JEL 3 B40	1p+N	6	40	5/100	30	B	**40990B**	**40990C**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELECTRONIC RESIDUAL CURRENT OPERATED CIRCUIT BREAKER (RCBO) JEL6

3+0 standard +extended 3 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Combined electronic residual current device 2P
Compares the leakage current between the phase and neutral conductors or between two phases.

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number Leakage current I Δ n (mA) 30
JEL 6 C50	2P	6	50	6 / 120	F	**40265**



UNTIL SUPPLY LAST

Combined electronic residual current device 3P
Compares the leakage current between the phases

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number Leakage current I Δ n (mA) 30	300
JEL 6 C16	3P	6	16	3 / 60	F		**40318**
JEL 6 C25	3P	6	25	3 / 60	F	**40325**	**40323**
JEL 6 C40	3P	6	40	3 / 60	F	**40340**	**40343**



UNTIL SUPPLY LAST

Combined electronic residual current device 3P+N
Compares the leakage current between the three phases and neutral conductors.

Type designation	Number of poles	Breaking capacity (kA)	Rated current (A)	Packing / Box (pcs)	Product category	Catalogue number Leakage current I Δ n (mA) 300
JEL 6 C40	3P+N	6	40	2 / 40	F	**40447**
JEL 6 C50	3P+N	6	50	2 / 40	F	**40436**



COMBINED SURGE ARRESTERS TYPE 1 + 2

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

Combined surge arresters Type 1 + 2 are coordinated in advance.They can manage and prevent the high energy during a thunderbolt and to assure the better level of security of electricity of the electrical equipment

Surge arresters Type 1 is used to catch the energy caused by higher electricity compared to the capacity of direct thunderbolt. The security device has passed a successful test according to the standards with electric wave 10/350 (class 1 test).

Surge arresters Type 2 is used to catch the energy caused by higher electricity, compared to the capacity of indirect strike or commutative overvoltage. The security device has passed a successful test according to the standards with electric wave 8/20 (class 2 test).

Response time: <25 nS
Voltage protection level: 1,5kV

Type of arrester	Max inpluse current Iimp (10/350μS)	Max discharge current Imax (8/20 μS)	Nominal line voltage Un (V)	Earthing system	Product category	Catalogue number
SPD-X/1P+N	12.5kA	50kA	230	TT,TN-S	B	**64502**
SPD-X/3P	12.5kA	50kA	230/400	TN-C	B	**64503**
SPD-X/3P+N	12.5kA	50kA	230/400	TT,TN-S	B	**64504**

Three phase protection TN-C system

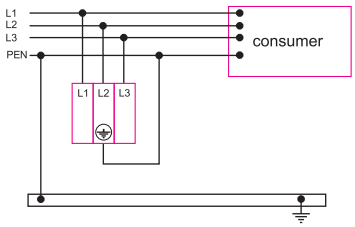

Three phase protection TN-S system

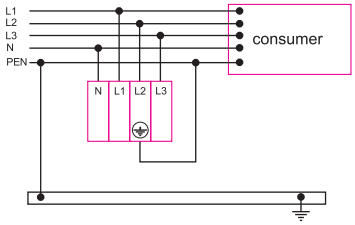

Monophase protection TT system



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN61 643-1



TYPE AC FOR AC CURRENT



Dimensions (mm)

C	H1	H2	D1	D2
5	90	45	43,5	58

SURGE ARRESTERS SPD TYPE

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The surge arrester consists of a semi-conductor valve element that opens at certain conditions. At normal conditions of the system, the surge arrester has infinitely high resistance between the protected conductors and earthing circuit. At voltage increase due to atmospheric nature or system failure, the valve element opens and leads the excessive voltage to the grounded circuit.
After reversion of the normal voltage the valve element closes. The arrester can endure high momentary overloading.

FUNCTIONS:
- protection of heavy-loaded electrical circuits from overload
- used to protect not only particular consumers/ circuits, but also the whole panel
- remarkable with high reliability of current characteristics
- control: automatic switching off at exit failure and recovery after eliminating the danger

TECHNICAL DATA:
- Rated operating voltage Uc: - the operating voltage of the surge arrester 275/440V; 50Hz
- Surge voltage Up: the voltage created in surge arrester terminals at rated discharge current running: according to the tables
- Rated discharge current In – the rated value of discharge current with a sinusoid 8/20μs, which can be repeatedly led to the ground: according to the tables
- Full discharge current Imax – the peak value of the discharge current with a sinusoid 8/20μs, which the surge arrester can bear once: according to the table
- Constant operating current: up to 800μA for 1P, 2P and 3P; up to 600μA for 1P + N, 3P + N
- Indication for damaged surge arrester
- Offered in types: 1P; 1P + N; 3P; 3P + N

CONNECTING:
- flexible or rigid conductors with corresponding section

MOUNTING:
- on DIN-rail
- mounting position: vertical
- mounting in the distribution box on the front or right before the breaker according to the attached schemes
- Breakers plastic material of UV rays and non-flammable
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

COLOUR CODE for all types 5κA - yellow; white – 10κA; green – 20 κA and red 40κA

Three phase protection TN-C system

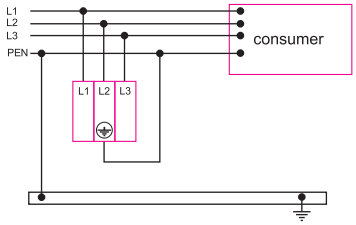

Three phase protection TN-C system

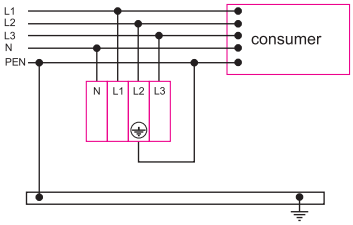

Monophase protection TT system



Three phase protection IT system



The surge arrester selection is made according to the overload risk level or atmosphere activity, named B, C or D (from high to low risk level).

THE COMPANY OFFERS THE FOLLOWING MODELS OF ARRESTERS:
Model SPD – Bxxxx – for systems with exceptionally high risk level. Mounted mainly in the beginning of the installation or in the main panel.
Model SPD – Cxxxx – for systems with high or average risk level. Mounted in the beginning of the installation or before the breaker.
Model SPD – Dxxxx – for systems with low risk level. Suitable for secondary protection of consumers in combination with SPD – Bxxxx/SPD – Cxxxx

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-D5/1p	5	10	275	1.2	17 / 170	B	**64101**
SPD-C10/1p	10	20	275	1.2	17 / 170	B	**64102**
SPD-C20/1p	20	40	275	1.8	17 / 170	B	**64103**
SPD-B40/1p	40	60	275	2	17 / 170	B	**64104**



Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-D5/1pN	5	10	275	1.2	8 / 80	B	**64201**
SPD-C10/1pN	10	20	275	1.2	8 / 80	B	**64202**
SPD-C20/1pN	20	40	275	1.8	8 / 80	B	**64203**
SPD-B40/1pN	40	60	275	2	8 / 80	B	**64204**



Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-D5/3p	5	10	440	1.2	5 / 50	B	**64301**
SPD-C10/3p	10	20	440	1.2	5 / 50	B	**64302**
SPD-C20/3p	20	40	440	1.8	5 / 50	B	**64303**
SPD-B40/3p	40	60	440	2	5 / 50	B	**64304**



Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-D5/3pN	5	10	440	1.2	4 / 40	B	**64401**
SPD-C10/3pN	10	20	440	1.2	4 / 40	B	**64402**
SPD-C20/3pN	20	40	440	1.8	4 / 40	B	**64403**
SPD-B40/3pN	40	60	440	2	4 / 40	B	**64404**

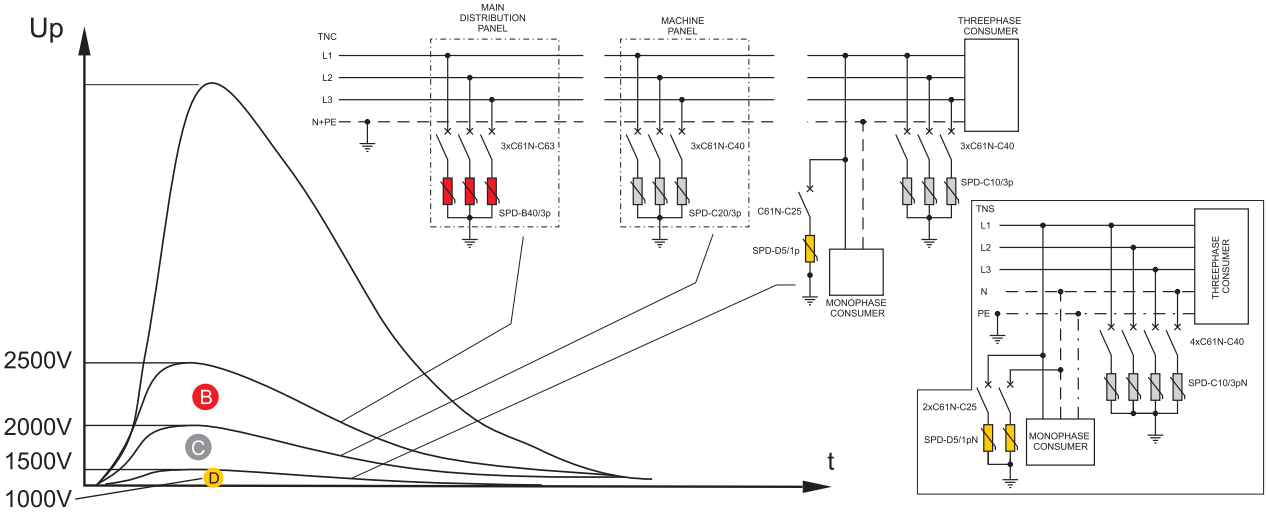

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

COMBINED SURGE ARRESTERS AC – DC

7+0 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

Specially designed surge arresters providing protection of solar and photo - voltaic systems; designed to protect system against overvoltages resulting from indirect light impact. They could be installed in earthed and non - earthed systems. They break photo - voltaic generator electric circuit when voltage reaches or over passes limit threshold value, providing photo - voltaic protection against destroying.

COLOUR CODE for all types 5кА - yellow; white – 10кА; green – 20 кА and red 30кА



TYPE AC FOR AC/DC CURRENT

Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-DC-D5/1p	5	10	275 AC/440 DC	≤ 1.2	17 / 170	B	**64105**
SPD-DC-C10/1p	10	20	275 AC/440 DC	≤ 1.5	17 / 170	B	**64106**
SPD-DC-C20/1p	20	40	275 AC/440 DC	≤ 1.8	17 / 170	B	**64107**
SPD-DC-B40/1p	30	60	275 AC/440 DC	≤ 2.2	17 / 170	B	**64108**



TYPE AC FOR AC/DC CURRENT

Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-DC-D5/1pN	5	10	275 AC/440 DC	≤ 1.2	8 / 80	B	**64205**
SPD-DC-C10/1pN	10	20	275 AC/440 DC	≤ 1.5	8 / 80	B	**64206**
SPD-DC-C20/1pN	20	40	275 AC/440 DC	≤ 1.8	8 / 80	B	**64207**
SPD-DC-B40/1pN	30	60	275 AC/440 DC	≤ 2.2	8 / 80	B	**64208**



TYPE AC FOR AC/DC CURRENT

Type of the arrester	In (kA)	Imax (kA)	Uc (V)	Up (kV)	Packing/Box (pcs)	Product category	Catalogue number
SPD-DC-D5/3p	5	10	385 AC/500 DC	≤ 1.2	5 / 50	B	**64305**
SPD-DC-C10/3p	10	20	385 AC/500 DC	≤ 1.5	5 / 50	B	**64306**
SPD-DC-C20/3p	20	40	385 AC/500 DC	≤ 1.8	5 / 50	B	**64307**
SPD-DC-B40/3p	30	60	385 AC/500 DC	≤ 2.2	5 / 50	B	**64308**

TYPE AC FOR AC/DC CURRENT

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1; EN 60 947-4-1
The products are in accordance with the directives of EC "Low voltage directives (LVD) no. 2006/95/EC" and "Electromagnetic Compatibility Directives (EMC) no. 2004/108/EC".





LH1-D 09~32





LH1-D 40



UNTIL SUPPLY LAST

LOW VOLTAGE CONTACTORS LH1 - D

3+0 standard +extended 3 YEAR TOTAL WARRANTY

LH 1 D contactors are alternating current contactors for control of circuits and consumers operating in class AC3.
It is suitable for consumers with rated current up to 95A. The contactors are offered in a type with 1 NO contact
for operating circuit making and the models over 40A also have 1NC operating contactor.

FUNCTIONS:
- switching on/off heavy-loaded electrical circuits at controlling signal to the coil
- making of control systems
- used as an operating element in process control panels
- remarkable with high reliability of current characteristics
- reliable separation of power contactors
- secured cover of the movable part of the contactor

TECHNICAL DATA:
- Operation class: AC 3
- Rated operating voltage of power contactors: up to 690V; 50/60Hz
- Composition of the power contact surfaces: unalloyed copper with coating 80% AgSnO
- Surge voltage wear resistance: >6000V
- Rated voltage of the coil: from 12 to 400V AC
- Limits of the controlling coil voltage: from 0.8 to 1.15 Uc
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors
- Electrical wear resistance (number of cycles):≥500000
- Mechanical wear resistance (number of cycles):≥500000
- Number of cycles per hour: 500 UP TO 32A; 600 for 40-95A
- Pole leaking power: up to 10W

MOUNTING:
- on DIN-rail or
- -ith bolts to the surface
- mounting position: vertical gradient – maximum ± 5°
- Ambient temperature: -10°C + 60°C
- Altitude: up to 2000m

Type	Overall dimensions (mm)					
	a	b	Φ	A	B	C
LH1 - D09-12	34/35	50/60	4.5	47	70	82
LH1 - D2510	40	48	4.5	57	80	95
LH1 - D3210	40	48	4.5	57	80	100
LH1 - D4011	40	100	6.5	77	126	116

Type number	Motor rated capacity (kW)					Coil capacity (VA)		Rated current in AC-3 440Vtp up	Tightening moment (N.m)	Coil voltage	Packing/ Box (pcs)	Product category	Catalogue number
	220V 230V	380V 400V	415V	440V	660V 690V	closed	open						
LH1 - D3210 1NO	7.5	15	15	15	18.5	7.5	90	32A	2.5	230 400	1/50	F	**73321** **73322**
LH1 - D4011 1NO	11	18.5	22	22	30	20	200	40A	5	230 400	1/20	F	**73401** **73402**

Documents corresponding to the product:
Standard EN 60947-1; EN 60 947-4-1



LOW VOLTAGE CONTACTORS LT1-D/HK

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

LT 1 D contactors are alternating current contactors for control of circuits and consumers operating in class AC3. It is suitable for consumers with rated current up to 95A. The contactors are offered in a type with 1 NO contact for operating circuit making and the models over 40A also have 1NC operating contactor.

FUNCTIONS:
- switching on/off heavy-loaded electrical circuits at controlling signal to the coil
- making of control systems
- used as an operating element in process control panels
- remarkable with high reliability of current characteristics
- reliable separation of power contactors
- secured cover of the movable part of the contactor

TECHNICAL DATA:
- Operation class: utilization category AC-3
- Rated operating voltage of power contactors: up to 690V; 50/60Hz
- Composition of the power contact surfaces: unalloyed copper with coating 80% AgSnO
- Surge voltage wear resistance: >8000V
- Rated voltage of the coil: from 12 to 400V AC
- Coil material: pure copper type QA-1
- Magnetic core material: alloy steel type 360
- Moveable part material: Bakelite
- Limits of the controlling coil voltage: operating range of coil
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors
- Electrical wear resistance (number of cycles):≥1000000
- Mechanical wear resistance (number of cycles):≥10000000
- Number of cycles per hour: 1200 UP TO 32A; 600 for 40-95A
- Pole leaking power: up to 13W

MOUNTING:
- on DIN-rail
- with bolts to the surface
- mounting position: vertical gradient – maximum ± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m



Type	Overall dimensions (mm)					
	a	b	Ø	A	B	C
LT1-HK 06~12/LT-1K	34/35	45	4.5	45	50	50
LT-D 09~12	34/35	50/60	4.5	47	70	82
LT1 D18	34/35	50/60	4.5	47	70	87
LT1 D25	40	48	4.5	57	80	95
LT1 D32	40	48	4.5	57	80	100
LT-D 40~65	40	100/110	6.5	77	126	116
LT-D 80~95	40	100/110	6.5	87	126	127



LT1-D 09~32
LT1 - K

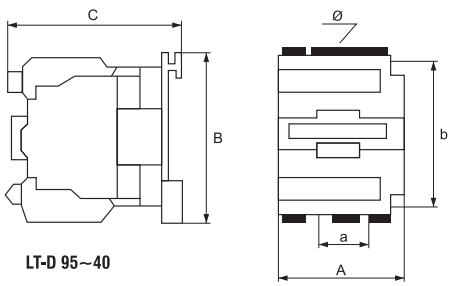

LT-D 95~40

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Type number	Rated capacity (kW)					Power consumption of coil (VA)		Rated current in AC-3 440V to up	Tightening moment (N.m)	Section of the power supply conductor	Packing/ Box (pcs)	Product category	Catalogue number according to the coil voltage (V)						
	220V 230V	380V 400V	415V	440V	660V 690V	closed inrush	open hold						230V	400V	12V	24V	36V	48V	110V
LT 1 - HK 0610 1NO	1.5	2.2	2.2	2.2	3	7	60	6A	1.7	0.75-2.5	1 / 100	B	**23061E**	**23062E**	**23063E**	**23064E**	**23065E**	**23066E**	**23067E**
LT 1 - HK 0910 1NO*	2.2	3.7	3.7	3.7	4	7	60	9A	1.7	0.75-2.5	1 / 100	F	**23091E**	**23092E**		**23094E**	**23095E**	**23096E**	**23097E**
LT 1 - HK 1210 1NO*	3	4	4	4	5	7	60	12A	1.7	0.75-2.5	1 / 100	F	**23121E**	**23122E**			**23125E**	**23126E**	**23127E**
LT 1 - HK 0610 1NO*	1.5	2.2	2.2	2.2	3	7	60	6A	1.7	0.75-2.5	1 / 100	F		**23062**	**23063**		**23065**	**23066**	**23067**
LT1 - D0910 1NO	2.2	4	4	4	5.5	7	60	9A	1.7	1-4	1 / 50	B	**23091**	**23092**	**23093**	**23094**	**23095**	**23096**	**23097**
LT1 - D0901 1NC	2.2	4	4	4	5.5	7	60	9A	1.7	1-4	1 / 50	B	**23273**	**23270**	**23271**	**23272**	**23277**	**23278**	**23279**
LT1 - D1210 1NO	3	5.5	5.5	5.5	7.5	7	60	12A	1.7	1-4	1 / 50	B	**23121**	**23122**	**23123**	**23124**	**23125**	**23126**	**23127**
LT1 - D1201 1NC	3	5.5	5.5	5.5	7.5	7	60	12A	1.7	1-4	1 / 50	B	**23274**	**23280**	**23281**	**23282**	**23283**	**23284**	**23285**
LT1 - D1810 1NO	4	7.5	9	9	10	7	60	18A	1.7	1-4	1 / 50	B	**23181**	**23182**	**23183**	**23184**	**23185**	**23186**	**23187**
LT1 - D1801 1NC	4	7.5	9	9	10	7	60	18A	1.7	1-4	1 / 50	B	**23275**	**23286**	**23287**	**23288**	**23289**	**23290**	**23291**
LT1 - D2510 1NO	5.5	11	11	11	15	7.5	90	25A	2.5	2.5-10	1 / 50	B	**23251**	**23252**	**23253**	**23254**	**23255**	**23256**	**23257**
LT1 - D2501 1NC	5.5	11	11	11	15	7.5	90	25A	2.5	2.5-10	1 / 50	B	**23276**	**23292**	**23293**	**23294**	**23295**	**23296**	**23297**
LT1 - D3210 1NO	7.5	15	15	15	18.5	7.5	90	32A	2.5	2.5-10	1 / 50	B	**23321**	**23322**	**23323**	**23324**	**23325**	**23326**	**23327**
LT1 - D4011 1NO+1NC	11	18.5	22	22	30	20	200	40A	5	2.5-16	1 / 20	B	**23401**	**23402**	**23403**	**23404**	**23405**	**23406**	**23407**
LT1 - D5011 1NO+1NC	15	22	25	25	33	20	200	50A	5	6-25	1 / 20	B	**23501**	**23502**	**23503**	**23504**	**23505**	**23506**	**23507**
LT1 - D6511 1NO+1NC	18.5	30	37	37	37	20	200	65A	5	6-25	1 / 20	B	**23651**	**23652**	**23653**	**23654**	**23655**	**23656**	**23657**
LT1 - D8011 1NO+1NC	22	37	45	45	45	20	200	80A	9	10-50	1 / 15	B	**23801**	**23802**	**23803**	**23804**	**23805**	**23806**	**23807**
LT1 - D9511 1NO+1NC	25	45	45	45	45	20	200	95A	9	10-50	1 / 15	B	**23951**	**23952**	**23953**	**23954**	**23955**	**23956**	**23957**

Note: *Until supply last - 3 year standard+0 year extended warranty

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1; EN 60 947-4-1



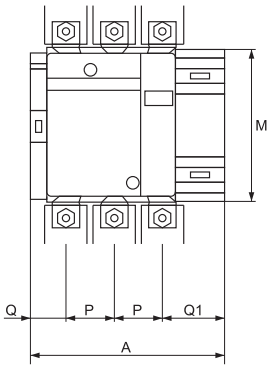



LOW VOLTAGE CONTACTORS LT1-F

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The contactors LT 1- F are alternating current contactors used to control circuits and consumers operating in normal working conditions with switching on /off the consumer and dirty working environment. They are suitable for consumers with electrical power consumption from 115A to 800A.

FUNCTIONS:
- frequently switching on/off heavy-loaded electrical circuits at controlling signal to the coil
- making of systems for consumers' control
- used as an operating element in process control panels
- remarkable with high reliability of current characteristics
- reliable separation of power contactors
- secured cover of the movable part of the contactor

TECHNICAL DATA:
- Operation class: utilization category AC-3
- Rated operating voltage of power contactors: up to 1000V; 50/60Hz
- Composition of the power contact surfaces: unalloyed copper with coating 80% AgSnO
- Surge voltage wear resistance: >8000V
- Coil composition: pure coil copper QA-1 type
- Magnetic core composition: steel alloy 360
- Movable part composition: bakelite
- Limits of the controlling coil voltage: operating range of coil
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors
  - rail
- Electrical wear resistance (number of cycles):≥10000000
- Mechanical wear resistance (number of cycles):≥10000000
- Number of cycles (switching on) per hour: 200
- Pole leaking power: from 16 to 80W
- Mounting:
  - with bolts to the surface
  - mounting position: vertical gradient – maximum± 10°C
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type	Overall dimensions (mm)							
	A	B	C	L	M	Q	Q1	P
LT 1 F150	163.5	170	171	107	150	26	57.5	40
LT 1 F225	168.5	197	181	113.5	172	21	51.5	48
LT 1 F265	201.5	203	181	141	178	39	66.5	48
LT 1 F400	213	206	219	145	182	43	74	48
LT 1 F630	309	304	255	155	264	60	89	80
LT 1 F800	309	304	255	155	264	60	89	80

Type number	Motor rated capacity (kW)							Power consumption of coil (VA)		Rated current in AC-3 440V to up	Tightening moment (N.m)	Packing/ Box (pcs)	Product category	Catalogue number according to the coil voltage (V)					
	220V 230V	380V 400V	415V	440V	500V	660V 690V	1000V	closed	open					230V	400V	24V*	36V	48V	110V
LT1 - F115	30	55	59	59	59	80	60	45	550	115 A	18	1 / 4	B	**23111**	**23112**	**23114**	**23115**	**23116**	**23117**
LT1 - F150	40	75	80	80	90	100	65	45	550	150 A	25	1 / 4	B	**23151**	**23152**		**23155**	**23156**	**23157**
LT1 - F225	63	110	110	110	129	129	100	55	805	225 A	35	1 / 2	B	**23861**	**23862**		**23865**	**23866**	**23867**
LT1 - F265	75	132	140	140	160	160	147	10	700	265 A	35	1 / 2	B	**23261**	**23262**		**23265**	**23266**	**23267**
LT1 - F400	110	200	220	250	257	280	185	18	1000	400 A	50	1 / 1	B	**23751**	**23752**				
LT1 - F630	200	335	375	400	400	450	450	25	1500	630 A	50	1 / 1	B	**23771**	**23772**				
LT1 - F800	250	450	450	450	450	475	450	15	1300	800 A	50	1 / 1	B	**23881**	**23882**				

Note: At mounting the containers from the series in control schemes a distance must be provided at the side of the contactor in case of eventual coil change.
*Until Supply Last- Product category F

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN60947-1; EN 60947-4-1

LOW VOLTAGE CONTACTORS WITH DIRECT CURRENT COIL LP1-D

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty







LP1-D 09~95

The contactors LP1 D are alternating current contactors with DC operating of coil for control. The power plugs of the contactor are designed for control of alternating current circuits and consumers operating in normal operating class AC-3 with frequently switching on/off the consumer and dirty working environment. The contactors are suitable for consumers with electrical power consumption from 9A to 225A.

FUNCTIONS:
- switching on/off alternating current consumers in direct current controlling schemes at controlling signal to the coil
- making of systems for consumers' control
- used as an operating element in process control panels
- remarkable with high reliability of current characteristics
- reliable separation of power contacts
- secured cover of the movable part of the contactor

TECHNICAL DATA:
- Rated operating voltage of the coil: from 12V DC to 220V DC
- Rated operating voltage of the power circuit: up to 690V DC
- insulation voltage: 690V
- Surge voltage wear resistance: >8000V
- Limits of the controlling coil voltage: operating range of coil
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors
- Electrical wear resistance (number of cycles):≥10000000
- Mechanical wear resistance (number of cycles):≥10000000
- Number of cycles per hour: 1200 up to 32A; 600 for 40-95A
- Pole leaking power: up to 13W

MOUNTING:
- on DIN-rail
- with bolts to the surface
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type	Overall dimensions (mm)				
	A	B	C	a	b
LP 1 D0910	47	76	95	34/35	50/60
LP 1 D1210	47	76	95	34/35	50/60
LP 1 D1810	47	76	95	34/35	50
LP 1 D2510	57	86	101	40	50
LP 1 D3210	57	86	101	40	50
LP 1 D4011	77	129	176	40	100
LP 1 D5011	77	129	176	40	100
LP 1 D6511	77	129	176	40	100
LP 1 D9511	87	129	182	40	100
LP 1 F115	163.5	170	171	40	150
LP 1 F150	163.5	170	171	40	150
LP 1 F225	168.5	197	181	48	172

Type	Rated current (A)	Auxiliary contact (pcs.)	Rated capacity of the consumer (kW)					Packing/Box (pcs)	Product category	Catalogue number according to the coil voltage (V DC)					
			230V	400V	415V	440V	690V			12V	24V	36V	48V	110V	230V
LP 1 D0910	9	1NO	2.20	4.00	4.00	4.00	5.50	1/40	B	**23962**	**23098**	**23130**	**23971**	**23980**	**23139**
LP 1 D1210	12	1NO	3.00	5.50	5.50	5.50	7.50	1/40	B	**23963**	**23128**	**23131**	**23972**	**23981**	**23140**
LP 1 D1810	18	1NO	4.00	7.50	7.50	7.50	10.0	1/30	B	**23964**	**23188**	**23132**	**23973**	**23982**	**23141**
LP 1 D2510	25	1NO	5.50	11.0	11.0	11.0	15.0	1/20	B	**23925**	**23258**	**23133**	**23974**	**23983**	**23142**
LP 1 D3210	32	1NO	7.50	15.0	15.0	15.0	18.5	1/30	B	**23966**	**23328**	**23134**	**23975**	**23984**	**23143**
LP 1 D4011	40	1NO+1NC	11.0	18.5	18.5	18.5	30.0	1/10	B	**23967**	**23408**	**23135**	**23976**	**23985**	**23144**
LP 1 D5011	50	1NO+1NC	15.0	22.0	22.0	22.0	33.0	1/10	B	**23968**	**23508**	**23136**	**23977**	**23986**	**23145**
LP 1 D6511	65	1NO+1NC	18.5	30.0	30.0	30.0	37.0	1/10	B	**23969**	**23658**	**23137**	**23978**	**23987**	**23146**
LP 1 D9511	95	1NO+1NC	25.0	45.0	45.0	45.0	45.0	1/10	B	**23970**	**23958**	**23138**	**23979**	**23988**	**23147**
LP 1 F115	115	1NO	30.0	55.0	59.0	59.0	80.0	1/4	B		**23118***	**23914**	**23917**	**23989**	**23148**
LP 1 F150	150	1NO	40.0	75.0	80.0	80.0	100	1/4	B		**23158***	**23915**	**23918**	**23990**	**23149**
LP 1 F225	225	1NO	63.0	110	110	110	129	1/2	B			**23916**	**23919**	**23994**	**23201**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN60947-1; EN 60947-4-1









LOW VOLTAGE CONTACTORS FOR SWITCHING ON OF CAPACITOR BANKS CJ19-43

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

The AC contactors CJ19-43 are specially designed electrical devices for commutation of three phase capacitors used for power correction. They are alternating current contactor LT1 Dxx with mounted a group for peak current lowering from the transitional process of the capacitor's switching on/off. This group is a combination of current limiting resistors, switched on in the beginning of the transitional process (switching on/off of the capacitor group).
The contactors are suitable for capacitors with rate up to 50 kVAr.

FUNCTIONS:
- switching on/off of capacitor banks for reactive power compensation
- making of systems for compensation of the energy reactive component
- lowering of the peak transitional currents at switching on/off of the capacitor
- remarkable with high reliability of current characteristics
- reliable separation of power contacts
- secured part of the contactor against consumer contact
- do not allow manual operation

TECHNICAL DATA:
- Operation class: utilization category AC6b
- Rated operating voltage of the controlling coil: 230V AC; 50/60Hz
- Rated operating voltage of the power circuit: up to 690V AC
- insulation voltage: 690V
- Surge voltage wear resistance: >8000V
- Limits of the controlling coil voltage: from 0.8 to 1.15 Uc
- Number of the contacts: 3 NO power contacts +1NO operative
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors
- Electrical wear resistance (number of cycles):≥300000
- Mechanical wear resistance (number of cycles):≥1000000
- Number of cycles (switching on) per hour: up to 600
- Pole leaking power: up to 13W

MOUNTING:
- on DIN-rail or
- with bolts to the surface
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type	Overall dimensions (mm)			
	A	B	C	D
CJ19-32 DPK	56	74	130	150
CJ19-40 DPK	75	127	180	150
CJ19-65 DPK	85	127	200	157
CJ19-95 DPK	85	127	200	157
CJ19-115DPK	122	165	230	157
CJ19-150DPK	122	165	230	157
CJ19-170DPK	122	165	230	157

Type	Rated current (A)	Rated capacity of the consumer (kVAr)		Coil voltage (V)	Packing/Box (pcs)	Product category	Catalogue number
		400/440V	690V				
CJ19-32 DPK	32	8	12.5	230	1/20	B	**23932**
CJ19-32 DPK	32	8	12.5	400	1/20	B	**23910**
CJ19-40 DPK	40	12.5	15	230	1/16	B	**23900**
CJ19-40 DPK	40	12.5	15	400	1/16	B	**23940**
CJ19-65 DPK	65	25	30	230	1/16	B	**23961**
CJ19-65 DPK	65	25	30	400	1/16	B	**23965**
CJ19-95 DPK	95	30	36	230	1/16	B	**23909**
CJ19-95 DPK	95	30	36	400	1/16	B	**23995**
CJ19-115 DPK	115	35	40	230	1/4	B	**23991**
CJ19-150 DPK	150	40	50	230	1/4	B	**23992**
CJ19-170 DPK	170	50	60	230	1/4	B	**23993**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN60947-1; EN 60947-4-1







Type	Overall dimensions (mm)		
	A	B	C
LT 4 - D1810	100	70	83
LT 4 - D2510	130	80	98
LT 4 - D3210	130	80	105
LT 4 - D4011	167	126	116
LT 4 - D6511	167	126	116
LT 4 - D9511	182	127	127

REVERSE CONTACTORS LT4-DXX

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

LT 4-Dxx series contactors is suitable for across- the line starting and reversing of-3 phase squirrel cage and slip ring motors. It consist of two magnetic contactors LT1D. The contactor is provided whit a built-in interlock safety mechanism. The contactor is used for reverse control of induction motors with shortly rotor.
The contactors from the series are offered for consumers up to 95A.

FUNCTIONS:
- switching on of electrical motors in one direction of rotation and reversing of the rotation direction at outside command
- making of control systems
- remarkable with high reliability of current characteristics
- reliable switching on or separation of power contacts
- secured part of the contactors against consumer contact
- secured cover of the movable part of the contactor
- impossibility for simultaneous switching on of the two contactors from the group due to mechanical locking

TECHNICAL DATA:
- Operation class: AC 3
- Rated operating voltage of the controlling coil: 230V AC; 50/60 Hz
- Rated operating voltage of the power circuit: up to 690V AC
- insulation voltage: 690V
- Surge voltage wear resistance: >8000V
- Limits of the controlling coil voltage: from 0.8 to 1.15 Uc
- Number of plugs: 3 NO power contacts +1NO operative (for contactors over 40A there is also additional 1NC contact)
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors

NOTE: The contactors are offered without factory cabling
- Electrical wear resistance (number of cycles):≥1 000 000
- Mechanical wear resistance (number of cycles):≥10 000 000
- Number of cycles (switching on) per hour: up to 600
- Pole leaking power: up to 13W

MOUNTING:
- on DIN-rail or
- with bolts to the surface
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type	Rated current (A)	Rated capacity of the consumer (kW)					Packing/Box (pcs)	Product category	Catalogue number
		230V	400V	415V	440V	690V			
LT 4 D1810	18	4	7.5	7.5	7.5	10	1 / 20	B	**23301**
LT 4 D2510	25	5.5	11	11	11	15	1 / 20	B	**23302**
LT 4 D3210	32	7.5	15	15	15	18.5	1 / 20	B	**23303**
LT 4 D4011	40	11	18.5	18.5	18.5	30	1 / 8	B	**23304**
LT 4 D6511	65	18.5	30	30	30	37	1 / 8	B	**23305**
LT 4 D9511	95	25	45	45	45	45	1 / 6	B	**23306**



Dimensions (mm)					
W	W2	L1	h1	h2	H
33	45	48	22	14	59

TIME DELAY CONTACT BLOCK LT02-DXX

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

LT02-Dxx is designed to set time intervals from 0.1 to 180s in different control schemes. It is used most frequently in combination with contactors from LT1-Dxx series to form "star/delta" starters for electrical motor control, as it provides the necessary time for motor winding.

Type	Number of contacts	Time delay	Delay	Product category	Catalogue number
LT02-DT0	NO+NC	0.1~3s	ON	B	**23901**
LT02-DT2	NO+NC	0.1~30s	ON	B	**23902**
LT02-DT4	NO+NC	10~180s	ON	B	**23903**
LT02-DT22	NO+NC	0.1~30s	OFF	B	**239022**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-4-1





Dimensions (mm)

H	W	L	W1	W2
32	40	35	26	45
H2	L1	L2		
48	6,5	37		

AUXILIARY CONTACTS

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

AUXILIARY CONTACTS
At necessity the element provide auxiliary number of contacts. They are specially designed for mounting on the movable part of the magnetic core of the contactors LT 1K/D series.

FUNCTIONS:
- extending the number of the operative contactors up to 4 in different
- Combinations
  - switches on simultaneously with the other contact system of the contactor
- Operation class: AC 3
- insulation voltage: 690V
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors

MOUNTING:
- on the movable cover of the contactor through pinching
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)

Type	For Contactor Series	Number of contacts	Rated current	Section of the conductor (mm^2)	Product category	Catalogue number
LT01-DN02	LT1-D & LT1-F	2NC	6A	0,5-1	B	**23002**
LT01-DN11	LT1-D & LT1-F	NO+NC	6A	0,5-1	B	**23011**
LT01-DN20	LT1-D & LT1-F	2NO	6A	0,5-1	B	**23020**
LT01-DN22	LT1-D & LT1-F	2NO+2NC	6A	0,5-1	B	**23022**
LT01-DN40	LT1-D & LT1-F	4NO	6A	0,5-1	B	**23040**
LT01-DN04	LT1-D & LT1-F	4NC	6A	0,5-1	B	**23004**
LT01-KN11	LT1-HK	NO+NC	6A	0,5-1	B	**23001**
LT01-KN22	LT1-HK	2NO+2NC	6A	0,5-1	B	**23003**



Dimensions (mm)

W1	W2	H	L	A
73	48	22	12,5	72

AUXILIARY CONTACTS LT03-DN11

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

Providing on necessity additional number of plug points and are mounted sideward to the movable part of the magnetic cores of contactors of the series LT1D till 65A. Variants with two additional plug points NO and NC are offered.

FUNCTIONS:
- expanding the number of the operational plug points
- switching on simultaneously with the rest of the contact system
- of the contactor

TECHNICAL CHARACTERISTICS:
- Environment operational regime: AC 3
- Insulation voltage: 690V
- Double connector: screw connector
- Connection:
  - flexible conductors with or without cable end
  - solid conductors
- Mounting method:
  - mounting position – sideward to the contactor
- Plastic: resistant to UV and non-burning (self-extinguishing material)



Type	Rated current	Section of the conductor (mm^2)	Product category	Catalogue number
LT03-DN11	6A	0,5-1	B	**23311**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 61095





Dimensions (mm)

H1	C	D1	D2	A	E
81	5	31	66	18	9





Dimensions (mm)

C	D1	D2	H3	H4
5	66	48	45	20
E	F			
35	85			

MODULE CONTACTORS K SERIES

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

Modular contactors K series are used for commutation of mono-phase and three-phase low power electrical consumers. They provide connection between the consumers in small overall dimensions, silent work, mounting only at DIN-rails.

FUNCTIONS:
- switching on of consumers
- making of control systems
- remarkable with high reliability of current characteristics
- reliable switching on or separation of power contacts

TECHNICAL DATA:
- Operation class: AC 7a
- Rated operating voltage of the controlling coil: 230V AC; 50/60 Hz
- Rated operating voltage of the power circuit: up to 690V AC
- insulation voltage: 690V
- Surge voltage wear resistance: >8000V
- Joining terminal: screw terminal
- Connecting:
  - flexible conductors with or without cable terminal
  - rigid conductors

MOUNTING:
- on DIN-rail or
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type	In	Coil voltage (V)	Contacts	Packing/Box (pcs)	Product category	Catalogue number
K20	20A	230V	2NO	1/12/120	B	**23008**
K20	20A	230V	NO+NC	1/12/120	B	**23007**
K20	20A	230V	2NC	1/12/120	B	**23009**
K20	25A	230V	NO+NC	1/12/100	B	**23012**
K20	25A	230V	2NO	1/12/100	B	**23013**
K20	25A	230V	2NC	1/10/100	B	**23014**
K20	40A	230V	NO+NC	1/6/60	B	**23015**
K20	40A	230V	2NO	1/6/60	B	**23016**
K20	40A	230V	2NC	1/6/60	B	**23017**
K20	100A	230V	2NO	1/4/40	B	**23080**
K20	100A	230V	1NO+1NC	1/4/40	B	**23083**
K20	100A	230V	2NC	1/4/40	B	**23084**
K40	25A	230V	2NO+2NC	1/6/60	B	**23410**
K40	25A	230V	3NO+1NC	1/6/60	B	**23411**
K40	25A	230V	4NO	1/6/60	B	**23412**
K40	25A	230V	4NC	1/6/60	B	**23413**
K40	40A	230V	2NO+2NC	1/4/40	B	**23422**
K40	40A	230V	3NO+1NC	1/4/40	B	**23423**
K40	40A	230V	4NO	1/4/40	B	**23409**
K40	40A	230V	4NC	1/4/40	B	**23424**
K40	63A	230V	2NO+2NC	1/4/40	B	**23425**
K40	63A	230V	3NO+1NC	1/4/40	B	**23426**
K40	63A	230V	4NO	1/4/40	B	**23427**
K40	63A	230V	4NC	1/4/40	B	**23428**
K40	80A	230V	4NO	1/2/20	B	**23480**
K40	80A	230V	2NO+2NC	1/2/20	B	**23483**
K40	80A	230V	4NC	1/2/20	B	**23484**
K40	80A	230V	3NO+1NC	1/2/20	B	**23485**

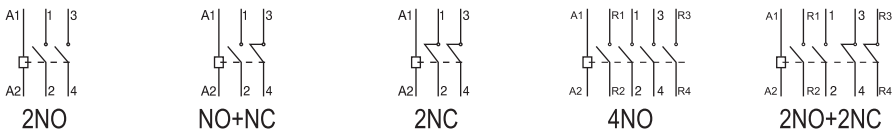

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-4-1

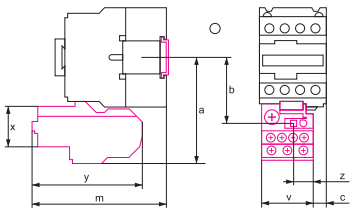



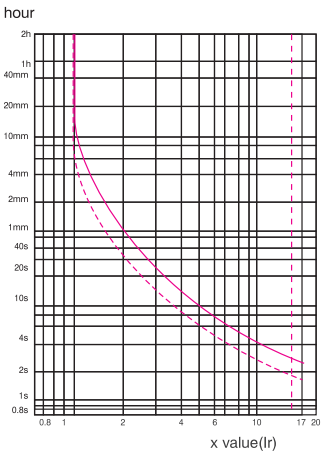

THERMAL OVERLOAD RELAYS

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The thermal relays LT 2- K/Exx series are three pole relays designed for protection of induction motors from overload or overheat. They are mounted to contactors LT 1 K/Dxx series and an operating circuit for motor control is passed through their NC contacts. They have bimetallic releases /1 per phase/ through them the motors current flows and indirectly mated. The bimetallic releases bend subject to the influence of mating and this results in tripping of the relay. The contacts change switch position. The choice of a suitable protection prevents motor's operation at unusual temperature conditions and guarantees maximum constant operation, increases the effectiveness and prolongs the term of exploitation.

FUNCTIONS:
- switching off alternating current consumers at current overload
- making of control systems for consumers
- used as a protective operating element in control panels of induction motors
- remarkable with high reliability of current characteristics

TECHNICAL DATA:
- Rated operating voltage: up to 690V AC; 50/60 Hz
- Rated operating current range: up to 690V AC
- insulation voltage: >690V
- Surge voltage wear resistance:≥6000V
- Joining terminal: screw terminal
- temperature compensation: -25 +55
- tripping category: class 10A
- Connecting:
  - flexible or rigid conductors with or without cable terminal for joining to the consumer
  - to the contactor through the relay terminals
  - the connecting terminals with the consumer can be adjusted according to the type of the contactor
- Electrical wear resistance (number of cycles):≥1000000
- Mechanical wear resistance (number of cycles):≥10000000
- Indication for protection activating
- Possibility for choice of the protection restoring (through the blue button)
- Possibility for range adjustment of the protection activating
- Possibility for operation at higher frequency

MOUNTING:
- mounting to the contactor: to the terminals of the contactor as it is additionally clamped to its frame through a pin
- mounting position: vertical gradient – maximum ± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Installation altitude: up to 2000m

NOTE: To protect the consumer from short circuit, before the combination contactor- thermal relay, a suitably measured breaker or safety device should be mounted.

Type	Dimensions (mm)							
	a	b	c	m	x	y	v	z
LT 2 - Kxx	81	50	0	98	47	92	44	17
LT 2 - E13xx	86	55	10.7	108	47	92	44	17
LT 2 - E23xx	86	55	9	109	47	92	44	17
LT 2 - E33xx	115	76	9.5	124	54	109	70	30

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



For contactor LT1-K06 type	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-K0303	-	-	-	0.30	0.25 - 0.30	1 / 100	B	**13403**
LT2-K0306	-	0.37	1.10	1.20	0.80 - 1.20	1 / 100	B	**13406**
LT2-K0307	0.37	0.75	1.50	1.80	1.20 - 1.80	1 / 100	B	**13407**
LT2-K0308	0.75	1.10	2.20	2.60	1.80 - 2.60	1 / 100	B	**13408**
LT2-K0310	1.10	1.50	3.00	3.70	2.60 - 3.70	1 / 100	B	**13410**
LT2-K0312	1.10	2.20	4.00	5.50	3.70 - 5.50	1 / 100	B	**13411**
LT2-K0314	2.20	4.00	5.50	8.00	5.50 - 8.00	1 / 100	B	**13412**
LT2-K0316	3.00	5.00	7.50	11.5	8.00 - 11.5	1 / 100	B	**13413**



UNTIL SUPPLY LAST

For contactor LT1-K06 type	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-K0301*	0.16	0.10 - 0.16	1 / 100	F	**13401**
LT2-K0302*	0.25	0.16 - 0.25	1 / 100	F	**13402**
LT2-K0304*	0.54	0.30 - 0.54	1 / 100	F	**13404**
LT2-K0305*	0.80	0.54 - 0.80	1 / 100	F	**13405**

*3 year standard+0 year extended warranty



For contactor LT1-D9 to LT1-D25 type	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-E1301	-	-	-	0.16	0.10 - 0.16	1 / 100	B	**13001**
LT2-E1302	-	-	-	0.25	0.16 - 0.25	1 / 100	B	**13002**
LT2-E1303	-	-	-	0.40	0.25 - 0.40	1 / 100	B	**13003**
LT2-E1304	-	-	0.37	0.63	0.40 - 0.63	1 / 100	B	**13004**
LT2-E1305	-	-	0.55	1.00	0.63 - 1.00	1 / 100	B	**13005**
LT2-E1306	-	0.37	1.10	1.60	1.0 - 1.60	1 / 100	B	**13006**
LT2-E1307	0.37	0.75	1.50	2.50	1.6 - 2.50	1 / 100	B	**13007**
LT2-E1308	0.75	1.50	3.00	4.00	2.5 - 4.00	1 / 100	B	**13008**
LT2-E1310	1.10	2.20	4.00	6.00	4.0 - 6.00	1 / 100	B	**13010**
LT2-E1312	2.00	3.70	5.50	8.00	5.5 - 8.00	1 / 100	B	**13012**
LT2-E1314	2.20	4.00	7.50	10.0	7.0 - 10.0	1 / 100	B	**13014**
LT2-E1316	3.70	5.50	11.0	13.0	9.0 - 13.0	1 / 100	B	**13016**
LT2-E1321	4.00	7.50	15.0	18.0	12.0 - 18.0	1 / 100	B	**13021**
LT2-E1322	5.50	9.00	18.5	25.0	17.0 - 25.0	1 / 100	B	**13022**
LT2-E1353	9.00	11.0	18.5	33.0	23.0 - 32.0	1 / 100	B	**13053**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



For contactor LT1-D32 type	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-E2353	11	11	18.5	32	23.0 - 32.0	1 / 100	B	**13253**
LT2-E2355	15	15	22.0	36	28.0 - 36.0	1 / 100	B	**13255**



For contactor LT1-D40 to LT1-D95 type	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-E3355	18.5	18.5	30	40	30.0 - 40.0	1 / 50	B	**13355**
LT2-E3357	22	22	30	50	37.0 - 50.0	1 / 50	B	**13357**
LT2-E3359	30	30	37	65	48.0 - 65.0	1 / 50	B	**13359**
LT2-E3363	45	45	55	80	63.0 - 80.0	1 / 50	B	**13363**
LT2-E3365	55	55	75	93	80.0 - 93.0	1 / 50	B	**13365**

For contactor LT1-F115 to LT1-F150	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-F4367	40	75	100	150	90-150	1/30	B	**13367**



For contactor LT1-F225 to LT1-F400	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-F4368	63	110	129	220	132-220	1/30	B	**13368**
LT2-F4369	100	160	220	330	200-330	1/18	B	**13369**
LT2-F4370	147	250	335	500	300-500	1/18	B	**13370**

For contactor LT1-F630	Motor capacity (kW) 220V 230V	380V 400V	660V 690V	Rated current (A)	Protection adjustment range	Packing/Box (pcs)	Product category	Catalogue number
LT2-F4371	200	335	450	630	380-630	1/18	B	**13371**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Dimensions



Auxiliary contact **UVR**



Dimensions (mm)

H	l1	l2	d	D
89	16	50	10	9,2
w1	w2	h1	h2	
44,5	18	22	45	

THERMOMAGNETIC AUTOMATIC BREAKER TM2/TM3

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

The thermomagnetic automatic breakers TM 2-Exx series are devices designed for control and protection of induction motors from overload, overheat or short circuit. The overload motor protection is carried out by the built in the breaker thermal elements, and the short circuit protection is carried out by the magnetic elements. These magnetic elements allow the adjustment of the current leakage which is 13 times the maximum current of the thermal protection. The overload protection elements include automatic compensation for the ambient temperature changes. In combination with under voltage release the thermomagnetic breaker TM 2-Exx also provides protection of the motors from fall out of a phase from the power supply. The choice of a suitable protection prevents motor's operation at unusual temperature conditions and guarantees maximum constant operation, increases the effectiveness and prolongs the term of exploitation.

FUNCTIONS:

- switching off alternating current consumers at current overload
- switching off the electrical circuit to the consumer at inlet short circuit
- protects the motor at lack/lowering of the phase voltage (if there is under voltage release)
- used as a protective operating element in control panels of induction motors
- remarkable with high reliability of current characteristics
- possibility for change/choice of the protection current (according to the operating current of the motor)
- automatic compensation of the ambient temperature

TECHNICAL DATA:

- Rated operating voltage: up to 690V AC; 50/60 Hz
- Rated operating current range: from 0.1 to 80A according to the type in table 1
- insulation voltage: 690V
- Surge voltage wear resistance:≥6000V
- Joining terminal: screw terminal
- Connecting:
  - flexible or rigid conductors with or without cable terminal for joining to the consumer
  - to the contactor through the relay terminals
  - the connecting terminals with the consumer can be adjusted according to the type of the contactor
- Electrical wear resistance (number of cycles):≥1000000
- Mechanical wear resistance (number of cycles):≥10000000
- Indication for protection activating
- Switching on of the breaker manually with button "I" and switching off with button "O" manually or automatically at failure or after activating of the protection
- Possibility for range adjustment of the protection activating
- Possibility for operation at higher frequency
- Possibility for independent operation or as an element of an automation system
- tripping category: class 10A

MOUNTING:

- mounting to DIN-rail
- mounting position: vertical gradient – maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

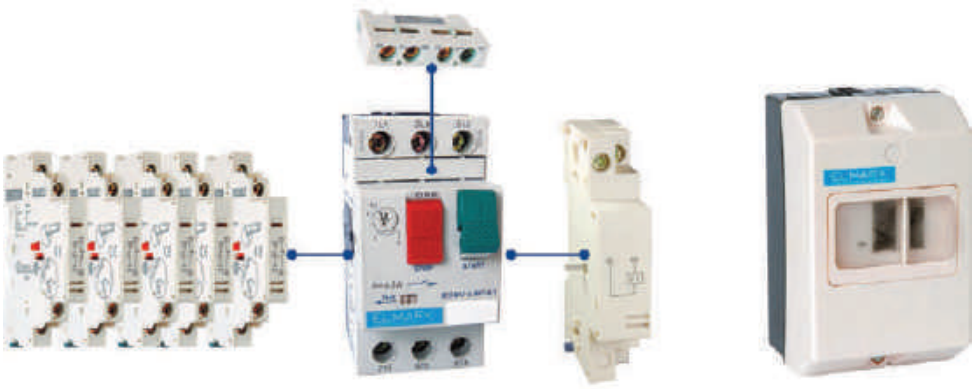

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

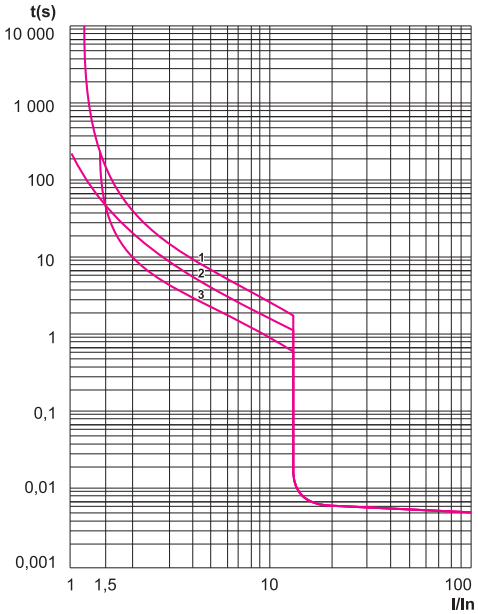

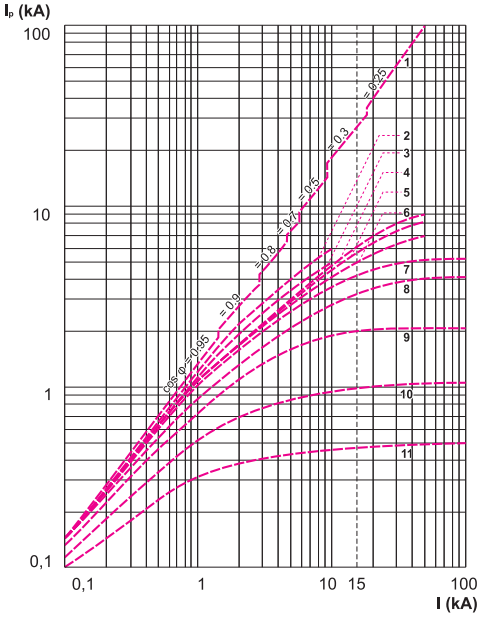

Type	Rated capacity of three-phase motor in AC-3 category					instantaneous short-circuit release (A)	Current setting range (A)	Thermal current Ithe TM2-E (A)	Packing/Box (pcs)	Product category	Catalogue number
	220V 230V	400V 410V	440V	500V	690V						
TM2-E01	-	-	-	-	-	1.5	0.1 - 0.16	0.16	1 / 50	B	**48001**
TM2-E02	-	0.06	0.06	-	-	2.4	0.16 - 0.25	0.25	1 / 50	B	**48002**
TM2-E03	0.06	0.09	0.09	-	-	5.0	0.25 - 0.40	0.40	1 / 50	B	**48003**
TM2-E04	-	0.12	0.18	-	0.37	8.0	0.40 - 0.63	0.63	1 / 50	B	**48004**
TM2-E05	0.09	0.25	0.25	0.37	0.55	13.0	0.63 - 1.00	1	1 / 50	B	**48005**
TM2-E06	0.18	0.37	0.37	0.37	0.75	22.5	1 - 1.60	1.6	1 / 50	B	**48006**
TM2-E07	0.37	0.75	0.75	1.10	1.50	33.5	1.6 - 2.50	2.5	1 / 50	B	**48007**
TM2-E08	0.55	1.10	1.50	1.50	2.20	51.0	2.5 - 4.00	4	1 / 50	B	**48008**
TM2-E10	1.10	2.20	2.20	3.00	4.00	78.0	4 - 6.30	6.3	1 / 50	B	**48010**
TM2-E14	1.50	3.00	4.00	4.00	5.50	138	6 - 10.0	9	1 / 50	B	**48014**
TM2-E16	2.20	5.50	5.50	7.50	9.00	170	9 - 14.0	13	1 / 50	B	**48016**
TM2-E20	4.00	7.50	7.50	9.00	15.0	223	13 - 18.0	17	1 / 50	B	**48020**
TM2-E21	5.50	9.00	11.0	11.0	18.5	327	17 - 23.0	21	1 / 50	B	**48021**
TM2-E22	5.50	11.0	11.0	15.0	22.0	327	20 - 25.0	23	1 / 50	B	**48022**
TM2-E32	7.50	15.0	15.0	18.5	22.0	416	24 - 32.0	24	1 / 50	B	**48032**
TM3-E40	11.0	18.5	22.0	25.0	33.0	480	25 - 40.0	32	1 / 15	B	**48040**
TM3-E63	15.0	30.0	33.0	40.0	55.0	550	40 - 63.0	50	1 / 15	B	**48063**
TM3-E80	22.0	40.0	45.0	55.0	63.0	665.5	56 - 80.0	64	1 / 15	B	**48080**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60 947-2; EN 60947-4-1

VOLTAGE RELEASE (VR) FOR TM2

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty



For increasing the effectiveness of the thermomagnetic breakers TM 2-Exx operation, they can be supplied with auxiliary devices, designed for widening the practice range and improving the technical characteristics of the breakers.
The release is designed to switch off the thermomagnetic breaker when the controlling voltage falls under breaking level 0.55 to 0.7 UN and does not allow switching on of the breaker unless the voltage is over 0.85 Un.

FUNCTIONS:
- switching off the breaker at power supply voltage fall under 0.55 – 0.7 Un
- does not allow switching on of the breaker when the power supply voltage is under 0.85 Un
- prevents unwarranted secondary start of the breaker at falling off and restoring of the power supply voltage
- protects the motor at lack/lowering of the phase voltage
- used as a protective operating element in control panels of induction motors
- remarkable with high reliability of current characteristics

MOUNTING:
- laterally to a breaker
- At the side of the breaker through special openings

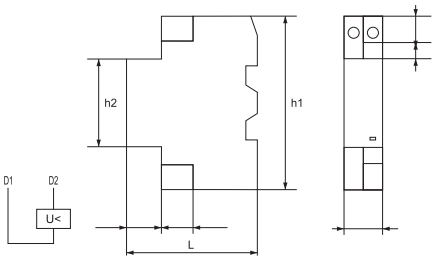

Type	Voltage (V)	Product category	Catalogue number
TM2 AU225	230	B	**48099**
TM3 AU385	400	B	**48098**

Documents corresponding to the product:
Standard EN 60529

WATERTIGHT BOX FOR TM2-E



Specially designed plastic box with silicon screen for increasing the IP code from dust and moisture to IP 65. Designed for thermal-magnetic circuit breakers of up to 32A
- Mounting:
  - mounting position: vertical gradient, maximum± 5°
  - mounted to horizontal surfaces (walls) with bolts
  - the breaker TM2 Exx is fixed inside of it on rail
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)

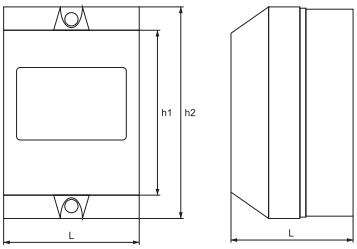

Type	Product category	Catalogue number
TM2 E	B	**8083**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AUXILIARY CONTACT BLOCK TM2 AE11-FRONT MOUNTING

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

Type	Product category	Catalogue number
TM2 AE11	B	**48912**

It is designed to switch on operational systems or signalization. Designed with one NO and one NC contact. It changes the position of its contacts according to the position of the breaker (switched on/off) to which it is mounted.

- Mounting:
  - laterally to a breaker TM2-Exx
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

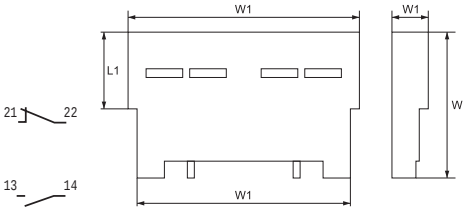



AUXILIARY CONTACT BLOCK TM2 AE11-SIDE MOUNTING

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

Type	Product category	Catalogue number
TM2 AN11	B	**48911**
TM3 AN11	B	**48913**

It is designed to switch on operational systems or signalization. Designed with one NO and one NC contact. It changes the position of its contacts according to the position of the breaker (switched on/off) to which it is mounted.

- Mounting:
  - laterally to a breaker TM2-Exx
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

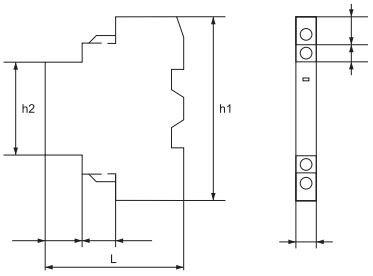

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-4-1



with thermal overload relays

STARTERS FOR DIRECT START

5+2 standard +extended | 7 YEAR TOTAL WARRANTY | *for industrial usage, 3 years warranty

The electromagnetic starters LT 5 Dxx series are devices designed for remote control, direct control and protection of induction motors or other electrical consumers. They are a combination of contactors LT 1 Dxx series and thermal protection LT 2 Exx factory cabled. The starters are offered on the market in metal or plastic boxes with the corresponding IP code from dust and moisture. At mounting there should be provided protection of the device from short circuit through breakers or disconnectors. If necessary, at client's order the factory mounted thermal protection in the pneumatic starter can be substituted. The choice of a suitable protection prevents motor's operation at unusual temperature conditions and guarantees maximum constant operation, increases the effectiveness and prolongs the term of exploitation.

FUNCTIONS:
- switching on/off alternating current consumers
- does not allow secondary unwarranted switching on of the starter at transitory lowering of the voltage
- protects the motor from overload in the range of the corresponding thermal protection
- remarkable with high reliability of current characteristics

TECHNICAL DATA:
- Rated voltage of the controlling voltage: 230/400V AC; 50/60 Hz

NOTE: In case you need different controlling coils voltage of the starters you can turn to our regional representatives.
- Rated operating voltage: 690V
- Rated operating current range: from 7 to 93 A AC
- insulation voltage: 690V
- Surge voltage wear resistance:≥6000V
- Joining terminal: screw terminal
- Little power consumption and small dimensions
- Connecting:
  - flexible or rigid conductors with or without cable terminal for joining to the consumer and section according to the motor power
  - two by two inlets/outlets supplied with orifices for the cables
- Possibility for range adjustment of the protection activating
- IP code: IP 44
- Possibility for operation at higher frequency
- Mounting:
  - mounting to a flat surface (wall) with bolts/screws
  - mounting position: vertical gradient, maximum± 5°
- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Metal corpus: corrosion-proof coating
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

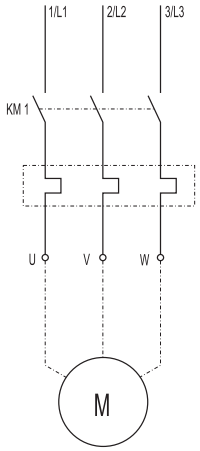

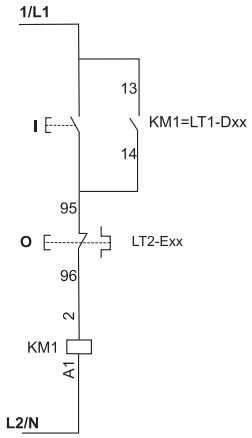

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





Type	Rated capacity of motors 50/60Hz AC-3 category 220V 230V	380V 400V	415V 440V	Rated current (A)	Thermal relay adjustment range	Coil voltage (V)	Packing/Box (pcs)	Product category	Catalogue number
LT5 D093	2.2	4.0	4.0	9	7 .. 10A	230	1 / 16	B	**43091**
						400	1 / 16	B	**43092**
LT5 D123	3.0	5.5	5.5	12	9 .. 13A	230	1 / 16	B	**43121**
						400	1 / 16	B	**43122**
LT5 D185	4.0	7.5	9.0	18	12 .. 18A	230	1 / 16	B	**43181**
						400	1 / 16	B	**43182**

Note: Upon request the thermal relay will be replaced





Type	Rated capacity of motors 50/60Hz AC-3 category 220V 230V	380V 400V	415V 440V	Rated current (A)	Thermal relay adjustment range	Coil voltage (V)	Packing/Box (pcs)	Product category	Catalogue number
LT5 D255	5.5	11	11	25	17 .. 25A	230	1 / 16	B	**43251**
						400	1 / 16	B	**43252**
LT5 D325	7.5	15	15	32	23 .. 32A	230	1 / 16	B	**43321**
						400	1 / 16	B	**43322**

Note: Upon request the thermal relay will be replaced





Type	Rated capacity of motors 50/60Hz AC-3 category 220V 230V	380V 400V	415V 440V	Rated current (A)	Thermal relay adjustment range	Coil voltage (V)	Packing/Box (pcs)	Product category	Catalogue number
LT5 D405	11.0	18.5	22	40	30 .. 40A	230	1/6	B	**43401**
						400	1/6	B	**43402**
LT5 D655	18.5	30.0	37	65	48 .. 65A	230	1/6	B	**43651**
						400	1/6	B	**43652**
LT5 D955	25.0	45.0	45	95	80 .. 93A	230	1/6	B	**43951**
						400	1/6	B	**43952**

Note: Upon request the thermal relay will be replaced

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-4-1



"STAR/DELTA"STARTER

5+2 standard +extended 7 YEAR TOTAL WARRANTY *for industrial usage, 3 years warranty

The electromagnetic starters LT 3 Dxx series are devices designed for remote control, direct control and protection of induction motors coiled and operating according to a starter scheme "star/delta". They are a combination of three contactors LT 1 Dxx series, time relay and a set of buttons "start" and "stop" factory cabled. They provide the easy motor unwinding giving possibility for setting the time for unwinding in "star" as the time for switching between "star" and "delta" is fixed to 0.5 seconds.
The starters are offered on the market in two types:
- closed type – metal boxes providing the corresponding IP code from dust and moisture (IP 54) as at mounting there should be provided protection of the device from short circuit through breakers or disconnectors
- open type – for mounting in distribution boxes as at mounting there should be provided protection of the device from short circuit through breakers or disconnectors

The starters are offered on the market without mounted thermal protection which is purchased separately according to the motor capacity. The choice of a suitable protection prevents motor's operation at unusual temperature conditions and guarantees maximum constant operation, increases the effectiveness and prolongs the term of exploitation. If necessary, at client's order the power supply operating voltage of the pneumatic starter can be changed.

FUNCTIONS:
- switching on/off alternating current three phase motors operating according to a scheme "star - delta"
- does not allow secondary unwarranted switching on of the starter at transitory lowering of the voltage
- protects the motor from overload in the range of the corresponding thermal protection
- indication of the operating condition through a valve indicator
- possibility for mounting of additional contacts (for the open type)
- remarkable with high reliability of current characteristics

TECHNICAL DATA:
- Rated voltage of the controlling voltage: 400V AC; 50/60 Hz

NOTE: In case you need different controlling coils voltage of the starters you can turn to our regional representatives.
- Rated operating voltage: 690V
- Rated operating current range: from 7 to 93A AC
- insulation voltage: >690V
- Surge voltage wear resistance:≥6000V
- Joining terminal: screw terminal
- Little power consumption and small dimensions
- Connecting:
  - flexible or rigid conductors with or without cable terminal for joining to the consumer and section according to the motor power
  - three by three inlets/outlets supplied with orifices for the cables
- Possibility for operation at higher frequency
- IP code: IP54
- Mounting:
  - mounting to a flat surface (wall) with bolts/screws
  - mounting position: vertical gradient, maximum± 5°
- The metal body is covered with corrosion-proof paint
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

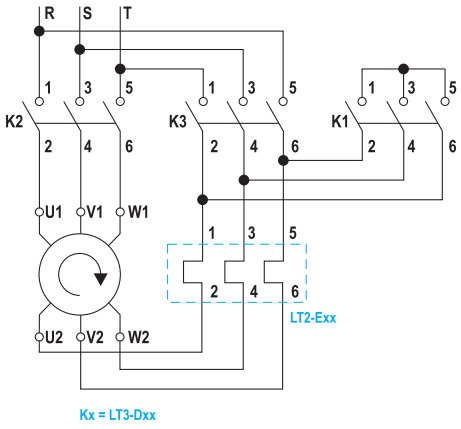

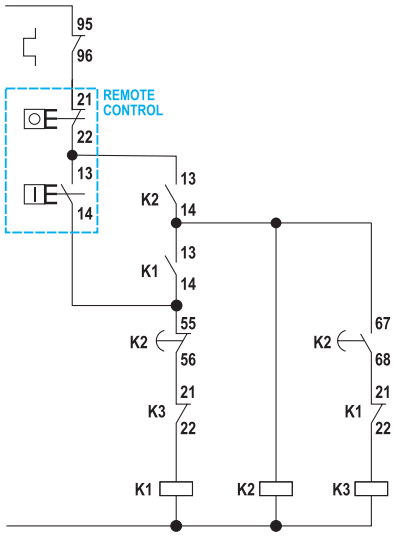

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type designation (without a box)	Overall dimensions (mm)		
	height	width	depth
LT3-D25A	135	170	160
LT3-D32A	135	170	160
LT3-D40A	150	285	190
LT3-D65A	150	285	190
LT3-D95A	150	310	190

Type designation (without a box)	Rated capacity (kW)				Rated current (A)	Coil voltage (V AC)	Packing/Box (pcs)	Product category	Catalogue number
	220V 230V	380V 400V	415V	440V					
LT3-D25A	11	15	15	15	25	400	1 / 6	B	**43253**
LT3-D32A	15	18.5	18.5	18.5	32	400	1 / 6	B	**43323**
LT3-D40A	18.5	22	22	22	40	400	1 / 4	B	**43403**
LT3-D65A	30	55	55	55	65	400	1 / 4	B	**43653**
LT3-D95A	37	75	75	75	95	400	1 / 4	B	**43953**

Note: It is necessary that thermal protection with suitable range is mounted to protect the controlled motor. The shown values of magnetic starters are for normal regimes for motor control, for hard operation regimes are chosen starters which correspond to the current rating of the motor.



Type designation (with box)	Overall dimensions (mm)		
	height	width	depth
LT 3 -B-D25A	370	240	160
LT 3 -B-D32A	370	240	160
LT 3 -B-D40A	470	265	160
LT 3 -B-D65A	470	265	160
LT 3 -B-D95A	470	265	160

Type designation (with box)	Rated capacity (kW)				Rated current (A)	Coil voltage (V AC)	Packing/Box (pcs)	Product category	Catalogue number
	220V 230V	380V 400V	415V	440V					
LT 3 - B - D25A	11	15	15	15	25	400	1 / 4	B	**43254**

Note: It is necessary that thermal protection with suitable range is mounted to protect the controlled motor. The shown values of magnetic starters are for normal regimes for motor control, for hard operation regimes are chosen starters which correspond to the current rating of the motor.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60947-1
EN 60947-4-1



with thermal overload relays

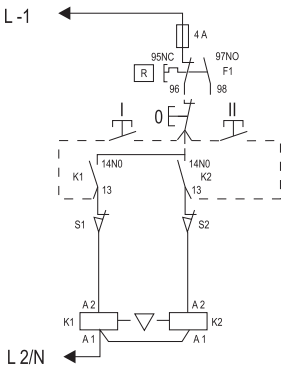

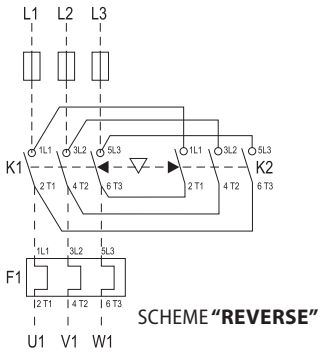

SCHEME **"REVERSE"**

REVERSE STARTER

5+2 standard +extended **7 YEAR TOTAL WARRANTY** *for industrial usage, 3 years warranty

The electromagnetic starters LT4 Dxx series are devices used for direct start, reverse start and protection of induction motors with short connected rotor. They are a combination of two contactors LT1 Dxx series supplied with two buttons "start" and one "stop" factory cabled. They provide the unwinding of the motor in one of the directions with possibility for pushing the button "stop" and giving command from the other "start" for changing the motor winding direction.
The two contactors are mechanically blocked and do not allow simultaneous start in both winding directions. The starters are offered – closed type in metal boxes providing the corresponding IP code from dust and moisture (IP54) as at mounting there should be provided protection of the device from short circuit through breakers or disconnectors. The starters are offered with mounted thermal protection which can be substituted according to the motor power. The choice of a suitable protection prevents motor's operation at unusual temperature conditions and guarantees maximum constant operation, increases the effectiveness and prolongs the term of exploitation.
If necessary, at order the power supply operating voltage of the pneumatic starter can be changed.

FUNCTIONS:
- switching on alternating current three phase motors in one winding direction, switching off and change of the winding direction at giving a signal
- does not allow secondary unwarranted switching on of the starter at transitory lowering of the voltage
- protects the motor from overload in the range of the corresponding thermal protection
- remarkable with high reliability of current characteristics

TECHNICAL DATA:
- Rated voltage of the controlling voltage: 400V AC; 50/60 Hz

NOTE: In case you need different controlling coils voltage of the starters you can turn to our regional representatives.
- Rated operating voltage: 690V
- Rated operating current range: from 7 to 93 A AC
- insulation voltage: 690V
- Surge voltage wear resistance:≥6000V
- Joining terminal: screw terminal
- Little power consumption and small dimensions
- Connecting:
  - flexible or rigid conductors with or without cable terminal for joining to the consumer and section according to the motor power
  - three by three inlets/outlets supplied with orifices for the cables
- Possibility for operation at higher frequency
- IP code: IP 44
- Mounting:
  - mounting to a flat surface (wall) with bolts/screws
  - mounting position: vertical gradient, maximum± 5°
- The metal body is covered with corrosion-proof paint
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m

Type designation (with a box)	Rated capacity (kW)				Overall dimensions (mm)			Rated current (A)	Coil voltage (V AC)	Packing/ Box (pcs)	Product category	Catalogue number
	220V 230V	380V 400V	415V	440V	height	width	depth					
LT 4 - B - D25A	11.0	15.0	15.0	15.0	240	240	160	25	400	1 / 8	B	**43001**
LT 4 - B - D40A	18.5	22.0	22.0	22.0	270	265	160	40	400	1 / 2	B	**43003**
LT 4 - B - D95A	37.0	75.0	75.0	75.0	270	265	160	95	400	1 / 4	B	**43005**
LT 4 - B - D25A	11.0	15.0	15.0	15.0	240	240	160	25	230	1 / 4	B	**43006**
LT 4 - B - D32A	15.0	18.5	18.5	18.5	240	240	160	32	230	1 / 4	B	**43007**
LT 4 - B - D40A	18.5	22.0	22.0	22.0	270	265	160	40	230	1 / 4	B	**43008**
LT 4 - B - D65A	30.0	55.0	55.0	55.0	270	265	160	65	230	1 / 4	B	**43009**
LT 4 - B - D95A	37.0	75.0	75.0	75.0	270	265	160	95	230	1 / 4	B	**43010**

Documents corresponding to the product:
Standard EN61800-3
EN61800-5-1



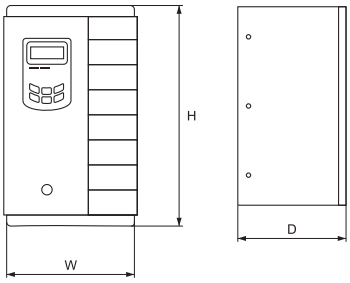

ELM 2000+ FREQUENCY INVERTERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

High-tech motor control concept, based on advanced DSP-technology - ready for V/Hz, SENSORLESS VECTOR, CLV and PMM motor control - intelligent AUTOTUNING functions for easy setup

Flexible inverter control, dual high resolution analogue inputs, free mappable digital I/O channels

Ready for all commonly used fieldbus systems

Universal function-set for all kind of industrial and residential applications, including integrated PID/pump controller routines

Smart PC-tools, for inverter control, parametrization and troubleshooting. Parameter-duplication stick

Brake chopper integrated

TECHNICAL FEATURES:

- Power range:
  - 0,4……400 kW
- Power input:
  - Rated input voltage- 1-Phase 220V~240V~±15%; 3-Phase 380V-460V (+/-)15%
  - Input frequency- 44….67 Hz
- Motor output:
  - Output frequency- 0-650 Hz
  - Frequency resolution- 0,01 Hz
  - Overload capability- 150% - 60 sec. / 10 min
- Control mode:
  - Motor control algorithm- V/Hz-SpaceVector, SLV-SENSORLESS VECTOR,Torque/Speed control
  - mode CLV-Closed loop vector,Permanent Magnet Synchronous Motor
  - Chopper frequency- 0.8…16 kHz (fixed / random)
  - V/Hz curve- Linear, exponential, and user-programmable curve
  - Starting torque- 150% rated torque at 0,5 Hz (in SLV Mode)
  - Torque compensation- Automatic / Manual
  - Motor data input- Manual, from nameplate / AUTOTUNING
  - Control range- 1:100 in SLV mode,1:1000 in CLV mode,1:20 in PMSM mode
  - Speed precision +/- 0,5% (SLV),+/- 0.02% (CLV)
  - Torque precision +/- 5% (SLV)
  - DC-Brake- User programmable functions
  - Brake chopper- Chopper transistor integrated (up to 90 kW)
- Display:
  - 7 segment, 4 characters
  - Config-Parameters and -value, programmable to display various working parameters
- I/O Channels and control functions:
  - Inverter control- Via terminals / Keypad / Serial link (or combination of all)
  - Digital inputs- 6 (8) Dig. inputs (NPN-PNP selectable) pulstrain-input
  - Speed reference input- Potentiometer (on keypad unit, external), analogue signal (terminals),
  - keypad, internal programmable value, pulsetrain, serial link
  - Analogue channels- analogue channels - 12 BIT: 0…10V, 0...5V, -10V...0...10V, 0..(4)20 mA,
  - all free scalable in gain and offset, and mathematically concatenable
  - Analogue outputs- 2 analogue outputs, programmable in gain and function (0…10V, 0(4)..20 mA)
  - Digital outputs- 2 digital outputs (free mapping to different functions)
  - Relais output- 1 switchover contact 3A 250VAC/30VDC (programmable assignment)
  - Data link- Serial link RS 485 (MODBUS)
  - Special functions- 24V / 50 mA auxiliary power supply on terminals, 10V potentiometer power
  - supply, 5V/100 mA power supply on modbus connector Simple PTC / KLIXON motor protection
- Protection:
  - Electrical- Overvoltage, undervoltage
  - Overcurrent, overload, motor-overload, output short-circuit
  - Thermal- Heatsink overtemperature, I^2xt motorprotection
- Operating conditions:
  - Protection class IP20
  - Working temperature -10+50 °C
  - Humidity- 0 to 95% RH, non-condensing, non-corrosive
  - Altitude- 1000 m, above 1% derating / 100m
  - Vibration- Max. 0,5 g

Type of sign
ELM2000+ 0015 T3
- power supply code: T3=three-phase; S2= single phase
- motor power
- inverter model

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LCD REMOTE FRAMESIZE KEYPAD FOR CABINET IP66
423432P



CABLE FOR REMOTE KEYPAD IP66 - 1.5meter
423433P



PARAMETER COPY STICK
423434P

Type	Input voltage (V)	Maximum output power (kW)	Maximum current output (A)	Dimentions (WxDxH-mm)	Weights (kg)	Product category	Catalogue number
E2000-0004 S2B	230	0.4	2.5A	80x140x135	1.40	B	**423400P**
E2000-0007 S2B	230	0.7	4.5A	80x140x135	1.50	B	**423401P**
E2000-0015 S2B	230	1.5	7A	106x180x150	2.00	B	**423402P**
E2000-0022 S2B	230	2.2	10A	106x180x150	2.10	B	**423403P**
E2000-0007 T3	400	0.7	2A	106x180x150	2.00	B	**423404P**
E2000-0015 T3	400	1.5	4.6A	106x180x150	2.10	B	**423405P**
E2000-0022 T3	400	2.2	6.5A	106x180x170	2.20	B	**423406P**
E2000-0030 T3	400	3.0	7A	138x235x152	2.50	B	**423407P**
E2000-0040 T3	400	4.0	9A	138x235x152	3.00	B	**423408P**
E2000-0055 T3	400	5.5	12A	156x265x170	3.50	B	**423409P**
E2000-0075 T3	400	7.5	17A	156x265x170	4.50	B	**423410P**
E2000-0110 T3	400	11.0	23A	205x340x196	4.80	B	**423411P**
E2000-0150 T3	400	15.0	32A	205x340x196	8.00	B	**423412P**
E2000-0185 T3	400	18.5	38A	205x340x196	8.50	B	**423413P**
E2000-0220 T3	400	22.0	44A	270x435x235	9.00	B	**423414P**
E2000-0300 T3	400	30.0	60A	315x480x235	22.50	B	**423415P**
E2000-0370 T3	400	37.0	75A	315x480x235	24.00	B	**423416P**
E2000-0450 T3	400	45.0	90A	360x555x265	24.50	B	**423417P**
E2000-0550 T3	400	55.0	110A	360x555x265	41.50	B	**423418P**
E2000-0750 T3	400	75.0	150A	410x650x300	42.00	B	**423419P**
E2000-0900 T3	400	90.0	180A	410x650x300	56.00	B	**423420P**
E2000-1100 T3	400	110.0	220A	516x765x326	56.50	B	**423421P**
E2000-1320 T3	400	132.0	265A	560x910x342	87.00	B	**423422P**
E2000-1600 T3	400	160.0	320A	560x910x342	123.00	B	**423423P**
E2000-1800 T3	400	180.0	360A	400x1310x385	124.00	B	**423424P**
E2000-2000 T3	400	200.0	400A	535x1340x380	125.00	B	**423425P**
E2000-2200 T3	400	220.0	440A	535x1340x380	185.00	B	**423426P**
E2000-2500 T3	400	250.0	480A	600x1465x380	186.00	B	**423427P**
E2000-2800 T3	400	280.0	530A	600x1465x380	225.00	B	**423428P**
E2000-3150 T3	400	315.0	580A	600x1465x380	230.00	B	**423429P**
E2000-3550 T3	400	355.0	640A	600x1600x388	233.00	B	**423430P**
E2000-4000 T3	400	400.0	690A	600x1600x388	234.00	B	**423431P**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN60898-1
EN 60947-2



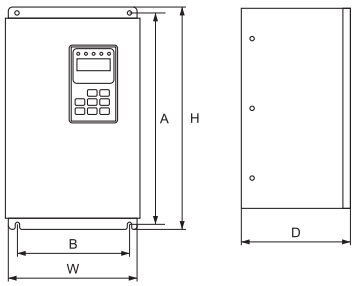

Type	Overall dimensions (mm)					
	H	W	A	B	D	d
G0007S2B	150	105	139	94	120	Ø4
G0015S2B	170	125	160	114	140	Ø5
G0022S2B	170	125	160	114	140	Ø5
G0007T3B	170	125	160	114	140	Ø5
G0015T3B	170	125	160	114	140	Ø5
G0022T3B	170	125	160	114	140	Ø5
G0037T3B	250	162	233	145	150	Ø6
G0040T3B	250	162	233	145	150	Ø6
G0055T3B	300	200	282	182	160	Ø6
G0075T3B	300	200	282	182	160	Ø6
G0110T3C	340	225	322	160	220	Ø6
G0150T3C	380	230	362	186	225	Ø6

UNTIL SUPPLY **LAST**

ELM 1000 FREQUENCY INVERTERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Frequency inverters are designed to control three-phase induction motors with short-circuited rotor. They provide for the implementation of some control laws, thus becoming an indispensable part of the control systems for conveyors and packaging machines, pumps, air conditioning systems, etc. The ELM 1000 inverter provides the so-called no-sensor control, V/f control and impulse control while the output load can reach up to 150% within 60 seconds. It features easy definition of curves and easy parameters setting of inverter through the use of control panel buttons. The inverter can auto calibrate according to the motor power, i.e. if the inverter is connected to a motor with power different from that set by the inverter manufacturer, it automatically adjusts its programmable parameters to suit the motor parameters.

FUNCTIONS:
- rotation speed increase – automatic and manual
- sliding compensation: from 0 to 20%
- no-sensor control of the motor
- adjustment of the V/F control curve – linear or quadratic
- energy saving through automatic optimization of the V/F curve
- PID control law implementation option
- omission of resonance frequencies
- JOG function
- 'counter' function
- automatic restart option in case of power supply failure
- fifteen speed degrees control option
- control choice from the control panel; external or COM terminal
- frequency control from the control panel, external potentiometer by current or by voltage
- auto-calibration in accordance with the switched motor
- incoming signals on clockwise or counter-clockwise rotation, multi-step control, restart, etc.
- outgoing discrete control signal 24V
- outgoing analogue control signal 0 – 10V
- DC brake in static mode
- dynamic breaking with external breaking resistor – used in inert electric motor load
- output voltage adjustment option
- activation of output safety functions option
- electronic motor protection

TECHNICAL FEATURES:
- Rated working voltage: 230/400V AC; 50 Hz
- Permissible working voltage deviation: ±10%
- Unbalance of phases: < 3%
- Frequency fluctuation: < 5%
- Output frequency: 0 – 400 Hz
- Output voltage: from 0 to Ubx max
- Overload capacity:
  - constant: up to 110%
  - momentary: up to 150%
- Precision of output frequency adjustment: 0.1%
- Type of connection:
  - the connection of the inverter to the power supply should always be done through a circuit breaker of the MCB or MCCB type
  - connection of consumer to power terminals: through conductors suitable for the power
  - connection of control circuits: flexible conductor up to 1.5 mm^2

NOTE: It is not recommendable to mount contactors or other commutation devices between the frequency inverter and the motor, except as described in the product passport.
- Mounting:
  - mounting to a flat surface by means of bolts
  - mounting position – vertical gradient maximum ± 5°

NOTE: When more than one inverter is mounted in a board, it is recommendable to mount them side by side and when this is not possible, the appropriate cooling conditions should be provided.
- Plastic: UV-rays resistant and fire resistant (self-extinguishing material)
- Ambient temperature: -10° to 65° C
- Altitude : up to 2000 m
- Function enhancement option: through the inclusion of additional modules

Type	Input voltage (V)	Maximum output power (kW)	Maximum current output (A)	Packing/Box (pcs)	Product category	Catalogue number
ELM1000-G0007T3B	400	0.75	2	1 / 4	F	**423307M**
ELM1000-G0040T3B	400	4.0	9	1 / 1	F	**423340M**
ELM1000-G0110T3C	400	11	23	1 / 1	F	**423391M**
ELM1000-G0150T3C	400	15	32	1 / 1	F	**423392M**

Type of sign
ELM1000- G -0150 T3 C
- lid type code: C=metal clips; B=plastic lid
- power supply code: T3=three-phase; S2= single phase
- motor power
- inverter type: G=constant momentum
- inverter model

Documents corresponding to the product:
Standard EN60947-4-2
EN 60947-1



SOFT STARTER ELM 2500

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Soft starters are designed to control the start of three-phase induction motors with short-circuited rotor. A number of motor control issues are avoided through them, and namely: prolonged start moments, auto-ignition of motor, there is no need of stardelta switching, auto-transformer switching, resistant switching, etc. The ELM 2500 soft starter pertains to the AC53b type of starters as per the standard requirements and it provides rotation of motor and once the operation mode is set, a shunt contactor of the LT 1 D/F series is switched to control motor operation as the soft starter is not designed to control motors in a set mode. Under a stop command in accordance with the selected control scheme, the soft starter can or can not be included in shutting the motor down.

FUNCTIONS:
- System functions
  - over-voltage protection – motor will switch off when power supply exceeds the preset limits
  - overload protection – protects the motor from overloading
  - phase loss protection
  - temperature overload protection
- Control functions
  - output faults
  - motor faults diagnostics
  - keyboard or outward control
  - delayed start option
  - faults memory

TECHNICAL FEATURES:
- Rated working voltage: 230/400V AC; 50 Hz
- Permissible working voltage deviation: ±10%
- Unbalance of phases: < 3%
- Frequency fluctuation: < 5%
- Obligatory bypass contactor installation
- Mounting :
  - mounting to a flat surface through bolts
  - mounting position – vertical gradient maximum ± 5°

NOTE: When more than one soft starter is mounted in a board, it is recommendable to mount them side by side and when this is not possible, the appropriate cooling conditions should be provided.
- Plastic: UV-rays resistant and fire resistant (self-extinguishing material)
- Altitude : up to 2000 m



Type	Overall dimensions (mm)					
	A	B	C	E	F	d
EL M25015	250	153	162	219	140	Ø6
EL M25022	250	153	162	219	140	Ø6
EL M25037	250	153	162	219	140	Ø6
EL M25045	250	153	162	219	140	Ø6
EL M25055	250	153	162	219	140	Ø6
EL M25075	510	260	194	389	232	Ø8



Type	Power of motor (kW)	Rated current (A)	Type of bypass contactor	Section of power supply conductors	Packing/Box (pcs)	Product category	Catalogue number
EL M25015	15	30	LT 1-D 50	10	1 / 1	F	**42225015**
EL M25045	45	90	LT 1-D 95	25	1 / 1	F	**42225045**
EL M25055	55	110	LT 1-F 115	25	1 / 1	F	**42225055**
EL M25075	75	150	LT 1-F 150	35	1 / 1	F	**42225075**



COMPLEX COMPENSATING DEVICES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The use of electrical energy in industry is invariably connected with its transformation. The development of semiconductor elements and the broader coming of semi-conductor transformers, frequency control, welding machines and electrical arc furnaces in industrial projects have a negative impact over the electrical power quality in the electro distributing systems. Induction machines need reactive energy to create electromagnetic field. The reactive component of current is taken from the electro distributing systems but it leads to additional losses in the power supply system and makes shorter the exploitation term of electrical devices. This leads to curving of the sinusoid form of current and voltage and interferences with harmonic character. Compensating the reactive power means to fill up the system in such a way that the needed reactive power to be created from the compensating device instead of being taken from the electro transportation system. This leads to killing the voltage fall and cable losses and increasing the outlet power of the power transporters and cutting down the bills for overconsumption of reactive energy paid by consumers to the electricity supply company. In practice compensating the reactive energy and high harmonics through LC filters combined in compensating installations has the broadest spreading.

THERE ARE SEVERAL TYPES OF COMPENSATION ACCORDING TO THEIR LOCATION:

individual compensation – when to every single motor or consumer is mounted a compensating system. It is applied to powerful motors and transformers with fixed capacity.

installation compensation – when the consumers from the whole section (workshop) are grouped and compensation is accomplished for the whole section.

overall compensation – accomplished at full compensation in the inlet of the installation.

ACCORDING TO THE TYPE OF THE COMPENSATING DEVICES COMPENSATION CAN BE:

- passive – when the system supplies constant reactive power. In this case the system does not react to changes in the size and nature of the harmonic components and also to the per cent increase of the reactive energy in time.
- active – broader spread. The system controls the form of the consumed current and generates different capacity depending on the load changes.

When designing the electro distributing system of industrial projects the following tasks are taken into consideration:

- defining the factor of non-sinusoid of the consumers and the voltage harmonic components
- defining the additional loading of the capacitor batteries from the harmonic components and calculating the filtering elements if needed

The calculation of the compensating device capacity is done by reading the reactive energy of the system and the working time of the system. Compensating devices represent a device of one or several metal boxes with common rail system, automatic regulator for cosφ control RPSF-xx series, different number of capacitor batteries (according to the capacity of the device) with different capacity HY 111 series, contactors for capacitor batteries control CJ 19-43 series, protective elements, etc.

The broadest spreading of compensation has acquired the compensation of harmonics and reactive energy with capacitors for high voltage. Capacitors HY 111 series are voltage remeasured and are able to endure overload from harmonic components up to 7% from the basic harmonics. They are used in systems with high harmonics foul up to 25%.

The high harmonics composition is defined after measuring the influence rate of each separate harmonics compared to the first one. In Bulgaria mostly spread are 5, 7, 9, 11 and 13 harmonics. The capacitors are remeasured for voltage 415V and are normally mounted right in the compensation systems.

When the high harmonics are over 25% the system is taken to be foul and in this case except using capacitors, filters for leveling the harmonics are to be used as well. These filters are calculated on the basis of the corresponding voltage harmonics and differ for the different harmonics. They are calculated using complex mathematical programme which reads the foul rate, the significance per cent of the voltage harmonic component, etc.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60831-1
EN 60831-2



CAPACITOR BATTERIES FOR REACTIVE ENERGY COMPENSATION

2+0 standard +extended 2 YEAR TOTAL WARRANTY

Capacitor batteries HY 111 series are specially designed three phase dry capacitors for compensation of reactive energy and correction of the capacity factor. It represents an aluminum cylindrical body in which a metal polypropylene folio is mounted which does not require special impregnation. The permittivity characteristics are acquired through filling with a special mixture on a vegetable base (resins). The capacitor battery is constructed in such a way that at failure (overload from voltage, current or temperature) breaks the connection to the upper cover where are the connections to the power supply. This is done by a specially constructed valve for overpressure mounted right above the capacitor element. The breaking of the inner couplings provides protection to the staff and environment from damage due to capacitor element failure. There is a three phase capacitor in the cylindrical body with built in resistor for rarefying the capacitors.
The capacitor battery can be used both for passive and active compensation.

TECHNICAL DATA:
- Rated operating voltage: 450V; 50Hz
- insulation voltage: 690V
- Surge voltage wear resistance: 6kV per minute
- Capacity: from 5,0 to 100,0 kVAr at 450V
- Tolerance: ±5%
- Operating temperature: -40°C - +65°C
- Capacity losses: 0.5W/kVAr
- Built in discharging resistance
- Admissible current overload: twice as much the peak current
- Discharge time: <50V per minute
- Altitude: 2000m

MOUNTING:
- With bolt M12 orM16 to a flat horizontal base

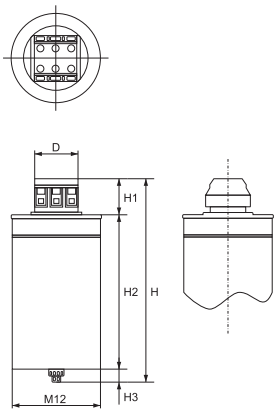

Dimensions (mm)

D	H1	H3
30	35	16

Type of the battery	Dimensions H / Ø (mm)	Operating voltage (V)	Battery capacity (kVAr)	Capacity (µF)	Packing/Box (pcs)	Product category	Catalogue number
HY 11A5	210/76	450	5.0	3X26.2	6	B	**49005**
HY 11A7	210/76	450	7.5	3X39	6	B	**49007**
HY 111A8*	230/80	450	8.0	3X39	6	F	**49008**
HY 111A10	240/76	450	10.0	3X52.4	6	B	**49010**
HY 111A15	240/86	450	15.0	3X78.9	6	B	**49015**
HY 111A20	240/116	450	20.0	3X105	6	B	**49020**
HY 111A30	280/160	450	30.0	3X157	6	B	**49030**
HY 111A50	345/180	450	50.0	3X262	6	B	**49050**
HY 111A100	300/300	450	100.0	3X524	6	B	**49100**
HY 111A12**	230 / 85	690	12.5	3X27.9	6	B	**49031**
HY 11A25**	280 / 115	690	25	3X55.7	6	B	**49032**

Note: *Until supply last, **Suitable for wind generators

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





CONTROLLER FOR AUTOMATIC REGULATION OF THE CAPACITY FACTOR (COSΦ REGULATOR)

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The automatic regulators of the capacity factor RPCF-xx series are devices for monitoring of low voltage systems and control of switching on of capacitor batteries for the capacity factor compensation. There is possibility for adjustment of the system parameters and control. Manufactured by the latest CMOS technology, they are distinguished with high degree of data security, easy programming and secure control of the outlets. There is possibility for indication and setting the parameters of the power supply system as: capacity coefficient, display of the system parameters such as voltage, current and capacity, losses, protection against overload, overload indication or lack of voltage, etc.
The change of parameters is performed through a combination of buttons on the front panel. There is light diode to indicate which parameter is being displayed on the screen and which outlets are in operation. The display is four digital. There is possibility for choice of the working conditions: manual or automatic.

TECHNICAL DATA:

- Rated operating voltage: 230/400V
- Operating frequency: 45 – 65Hz
- insulation voltage: 690V
- Surge voltage wear resistance: 6kV per minute
- Measurement range: from 0 to 9999kVAr
- Measurement accurateness:
- voltage: ±1.0%
- current: ±1.0%
- capacity coefficient: ±1.0%
- reactive energy: ±2.0%
- Operating temperature: -10+65°C
- Humidity: 30 – 60%
- Display: 4 digital
- Responsiveness: 20mA
- Outlet: 7A
- Number of outlets: 12 and 16
- Altitude: up to 2500m

MOUNTING:
On the front panel of the box through cutting an opening

Type	Number of steps	Dimensions H (mm)	Packing/Box (pcs)	Product category	Catalogue number
HY-RPCF12	12	122x122	8	B	**49120**
HY-RPCF16	16	144x144	8	B	**49160**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR POWER OFF-GRID SYSTEMS

The Solar Home Power system is a fixed installation designed for domestic application. They is powered by solar energy using solar cells that convert solar energy (sunlight) directly to electricity.
The Solar Home Power system are the perfect compact solution for an independent power supply in remote locations where electricity is unavailable, unreliable or expensive. Can be used in houses, Huts & Cottages, holiday areas, offices and etc
The Solar Home Power system can achieve energy independence - no accession contracts, monthly charges and the need to build an energy grid to your home.
The Solar Home Power Systems are compact, portable and easily mountable. They are an economical solution to all your power problems.



HOME SOLAR POWER OFF-GRID SYSTEM 500W SET

3+2 standard +extended 5 YEAR TOTAL WARRANTY

FUNCTION:
- Solar power supply

SOLAR PANEL:
- Type: Polycrystalline 18V 150W
- Optimum Operating Voltage: 18V
- Optumum Operating Current: 8.33A
- Open- Circuit Voltage: 20.88V
- Short- Circuit Current: 9.57A
- Power: 150W
- Sizes LxWxH(mm): 1490x680x5

INVERTER:
- 500W
- Ouput
  - USB 5V
  - 12V DC
  - 220V AC: Universal socket
- Size LxWxH (mm): 200x94x228

SET INCLUDED:
- Solar panel 18V 150W: 1 pc
- Inverter 500W: 1 pc

Type	Solar panel	Inverter	Battery	Packing/Box (pcs)	Product category	Catalogue number
ELM- 500SOL	18V 150W	500W	100Ah Not included	1	E	**98SOL500**

Recommended with a battery 100Ah with a catalog number: 98BAT100
Discharging time at 75% consumption from total Inverter power (about 375W) by using 100Ah battery: 3.2h

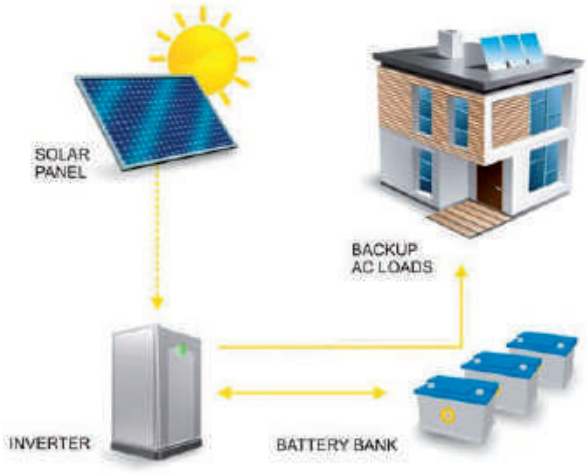

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





HOME SOLAR POWER OFF-GRID SYSTEM 800W SET

3+2 standard +extended 5 YEAR TOTAL WARRANTY

FUNCTION:
- Solar power supply

SOLAR PANEL:
- Type: Polycrystalline 18V 150W
- Optimum Operating Voltage: 18V
- Optumum Operating Current: 8.33A
- Open- Circuit Voltage: 20.88V
- Short- Circuit Current: 9.57A
- Power: 150W
- Sizes LxWxH(mm): 1490x680x5

INVERTER:
- 800W
- Ouput
  - USB 5V
  - 12V DC
  - 220V AC: Universal socket
- Size LxWxH (mm): 300x100x220

SET INCLUDED:
- Solar panel 18V 150W: 1 pc
- Inverter 800W: 1 pc

Type	Solar panel	Inverter	Battery	Packing/Box (pcs)	Product category	Catalogue number
ELM- 800SOL	18V 150W	800W	100Ah Not included	1	E	**98SOL800**

Recommended with a battery 100Ah with a catalog number: 98BAT100
Discharging time at 75% consumption from total Inverter power (about 600W) by using 100Ah battery: 2h



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

HOME SOLAR POWER OFF-GRID SYSTEM 2000W SET

3+2 standard +extended 5 YEAR TOTAL WARRANTY



FUNCTION:
- Solar power supply

SOLAR PANEL:
- Type: Polycrystalline 36V 250W
- Optimum Operating Voltage: 36V
- Optumum Operating Current: 13.89A
- Short- Circuit Current: 15.97A
- Power: 2x250W

INVERTER:
- 2000W
- Output
  - USB 5V
  - 12V DC
  - 220V AC: Universal socket
- Size LxWxH (mm): 300x100x220

SET INCLUDED:
- Solar panel 36V 250W: 2 pc
- Inverter 2000W: 1 pc



Type	Solar panel	Inverter	Battery	Packing/Box (pcs)	Product category	Catalogue number
ELM- 2000SOL	36V 250Wx2	2000W	2x250Ah Not included	1	E	**98SOL2000**

Recommended with two battery 250Ah with a catalog number: 98BAT250
Discharging time at 75% consumption from total Inverter power (about 1500W) by using 2 battery 250Ah: 4h

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



98BAT100

VRLA BATTERY ULTRACELL 100AH

2+0 standard +extended 2 YEAR TOTAL WARRANTY

APPLICATON:
- Golf Trolleys
- Garden Equipment
- Portable Equipment
- Solar/Wind Mill Units
- Medical Equipment
- Traffic Lights

TECHNICAL DATA:
- Nominal Voltage: 12V
- Nominal Capacity (10HR): 100Ah
- Cycle Life in Relation to Depth of Discharge:
  Extracted Capacity 50%: 1200 Cycles
  Extracted Capacity 20%: 3600 Cycles
- Rated Capacity:
  20HR 1.80V/cell, 25°C- 103 Ah/5.15A
  10HR 1.80V/cell, 25°C- 100 Ah/10.0A
  5HR 1.75V/cell, 25°C- 85 Ah/17.0A
  3HR 1.75V/cell, 25°C- 73.8 Ah/24.6A
  1HR 1.60V/cell, 25°C- 59.7 Ah/59.7A
- Max Discharge Current: 1200A (5s)
- Internal resistance: Approx 5mΩ
- Operating Temp Range:
  Discharge: -15 ~ 50°C
  Charge: 0 ~ 40°C
  Storage: -15 ~ 40°C
- Nominal Operating Temp Range: 25 ± 3°C
- Container Material: ABS
- Indoor use
- Dimension LxWxH (mm):
330±3MMx173±3MMx232±3MM
- Weight: 30.4 kg
- Catalogue number: 98BAT100
- Product category: E

Discharge Characteristics

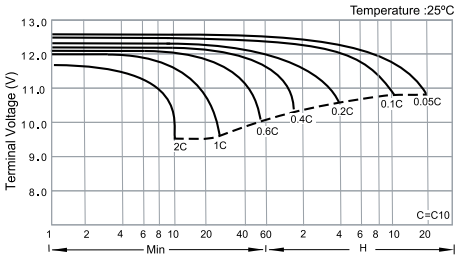

Cycle Life in Relation to Depth of Discharge

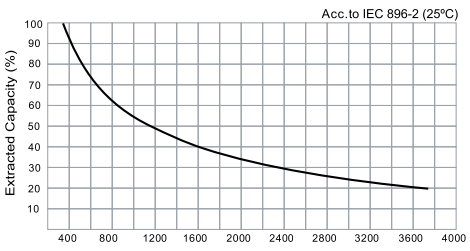

Float Charging Characteristics

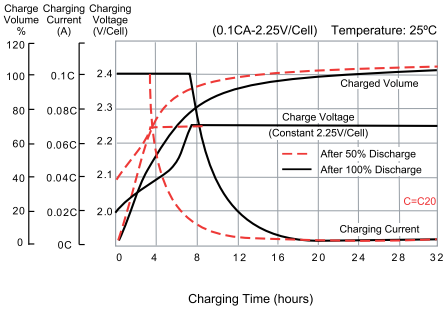

General Relation of Capacity vs. Storage Time

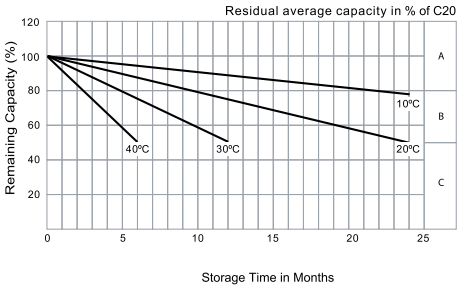

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



98BAT250

VRLA BATTERY ULTRACELL 250AH

2+0 standard +extended 2 YEAR TOTAL WARRANTY

APPLICATON:
- UCG Series VRLA batteries can be used for:
- Golf Trolleys
- Garden Equipment
- Portable Equipment
- Solar/Wind Mill Units
- Medical Equipment
- Traffic Lights

TECHNICAL DATA:
- Nominal Voltage: 12V
- Nominal Capacity (10HR): 250Ah
- Cycle Life in Relation to Depth of Discharge:
  Extracted Capacity 50%: 1200 Cycles
  Extracted Capacity 20%: 3600 Cycles
- Rated Capacity:
  20HR 1.80V/cell, 25°C- 258 Ah/12.9A
  10HR 1.80V/cell, 25°C- 250 Ah/25A
  5HR 1.75V/cell, 25°C- 212.5 Ah/42.5A
  3HR 1.75V/cell, 25°C- 184.5 Ah/61.5A
  1HR 1.60V/cell, 25°C- 149.3 Ah/149.3A
- Max Discharge Current: 2500A (5s)
- Internal resistance: Approx 2.5mΩ
- Operating Temp Range:
  Discharge: -15 ~ 50°C
  Charge: 0 ~ 40°C
  Storage: -15 ~ 40°C
- Nominal Operating Temp Range: 25 ± 3°C
- Container Material: ABS
- Indoor use
- Dimension LxWxH (mm):
522±3mmx268±3mmx226±3mm
- Weight: 70 kg
- Catalogue number: 98BAT250
- Product category: E

Discharge Characteristics

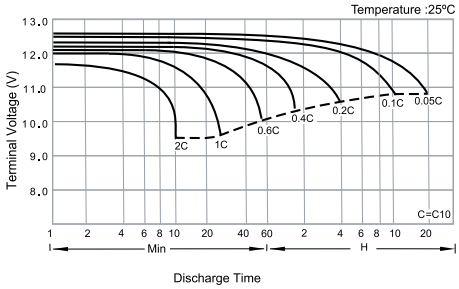

Cycle Life in Relation to Depth of Discharge

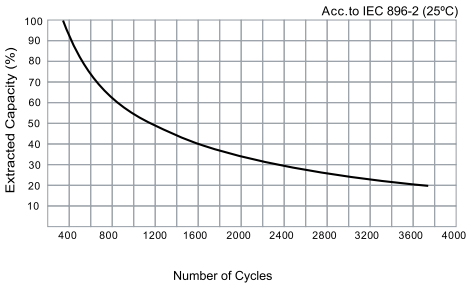

Float Charging Characteristics

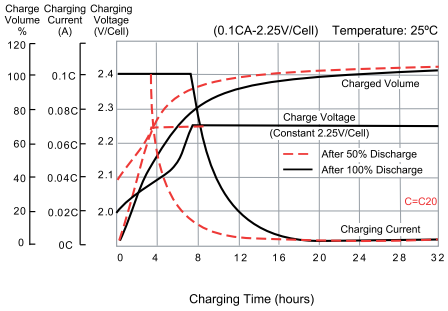

General Relation of Capacity vs. Storage Time

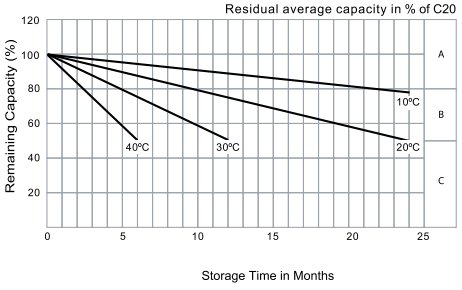

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



MONOCRYSTALLINE HALF CUT CELL SOLAR PANEL

10+0 standard +extended 10 YEAR TOTAL WARRANTY

Mono half cut cells Solar Panel that are cut in half. That improves the module's performance and durability. When solar cells are halved, their current is also halved, so resistive losses are lowered and the cells can produce a little more power. Smaller cells experience reduced mechanical stresses, so there is a decreased opportunity for cracking. Half-cell modules have higher output ratings and are more reliable than traditional panels.

Catalogue number: 98SOL380M

SPECIFICATION

- irradiance 1000 W/m2, AM 1.5, gand cell temperature of 25°C
- Peack power (Pmax): 340
- Maximum power voltage (Vmp): 34.40
- Maximum power current (Imp): 9.90
- Open circuit voltage (Voc): 40.50
- Short circuit current (Isc): 10.50
- Module efficiency (%): 20.2
- Maximum system voltage (V): 1500
- Power tolerance (W): 0-5
- Cell type: 158.75mm, 9BB
- Number of cells: 120 (6x10+6x10)
- Dimensions HxWxD (mm): 1689x996x35
- Weight (kg): 19.5
- Max. load (Pa): 5400
- EC Declaration of conformity

CHARACTERISTICS AT DIFFERENT IRRADIATIONS

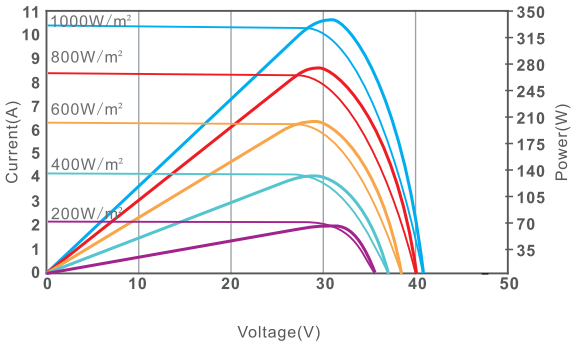

CHARACTERISTICS AT DIFFERENT TEMPERATURES

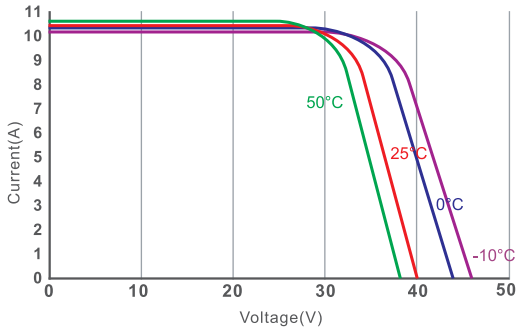

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

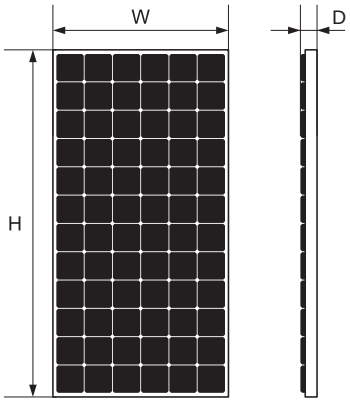

Dimensions (mm)

H	W	D
1689	996	35

MECHNICAL DATA

Cell Type:	158.75mm, 9BB
Number of Cells:	120 cells (6x10+6x10)
Weight:	19.5kg
Dimension:	1689x996x35mm
Max Load:	5400 Pascals
Junction Box:	IP68 rated
Connector:	MC4 Compatible
Wire Type:	PV Wire

TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc):	0.04% /°C
Temp. Coeff. of Voc (TK Voc):	-0.28% /°C
Temp. Coeff of Pmax (TK Pmax):	-0.37% /°C

ADVANTAGES OF HALF CELL SOLAR PANELS:

- It is superior in low sunlight performance.
- It is not affected by shade as much as standard panels.
- It is more durable for long life performance
- It it is less susceptible to micro cracking. (cracks that develop in cells over time)
- They perform better under high heat conditions than standard solar panels.
- They are less susceptible to hot spots, a major cause of panel failure.
- They are much higher efficiency than standard panels.

HALF CELL MODULE **STANDART MODULE**

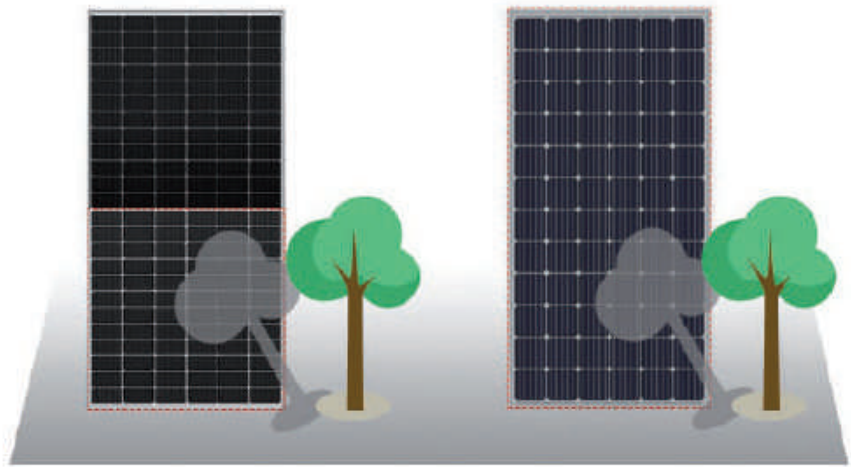

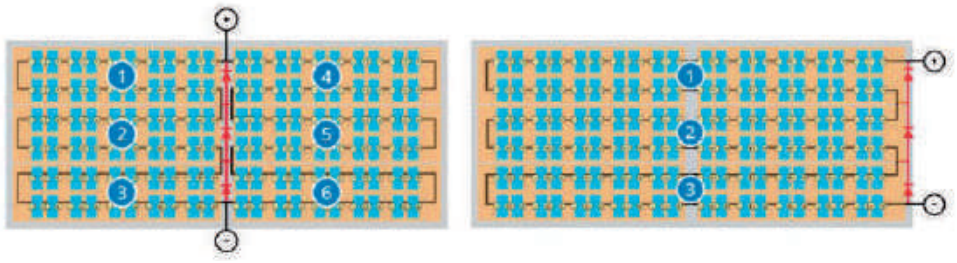

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR MOUNTING STRUCTURE

Since solar panels are designed for outdoor installation and are subject to continuous weather conditions, the type of material that makes the structure is important for the reliability of the entire system. Due to the envisaged long service life of more than 25 years, the construction and attachment of the panels to it must be secure.
The mounting structure are available for ground and in different variants according to the type of the roof - metal, bitumen or tile, flat or pitched.

1 | TILE ROOF MOUNTING STRUCTURE FOR PITCHED ROOF, SET

TECHNICAL DATA:
- Installation Site: tile roof
- Panel type: framed
- Roof Slope: Up to 60 degree
- Wind Speed: Up to 60 m/s
- Snow load: 1.4 KN/m2

FEATURES:
- You can choose your own configuration of elements or the proposed ready-made variants of kits for different power
- Variuos roof hooks for different tile roofs
- Suitable for all framed PV modules
- Easy and fast installation
- Pre-assembled components save the installation time and cost

SUITABLE COMPONENTS FOR PITCHED TILE ROOF



Description	Material	Product category	Catalogue number
Rails- 2100mm	Aluminium 6005-T5	E	423200



Description	Material	Product category	Catalogue number
Rail connector- 140mm	Aluminium 6005-T5	E	423201



Description	Material	Product category	Catalogue number
Mid clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423202



Description	Material	Product category	Catalogue number
End clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423203



Description	Material	Product category	Catalogue number
Tile Roof Hook 1	stainless steel	E	423204

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Tile Roof Hook 2	stainless steel	E	423205



Description	Material	Product category	Catalogue number
Tile Roof Hook 13	stainless steel	E	423206



Description	Material	Product category	Catalogue number
Tile Roof Hook 14	stainless steel	E	423207



Description	Material	Product category	Catalogue number
Grounding Clip	stainless steel	E	423208



Description	Material	Product category	Catalogue number
Earth lug	Aluminium	E	423209



Description	Material	Product category	Catalogue number
Cable clip 1- 2x4/6mm²	stainless steel	E	423210



Description	Material	Product category	Catalogue number
Cable clip 2- 4x90°4/6mm²/3x90°10mm²	stainless steel	E	423211

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Cable clip 8- 2x90°4/6mm²	stainless steel	E	423212



Description	Material	Product category	Catalogue number
Cable clip 9- 2x90°4/6mm²	stainless steel	E	423213









TILE ROOF MOUNTING STRUCTURE FOR PITCHED ROOF

BASIC ELEMENTS QUANTITY CALCULATION FOR EACH SOLAR POWER SYSTEMS STRUCTURE SETS FROM 3.6 TO 30KW:

Quantity from each elements are calculated for solar panel with dimensions 1689x996x35mm and peak power 340W with catalogue number 98SOL380M.

ELEMENT		ELEMENT QTY					
Description	Catalogue number	at 3.6 kW	at 5 kW	at 10 kW	at 15 kW	at 20 kW	at 30 kW
Rails- 2100mm	423200	12	16	30	46	60	90
Rail connector- 140mm	423201	8	12	22	34	45	67
Mid clamp for framed panel 30-50mm	423202	18	26	66	78	102	154
End clamp for framed panel 30-50mm	423203	24	32	60	92	120	180
Tile Roof Hook 1	423204	26	34	64	98	126	190
Grounding Clip	423208	18	26	66	78	102	154
Earth lug	423209	12	16	32	48	60	92

SETS CATALOGUE NUMBERS:

The quantity elements for each structure set is to described in the table upper.

Solar power systems (kW)	Product category	Catalogue number
3.6	E	423270P/TR
5	E	423271P/TR
10	E	423272P/TR
15	E	423273P/TR
20	E	423274P/TR
30	E	423275P/TR

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



2 | SANDWICH ROOF MOUNTING STRUCTURE FOR PITCHED ROOF, SET

TECHNICAL DATA:
- Installation: tin roof mounting brackets
- Panel type: framed
- Panel orientation: landscape or portrait
- Roof slope: up to 60 degree
- Max wind speed: up to 60 m/s
- Snow load: 1.4 KN/m2

FEATURES:
- Universal roof brackets for different tin roofs
- Suitable for all framed PV modules
- Easy and fast installation
- Pre-assembled components save the installation time and cost

SUITABLE COMPONENTS FOR PITCHED SANDWICH ROOF:



Description	Material	Product category	Catalogue number
Rails- 2100mm	Aluminium 6005-T5	E	423200



Description	Material	Product category	Catalogue number
Rail connector- 140mm	Aluminium 6005-T5	E	423201



Description	Material	Product category	Catalogue number
Middle clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423202



Description	Material	Product category	Catalogue number
End clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423203



Description	Material	Product category	Catalogue number
L-feet for tin roof	stainless steel	E	423216



Description	Material	Product category	Catalogue number
Tin Roof Hook 2	stainless steel	E	423217

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Tin Roof Hook 3	stainless steel	E	423218



Description	Material	Product category	Catalogue number
Grounding Clip	stainless steel	E	423208



Description	Material	Product category	Catalogue number
Earth lug	Aluminium	E	423209



Description	Material	Product category	Catalogue number
Cable clip 1- 2x4/6mm^2	stainless steel	E	423210



Description	Material	Product category	Catalogue number
Cable clip 2- 4x90°4/6mm^2/3x90°10mm^2	stainless steel	E	423211



Description	Material	Product category	Catalogue number
Cable clip 8- 2x90°4/6mm^2	stainless steel	E	423212



Description	Material	Product category	Catalogue number
Cable clip 9- 2x90°4/6mm^2	stainless steel	E	423213

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

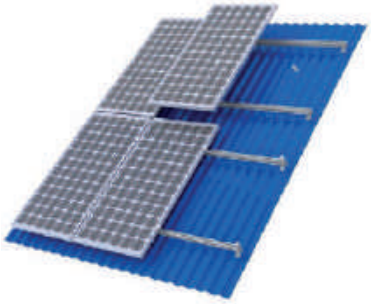

BASIC ELEMENTS QUANTITY CALCULATION FOR EACH SOLAR POWER SYSTEMS STRUCTURE SETS FROM 3.6 TO 30KW:

Quantity from each elements are calculated for solar panel with dimensions 1689x996x35mm and peak power 340W with catalogue number 98SOL380M.

ELEMENT		ELEMENT QTY					
Description	Catalogue number	at 3.6 kW	at 5 kW	at 10 kW	at 15 kW	at 20 kW	at 30 kW
Rails- 2100mm	423200	12	16	30	46	60	90
Rail connector- 140mm	423201	8	12	22	34	45	67
Middle clamp for framed panel 30-50mm	423202	18	26	66	78	102	154
End clamp for framed panel 30-50mm	423203	24	32	60	92	120	180
L-feet for tin roof	423216	26	34	64	98	126	190
Grounding Clip	423208	18	26	66	78	102	154
Earth lug	423209	12	16	32	48	60	92

SETS CATALOGUE NUMBERS:

The quantity elements for each structure set is to described in the table upper.

Solar power systems (kW)	Product category	Catalogue number
3.6	E	423270P/DR
5	E	423271P/DR
10	E	423272P/DR
15	E	423273P/DR
20	E	423274P/DR
30	E	423275P/DR



SANDWICH ROOF MOUNTING OPTION 1



SANDWICH ROOF MOUNTING OPTION 2



SANDWICH ROOF MOUNTING STRUCTURE FOR PITCHED ROOF

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



3 | SHINGLE ROOF MOUNTING STRUCTURE FOR PITCHED ROOF, SET

TECHNICAL DATA:
- Installation Site: shingle roof
- Panel type: framed
- Roof Slope: Up to 60 degree
- Wind Speed: Up to 60 m/s
- Snow load: 1.4 KN/m2

FEATURES:
- Suitable for all framed PV modules
- Easy and fast installation
- Pre-assembled components save the installation time and cost

SUITABLE COMPONENTS FOR PITCHED SHINGLE ROOF:



Description	Material	Product category	Catalogue number
Rails- 2100mm	Aluminium 6005-T5	E	423200



Description	Material	Product category	Catalogue number
Rail connector- 140mm	Aluminium 6005-T5	E	423201



Description	Material	Product category	Catalogue number
Middle clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423202



Description	Material	Product category	Catalogue number
End clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423203



Description	Material	Product category	Catalogue number
L-feet with cone hole	stainless steel	E	423214



Description	Material	Product category	Catalogue number
Flashing plate 280x280	stainless steel	E	423215

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Grounding Clip	stainless steel	E	423208



Description	Material	Product category	Catalogue number
Earth lug	Aluminium	E	423209



Description	Material	Product category	Catalogue number
Cable clip 1- 2x4/6mm²	stainless steel	E	423210



Description	Material	Product category	Catalogue number
Cable clip 2- 4x90°4/6mm²/3x90°10mm²	stainless steel	E	423211



Description	Material	Product category	Catalogue number
Cable clip 8- 2x90°4/6mm²	stainless steel	E	423212



Description	Material	Product category	Catalogue number
Cable clip 9- 2x90°4/6mm²	stainless steel	E	423213

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BASIC ELEMENTS QUANTITY CALCULATION FOR EACH SOLAR POWER SYSTEMS STRUCTURE SETS FROM 3.6 TO 30KW:

Quantity from each elements are calculated for solar panel with dimensions 1689x996x35mm and peak power 340W with catalogue number 98SOL380M.

ELEMENT		ELEMENT QTY					
Description	Catalogue number	at 3.6 kW	at 5 kW	at 10 kW	at 15 kW	at 20 kW	at 30 kW
Rails- 2100mm	423200	12	16	30	46	60	90
Rail connector- 140mm	423201	8	12	22	34	45	67
Middle clamp for framed panel 30-50mm	423202	18	26	66	78	102	154
End clamp for framed panel 30-50mm	423203	24	32	60	92	120	180
L-feet with cone hole	423214	26	34	64	98	126	190
Flashing plate 280x280	423215	26	34	64	98	126	190
Grounding Clip	423208	18	26	66	78	102	154
Earth lug	423209	12	16	32	48	60	92

SETS CATALOGUE NUMBERS:

The quantity elements for each structure set is to described in the table upper.

Solar power systems (kW)	Product category	Catalogue number
3.6	E	423270P/SR
5	E	423271P/SR
10	E	423272P/SR
15	E	423273P/SR
20	E	423274P/SR
30	E	423275P/SR



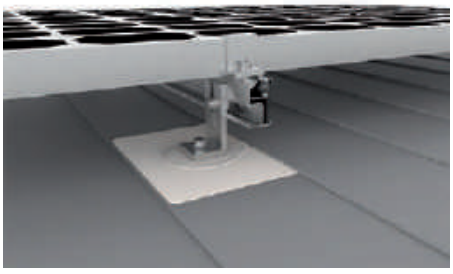

SHINGLE ROOF MOUNTING STRUCTURE FOR PITCHED ROOF

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



4 | TRIANGULAR MOUNTING STRUCTURE FOR GROUND AND FLAT ROOF, SET

TECHNICAL DATA:
- Installation Site: flat roof
- Panel type: framed
- Wind Speed: Up to 60 m/s
- Snow load: 1.4 KN/m2

FEATURES:
- Triangular mounting brackets with stable structure, it can be installed directly on rooftop, ground or pre-made cement blocks as your option
- Suitable for all framed PV modules
- Easy and fast installation
- Pre-assembled components save the installation time and cost

SUITABLE COMPONENTS FOR TRIANGULAR MOUNTING STRUCTURE FOR GROUND AND FLAT ROOF:



Description	Material	Product category	Catalogue number
Rails- 2100mm	Aluminium 6005-T5	E	423200



Description	Material	Product category	Catalogue number
Rail connector- 140mm	Aluminium 6005-T5	E	423201



Description	Material	Product category	Catalogue number
Middle clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423202



Description	Material	Product category	Catalogue number
End clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423203



Description	Material	Product category	Catalogue number
15° Triangular mounts	Aluminium 6005-T5	E	423223



Description	Material	Product category	Catalogue number
30° Triangular mounts	Aluminium 6005-T5	E	423227

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
L-connector for rail	stainless steel	E	423224



Description	Material	Product category	Catalogue number
Hex nut anchor	Galvanized steel	C	M517215



Description	Material	Product category	Catalogue number
Grounding Clip	stainless steel	E	423208



Description	Material	Product category	Catalogue number
Earth lug	Aluminium	E	423209



Description	Material	Product category	Catalogue number
Cable clip 1- 2x4/6mm²	stainless steel	E	423210



Description	Material	Product category	Catalogue number
Cable clip 2- 4x90°4/6mm²/3x90°10mm²	stainless steel	E	423211



Description	Material	Product category	Catalogue number
Cable clip 8- 2x90°4/6mm²	stainless steel	E	423212

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Cable clip 9- 2x90°4/6mm²	stainless steel	E	423213

BASIC ELEMENTS QUANTITY CALCULATION FOR EACH SOLAR POWER SYSTEMS STRUCTURE SETS FROM 3.6 TO 30KW:

Quantity from each elements are calculated for solar panel with dimensions 1689x996x35mm and peak power 340W with catalogue number 98SOL380M.



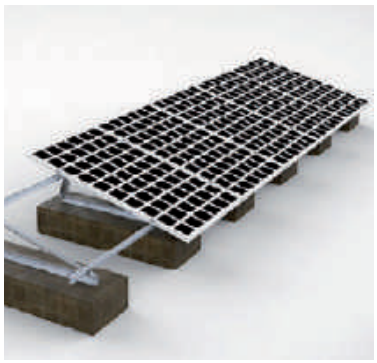

TRIANGULAR MOUNTING STRUCTURE
FOR GROUND AND FLAT ROOF

ELEMENT		ELEMENT QTY					
Description	Catalogue number	at 3.6 kW	at 5 kW	at 10 kW	at 15 kW	at 20 kW	at 30 kW
Rails- 2100mm	423200	12	16	30	46	60	90
Rail connector- 140mm	423201	8	12	22	34	45	67
Middle clamp for framed panel 30-50mm	423202	18	26	66	78	102	154
End clamp for framed panel 30-50mm	423203	24	32	60	92	120	180
30° Triangular mounts	423227	12	16	30	46	60	90
L-connector for rail	423224	24	32	60	92	120	180
Hex nut anchor	M517215	26	34	64	98	126	190
Grounding Clip	423208	18	26	66	78	102	154
Earth lug	423209	12	16	32	48	60	92

SETS CATALOGUE NUMBERS:

The quantity elements for each structure set is to described in the table upper.

Solar power systems (kW)	Product category	Catalogue number
3.6	E	423270F/TR
5	E	423271F/TR
10	E	423272F/TR
15	E	423273F/TR
20	E	423274F/TR
30	E	423275F/TR

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5 | BALLASTED TRIANGULAR MOUNTING STRUCTURE FOR FLAT ROOF, SET

TECHNICAL DATA:
- Installation Site: flat roof
- Panel type: framed
- Wind Speed: Up to 60 m/s
- Snow load: 1.4 KN/m2

FEATURES:
- Triangular mounting brackets with stable structure, it can be installed directly on rooftop, ground or pre-made cement blocks as your option
- Suitable for all framed PV modules
- Easy and fast installation
- Pre-assembled components save the installation time and cost

SUITABLE COMPONENTS FOR BALLASTED TRIANGULAR MOUNTING STRUCTURE FOR FLAT ROOF:



Description	Material	Product category	Catalogue number
Rails- 2100mm	Aluminium 6005-T5	E	423200



Description	Material	Product category	Catalogue number
Rail connector- 140mm	Aluminium 6005-T5	E	423201



Description	Material	Product category	Catalogue number
Middle clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423202



Description	Material	Product category	Catalogue number
End clamp for framed panel 30-50mm	Aluminium 6005-T5	E	423203



Description	Material	Product category	Catalogue number
15° Triangular mounts	Aluminium 6005-T5	E	423223



Description	Material	Product category	Catalogue number
30° Triangular mounts	Aluminium 6005-T5		423227

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
L-connector for rail	stainless steel	E	423224



Description	Material	Product category	Catalogue number
Angle Plate	stainless steel	E	423225



Description	Material	Product category	Catalogue number
Grounding Clip	stainless steel	E	423208



Description	Material	Product category	Catalogue number
Earth lug	Aluminium	E	423209



Description	Material	Product category	Catalogue number
Cable clip 1- 2x4/6mm²	stainless steel	E	423210



Description	Material	Product category	Catalogue number
Cable clip 2- 4x90°4/6mm²/3x90°10mm²	stainless steel	E	423211



Description	Material	Product category	Catalogue number
Cable clip 8- 2x90°4/6mm²	stainless steel	E	423212

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Material	Product category	Catalogue number
Cable clip 9- 2x90°4/6mm²	stainless steel	E	423213

BASIC ELEMENTS QUANTITY CALCULATION FOR EACH SOLAR POWER SYSTEMS STRUCTURE SETS FROM 3.6 TO 30KW:

Quantity from each elements are calculated for solar panel with dimensions 1689x996x35mm and peak power 340W with catalogue number 98SOL380M.





BALLASTED TRIANGULAR MOUNTING STRUCTURE FOR FLAT ROOF

ELEMENT		ELEMENT QTY					
Description	Catalogue number	at 3.6 kW	at 5 kW	at 10 kW	at 15 kW	at 20 kW	at 30 kW
Rails- 2100mm	423200	12	16	30	46	60	90
Rail connector- 140mm	423201	8	12	22	34	45	67
Middle clamp for framed panel 30-50mm	423202	18	26	66	78	102	154
End clamp for framed panel 30-50mm	423203	24	32	60	92	120	180
30° Triangular mounts	423227	12	16	30	46	60	90
L-connector for rail	423224	24	32	60	92	120	180
Angle Plate	423225	12	16	30	46	60	90
Grounding Clip	423208	18	26	66	78	102	154
Earth lug	423209	12	16	32	48	60	92

SETS CATALOGUE NUMBERS:

The quantity elements for each structure set is to described in the table upper.

Solar power systems (kW)	Product category	Catalogue number
3.6	E	423270F/BTR
5	E	423271F/BTR
10	E	423272F/BTR
15	E	423273F/BTR
20	E	423274F/BTR
30	E	423275F/BTR

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





H1Z2Z2-K UNIPOLAR CABLE FOR PHOTOVOLTAIC AND SOLAR PLANTS WITH UV RESISTANT SHEATH

5+2 standard +extended 7 YEAR TOTAL WARRANTY

TECHNICAL CHARACTERISTICS:
- Operating voltage: AC- 1.0KV; DC- 1.5KV
- Max. operating voltage: AC- 1.2KV; DC- 1.8KV
- Test volatge: AC- 6.5KV for 5 min; DC- 15KV for 5 min
- Ambient work temperature: from -40 to + 90 °C
- Max. short circuit temperature: +250 ° C for 5s
- Maximum pulling stress: 15 N/mm^2 in operation, 50 N/mm^2 during installation

TECHNICAL DATA:
- Conductor: Tinned copper multi-wires class 5
- Insulation: LSZH reticulated elastomeric compound with neutral colour
- Outer sheath: LSZH reticulated elastomeric compound
- UV resistant
- Colour: Black and red
- Reaction to fire - Performance: EN 50575:2016 Eca

Cross section (n x mm^2)	Colour	Outer diameter (mm)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
4	black	5,6	58	100	E	M411079/BL
4	red	5,6	58	100	E	M411079/R

SOLAR CABLE LENGTH, INCLUDED TO EACH SET

3.6kW	5kW	10kW	15kW	20kW	30kW	Catalogue number
x50m	x50m	x50m	x75m	x100m	x100m	M411079/BL
x50m	x50m	x50m	x75m	x100m	x100m	M411079/R





SINGLE MALE/FEMALE CABLE COUPLER IP67 SET, MC4 COMPATIBLE

TECHNICAL DATA:
- Rated voltage: 1000V
- Rated current: 30A
- Test voltage: 6KV(50Hz)
- Contact material: Copper, sliver plated
- Operating temperature: -40 to +125°C
- Suitable cable cross section: 2.5mm^2; 4mm^2 and 6mm^2

Type	Range of cable glands (mm)	Conductor cross section (mm^2)	Packing (m)	Product category	Catalogue number
Single male/female couplers, SET	3-6	4/6	1/5	E	411078/MF

EC Declaration of conformity

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DOUBLE MALE SINGLE FEMALE CABLE COUPLER IP67, MC4 COMPATIBLE

Type	Range of cable glands (mm)	Conductor cross section (mm^2)	Packing (m)	Product category	Catalogue number
2 male/ 1 female coupler	3-6	4/6	E	1	411080/M

EC Declaration of conformity



DOUBLE FEMALE SINGLE MALE CABLE COUPLER IP67, MC4 COMPATIBLE

Type	Range of cable glands (mm)	Conductor cross section (mm^2)	Packing (m)	Product category	Catalogue number
2 female/ 1 male coupler	3-6	4/6	E	1	411080/F

EC Declaration of conformity



DC PHOTOVOLTAIC ISOLATOR FOUR POLES SWITCH 1200V, IP66

3+2 standard +extended 5 YEAR TOTAL WARRANTY

DC switches shall be installed between the solar arrays and solar inverter for isolation the PV array during system installation or any maintenance.

TECHNICAL DATA:
- Rated insulation voltage (Ui): 1200V
- Rated heating current (Ith): 32A
- Poles: 4P
- Mechanical life: 10 000 cycles
- Operating temperature: -25 to +70°C
- Storage temperature: -40 to +70°C
- IP code: IP66
- Handle colour: Black

FEATURES:
- Vertical and horizontal installation
- UV resistance
- Flame retardant material
- Breatle valve
- Lockable at off position

Model	Poles	Rated insulation voltage (V)	Rated heating current (A)	IP code	Packing/Box (pcs)	Product category	Catalogue number
EL-DC4P	4	1200	32	66	1/20	E	98SOL4P/DC

DC SWITCH QUANTITY, INCLUDED TO EACH SET

3.6kW	5kW	10kW	15kW	20kW	30kW	Catalogue number
1	2	2	2	2	3	98SOL4P/DC

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PV ON-GRID TIE INVERTERS, SOLIS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Converts the variable direct current (DC) output of a photovoltaic (PV) solar panel into a utility frequency alternating current (AC) that can be fed into a commercial electrical grid. The output current has a standard output of 220/230V for single phase and 220/380V, 230/400V for three phase.
Inverters (3.6-30)kW are reliable preferred equipment for residential, industrial and commercial pv power stations. Smaller size, higher efficiency, huge large color display for visual inspection of product operation.

FEATURES
- Super high frequency switching technology
- Wide voltage range and low startup voltage
- Precise MPPT algorithm
- Intergrated Export Power Manager (EPM)
- Friendly and adaptable connection to the grid
- IP protection: IP65

PROTECTION:
- DC reverse-polarity protection
- Short circuit protection
- Output over current protection
- Surge protection
- Grid monitoring
- Anti-islanding protection
- Temperature protection

COMMUNICATION
- RS485
- Wi-Fi- optional with WI-FI stick with cat. number 423050

CERTIFICATION
- TÜV Rheinland CERTIFICATED
- Compliance Document
- Certificate of Conformity

Model	Recommended max. PV power	Rated output power	Operation phase	MPPT number	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
Solis-mini-3600-4G	4kW	3.6kW	Single	1	310	373	160	E	423001
Solis-1P5K-4G	5.8kW	5kW	Single	2	310	543	160	E	423002
Solis-3P10K-4G	12kW	10kW	Three	2	310	563	219	E	423020
Solis-3P15K-4G	18kW	15kW	Three	2	310	563	219	E	423021
Solis-3P20K-4G	24kW	20kW	Three	2	310	563	219	E	423022
Solis-3P30K-5G	36kW	30kW	Three	3	530	700	356.5	E	423023

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ENERGY STORAGE INVERTER, SOLIS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

The AC-Coupled inverter is used for upgrade the existing SOLIS single phase on-grid power generation system to a hybrid system which can work with batteries to optimize self-consumption. Energy storage inverter is a good choice for ON- GRID and OFF-GRID integrated storage solutions.

FEATURES
- Compatible with any existing SOLIS single phase grid-tied PV system, option to upgrade
- Compatible with both lead-acid battery and li-ion battery
- Off-grid backup function
- Emergency Power Supply function (EPS)
- Intelligent Energy Menagement System (EMS)
- Natural cooling without external fan
- Intelligent debugging APP which support one-click inverter configuration
- Various work mode for diff erent application scenario
- IP protection: IP65

PROTECTION:
- Battery reverse protection
- Battery over and under voltage protection
- Short circuit protection
- Output over current protection
- Temperature protection

COMMUNICATION
- RS485
- CAN
- Wi-Fi- optional with WI-FI stick with cat. number 423050

CERTIFICATION
- TÜV SÜD CERTIFICATED
- Attestation of Conformity
- Certificate

Model	Max. charging power (W)	Operation phase	Battery type	Battery voltage range (V)	Battery capacity (Ah)	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
SOLIS-RAI-3K-48ES-5G	3000W	Single	Li-ion/ Lead-acid*	40-60V	50-2000Ah	403	525	170	E	423040

*Battery voltage range: 42-58V | Battery type: Li-ion/Lead-acid | Battery capacity: 50 - 2000Ah | Battery not included | Compatible with Pylontech US2000

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SINGLE PHASE HYBRID INVERTER SOLIS, 5KW

5+0 standard +extended 5 YEAR TOTAL WARRANTY

This inverter is used for residential hybrid system, witch can work with batteries to optimize self consumption. This unit is a good choice for ON- GRID and for OFF-GRID integrated storage solutions. Can operate in both ON- GRID and in OFF-GRID mode.

FEATURES
- Uninterrupted power supply, 20ms reaction
- 5kW backup power to support more important loads
- With shifting and peak shaving capabilities friendly to grid
- Multiple working modes to make maximize self-consumption, increase benefit
- Higher charge-discharge efficiency, improving the economic benefits
- Compatible with lithium & lead-acid batteries, increased more choice in different markets
- Fanless design, long lifespan
- Intelligent BMS function, improving battery's reliability
- With high-frequency isolation technology, making system safer and long lifespan
- 24-hour fully intelligent energy management, Real-time grasp of PV plant status
- Remotely control & upgrade function, making digital power plant maintenance at your fingertips

PROTECTION:
- Ground fault monitoring
- Battery over and under voltage protection
- Short circuit protection
- Output over current protection
- Temperature protection
- DC reverse-polarity protection

COMMUNICATION
- RS485
- Wi-Fi- optional with WI-FI stick with cat. number 423050

CERTIFICATION
- TÜV SÜD CERTIFICATED
- Attestation of Conformity
- Certificate
- Compliance Document
- Bestätigung

Model	Recommended max. PV power	Rated output power	Operation phase	MPPT number	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
SOLIS-RHI-5K-48ES-5G	8kW	5kW	Single	2	333	505	249	E	423041

*Battery voltage range: 42-58V | Battery type: Li-ion/Lead-acid | Battery capacity: 50 - 2000Ah | Battery not included | Compatible with Pylontech US2000

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

WIFI STICK FOR INVERTERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Solar power system can be monitored remotely via WIFI to provide you accurate and comprehensive data analysis and fault alarm at any time and place, make product operation more stable and reliable, and realize stable and intelligent operation and maintenance management services. This is posssible with WIFI stick, which you need to connect to your inverter.

FEATURES

- Quick installation and easy operation
- Easy visualization of data and other information via Internet
- Enabling local and remote monitoring
- WiFi communication supporting remote monitoring

Model	Max.number of inverters	Remote communication	Firmware updates	Data storage	Preferences setting	Protection class	Product category	Catalogue number
EL-WIFI	1	WiFi(802.11/b/g/n)	Wireless	8MBYTE FLASH	Web Sever	IP65	E	423050

* WiFi communication range: 100m in outdoor open area without obstruction.

SINGLE AND THREE PHASE MULTIFUNCTION SMART DIN KWH METERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY





DTSD1352 is a smart meter designed for power supply system, industrial and mining enterprises and utilities to calculate the electricity consumption and manage the electric demand. It features the high precision, small size and simple installation. It integrates the measurement of all electrical parameters with the comprehensive electricity metering and management provides various data on previous 12 months, checks the 31st harmonic content and the total harmonic content, realizes the remote communication and the remote control with switching input and relay output and boasts the alarm output. It is fitted with RS485 communication port and adapted to MODBUS-RTU. DTSD1352 can be used in all kinds of control systems, SCADA systems and energy management systems

FEATURES

- 8 bits lcd display
- Measure parameters: Voltage, current,active power,reactive power, apparent power, power factor and frequency (U,I ,P,Q,S,PF,F)
- Optional communication protocol and functions: Modbus RTU RS485
- Multi-tariff :frozen KWH historical, KWH in 3 months, adapt 4 time zones, 2 time interval lists, 14 time interval by day and 4 tarriff rates

Model	Type	Measuring range	Overall dimensions (mm)	Product category	Catalogue number
DDSD1352	Single phase	10 (60A)	88x36x70	E	423060
DTSD1352	Three phase	10 (80A)	80x126x70	E	423061

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLIS EXPORT MANAGER EPM3-5G

5+0 standard +extended 5 YEAR TOTAL WARRANTY

The Solis export power manager is the ideal solution for smart energy management for both residential and commercial systems.The unit allows you to adjust export values to satisfy local network regulatory requirements. Energy management with the Solis export power manager allows for higher self-consumption and efficient use of the locally generated PV power.

FEATURES
- Smart & strong: Simultaneous control of 80 X Solis inverters
- Saving & high precision: Simultaneously monitor the operating data of the 80 X Solis inverter, saving the cost of the monitoring system
- Friendly & compatible: Saving & high precision: Support "Δ" and "Y" grid systems
- Realizing reactive compensation of the system, which ensure the power factor of the system is up to standard
- The control accuracy is up to 3%, which improves the system's spontaneous use rate
- Supports simultaneous access of Solis inverters with different power

COMMUNICATION:
- With inverter: Modbus RS485
- Maximum communication inverter numbers: 10
- Maximum communication distance: 1000m
- Monitoring: Wi-Fi stick or GPRS stick for single inverter conection Wi-Fi box or GPRS box for 2-10 inverters conection

TECHNICAL DATA
- Input frequency range: 45-65 Hz
- Input voltage range: L to N: 100-277 V
- Ambient temperature: -25°C to +60°C
- Ingress protection: IP65
- Relative humidity: 5%-95%
- CT connection: Plug terminal
- Weight: 2.1 kg

Model	Rated voltage (V)	Input current (A)	Maximum communication inverter numbers	Length (mm)	Width (mm)	Height (mm)	Product category	Catalogue number
Solis-EPM3-5G	400V, 3/N/PE or 3/PE	5	10	364	276	114	E	423051



SOLIS EXPORT MANAGER EPM3-5G-PLUS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

The Solis export power manager is the ideal solution for smart energy management for both residential and commercial systems.The unit allows you to adjust export values to satisfy local network regulatory requirements. Energy management with the Solis export power manager allows for higher self-consumption and efficient use of the locally generated PV power.

FEATURES
- Smart & strong: Simultaneous control of 80 X Solis inverters
- Saving & high precision: Simultaneously monitor the operating data of the 80 X Solis inverter, saving the cost of the monitoring system
- Friendly & compatible: Saving & high precision: Support "Δ"" and "Y" grid systems
- Realizing reactive compensation of the system, which ensure the power factor of the system is up to standard
- The control accuracy is up to 3%, which improves the system's spontaneous use rate
- Supports simultaneous access of Solis inverters with different power

COMMUNICATION:
- With inverter: Modbus RS485
- Maximum communication inverter numbers: 80
- Maximum communication distance: 1000m
- Monitoring: Wi-Fi box (Built in)

TECHNICAL DATA
- Input frequency range: 45-65 Hz
- Input voltage range: L to N: 320-480V
- Dysplay: LCD
- Ambient temperature: -25°C to +60°C
- Ingress protection: IP65
- Relative humidity: 5%-95%
- CT connection: Plug terminal
- Weight: 5.4 kg

Model	Rated voltage (V)	Input current (A)	Maximum communication inverter numbers	Length (mm)	Width (mm)	Height (mm)	Product category	Catalogue number
Solis-EPM3-5G-PLUS	400V, 3/N/PE	5	80	488	446	149	E	423052

PYLONTECH LITHIUM BATTERY, US2000 SERIES

7+3 standard +extended 10 YEAR TOTAL WARRANTY



Lithium battery US2000 series is the latest generation lithium iron phosphate battery module and is a perfect solution for residential storage facilities. The easy in modulating makes it possible to create storage systems of small or large capacities. The first installation can be expanded depending on the change in energy requirements in time latter.

FEATURES

- The whole module is non-toxic, non-polluting and environmentally friendly.
- Cathode material is made from LiFePO4 with safety performance and long cycle life.
- Battery management system (BMS) has protection functions including over-discharge, over-charge, over-current and high/low temperature.
- Vertical industry integration ensures more than 6000 cycles with 90% DoD.
- The system can automatically manage charge and discharge state and balance current and voltage of each cell.
- Flexible configuration, multiple battery modules can be in parallel for expanding capacity and power.
- Adopted self-cooling mode rapidly reduced system entire noise.
- The module has less self-discharge, up to 6 months without charging on shelf.
- No memory effect, excellent performance of shallow charge and discharge.
- Working temperature range is from -10° to 50°C, (Charging 0~50°C; discharging -10~50°C) with excellent discharge performance and cycle life.
- Compact and fashionable design fits in your home environment.
- Compatible with most of the available Hybrid inverters.

TECHNICAL DATA:

- Nominal voltage: 48V
- Nominal capacity: 2400Wh
- Usable capacity: 2200Wh
- Dimension: 442x410x89mm
- Charge voltage: 52.5- 53.5V
- Discharge voltage: 45- 53.5V
- Communication port: RS485, CAN
- Configuration (max. in 1 battery group): 8pcs
- IP code: IP20
- Cooling type: Natural cooling
- Working temperature: Charge: from 0 to 50°C, Discharge: from-10 to 50°C
- Humidity: 5-85%
- Weight: 24Kg
- Altitude: up to 2000m
- Cycle life: > 4500, 25°C

Model	Nominal voltage (V)	Nominal capacity (Wh)	Usable capacity (Wh)	Product category	Catalogue number
US2000	48	2400	2200	E	98BAT2000US

Up to 6 months without charging.

MOUNTING BRACKETS FOR PYLONTECH LITHIUM BATTERY, US2000 SERIES



Mounting brackets keep a few batteries in one pile. It is an essential accessorie because it improves the cooling of the batteries and allows easy circulation of air around the batteries.
Set of 2 mounting brackets.

INSTALLATION REQUIREMENT:

- We do not recommend to stack batteries one on top of the other without the brackets.
- Maximum 4 batteries can be athwart stacked
- One or two batteries can be sidelong stacked

SET: 2 mounting brackets
SET catalogue number: 98BAT2000BR

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ON GRID SOLAR SYSTEMS - SET WITH MONOCRYSTALLINE HALF CELLS SOLAR PANEL

10+0 standard +extended 10 YEAR TOTAL WARRANTY

Solar power systems (kW)	Phase	Panel QTY	Product category	Catalogue number
3.6	1	11	E	98SOL3600M
5	1	15	E	98SOL5000M/TB
10	3	30	E	98SOL10000M
15	3	45	E	98SOL15000M
20	3	60	E	98SOL20000M
30	3	90	E	98SOL30000M

*SET Included: Solar panels, inverter, DC power cables and DC 4P Switch 32A | Warranty: 10+0, Inverter: 5+0



HYBRID SOLAR SYSTEMS - SET WITH MONOCRYSTALLINE HALF CELLS SOLAR PANEL

10+0 standard +extended 10 YEAR TOTAL WARRANTY

Solar power systems (kW)	Phase	Panel QTY	Product category	Catalogue number
5	1	15	E	98SOL5000HM

*SET Included: Solar panels, inverter, DC power cables, 1x2.4kW battery US2000 and DC 4P Switch 32A | Warranty: 10+0, Inverter: 5+0

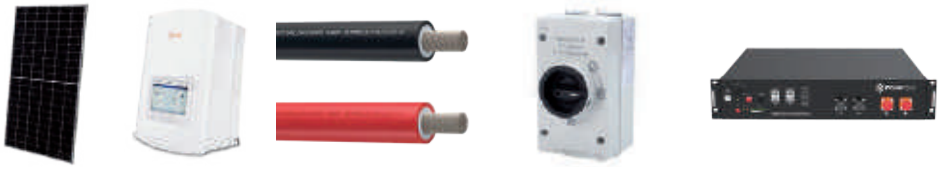

ENERGY STORAGE INVERTER SOLIS SOLIS-RAI-3K-48ES-5G WITH BATTERY PYLONTECH US2000

10+0 standard +extended 10 YEAR TOTAL WARRANTY

Solar power systems (kW)	Phase	Panel QTY	Product category	Catalogue number
3	1	Not included	E	98SOL3000EM

*SET Included: Inverter and 1x2.4kW battery US2000 | Warranty: 10+0, Inverter: 5+0
Compatible with any existing SOLIS single phase ON-grid-tied PV system, option to upgrade



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

RECOMMENDED SOLAR PANEL STRING INSTALLATION OF EACH SET

Number of strings MPPT-1	Number of strings MPPT-2	Number of strings MPPT-3	QTY of panels per Strings MPPT-1	QTY of panels per Strings MPPT-2	QTYof panels per Strings MPPT-3	Solar power systems (kW)
1			11			3.6
1	1		8	7		5
1	1		15	15		10
2	1		12	21		15
2	2		15	15		20
2	2	2	15	15	15	30



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

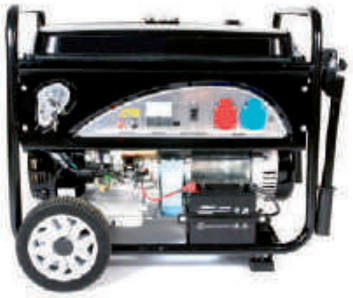

ELECTRICAL GASOLINE GENERATORS EL-GF SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Generators are machines that provide electricity when power from the local grid is unavailable.Electrical generators are used as a primary power source in areas where a local electrical grid is unavailable or difficult to access such as mining and farming operations or even new developments and construction and to supply backup power to facilities, businesses, or homes during power outages. Electrical generators don't create electricity. They convert mechanical energy into electrical power. Capturing the power of motion and turning it into electrical energy by forcing electrons from the external source through an electrical circuit. A generator is an electrical motor working in reverse. Once an electrical current has been established, it is directed through copper wires to power machines, devices, or electrical systems

FEATURES:

Automatic voltage regulator (AVR): An automatic voltage regulator (AVR) is a electronic device for automatically maintaining generator output terminal voltage at a set value under varying load and operating temperature. It controls output by sensing the voltage Vout at a power-generating coil and comparing it to a stable reference. The error signal is then used to adjust an average value of the field current.

Switch for electric start: no included by EL-3GF-6

Two power supply voltage: 220 and 380V AC (all models without EL-3GF-6)

Four stroke engine: more fuel efficient as compared to 2-stroke generators. They consume the fuel on every 4th cycle. Moreover 4 strokeengine is and more durability A 2-stroke engine works more as compared to a 4 stroke engine for a specific time. It is evident from the fact that a 2-stroke engine produces more heat and more exhaust in one hour as compared to a 4-stroke engine

Less sound: A 4-stroke engine produces less sound and makes less pollution. It is safe for the environment. This is due to the fact that you do not have to add oil in the gas and hence no oil is burned during the combustion process

No Extra Oil in Fuel: There is no need to add extra oil along with the fuel in the fuel tank. Separate engine oil is used which needs to be replaced after every 500 hours of activity

Compact design. User-frendly in operations

Model	Rated power (kW)	Max. power (kW)	Fuel tank capacity (L)	Fuel comsumption (g/(kW·h))	Running time (h)	Product category	Catalogue number
EL-2.8GF-6	2.8	3	15	≤530	10	E	**45GF36**
EL-5GF-2-4	5	5.5	25	≤480	9.5	E	**45GF524**
EL-7GF-2-4	7	7.5	25	≤515	5.8	E	**45GF724**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELECTRICAL DIESEL GENERATORS EL-DF SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

A diesel generator is machinery that converts the chemical energy in diesel to electrical energy and is is used to power electrical equipment. They can be used to supply a range of applications such as homes, schools, factories, hospitals and other.
Diesel generators are available with and without canopy. Canopies are made of gavanized 3 mm metal sheets. The painting is done by nano technologic electronic powder coating technic. Galvanized metal sheets are durable against rust. On the doors of canopies are used stainless steel hinges and locks.
In canopies, high levels of sound muting type of silence are located in an isolated area to insulate heat which included exhaust pipes and exhaust itself.

ELECTRICAL DIESEL GENERATORS EL-DF SERIES WITH CANOPY



Model	Power stand by (kVA/kW)	Power prime (kVA/kW)	Output voltage (V)	Length (mm)	Width (mm)	Height (mm)	Product category	Catalogue number
EL-DF15C	12/10	11/9	400/230	1350	850	1080	E	45DG15/12C
EL-DF25C	25/20	23/18	400/230	2000	950	1450	E	45DG25/20C
EL-DF55C	55/44	50/40	400/230	2400	1000	1800	E	45DG55/44C
EL-DF75C	75/60	68/55	400/230	2400	1000	1800	E	45DG75/60C
EL-DF94C	94/75	85/68	400/230	2700	1100	1800	E	45DG94/75C
EL-DF110C	110/88	100/80	400/230	3100	1100	1880	E	45DG110/88C
EL-DF150C	150/120	136/109	400/230	3100	1100	1880	E	45DG150/120C
EL-DF175C	175/140	159/127	400/230	3100	1100	1880	E	45DG175/140C

ELECTRICAL DIESEL GENERATORS EL-DF SERIES WITHOUT CANOPY



Model	Power stand by (kVA/kW)	Power prime (kVA/kW)	Output voltage (V)	Length (mm)	Width (mm)	Height (mm)	Product category	Catalogue number
EL-DF15	12/10	11/9	400/230	1350	850	1050	E	45DG15/12
EL-DF25	25/20	23/18	400/230	1650	950	1400	E	45DG25/20
EL-DF55	55/44	50/40	400/230	2000	1000	1700	E	45DG55/44
EL-DF75	75/60	68/55	400/230	2000	1000	1800	E	45DG75/60
EL-DF94	94/75	85/68	400/230	2150	1100	1800	E	45DG94/75
EL-DF110	110/88	100/80	400/230	2500	1100	1780	E	45DG110/88
EL-DF150	150/120	136/109	400/230	2500	1100	1780	E	45DG150/120
EL-DF175	175/140	159/127	400/230	2500	1100	1780	E	45DG175/140

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



QUARZ TIME SWITCH WITH POWER RESERVE TM 180 MINI

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The mechanic relay for time is supposed to be used for managing chains with maximum capacity of 3500W.After the setting ,the timer executes the functions we required in 24 hours regime. The minimum period for setting is 15 minutes as it is executed within 96 pcs segments which the timing of the work and rest of the consummator is being set.The timer is accomplished with a battery which assures the work by 70 hours after power failure.

Type	Packing/Box (pcs)	Product category	Catalogue number
TM 180	1 / 200	B	**50137**

Dimensions (mm)

H	L	D
90	18	60

TECHNICAL DATA:

- Rated voltage: 230-240V AC 50/60Hz
- Time range: 24 hours
- Min. programmable interval: 15 minutes
- Time adjustment: manual
- Battery power reserve: 70 hours
- Time deviation: ± 1s (at 20°C)
- Consumption: 2.5VA
- Contact: 1NO
- Contact capacity:
- 16A/250V (COSΦ=1)
- 4A/250V (COSΦ=0.6)
- Electrical endurance: 10^5 times
- Mechanical endurance: 10^7 times
- Section of the conductor: rigid conductors up to 6mm²



MOUNTING:

- DIN-rail



QUARZ TIME SWITCH WITH POWER RESERVE TM 181

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The mechanic relay for time is supposed to be used for managing chains with maximum capacity of 3500W.After the setting ,the timer executes the functions we required in 24 hours regime. The minimum period for setting is 30 minutes as it is executed within 48 pcs segments which the timing of the work and rest of the consummator is being set.The timer is accomplished with a battery which assures the work by 150 hours after power failure.

Type	Packing/Box (pcs)	Product category	Catalogue number
TM 181	1 / 100	B	**50138**

Dimensions (mm)

H	L	D
90	53.5	65.5

TECHNICAL DATA:

- Rated voltage: 110-240V AC 50/60Hz
- Time range: 24 hours
- Min. programmable interval: 30 minutes
- Time adjustment: manual
- Battery power reserve: 150 hours
- Time deviation: ± 1s (at 20°C)
- Consumption: 2.5VA
- Contact: 1NO
- Contact capacity: 16A
- Electrical endurance: 10^5 times
- Mechanical endurance: 10^7 times
- Section of the conductor: rigid conductors up to 6mm²

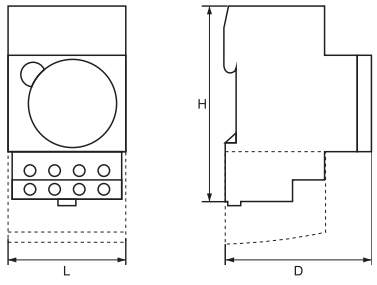

MOUNTING:

- DIN-rail

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



24 HOURS PLUG-IN MECHANICAL TIMER

2+0 standard +extended 2 YEAR TOTAL WARRANTY

Mechanical german plug-in timer with children protector. Two position switch for permament and time contol.

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Min. setting time: 15 mins
- Max. setting time: 24 hours
- active load: up to 16A
- IP20
- Size (mm): 82x84x56

Type	Packing/Box (pcs)	Product category	Catalogue number
EL-PMT-1	1/24/48	B	**50140**



PROGRAMMABLE WEEKLY TIMER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The product according to the time set by the user, automatically turn On/Off the variety of electrical equipment. Included LI-ion battery

TECHNICAL DATA:
- Power supply voltage: 220-250V; 50/60Hz
- Adjustment range: 1 min
- Commutating capacity:
- active load: up to 30A
- Operations: 17 switching ON/OFF per day, up to 119 ON/OFF per week
- Operating temperature: 0 ÷ +55°C
- Size (LxWxH)mm: 60x32.5x60

MOUNTING:
- With bolts to the surface

Type	Packing/Box (pcs)	Product category	Catalogue number
EL-PWT-1	1/200	B	**50139**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WEEKLY PLUG-IN DIGITAL TIMER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Digital german plug-in timer with coundown function and rechargeable NI-MH battery. Two outlets for permament and time contol.

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Min. setting time: 1 min
- Max. setting time: 7 days
- Program per day: 16 ON/OFF
- active load: up to 16A
- IP20
- Size (mm): 68.4x73x77.2

Type	Packing/Box (pcs)	Product category	Catalogue number
EL-WDT-2	1/24/48	B	**50141**



WEEKLY PLUG-IN DIGITAL TIMER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Digital german plug-in timer with children protector and rechargeable NI-MH battery. Two outlets for permament and time contol.

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Min. setting time: 1 min or 1 sec
- Max. setting time: 7 days
- Program per day: 8 or 20 ON/OFF
- active load: up to 16A
- IP20
- Size (mm): 130x75x70

Type	Packing/Box (pcs)	Product category	Catalogue number
EL-WDT-3	1/24/48	B	**50142**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PROGRAMMABLE DIGITAL ONE-CHANNEL TIMER TE 15A

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The timer is manufactured under the CMOS technology with a quartz minicontroller which makes it reliable for operation. The timer is adjusted for DIN-rail mounting. It can memorize up to eight ON/OFF programs (ON/OFF cycles). Each program setting is done through the push buttons. Programming starts with selection of the days of the week (you can choose among a whole week cycle, work days cycle, weekend cycle, or a specific day of the week); then the cycle start time and end time are set. If you have selected work days cycle, then the program will start and stop at the set times each work day of the week. This is one ON/OFF program. Where necessary, other programs can be memorized up to the limit of eight possible programs. If you continue setting new programs the first memorized program will be deleted. The minimal interval for cycle programming is 1 minute..

Type	Packing/Box (pcs)	Product category	Catalogue number
TE 15A	1 / 100	B	**50036**

Dimensions (mm)

H	L	D
85	36	64

TECHNICAL DATA:

- Display: LCD
- Power supply voltage: 230V; 50Hz
- Operations: 16 switching ON/OFF
- Minimum setting unit: 1 min
- Time setting range: 1 min- 168 hours
- Time deviation: <2s (at 25°C)
- Battery for programme storing: up to 15 days
- Power consumption: <4.5VA
- Switched on indicator
- Electrical wear resistance: 105 cycles
- Mechanical wear resistance: 107 cycles
- Operating temperature: -10°C ÷ +65C
- Humidity: 35 – 85%RH
- Number of contacts: 1NO + 1NC
- Commutating capacity:
  - active load: up to 16A
- Weight: 125g

MOUNTING:

- DIN-rail



PROGRAMMABLE DIGITAL ONE-CHANNEL TIMER TE 15B

UNTIL SUPPLY LAST

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The timer is manufactured under the CMOS technology with a quartz minicontroller which makes it reliable for operation. The timer is adjusted for DIN-rail mounting.It can memorize up to six ON/OFF programs (ON/OFF cycles). Each program setting is done through the push buttons. Programming starts with selection of the days of the week (you can choose among a whole week cycle, work days cycle, weekend cycle, or a specific day of the week); then the cycle start time and end time are set. If you have selected work days cycle, then the program will start and stop at the set times each work day of the week. This is one ON/OFF program. Where necessary, other programs can be memorized up to the limit of eight possible programs. If you continue setting new programs the first memorized program will be deleted. The minimal interval for cycle programming is 1 minute. There is possibility for automatic correction of the time according to the seasonal sun variations.

Type	Packing/Box (pcs)	Product category	Catalogue number
TE 15 B	1 / 100	F	**50101**

Dimensions (mm)

H	W	L
85	36	64

TECHNICAL DATA:

- Display: LCD
- Automatic adjustment of the current time (time correction winter/summer)
- Power supply voltage: 230V; 50Hz
- Operations: 6 switching ON/OFF
- Time deviation: <2s (at 25°C)
- Battery for programme storing: up to 15 days
- Power consumption: <5VA
- Switched on indicator
- Electrical wear resistance: 10^5 cycles
- Mechanical wear resistance: 10^7 cycles
- Operating temperature: -10 ÷ +65°C
- Humidity: 35 – 85%RH
- Number of contacts: 1NO + 1NC
- Commutating capacity:
  - active load: up to 6A
  - inductive load: up to 2.5
- Weight: 120g

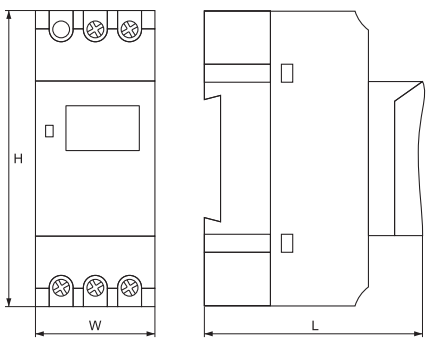

MOUNTING:

- DIN-rail

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STARCASE DELAY TIMER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The timer is adjusted for DIN-rail mounting. Provide control of lighting circuits with automatic switch Off after pre-set time. Two position switch for permament and time lighting contol and choise for time delay setting from 30 sec to 10 minutes. Compact 1-mode design- 17.5mm

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Adjustment range: 0.5 to 10 min
- Power consumption: <2.5VA
- Operating temperature: -10 ÷ +60°C
- Humidity: 45 – 95%RH
- Number of contacts: 1NO
- Commutating capacity:
- active load: up to 16A
- inductive load: up to 10 A

MOUNTING:
- DIN-rail

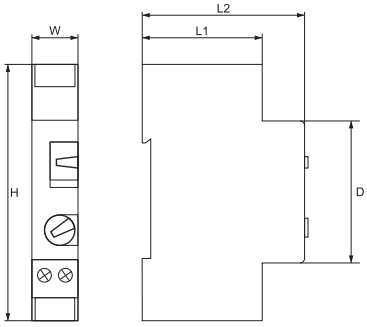

Type	Packing/Box (pcs)	Product category	Catalogue number
TE 17	1/240	B	**35007**

Dimensions (mm)

H	W	L1	L2	D
82	17.5	40	65	45



TIME RELAY "STAR/DELTA" TE 19

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The time relay is manufactured under the most modern methods of qualitative and reliable materials. The timer is adjusted for DIN-rail mounting. It is used to provide reliable and safe time hold at "star/delta" starters and it is used for setting fixed time intervals. Programming is done through selection of the time unit (seconds or minutes) and rate (x 0.1 or x1) by the slide switches, and then selection of a value from the timer knob (from 0 to 10). Whenever timer circuit receives a signal, it executes the set cycle and then stops until a new signal is available. It gives possibility for time adjustment for motor unwinding in star up to 600s and time change to delta according to the consumer's need.

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Adjustment range for operation in star: 1 to 600 seconds
- Repetition accuracy: ±5% from the whole scale
- Adjustment accuracy: ±5% from the whole scale
- Zeroing time: <0.5s
- Power consumption: <5VA
- Electrical wear resistance: 100 000 cycles
- Mechanical wear resistance: 1 000 000 cycles
- Operating temperature: -10 ÷ +65°C
- Humidity: 45 – 85%RH
- Commutating capacity: up to 5A
- Indication:
  - at operation in "star": red indication
  - at operation in "delta": green indication
- Weight: 150g

MOUNTING:
- DIN-rail

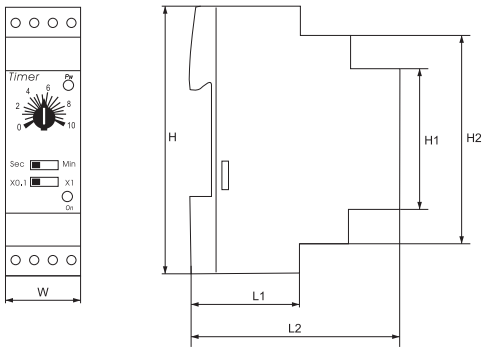

Type	Packing/Box (pcs)	Product category	Catalogue number
TE19	1 / 200	B	**50102**

Dimensions (mm)

H	W	L1	L2	H1	H2
85	24	34	66	45	60

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TIMER TE8A – 1A, TE8A – 2A

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The timer is manufactured under the most modern technology CMOS with a quartz minicontroller which makes it precise, qualitative and reliable. It has a built in battery which allows operation of the timers without charging up to 150 hours. The timer is adjusted for DIN-rail mounting. Timer programming is done through selection of the operational day(s) of the week, followed by selection of the start time and end time. You may choose out of ten modes (one for each day of the week, one for the work days, one for the weekends and one for the whole week). When setting the time, you should start first with the hours and then continue with the minutes.
TE8A - 1a - Up to eight programs can be memorized. The on/off time resolution is 1 minute.
TE8A - 2a - It has two operating channels, each of which can adjust four programmes for a day or a week with minimal interval of 1 minute for switching on and off.
Indication on LCD display with high resolution and showing the time in hours, minutes and seconds.

Type	Packing/Box (pcs)	Product category	Catalogue number
TE8A - 1a	1 / 75	B	**50113**
TE8A - 2a	1 / 75	B	**50114**

Technical data:
- Power supply voltage: 230V; 50Hz
- Power consumption: <5VA
- Electrical wear resistance: 10^7 cycles
- Mechanical wear resistance: 10^5 cycles
- Operating temperature: -10ºC ÷ +65ºC
- Temperature of storage: up to 70C
- Humidity: 45 – 85%RH
- Commutating capacity: up to 16A
- Two outlet relays
- Li-Ion battery: 150h
- Weight: 150g
-

Mounting:
- DIN-rail

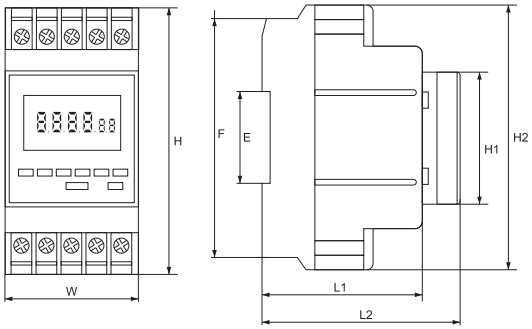

Dimensions (mm)

H	H1	H2	W
100	50	68	50
E	**L1**	**L2**	**F**
36	60	74	90



IMPULSE RELAY

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Impulse relays allow circuit remote control. They can be operated manually, remotely, from several control points, or by impulses. Impulse relays are most frequently used for the control of lighting circuits in various public places with multiple control points.

TECHNICAL DATA:
- Control voltage: 230V
- Rated current of the power circuit: 16A
- Electrical endurance: 200000 cycles
- Maximum switching frequency: 5 operations/minute
- Impulse duration: 50ms

CONNECTION:
- tunnel terminals

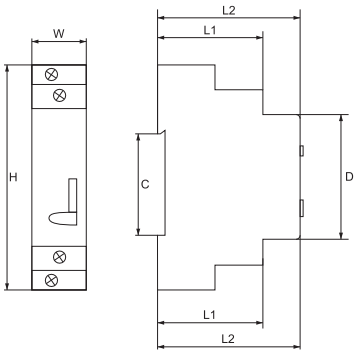

Type	Packing/Box (pcs)	Product category	Catalogue number
EPN510	8 / 160	B	**50300**

Dimensions (mm)

H	W	C	D	L1	L2
85	24	36	45	34	66

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

TIMER TE6B

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The timer is manufactured under the most modern technology CMOS with a quartz minicontroller which makes it precise, qualitative and reliable. The timer is modulated to be mounted on the front panel of boards. The direction of operation is adjusted – direct or reverse. There is possibility to adjust the time range from 0.01 second to 99 hours 59 minutes, possibility for correction of the set values during operation. Indication on LCD display with high resolution and showing the time in hours, minutes and seconds.

Type	Packing/Box (pcs)	Product category	Catalogue number
TE6B	1 / 100	B	**50104**

Dimensions (mm)

D	W	L
8.5	45	80

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Possibility for choice of operating range:
  - from 0.01 second to 99.99 seconds
  - from 1 second to 99.59 minutes
  - from 1 minute to 99.59 hours
- Error: <0.01% ±0.05s
- Minimal duration of the input pulse: 20ms
- Power consumption: <5VA
- Electrical wear resistance: 10^7 cycles
- Mechanical wear resistance: 10^5 cycles
- Operating temperature: -10 ÷ +65°C
- Temperature of storage: up to 70°C
- Humidity: 45 – 85%RH
- Commutating capacity at active load: 3A
- Weight: 300g

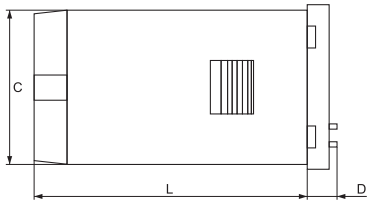

MOUNTING:
- on the front panel of the board

TIMER TE48S-S

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The timer is manufactured under the most modern technology CMOS with a quartz minicontroller which makes it precise, qualitative and reliable. The timer is modulated to be mounted on the front panel of boards. The direction of operation is adjusted – direct or reverse. It represents two separate operating channels, each of which can operate independently with time range adjustment from 1 second to 99 minutes. Possibility for correction of the set values during operation. First, select the time unit (seconds or minutes) and then set the time. Depending on the timer coupling, it can be used as a cyclic timer relay, i.e. it initially counts the first time set, then counts the second time set, then starts counting over the first time again, etc. until a stop signal is received. In another mode, the timer can count the set time and stop until a new signal is received to count the next cycle. Indication on LCD display with high resolution and showing the time in hours, minutes and seconds.

Type	Packing/Box (pcs)	Product category	Catalogue number
TE48S-S	84	B	**50105**

Dimensions (mm)

D	E	L1	L2
5	44.8	74	95

C	H	W
15	58	48

TECHNICAL DATA:
- Power supply voltage: 230V; 50Hz
- Admissible variation of the input voltage: 85-110%U
- Possibility for choice of operating range:
  - from 1 to 99 seconds
  - from 1 minute to 99 minutes
- Error: <0.01% ±0.05s
- Minimal duration of the input pulse: 20ms
- Power consumption: <5VA
- Electrical wear resistance: 10^7 cycles
- Mechanical wear resistance: 10^5 cycles
- Operating temperature: -10 ÷ +65°C
- Temperature of storage: up to 70°C
- Humidity: 45 – 85%RH
- Commutating capacity at load: 3A
- Weight: 300g

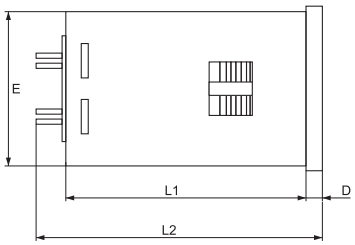





MOUNTING:
- on the front panel of the board

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

TIMER TE 19M

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Timer is developed using modern technologies from quality and reliable materials and is adapted for mounting on DIN rail. It is used for providing time intervals in eight time programs, which are assigned by combinations of the keys. There is an option for it to operate in time ranges (assigned by the keys K4, K5,K6): seconds, minutes or hours depending on the necessity of the user. Power contact up to 3A.

TECHNICAL CHARACTERISTICS:

- Input voltage: 230V; 50Hz
- Range of setting: from 0.6 sec to 100 hours
- Accuracy of setting: ± 5% from the whole scale
- Time for nullifying: <0.5 seconds
- Consumed capacity: < 5VA
- Electrical endurance (number of cycles): 100 000 cycles
- Mechanical endurance (number of cycles): 1 000 000 cycles
- Operation temperature: -10 ÷ +65°C
- Humidity: 45 - 85%RH
- Computing option: up to 5A
- Indication:
  - on power supply: red indication
  - on operational output relay: green indication
- Weight: 150 gr.
- Time functions: according to the programming guide



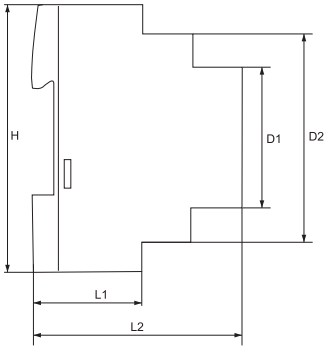

MOUNTING METHOD:

- DIN rail

Type	Packing/Box (pcs)	Product category	Catalogue number
TE 19M	1 / 200	B	**50102M**

Dimensions (mm)

H	W	H1	H2	L1	L2
85	24	45	60	34	66

UNIVERSAL DIGITAL COUNTER CE2J

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The device is manufactured under the modern technology CMOS which allows high speed of counting and high counting reliability. It has a built in battery which allows data storing for more than 10 years. It is supplied with a digital display with black lighting digits, providing excellent visibility at different lighting. The counter is to be mounted on the front panel of the boards. It is used for impulse sequence counting with accumulation or deduction. There is possibility for relay outlet operation at reaching beforehand set value, and also a possibility for changing the position of the decimal point.

TECHNICAL DATA:

- Display: LCD
- Power supply voltage: 230V; 50Hz
- Counting range: 0 - 99999
- Counting speed: 30/3k cps
- Zeroing: outside impulse
- Battery for programme storing: up to 10 years
- Power consumption: <5VA
- Operating temperature: -10 ÷ +65°C
- Humidity: 35 – 85%RH
- Commutating capacity: relay outlet with active load: up to 3A
- Weight: 250g

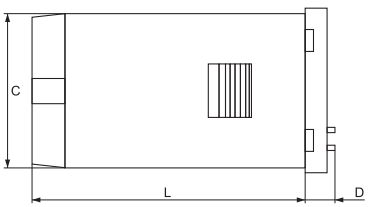

MOUNTING:

- on the front panel
- opening with dimensions: 45x45

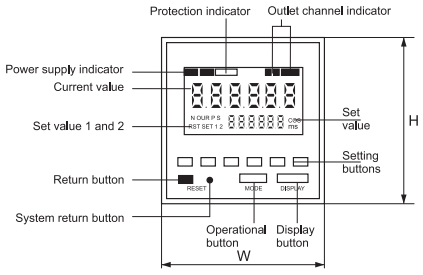

Documents corresponding to the product:
Standard EN 61010-1

Type	Packing/Box (pcs)	Product category	Catalogue number
CE2J	1 / 45	B	**50111**

Dimensions (mm)

H	W	C	D	L
68	68	65	8.5	90

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

COMBINED DIGITAL COUNTER/TIMER CE10J

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The device is for front mounting in the board. It can be used as a counter or timer choosing a definite combination from keys. It is manufactured under the modern technology CMOS which allows high speed of counting, precision at operation as a timer and high reliability. It has a built in battery which allows data storing for more than 10 years. It is supplied with a digital display providing excellent visibility at different lighting. It is used for impulse sequence counting with accumulation or deduction. There is possibility for relay outlet operation at reaching beforehand set value, and also a possibility for changing the position of the decimal point.

TECHNICAL DATA:
- Display: LCD
- Power supply voltage: 230V; 50Hz
- Counting range: 0 – 999
- Timer range: 0.01 – 99h99min
- Counting speed: 30/500 cps
- Zeroing: outside impulse
- Battery for programme storing: up to 10 years
- Power consumption: <3VA
- Mechanical wear resistance: 107 cycles
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Commutating capacity: relay outlet with active load: up to 3A
- Weight: 120g





MOUNTING:
- on the front panel
- opening with dimensions: 45x45

Documents corresponding to the product:
Standard EN 61010-1

Type	Packing/Box (pcs)	Product category	Catalogue number
CE10J	1 / 45	B	**50120**

Dimensions (mm)

H	W	C	D	L
68	68	65	6	90

TOTAL DIGITAL COUNTER CE15J

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The device is to be mounted on DIN-rail. It is used as an impulse counter with no outside power supply. For that purpose there is a Li battery built in the device which provides data storing and operation of the device for 5 years. It has eight digital lighting display providing excellent visibility at different lighting. It is used for impulse sequence counting with accumulation.

TECHNICAL DATA:
- Display: LCD
- Power supply voltage: built in battery
- Inlet signal: 100-230V AC/DC
- Counting accuracy: <0.002%
- Data storing battery: up to 5 years
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Weight: 120g

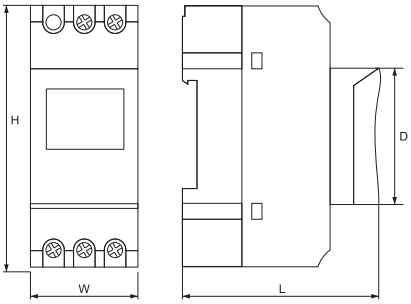

Dimensions (mm)

H	W	D	L
86	36	45	64

MOUNTING:
- DIN-rail

Documents corresponding to the product: EN 61010-1

Type	Packing/Box (pcs)	Product category	Catalogue number
CE15J	1 / 100	B	**50112**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TOTAL DIGITAL COUNTER CE15L

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The device is to be mounted on DIN-rail. It is used as a time impulse counter with no outside power supply. For that purpose there is a Li battery built in the device which provides data storing and operation of the device for 5 years. It has eight digital lighting display providing excellent visibility at different lighting. It is used for time impulse sequence counting with accumulation. It displays the operated time.

TECHNICAL DATA:
- Display: LCD
- Power supply voltage: built in battery
- Inlet signal: 100-230V AC/DC
- Counting accuracy: <0.002%
- Battery for data storing: up to 5 years
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Weight: 120g

MOUNTING:
- DIN-rail

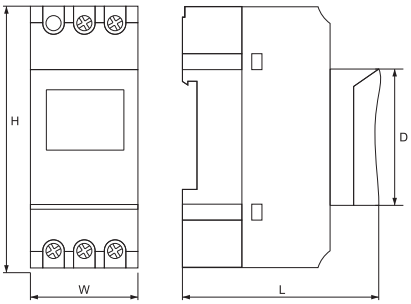

Dimensions (mm)

H	W	D	L
86	36	45	64

Documents corresponding to the product: EN 61010-1

Type	Packing/Box (pcs)	Product category	Catalogue number
CE15L	1 / 100	B	**50115**



PHASE SEQUENCE INDICATOR EK - RSTB

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The device is to be mounted on DIN-rail. It is used for control and indication of the presence, sequence and quality of the phases. The device indicates the following fault: lack of one or several phases; change in the sequence of the phases; lowering of the power supplying voltage: under 10%; increasing of the power supplying voltage: over 10%; phase asymmetry of the power supplying voltage: ±10%. In the presence of one of the conditions above a relay starts operating in the device which breaks the controlling circuit. The time between fault indication and outlet relay switching on can be adjusted in order to prevent unwilling stops at very short breaks. When the voltage is back to normal limits, the device receives energy (indication lights) according to the hysteresic values. At phase sequence fault the device operates immediately.

TECHNICAL DATA:
- Power supply voltage: 400V; 50Hz
- Possibility for operation range adjustment: 0.1 – 10 seconds
- Possibility for working range adjustment: from 300 to 480 V
- Electrical wear resistance: 1 000 000 cycles
- Mechanical wear resistance: 10 000 000 cycles
- Indication: green LED – indication for a change in the condition; red LED - failure
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Weight: 120g
-

MOUNTING:
- DIN-rail

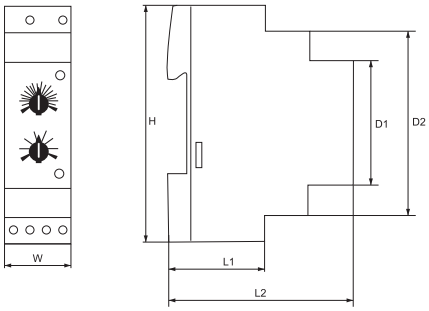

Dimensions (mm)

H	W	D1	D2	L1	L2
85	24	45	60	34	66

Documents corresponding to the product: EN 61010-1

Type	Packing/Box (pcs)	Product category	Catalogue number
EK - RSTB	1 / 200	B	**50103**



Documents corresponding to the product: Standard EN 60051-1





UNTIL SUPPLY LAST

EVT5 - CONTROL VOLTAGE TRANSFORMER

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTIONS:
Reduction of main voltage within standard range
- Galvanic separation of the power supply circuit from the operation circuit

TECHNICAL FEATURES:
- Input voltage: 400 or 230 V
- Frequency : 50/60Hz
- Short circuit resistance: unstable
- Temperature class: B (130ºC)
- Construction: open (for installation in other products)
- Magnetic circuit: cold rolled electric furnace steel
- Coils: pure electrotechnical copper
- IP code: IP20

CONNECTION:
- flexible or hard conductors of relevant section to terminals

MOUNTING:
- Mounting in distribution boards or products
- fastening: by means of screws/bolts to the surface
- position: vertical
- ambient temperature: -20 ÷ +65ºC

Type	Initial voltage (V)	Secondary voltage (V)	Power VA	Dimensions						Packing / Box (pcs.)	Product category	Catalogue number
				C	D	E	F	G	d			
EVT5 - 250VA	230	48-36	250	130	100	120	53	130	20	16	F	**45242N**
EVT5 - 250VA	400	24-12	250	130	100	120	53	130	20	12	F	**45444**
EVT5 - 500VA	400	48-24-12	500	150	113	133	53	140	20	4	F	**45445**
EVT5 - 500VA	230	110-48-24	500	150	125	133	53	140	20	4	F	**45215**
EVT5 - 500VA	400	110-48-24	500	150	125	133	53	140	20	6	F	**45415**
EVT5 - 1000VA	400	48-24-12	1000	170	125	150	65	155	20	2	F	**45441**
EVT5 - 1600VA	400	48-24-12	1600	190	125	150	65	170	20	2	F	**454416**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Documents corresponding to the product: Standard EN 61010-1; EN 60044-1; EN 60044-6





CURRENT MEASUREMENT TRANSFORMERS MES - XX/X5 TYPE

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The measurement transformers find application at current measuring, current regulation, systems for current characteristics watching, systems for reactive energy compensation, signaling, etc. They are with x/5 gear ratio as X is the inlet range of the transformer.

TECHNICAL DATA:
- Maximum operating voltage: 720V; 50Hz
- Admissible deviation of the operating current: 1.2 x In
- Inlet current: 50 – 1200A
- Outlet current: 5A
- Impulse voltage wear resistance: 4000V; 50Hz (1min)
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Precision class: 0.5

MOUNTING:
- Current transformers can be DIN rail mounted;
- vertically or horizontally to the power supplying rails according to the opening of the transformer
- Current transformers can be mounted on flat surfaces by use of fixing clamps.

Type	Overall dimensions (mm)						
	A	B	C	D	E	F	G
MES - 75/30	88	52	52	41	77	31	31
MES - 75/40	88	52	52	41	77	41	41
MES - 86/60	117	57	57	184	77	61	61

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
MES - 75/30	50/5	0.5	1	0.60	1 / 40	B	**45050A**
MES - 75/30	75/5	0.5	1.5	0.60	1 / 40	B	**45075A**
MES - 75/30	100/5	0.5	1.5	0.60	1 / 40	B	**45103A**
MES - 75/30	150/5	0.5	2.5	0.60	1 / 40	B	**45153A**

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
MES - 75/40	200/5	0.5	3.75	0.60	1 / 40	B	**45204A**
MES - 75/40	250/5	0.5	3.75	0.60	1 / 40	B	**45254A**
MES - 75/40	300/5	0.5	5	0.60	1 / 40	B	**45304A**
MES - 75/40	400/5	0.5	5	0.60	1 / 40	B	**45404A**
MES - 75/40	500/5	0.5	5	0.60	1 / 40	B	**45504A**
MES - 75/40	600/5	0.5	5	0.60	1 / 40	B	**45604A**

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
MES - 86/60	400/5	0.5	3.75	0.60	1 / 40	B	**45406A**
MES - 86/60	500/5	0.5	5	0.60	1 / 40	B	**45506A**
MES - 86/60	600/5	0.5	10	0.60	1 / 40	B	**45606A**
MES - 86/60	800/5	0.5	10	0.60	1 / 40	B	**45806A**
MES - 86/60	1000/5	0.5	10	0.60	1 / 32	B	**45906A**
MES - 86/60	1200/5	0.5	10	0.60	1 / 32	B	**45916A**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Documents corresponding to the product: Standard EN 60044-1

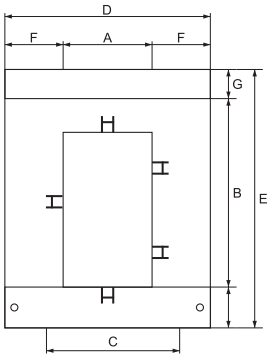

CURRENT TRANSFORMERS, TYPE CP

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Current measuring transformers of duct type. Specially designed to be installed in measuring circuits without removing cables in current measuring circuit. CP Transformers save installation time and decrease installation costs

TECHNICAL SPECIFICATION:

- small size table:
- secondary coil rated current 5A
- rated voltage 720V
- frequency 50Hz
- rated load: up to 30VA
- safety coefficient: fs≤5
- accuracy class :0.5; 1
- secondary coil connection: cable shoe terminal

Type	Overall dimensions (mm)						
	A	B	C	D	E	F	G
CP 23	20	30	51	89	111	34	47
CP 58	50	80	78	114	145	32	32
CP 88	80	80	108	144	145	32	32

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
CP 23	200/5	1	1.5	0,74	1 / 45	B	**452320**
CP 23	250/5	1	2.5	0,74	1 / 45	B	**452325**
CP 23	300/5	0,5	2.5	0,74	1 / 45	B	**452330**

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
CP 58	250/5	0,5	1,5	0,87	1 / 36	B	**455825**
CP 58	300/5	0,5	2,5	0,87	1 / 36	B	**455830**
CP 58	400/5	0,5	2,5	0,87	1 / 36	B	**455840**
CP 58	500/5	0,5	5	0,87	1 / 36	B	**455850**
CP 58	600/5	0,5	5	0,87	1 / 36	B	**455860**

Type	Range	Precision class	Capacity VA	Weight kg	Packing/Box (pcs)	Product category	Catalogue number
CP 88	400/5	0,5		1	1 / 20	B	**458840**
CP 88	500/5	0,5	2,5	1	1 / 20	B	**458850**
CP 88	600/5	0,5	5	1	1 / 20	B	**458860**
CP 88	750/5	0,5	2,5	1	1 / 20	B	**458875**
CP 88	800/5	0,5	3.75	1	1 / 20	B	**458880**
CP 88	1000/5	0,5	5	1	1 / 20	B	**458890**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Documents corresponding to the product: EN 60947-5-1; EN 61810

INDUSTRIAL RELAYS AND BASES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Devices intended for construction of automation and signalling boards. They are mainly used for command transfer towards the executive mechanisms. Currents of comparatively heavy values enabling the direct control of industrial executive mechanisms are commuted in comparatively small sizes. The contact surfaces are made from silver-coated electrolytic copper. The entire contact system is closed within a lid of colourless fire-proof plastic with a test-button installed to it. The base provides a safe electric connection of the conductors of the electric installation and the relays and is used to install the relay to the DIN busbar.

TECHNICAL CHARACTERISTICS:

- Supply voltage: from 12 to 230V AC, 50 Hz and from 12 to 110V DC
- Acceptable deviation of the supply voltage: 85 -110% Un
- Rated current of the sockets: 10A AC
- Electrical endurance: 1 000 000 cycles
- Isolation resistance: 500 mΩ /min (500V)
- Impulse tension resistance: 2000V, 50Hz
- Dielectric strength: 1000V AC/1 min
- Turn-out time: 25ms
- Working temperature: -5 ÷ + 65°C
- Humidity: 35 - 85% RH

METHOD OF INSTALLATION:

- on a DIN rail by means of a socket



Relay type	Voltage of the coil (V)	Socket type	Resistance of the coil (Ω)	Number of contacts	Packing/Box (pcs)	Product category	Catalogue number
ELM - 14FC	12 VDC	ELM-RT624-B	260	NO+NC	100 / 1000	B	**57141**
ELM - 14FC	24 VDC	ELM-RT624-B	1080	NO+NC	100 / 1000	B	**57142**
ELM - 14FC	48 VDC	ELM-RT624-B	4260	NO+NC	100 / 1000	B	**57143**





Relay type	Voltage of the coil (V)	Socket type	Resistance of the coil (Ω)	Number of contacts	Packing/Box (pcs)	Product category	Catalogue number
ELM - 60.2	12 VDC	ELM - 90.22	96	2NO+2NC	20 / 300	B	**57601**
ELM - 60.2	24 VDC	ELM - 90.22	384	2NO+2NC	20 / 300	B	**57602**
ELM - 60.2	48 VDC	ELM - 90.22	1540	2NO+2NC	20 / 300	B	**57603**
ELM - 60.2	230 VAC	ELM - 90.22	7400	2NO+2NC	20 / 300	B	**57605**
ELM-60.2	24VAC	ELM-90.22		2NO+2NC	20 / 300	B	**57606**
ELM - 60.13	12 VDC	ELM - 90.23	96	3NO+3NC	20 / 300	B	**57611**
ELM - 60.13	24 VDC	ELM - 90.23	384	3NO+3NC	20 / 300	B	**57612**
ELM - 60.13	48 VDC	ELM - 90.23	1540	3NO+3NC	20 / 300	B	**57613**
ELM - 60.13	110 VAC	ELM - 90.23	1700	3NO+3NC	20 / 300	B	**57614**
ELM - 60.13	230 VAC	ELM - 90.23	7400	3NO+3NC	20 / 300	B	**57615**
ELM-60.13	24VAC	ELM90.23		3NO-3NC	20/300	B	**57616**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Relay type	Voltage of the coil (V)	Socket type	Resistance of the coil (Ω)	Number of contacts	Packing/Box (pcs)	Product category	Catalogue number
ELM - 55.02	12 VDC	ELM - RT702-B	42	2NO+2NC	50 / 500	B	**57521**
ELM - 55.02	24 VDC	ELM - RT702-B	168	2NO+2NC	50 / 500	B	**57522**
ELM - 55.02	48 VDC	ELM - RT702-B	675	2NO+2NC	50 / 500	B	**57523**
ELM - 55.02	230 VAC	ELM - RT702-B	14000	2NO+2NC	50 / 500	B	**57525**
ELM55.02	24VAC	ELM - RT702-B		2NO+2NC	50 / 500	B	**57526**
ELM - 55.04	12 VDC	ELM-RT704-B	42	4NO+4NC	50 / 500	B	**57541**
ELM - 55.04	24 VDC	ELM-RT704-B	168	4NO+4NC	50 / 500	B	**57542**
ELM - 55.04	48 VDC	ELM-RT704-B	675	4NO+4NC	50 / 500	B	**57543**
ELM - 55.04	110 VAC	ELM-RT704-B	3500	4NO+4NC	50 / 500	B	**57544**
ELM - 55.04	230 VAC	ELM-RT704-B	14000	4NO+4NC	50 / 500	B	**57545**
ELM-55.04	24VAC	ELM-RT704-B		4NO+4NC	50 / 500	B	**57546**



57901 57902, 57912



57904, 57905

Socket type	Dimensions (mm)	Number of terminals (pcs.)	Packing/Box (pcs)	Product category	Catalogue number
ELM - RT624-B	76 x 15	5	20 / 600	B	**57901**
ELM - RT702-B	76 x 27	11	10 / 240	B	**57902**
ELM - RT704-B	76 x 27	14	10 / 240	B	**57912**
ELM - 90.22	68 x 38	8	10 / 400	B	**57904**
ELM - 90.23	68 x 38	11	10 / 400	B	**57905**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

INDUSTRIAL SOLID STATE RELAYS (SSR)

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Documents corresponding to the product: EN 60947-5-1; EN 61810

Industrial SSR are intended for mounting in power and control cabinets as an output switch devices with reliable ON/OFF performance. The SSR are based on the CMOS technology. The non-contact electronic switch is optically separated from the input signal by a photoelectric coupler. This allows use of switch currents of up to 50A despite of the devices small overall size. Another important feature of the relay is that output load can be regulated depending on the input signal value. The relay is mainly used to transmit control signals to actuating mechanisms since it can work at comparatively high currents making it possible to directly control actuators. SSR have transparent plastic covers to additionally improve their safety level. The SSR use is connected with considerable heat emissions, so measures must be taken to dispense the excessive thermal energy in the atmosphere. This is achieved through application of specially deigned radiators. The correct definition of radiator parameters is of critical importance. It is made by calculating the heat generation capacity with the formula: Heat generation = active load current x 3.0 W/A. The heat removal surface is estimated with the help of the following graphic:

TECHNICAL SPECIFICATIONS:

- Load/output voltage: 30/400V 50 Hz or the solid state voltage regulators
- Rated output current: from 10A to 60A
- Insulating voltage: 1000 MΩ /min (500V)
- Impulse voltage stability: 2000V, 50Hz
- Dielectric Strength: < 2500VAC / 1 min
- Leakage current: <2mA
- Turn-on time: <10ms
- Operating temperature: -5°C + 65°C
- Relative Humidity: 35 - 85%RH



Type	Relay Type	Control Voltage (V)	Output Voltage (V)	Number of phases	Output Current (A)	Packing/Box (pcs)	Product category	Catalogue number
ZG3NC - 2 - 10B	SSR	3-32VDC	230VAC	1	10	10 / 100	B	**57710**
ZG3NC - 2 - 20B	SSR	3-32VDC	230VAC	1	20	10 / 100	B	**57720**
ZG3NC - 2 - 25B	SSR	3-32VDC	230VAC	1	25	10 / 100	B	**57725**
ZG3NC - 2 - 40B	SSR	3-32VDC	230VAC	1	40	10 / 100	B	**57740**
ZG3NC - 2 - 60B	SSR	3-32VDC	230VAC	1	60	10 / 100	B	**57760**
ZG3NC - 3 -10B	SSR	3-32VDC	400VAC	2	10	10 / 100	B	**57713**
ZG3NC - 3 - 20B	SSR	3-32VDC	400VAC	2	20	10 / 100	B	**57723**
ZG3NC - 3 - 25B	SSR	3-32VDC	400VAC	2	25	10 / 100	B	**57735**
ZG3NC - 3 - 40B	SSR	3-32VDC	400VAC	2	40	10 / 100	B	**57743**
ZG3NC - 3 - 60B	SSR	3-32VDC	400VAC	2	60	10 / 100	B	**57763**



UNTIL SUPPLY LAST

Type	Relay Type	Control Voltage (V)	Output Voltage (V)	Number of phases	Output Current (A)	Packing/Box (pcs)	Product category	Catalogue number
ZG1NC - 2 - 10D	SS voltage regulator	1-10VDC	0-230VAC	1	10	10 / 100	F	**57810**
ZG1NC - 3 -10D	SS voltage regulator	1-10VDC	0-400VAC	2	10	10 / 100	F	**57813**



Type	Relay Type	Control Voltage (V)	Output Voltage (V)	Number of phases	Output Current (A)	Packing/Box (pcs)	Product category	Catalogue number
ZG33 - 3 - 10B	SSR	3-32VDC	400VAC	3	10	1 / 30	B	**57831**
ZG33 - 3 - 20B	SSR	3-32VDC	400VAC	3	20	1 / 30	B	**57832**
ZG33 - 3 - 25B	SSR	3-32VDC	400VAC	3	25	1 / 30	B	**57833**
ZG 33 - 3 - 40B	SSR	3-32VDC	400VAC	3	40	1 / 30	B	**57834**

Note: The relay output must be supplied with a varistor to ensure its over-voltage protection, whenever RRS is used to control inductive loads.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL VOLTMETER/AMPEREMETER EKDP 15 A/V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Digital device adjusted for DIN-rail mounting and offered in two types:
- amperemeter
- voltmeter

It is supplied with LCD display where the measurement quantity is displayed with numbers with 31/2 size. It has high accuracy of analogue-digital transfer, measurement precision and electromagnetic interference stability. There is possibility for adjustment of the measurement range through built in micro switches. Adjusted to measure constant current (AD,DV) and alternating current (AA,VA) quantities.

TECHNICAL DATA:
- Power supply voltage: 100 - 240V; 50Hz
- Inlet signal:
  - operating as voltmeter: 2 – 700V (the range is adjusted from inside)
  - operating as amperemeter: 5 – 2000A (the range is adjusted from inside)

NOTE: At current range over 5A a current measurement transformer should be used
- Consumption: <4VA
- Impulse voltage wear resistance: 4000V; 50Hz (1min)
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Precision: 0.5% from the whole scale
- Display: LCD
- Weight: 150gr

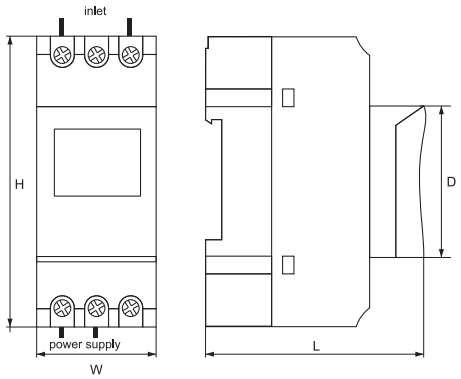

MOUNTING:
- DIN-rail

Documents corresponding to the product: Standard EN 61010-1

Type	Packing/ Box (pcs)	Product category	Catalogue number
EKDP-15AA	1 / 100	B	**50117A**
EKDP-15DA	1 / 100	B	**50117D**
EKDP-15AV	1 / 100	B	**50116A**
EKDP-15DV	1 / 100	B	**50116D**

Dimensions (mm)

H	W	L	D
88	36	64	45



DIGITAL VOLTMETER/AMPEREMETER AND FREQUENCY METER EKDP7

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Digital device adjusted for mounting on the front panel of electrical boards and offered in the following types:
- amperemeter:

EKDP7 – AA – amperemeter for alternating current
EKDP7 – DA – amperemeter for direct current
- voltmeter:

EKDP7 – AV – voltmeter for alternating current
EKDP7 – DV – voltmeter for direct current
EKDP7 – Hz – frequency meter

It is supplied with LCD display where the measurement quantity is displayed with numbers with 31/2 size. It has high accuracy of analogue-digital transfer, measurement precision and electromagnetic interference stability. There is possibility for adjustment of the measurement range through built in micro switches. Adjusted to measure direct current and alternating current quantities.

TECHNICAL DATA:
- Power supply voltage: 100 - 240V; 50Hz
- Inlet signal:
  - operating as voltmeter: 2 – 700V (the range is adjusted from inside)
  - operating as amperemeter: 5 – 2000A (the range is adjusted from inside

NOTE: For high current range a current measurement transformer should be used for alternating current device and a measurement shunt for direct current.
- Consumption: <5A
- Impulse voltage wear resistance: 4000V; 50Hz (1min)
- Operating temperature: -5 ÷ +65°C
- Humidity: 35 – 85%RH
- Precision: 0.5% from the whole scale
- Display: LCD
- Weight: 130gr

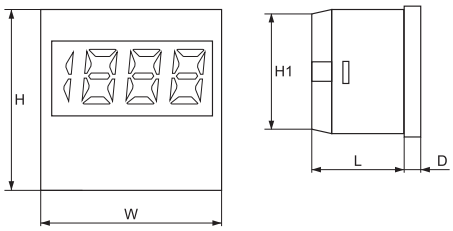

MOUNTING:
- on the front panel

Documents corresponding to the product: Standard EN 61010-1

Type	Packing/ Box (pcs)	Product category	Catalogue number
EKDP7-AV	1 / 84	B	**50106**
EKDP7-AA	1 / 84	B	**50107**
EKDP7-DV	1 / 84	B	**50108**
EKDP7-DA	1 / 84	B	**50109**
EKDP7-HZ	1 / 84	B	**50110**

Dimensions (mm)

H	W	H1	D	L
72	72	68	6	42

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL ROUND VOLTMETER/ AMPEREMETER AND FREQUENCY METER EL-ED16R

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Range	Diameter (mm)	Packing / Box (pcs)	Product category	Catalogue number
Voltmeter	AC 12-500V	22	10/500	B	**401553**
Amperemeter	AC 0-100A	22	10/500	B	**401554**
Frequency meter	AC 35-99 HZ	22	10/500	B	**401555**





DIGITAL SQUARE VOLTMETER/ AMPEREMETER AND FREQUENCY METER EL-ED16S

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Range	Diameter (mm)	Packing / Box (pcs)	Product category	Catalogue number
Voltmeter	AC 12-500V	22	10/500	B	**401556**
Amperemeter	AC 0-100A	22	10/500	B	**401557**
Frequency meter	AC 35-99 HZ	22	10/500	B	**401558**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product: Standard IEC 62052-11; IEC 62053-21; IEC 62056-21

DIN RAIL MOUNTED KWH METERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Electronic single and three phase kWh meters intended for DIN rail mounting and active energy measurement. Meters are suitable for home and commercial applications. They perform direct measurement of the real consumption of electric power and the results are shown on the LCD display. The system doesn't need any additional adjustment or calibration. The range includes single and multi-tariff models.





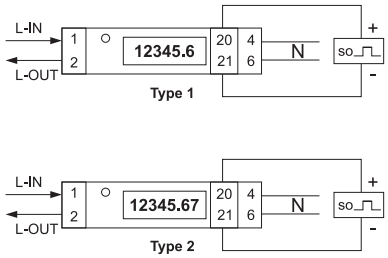

Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
DDS - 1Y - 45	5A (45A)	1	1000	230	63 / 18 / 118	1 / 120	F	**50214**

UNTIL SUPPLY LAST



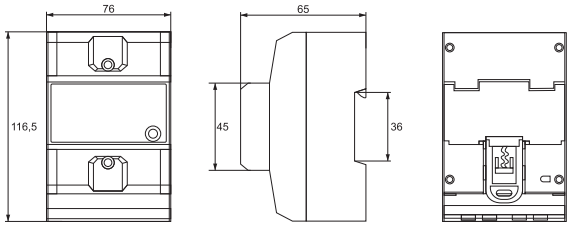



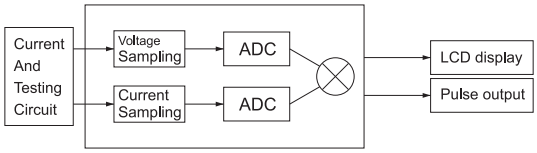

Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
DD4F-S01-1Y-60	5A (60A)	4	1600	230	116.5 / 76 / 65	1 / 48	F	**50220**

UNTIL SUPPLY LAST

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



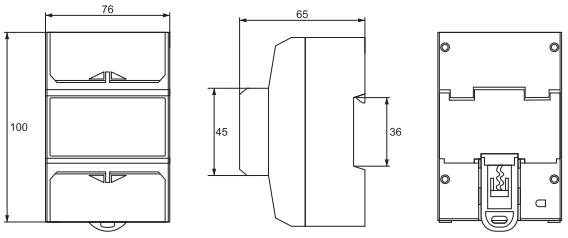



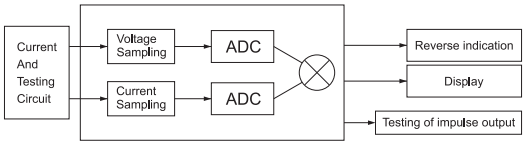

Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
DDS - 1Y - 100	10A (100A)	1	1600	230	65 / 76 / 100	1 / 45	F	**50260**

UNTIL SUPPLY **LAST**



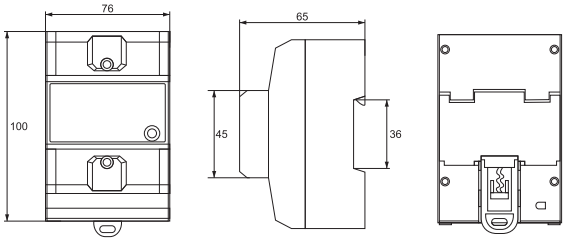



Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
DDS - 3Y 80	20A (80A)	1	800	3x230/400	65 / 76 / 100	1 / 45	F	**50380**

UNTIL SUPPLY **LAST**



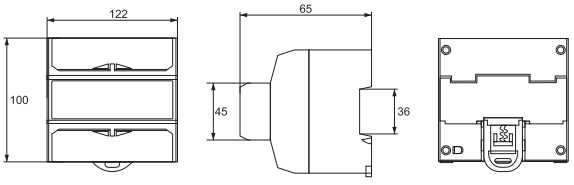



Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
DTGS-S01-3Y100	10A (100A)	4	800	3X230/400	122 / 100 / 65	1 / 30	F	**50400**

UNTIL SUPPLY **LAST**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
EL-45SA	5A(40A)	1	2000	230	116 /18/ 59	1/10	B	**50213**



Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
EL-100SA-U	10A(60A)	1	1600	230	100 /76/ 65	1/60	B	**50216**



Type	Measuring range	Number of Tariffs	Meter constant (imp/kWh)	Voltage (V)	Overall dimensions (mm) height / width / depth	Packing/Box (pcs)	Product category	Catalogue number
EL-024	3x20A(100A)	1	400	3x220/380	100 /76/ 65	1/60	B	**50217**



Documents corresponding to the product:
Standard EN 60051-1



ANALOGUE (POINTER) PANEL METERS SD72 TYPE FOR BUILD-IN

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Analogue devices adjusted for mounting on the front panel of electrical boards. Designed for frequency measurement, capacity, alternating or direct voltage and current of the power supply grid, with overall dimensions 72x72mm. They are manufactured on the basis of bridge measurement schemes. There is possibility for display change for the higher scopes of measuring.

Type	Type of the measurment system	Precision class	Range	Note	Packing/Box (pcs)	Product category	Catalogue number
amperemeter AC	MEMSI	1.5	0-100A	current transfer 100/5	1 / 100	B	**654010**
amperemeter AC	MEMSI	1.5	0-200A	current transfer 200/5	1 / 100	B	**654020**
amperemeter AC	MEMSI	1.5	0-400A	current transfer 400/5	1 / 50	B	**654040**
amperemeter AC	MEMSI	1.5	0-600A	current transfer 600/5	1 / 50	B	**654060**
amperemeter AC	MEMSI	1.5	0-1000A	current transfer 1000/5	1 / 50	B	**654100**
amperemeter AC	MEMSI	1.5	0-1500A	current transfer 1500/5	1 / 50	B	**654150**
voltmeter AC*	MEMSI	1.5	0-500V	-	1 / 50	B	**50125**
frequency meter**	ME	0.5	45-65Hz	-	1 / 50	B	**50126**
cosφ meter	MEMSI	1.5	3P 400V	-	1 / 50	B	**50127**
amperemeter DC	MEMC	1.5	0-5A	-	1 / 50	B	**50128**
amperemeter DC	MEMC	1.5	0-50A	outer resistor 60mV	1 / 50	B	**50129**
voltmeter DC	MEMC	1.5	0-50V	-	1 / 50	B	**50130**
voltmeter DC	MEMC	1.5	0-100V	-	1 / 20	B	**50131**
wattmeter	MEMSI	1.5	0-3000W 1P240V	-	1 / 25	B	**50132**
wattmeter	MEMSI	1.5	0-3000W 3P 3 line	-	1 / 25	B	**50133**
wattmeter	MEMSI	1.5	0-3000W 3P 4 line	-	1 / 25	B	**50134**

Note: MEMSI - magnetic-electrical movable steel instrument; MEMC – magnetic-electrical movable coil
* Possibility for supplying with voltage transformer X/100V for range expanding
** Possibility for voltage 110V, 230V , 400V

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ALL-PURPOSE LIMIT SWITCH – SERIES CSA-XXX

3+0 standard +extended 3 YEAR TOTAL WARRANTY

The all-purpose limit switches are devices used in automatic systems as a control element. They are used for setting of gearing limits. They are mounted on transport lines, conveyors and other linear progressive motion machines. They feature a vibration-resistant metal shell.

PRODUCT CONFORMITY DOCUMENTATION:

- Standard: EN 60947-1; EN 60947-5-1
- Dielectric strength: 1000V AC
- Rated current: 10A active; 4A inductive
- Insulating resistance: 100mΩ
- Electrical endurance (number of cycles): 500 000 with active load
- Mechanical endirance (number of cycles): 1 000 000
- Gearing speed: 5mm/s to 0.5 m/s
- Rated voltage: 230V
- Rated current: up to 10A
- IP code: IP66
- Cable input: cable glandPG11
- Section of power supply conductor: up to 2mm^2
- Fastening strength of terminals: 6-8kgf/cm













Type	Type of the head	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/ Box (pcs)	Product category	Catalogue number
CSA - 001	metal cylinder	800	400	2.0mm	5.8mm	10 / 90	B	**46A001**
CSA - 003	cylinder with metal roll	800	400	2.0mm	5.8mm	10 / 90	B	**46A003**
CSA - 012	horizontal lever with metal roll	800	400	2.0mm	5.8mm	10 / 90	B	**46A012**
CSA - 031	adjustable lever with metal roll	400	100	22.5°	95°	10 / 80	B	**46A031**
CSA - 021	lever with metal roll	400	100	22.5°	95°	10 / 80	B	**46A021**
CSA - 081	spring lever	150	50	22.5°	50mm	10 / 80	B	**46A081**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ALL-PURPOSE LIMIT SWITCH – SERIES TZ-6XXX

3+0 standard +extended 3 YEAR TOTAL WARRANTY

The all-purpose limit switches are installed on transport lines, conveyors and other linear progressive motion machines. The miniature limit switch is mounted in an aluminum shell, resistant to vibrations, lubricants and water.

PRODUCT CONFORMITY DOCUMENTATION:

- Standard: EN 60947-1; EN 60947-5-1
- Dielectric strength: 1000V AC
- Rated current: 15A active; 5A inductive
- Insulating resistance: 100mΩ
- Contact resistance: 15mΩ
- Electrical endurance (number of cycles): 500 000 with active load
- Mechanical endurance (number of cycles): 10 000 000
- Gearing speed: 0.1mm/s to 0.5 m/s
- Rated voltage: 230V
- IP code: IP65
- Cable input: cable gland PG11
- Section of power supply conductor: up to 1.5mm^2













Type of contact system



Type	Type of the head	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/ Box (pcs)	Product category	Catalogue number
TZ-6001	metal cylinder	350	115	0.5mm	5.5mm	1 / 50	B	**466001**
TZ -6101	oil-resistant metal cylinder	800	240	2mm	5mm	1 / 50	B	**466101**
TZ -6102	oil-resistant cylinder with metal roll	500	100	1mm	3.5mm	1 / 50	B	**466102**
TZ -6104	oil-resistant horizontal lever with metal roll	640	230	5mm	6mm	1 / 50	B	**466104**
TZ -6143	oil-resistant vertical lever with metal roll	640	230	5mm	6mm	1 / 50	B	**466143**
TZ -6106	spring lever	150	-	20°	-	1 / 50	B	**466106**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

UNIVERSAL LIMIT SWITCH – SERIES CM-1XXX

3+0 standard +extended 3 YEAR TOTAL WARRANTY













Limit switches of the CM series are used mainly as replacement of the limit switches of the TZ series or for setting the movement limits of some types of equipment. The switches are supplied with screw cable terminals. They can work at resistance loads as high as 15A, and are of single circuit type. Limit switches have high accuracy and can operate at wide variety of speeds.

ITEMS ARE COMPLIANT WITH THE FOLLOWING STANDARDS:
EN 60947-1; EN 60947-5-1

- Dielectric Strength: 1000V AC
- Rated current: 15A active; 5A inductive
- Insulation Resistance: 100mΩ min. (at 500VDC)
- Contact Resistance: 5mΩ
- Electrical Life (No. of cycles): 500 000 with non-inductive load
- Mechanical Life (No. of cycles): 5 000 000
- Operating frequency: 20 electrical operations/minute
- Operating speed: 0.1mm/s to 1.0m/s
- Rated voltage: 230V
- IP code: IP40
- Fastening strength of terminals: 6-8kgf/cm

Type of contact system



Type	Type of the head	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/ Box (pcs)	Product category	Catalogue number
CM -1307	Metal cylinder	350	114	0.4mm	5.5mm	1 / 480	B	**468105**
CM -1309	Cylinder and transverse metal roll	350	114	0.4mm	5.5mm	1 / 480	B	**468106**
CM -1308	Cylinder longitudinal metal roll	350	114	0.4mm	5.5mm	1 / 480	B	**468109**
CM -1305	Metal cylinder	350	114	0.4mm	1.6mm	1 / 480	B	**468110**
CM -1703	Extended metal roll	160	22	7.1mm	1.02mm	1 / 480	B	**468113**
CM -1705	Spring lever	10	3	20mm	5.6mm	1 / 480	B	**468117**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.








ALL-PURPOSE LIMIT SWITCH – SERIES TZ-8XXX

3+0 standard +extended 3 YEAR TOTAL WARRANTY

The all-purpose limit switches are devices used for setting gearing limits. They are mounted on transport lines, conveyors and other linear progressive motion machines. They have small dimensions and a vibration-resistant metal shell with plastic lid, resistant to oil and water.

PRODUCT CONFORMITY DOCUMENTATION:

- Standard: EN 60947-1; EN 60947-5-1
- Dielectric strength: 1000V AC
- Rated current: 5A active; 3A inductive
- Insulating resistance: 100MΩ
- Contact Resistance: 25mΩ
- Electrical endurance (number of cycles): 500 000 with active load
- Mechanical endurance (number of cycles): 5 000 000
- Gearing speed: 5mm/s to 0.5 m/s
- Rated voltage: 230V
- IP code: IP65
- Cable input: cable gland PG11
- Section of power supply conductor: up to 2mm
- Fastening strength of terminals: 6-8kgf/cm

Type of contact system










Type	Type of the head	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/Box (pcs)	Product category	Catalogue number
TZ -8104	lever with metal roll	750	100	20°	50°	10 / 100	B	**468104**
TZ -8108	adjustable lever with metal roll	750	100	20°	50°	10 / 100	B	**468108**
TZ -8112	cylinder with metal roll	900	150	1.5mm	4.0mm	10 / 100	B	**468112**
TZ -8111	metal cylinder	900	150	1.5mm	4.0mm	10 / 100	B	**468111**
TZ -8107	metal rod	750	100	20°	50°	10 / 100	B	**468107**
TZ -8167	spring lever	150	-	30mm	-	10 / 100	B	**468167**

ALL-PURPOSE LIMIT SWITCH – SERIES CWL-XXX

3+0 standard +extended 3 YEAR TOTAL WARRANTY

The all-purpose limit switches are devices used for setting gearing limits. They are mounted on transport lines, conveyors and other linear progressive motion machines. They have aluminium shell of high mechanic strength and resistance to oil, water and pressure.

PRODUCT CONFORMITY DOCUMENTATION:

- Standard: EN 60947-1; EN 60947-5-1
- Dielectric strength: 1000V AC
- Rated current: 10A active; 3A inductive
- Insulating resistance: 100mΩ
- Contact resistance: 15mΩ
- Electrical endurance (number of cycles): 500 000 with active load
- Mechanical endurance (number of cycles): 10 000 000
- Gearing speed: 1mm/s to 2 m/s
- Rated voltage: 230V
- IP code: IP66
- Cable input: cable gland
- Metal shell
- Vibration-resistant













Type of contact system















Type	Type of the head	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/ Box (pcs)	Product category	Catalogue number
CWLD	metal cylinder	2720	910	2.0mm	6.4mm	1 / 50	B	**46LD**
CWLD2	cylinder with metal roll	2720	910	2.0mm	5.6mm	1 / 50	B	**46LD2**
CWLCA2-2	lever with metal roll	1360	227	20°	50°	1 / 50	B	**46LCA2-2**
CWLCA12-2-Q	adjustable lever with metal roll	2720	910	20°	50°	1 / 50	B	**46LCA12-2-Q**
CWCA32-41	fork	1200	-	55°	90±10°	1 / 50	B	**46LCA32-41**
CWLNJ	oil-resistant spring lever	150	-	28mm	90±10°	1 / 50	B	**46LNJ**
CWLCL	metal rod	142	28	20°	50°	1 / 50	B	**46LCL**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELMARK®
www.elmarkholding.eu

UNIVERSAL LIMIT SWITCH – SERIES CZ93-XX

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Limit switches of the CZ 93 series are Safety Key Interlock Switches. They are used in object control systems with high safety requirements. The limit switch body is mounted to the fixed system component, while the safety key is mounted to the movable system component. System operation cannot start, unless a full interlocking is achieved. Safety key interlock switches can operate at up to 10A non-inductive resistance load, 3A lamp load and 5A inductive load. They have high operating accuracy at wide variety of speeds. These limit switches are available in two versions depending on the operating contacts number: 2NC and NO+NC

COMPLIANT WITH THE FOLLOWING STANDARDS:
EN 60947-1; EN 60947-5-1

- Dielectric Strength: 2500V AC
- Rated current: 10A active; 3A inductive
- Insulation Resistance: 100mΩ min. (at 500VDC)
- Contact Resistance: 25mΩ
- Electrical Life (No. of cycles): 50 000 with non-inductive load
- Mechanical Life (No. of cycles): 2 000 000
- Operating frequency: 30 electrical operations/minute
- Operating speed: 0.1mm/s to 0.5m/s
- Rated voltage: 230V
- IP code: IP65

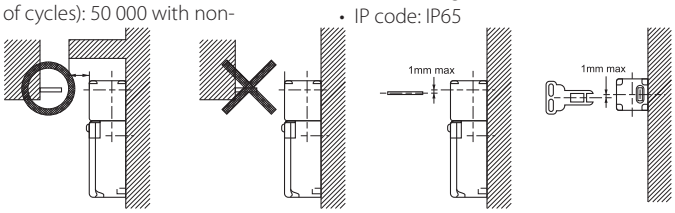



Type of the contact system

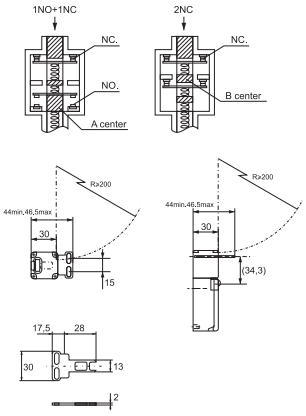

Type	Key type	Power of starting (g)	Power of release (g)	Switching position	General movement	Packing/ Box (pcs)	Product category	Catalogue number
CZ-93BPG01	CZ93-K1	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ08**
CZ-93CPG01	CZ93-K1	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ09**
CZ-93BPG02	CZ93-K2	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ10**
CZ-93CPG02	CZ93-K2	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ11**
CZ-93BPG03	CZ93-K3	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ12**
CZ-93CPG03	CZ93-K3	147N	29.4N	6 mm	28mm	10 / 100	B	**46CZ13**



Type	Key Actuating	Packing / Box (pcs)	Product category	Catalogue number
CZ 93 - K 1	Horizontal	1 / 100	B	**46CZ931**
CZ 93 - K 2	Vertical	1 / 100	B	**46CZ932**
CZ 93 - K 3	Adjustable	1 / 100	B	**46CZ933**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ALL-PURPOSE PROXIMITY SWITCH – SERIES LM XX

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Proximity induction sensors are all-purpose switches used in machine systems and equipment for no contact surveillance of metal elements motion. They can also be used in other machine systems applications as no contact control sensors for level of liquids, control sensors for the speed and position of rotating chains, etc. They are developed on the base of PNP and NPN transition. They have small dimensions and feature a metal cylindrical shell resistant to vibrations and a plastic lid which is oil and water resistant.

- Insulating resistance: ≥ 50 M Ω
- Gearing distance: from 2 mm to 7 mm
- Precision of repetition: 0.01
- Ambient temperature: -25˚C to +65˚C
- Gearing speed: 5mm/s
- Rated voltage: 6~36VDC; 90~230VAC
- IP code: IP 67

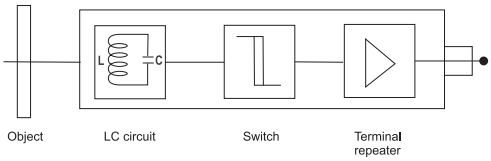


EL-LM8


EL-LM12


EL-LM18


EL-LM22

	Type	Start distance (mm)	Power supply voltage	Type of transition	Type of contact	Output load	Packing / Box (pcs)	Product category	Catalogue number
	EL-LM8-3002NA	2	15~30 VDC	NPN	NO	130 mA	2 / 200	B	**46LM 8-32NA**
	EL-LM8-3002NB	2	15~30 VDC	NPN	NC	130 mA	2 / 200	B	**46LM 8-32NB**
	EL-LM8-3002PA	2	15~30 VDC	PNP	NO	130 mA	2 / 200	B	**46LM 8-32PA**
	EL-LM8-3002PB	2	15~30 VDC	PNP	NC	130 mA	2 / 200	B	**46LM 8-32PB**
	EL-LM8-2002A	2	90~230VAC	SCR	NO	150 mA	2 / 200	B	**46LM 8-22A**
	EL-LM12-3004NA	4	15~30 VDC	NPN	NO	200 mA	2 / 200	B	**46LM 12-34NA**
	EL-LM12-3004NB	4	15~30 VDC	NPN	NC	200 mA	2 / 200	B	**46LM 12-34NB**
	EL-LM12-3004PA	4	15~30 VDC	PNP	NO	200 mA	2 / 200	B	**46LM 12-34PA**
	EL-LM12-3004PB	4	15~30 VDC	PNP	NC	200 mA	2 / 200	B	**46LM 12-34PB**
	EL-LM12-2004A	4	90~230VAC	SCR	NO	300 mA	2 / 200	B	**46LM 12-24A**
	EL-LM18-3008NA	8	15~30 VDC	NPN	NO	200 mA	1 / 100	B	**46LM 18-38NA**
	EL-LM18-3008NB	8	15~30 VDC	NPN	NC	200 mA	1 / 100	B	**46LM 18-38NB**
	EL-LM18-3008PA	8	15~30 VDC	PNP	NO	200 mA	1 / 100	B	**46LM 18-38PA**
	EL-LM18-3008PB	8	15~30 VDC	PNP	NC	200 mA	1 / 100	B	**46LM 18-38PB**
	EL-LM18-2008A	8	90~230VAC	SCR	NO	300 mA	1 / 100	B	**46LM 18-28A**
	EL-LM22-3010NA	10	15~30 VDC	NPN	NO	200 mA	1 / 100	B	**46LM 22-30NA**
	EL-LM22-3010NB	10	15~30 VDC	NPN	NC	200 mA	1 / 100	B	**46LM 22-30NB**
	EL-LM22-3010PA	10	15~30 VDC	PNP	NO	200 mA	1 / 100	B	**46LM 22-30PA**
	EL-LM22-3010PB	10	15~30 VDC	PNP	NC	200 mA	1 / 100	B	**46LM 22-30PB**
	EL-LM22-2010A	10	90~230VAC	SCR	NO	300 mA	1 / 100	B	**46LM 22-20A**
	EL-LM12-4002A	2	230VAC	inductive	NO	100 mA	2 / 200	B	**46LM 12-44A**
	EL-LM12-4004A	4	230VAC	inductive	NO	300 mA	2 / 200	B	**46LM 12-46A**
									
	EL-LM18-4006A	5	230VAC	inductive	NO	100 mA	1 / 100	B	**46LM 18-44A**
	EL-LM18-4008A	8	230VAC	inductive	NO	300 mA	1 / 100	B	**46LM 18-48A**
									

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

CAPACITIVE SENSORS – SERIES CM XX

3+0 standard +extended 3 YEAR TOTAL WARRANTY



EL-CM12

Capacitive sensors are used in machine systems and equipment for no-contact motion surveillance. They consist of two coaxial electrodes, a condenser and RC generator. This type of sensors reacts to both metal and non-metal objects, as the gearing distance for non-metal objects depends on their dielectric constants. They allow gearing distance adjustment for non-magnetic conductive materials. They are developed on the base of PNP and NPN transition. They have small dimensions and feature a metal cylindrical shell resistant to vibrations and a plastic lid which is oil and water resistant.

- Insulating resistance: ≥ 50 M Ω
- Gearing distance: from 2 mm to 15 mm
- Precision of repetition: 0.01
- Ambient temperature: -25˚C to +65˚C
- Gearing speed: 5mm/s
- Rated voltage: 6~36VDC; 90~230VAC
- IP code: IP 54

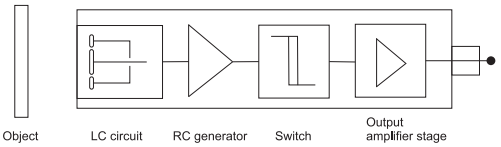



EL-CM18



EL-CM24



EL-SM12



EL-XM24

	Type	Start distance (mm)	Power supply voltage	Type of transition	Type of contact	Output load	Packing / Box (pcs)	Product category	Catalogue number
	EL-CM12-3004NA	0~4	15~30 VDC	NPN	NO	200 mA	1/100	B	**46CM 12-32NA**
	EL-CM12-3004NB	0~4	15~30 VDC	NPN	NC	200 mA	1/100	B	**46CM 12-32NB**
	EL-CM12-3004PA	0~4	15~30 VDC	PNP	NO	200 mA	1/100	B	**46CM 12-32PA**
	EL-CM12-3004PB	0~4	15~30 VDC	PNP	NC	200 mA	1/100	B	**46CM 12-32PB**
	EL-CM18-3008NA	0~8	15~30 VDC	NPN	NO	200 mA	1/100	B	**46CM 18-38NA**
	EL-CM18-3008NB	0~8	15~30 VDC	NPN	NC	200 mA	1/100	B	**46CM 18-38NB**
	EL-CM18-3008PA	0~8	15~30 VDC	PNP	NO	200 mA	1/100	B	**46CM 18-38PA**
	EL-CM18-3008PB	0~8	15~30 VDC	PNP	NC	200 mA	1/100	B	**46CM 18-38PB**
	EL-CM18-2008A	0~8	90~230VAC	SCR	NO	300 mA	1/100	B	**46CM 18-28A**
	EL-CM24-3012NA	8	15~30 VDC	NPN	NO	200 mA	1/100	B	**46CM 24-12NA**
	EL-CM24-3012NB	8	15~30 VDC	NPN	NC	200 mA	1/100	B	**46CM 24-12NB**
	EL-CM24-3012PA	8	15~30 VDC	PNP	NO	200 mA	1/100	B	**46CM 24-12PA**
	EL-CM24-3012PB	8	15~30 VDC	PNP	NC	200 mA	1/100	B	**46CM 24-12PB**
	EL-CM24-2012A	8	90~230VAC	SCR	NO	300 mA	1/100	B	**46CM 24-12A**
	EL-SM12-3110NA	10	15~30 VDC	NPN	NO	200 mA	2/200	B	**46SM 12-31NA**
	EL-SM12-3110NB	10	15~30 VDC	NPN	NC	200 mA	2/200	B	**46SM 12-31NB**
	EL-SM18-3110PA	10	15~30 VDC	PNP	NO	200 mA	1/100	B	**46SM 18-31PA**
	EL-SM18-3110PB	10	15~30 VDC	PNP	NC	200 mA	1/100	B	**46SM 18-31PB**
	EL-XM18-305PMI	5	15~30 VDC	inductive	NO	100 mA	1/100	B	**46XM 18-35A**
	EL-XM18-305PMU	5	15~30 VDC	inductive	NC	100 mA	1/100	B	**46XM 18-35B**
	Note: Sensor of Hall								
	EL-XM24-308PMI	8	15~30 VDC	inductive	NO	300 mA	1/100	B	**46XM 24-38A**
	EL-XM24-308PMU	8	15~30 VDC	inductive	NC	300 mA	1/100	B	**46XM 24-38B**

Note: MI - current type; MU - voltage type

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

PHOTOELECTRICAL SENSOR

3+0 standard +extended 3 YEAR TOTAL WARRANTY


EL-G12

Photoelectrical sensors of the Gxx series are all-purpose switches used in machine systems and equipment for no contact surveillance of motion of elements. They are based on the photoelectric principle of operation – inside the sensor there is a photo signal emitter and receiver of the returned signal. There are three types of sensors: diffuse sensors, reflector sensors and emitter-receiver sensors. These types of sensors differ in the way of returning the signal. They allow for gearing distance adjustment. They are developed on the base of PNP and NPN transition. They have small dimensions and feature a metal cylindrical shell resistant to vibrations and a plastic lid which is oil and water resistant.

TECHNICAL FEATURES:

- Power supply voltage: 15~30 VDC
- Insulating resistance: ≥ 50 M Ω
- Gearing distance: from 2 mm to 7 mm
- Precision of repetition: 0.01
- Ambient temperature: -25˚C to +65˚C
- Gearing speed: 5mm/s
- Rated voltage: 6~36VDC; 90~230VAC
- IP code: IP 67

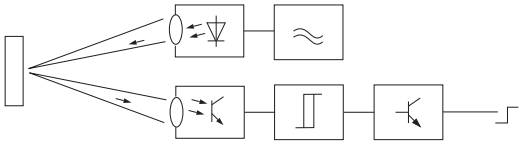


EL-G18




EL-G30




EL-G35




EL-G50




EL-BZJ

Type	Start distance	Type of transition	Type of contact	Type of sensor	Packing / Box (pcs)	Product category	Catalogue number
EL-G12-3A07NA	70 mm	NPN	Ø12; l=50	Diffuse	1 / 100	B	**46G12A071**
EL-G12-3A07PA	70 mm	PNP	Ø12; l=50	Diffuse	1 / 100	B	**46G12A072**
EL-G12-3C3NA	3 m	NPN	Ø12; l=50	Truth beam	1 / 100	B	**46G123C11**
EL-G12-3C3PA	3 m	PNP	Ø12; l=50	Truth beam	1 / 100	B	**46G123C12**
EL-G18-3A10NA	100 mm	NPN	Ø18; l=70	Diffuse	1 / 100	B	**46G18A101**
EL-G18-3A10PA	100 mm	PNP	Ø18; l=70	Diffuse	1 / 100	B	**46G18A102**
EL-G18-3B2NA	2 m	NPN	Ø18; l=70	Reflector	1 / 100	B	**46G183B11**
EL-G18-3B2PA	2 m	PNP	Ø18; l=70	Reflector	1 / 100	B	**46G183B12**
EL-G18-3C5NA	5 m	NPN	Ø18; l=70	Truth beam	1 / 100	B	**46G185C11**
EL-G18-3C5PA	5 m	PNP	Ø18; l=70	Truth beam	1 / 100	B	**46G185C12**
EL-G30-3A70NA	500 mm	NPN	Ø22; l=70	Diffuse	1 / 100	B	**46G30A101**
EL-G30-3A70PA	500 mm	PNP	Ø22; l=70	Diffuse	1 / 100	B	**46G30A102**
EL-G30-3B3NA	3 m	NPN	Ø22; l=70	Reflector	1 / 100	B	**46G303B11**
EL-G30-3B3PA	3 m	PNP	Ø22; l=70	Reflector	1 / 100	B	**46G303B12**
EL-G30-3C101NA	10 m	NPN	Ø22; l=70	Truth beam	1 / 52	B	**46G305C11**
EL-G30-3C101PA	10 m	PNP	Ø22; l=70	Truth beam	1 / 52	B	**46G305C12**
EL-G35-3A50NA	500 mm	NPN	NO	Diffuse	1 / 100	B	**46G35A101**
EL-G35-3A50PA	500 mm	PNP	NO	Diffuse	1 / 100	B	**46G35A102**
EL-G35-3B3NA	3 m	NPN	NO	Reflector	1 / 100	B	**46G353B11**
EL-G35-3B3PA	3 m	PNP	NO	Reflector	1 / 100	B	**46G353B12**
EL-G35-3C5NA	5 m	NPN	NO	Truth beam	1 / 50	B	**46G355C11**
EL-G35-3C5PA	5 m	PNP	NO	Truth beam	1 / 50	B	**46G355C12**
EL-G50-3A30NA	500 mm	NPN	NO	Diffuse	1 / 100	B	**46G50A101**
EL-G50-3A30PA	500 mm	PNP	NO	Diffuse	1 / 100	B	**46G50A102**
EL-G50-3B4NA	4 m	NPN	NO	Reflector	1 / 100	B	**46G503B11**
EL-G50-3B4PA	4 m	PNP	NO	Reflector	1 / 100	B	**46G503B12**
EL-G50-3C5NA	5 m	NPN	NO	Truth beam	1 / 50	B	**46G505C11**
EL-G50-3C5PA	5 m	PNP	NO	Truth beam	1 / 50	B	**46G505C12**
EL-BZJ-211	10 mm	Reflector	NO	Colour detector	1 / 50	B	**46BZJ211**
EL-BZJ-311	9mm	Reflector	NO	Colour detector	1 / 50	B	**46BZJ311**
EL-BZJ-411	9mm	Reflector	NO	Colour detector	1 / 50	B	**46BZJ411**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

POWER SUPPLIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The DRP-xx-xx series of power supplies are voltage reduction and rectification units ideally suited to provide stable power supply of systems and equipment for contact-free movement monitoring elements (such as inductive, capacity and photo sensors, logic elements and systems, etc.). They have small overall dimensions and can be installed on a DIN rail. The power units have metal or plastic cases resistant to vibrations and plastic oil- and waterproof covers. They are able to provide stable output voltage at comparatively fluctuating input voltage. Devices have built-in overload and short circuit protection, allowing short time overload of up to 130%. Power supplies are available with various output voltages (5, 12, 15 and 24 V DC) and different output power rates.

TECHNICAL SPECIFICATIONS:

- Input voltage: 80 ~ 230V AC
- Over-voltage: 115 ~ 135% of the rated output voltage
- Overload: 120 ~ 120% of the rated output power
- Terminals: Input – 2 screw terminals; Output: 4 screw terminals;
- IP code: IP44
- Power indicator
- Installation: DIN rail
- Cooling: Free air cooling convection



Type	Output Voltage (V)	Output (A)	Load Tolerance	Power (W)	Dimensions W/H/L (mm)	Packing / Box (pcs)	Product category	Catalogue number
DR - 45 -5	5	5	±2%	25	78 / 93 / 56	1 / 50	C	**46DR455**
DR - 45 - 12	12	3.5	±1%	42	78 / 93 / 56	1 / 50	C	**46DR4512**
DR - 45 - 15	15	2.8	±1%	42	78 / 93 / 56	1 / 45	C	**46DR4515**
DR - 45 - 24	24	2	±1%	48	78 / 93 / 56	1 / 16	C	**46DR4524**

Type	Output Voltage (V)	Output (A)	Load Tolerance	Power (W)	Dimensions W/H/L (mm)	Packing / Box (pcs)	Packing / Box (pcs)	Catalogue number
DR - 75 -12	12	6.3	±2%	75	55.5 / 125.3 / 100	1 / 18	C	**46DR7512**
DR - 75 - 24	24	3.2	±1%	75	55.5 / 125.3 / 100	1 / 18	C	**46DR7524**
DRP - 240 - 24	24	10	±1%	240	125.5 / 125.3 / 100	1 / 12	C	**46DR2424**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

FLOAT SWITCHES

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Float switches of the type QW-xx-xx are sealed units for direct pump control. They are intended for continuous liquid level maintenance in pools, tanks or ponds exercised through direct control of the pumping in or out process in the respective reservoir. They are pre-wired and depending on the chosen configuration can control either the pumping in, or pumping out of the reservoir. They allow direct control of single phase pumps with mounted power of 1 kW. Float switches are waterproof.

The automatic level control units of the DHC1Y-xx series are intended for mounting on pumping control panels. They do not use any additional sensors, but conductive probes to contact the liquid. The unit sends low (harmless) voltage signals to the probes and once a contact between a probe and liquid is established, the unit changes its contactors' state. Units are available in three variants with different number of control contacts suitable for different applications. Each contact can transfer current of up to 5A, which is enough to ensure control over the powerful pumps' contactors or to directly control pumps with mounted power of 1 kW. The automatic level control units can be installed on a DIN rail.

Type	Number of probes (No. of levels)	Output Load (A)	Accuracy	Operating Voltage (V)	Note	Packing / Box (pcs)	Product category	Catalogue number
DHC1Y - S	1	5	±1%	230	-	100	B	**46DW001**
DHC1Y - SD	3	5	±1%	230	-	100	B	**46DW002**
DHC1Y - T	1	5	±1%	230	2 pumps control	100	B	**46DW003**



QW - 70AB



QW - M 15 - 3

Type	Number of probes (No. of levels)	Output Load (A)	Accuracy	Operating Voltage (V)	Note	Packing / Box (pcs)	Product category	Catalogue number
QW - M 15 - 3	2	6	±1%	230	-	1 / 30	B	**46DW004**
QW - 70AB	2	4	±1%	230	-	1 / 20	B	**46DW005**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product: Standard: EN 60947-1; EN 60947-3-1



ROTARY SWITCHES LW26 SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The rotary switches LW26 series are produced for switching on/off electrical circuits with commutated current from 20 to 160A. They are designed on the bases of the rotor-eccentric switching on which is realized through turning of the handle to 60 or 90 degrees. The normal operation is used for commutation of two, three or four conductor systems. There are special rotary switches that switch on under given connection schemes and are used to control motors, electric welding machines and other consumers.

TECHNICAL DATA:
- Power supply voltage: 230/400V; 50Hz
- Insulation voltage: 690V
- Impulse voltage wear resistance: 6000V
- Mechanical wear resistance: 3x105 commutation cycles
- Operating temperature: -10 ÷ +65°C
- Humidity: 35 – 85% RH
- Commuting capacity: up to 160A according to the tables
- Plastic: UV rays wear resistance
- IP code:
  - IP42 for the ordinary breakers mounted in a panel
  - IP65 for the breakers offered in a box
- Cable connection: screw joining
- Tightening moment of the bolt: 1.33N
- Maximum section of the power supply conductors: according to the dimensions table
- Weight: according to the number of the contacts

MOUNTING:
- directly to the control panel
- thickness of the surface to which it is mounted: max 5mm

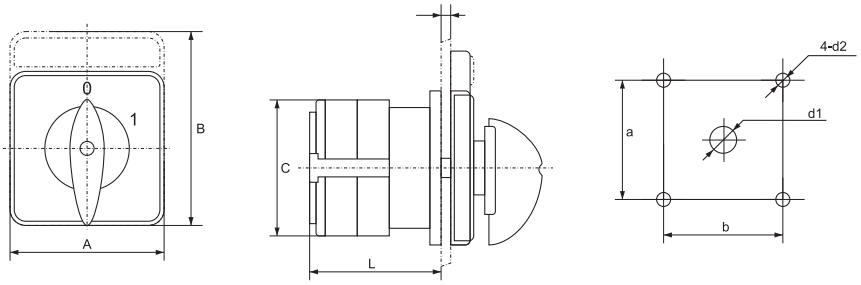

Type	Front panel	Joining conductor (mm^2)	Overall dimensions (mm)				Mounting dimensions (mm)			
			A	B	C	L	a	b	d1	d2
LW26-20	M1 panel	1x2.5	48	48	43	22 + 9.6n	36	36	Ø8.5	Ø4.5
	M1 panel with inscription field		48	60	43	22 + 9.6n	36	36	Ø8.5	Ø4.5
LW26-25	M1 panel	1x4.0	48	48	45.2	23+12.8n	36	36	Ø8.5	Ø4.5
LW26-32	M2 panel	1x6.0	64	64	58	29.2 + 12.8n	48	48	Ø10	Ø4.5
LW26-63	M2 panel	1x16	64	64	66	29.2 + 21.5n	48	48	Ø10	Ø4.5
LW26-125	M3 panel	1x35	88	88	84	35 + 26.5n	68	68	Ø13	Ø6
LW26-160	M3 panel	1x50	88	88	88	35 + 32.5n	68	68	Ø13	Ø6

*** n** - number of modules



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 10Q	Q10 three-poles switching on; motor starting and stopping; voltage turning on/off to the consumers	10	2	1 / 100	B	**492101**
LW26 - 16Q		16	2	1 / 100	B	**492161**
LW26 - 20Q		20	2	1 / 100	B	**492201**
LW26 - 25Q		25	2	1 / 100	B	**492251**
LW26 - 32Q		32	2	1 / 72	B	**492321**
LW26 - 63Q		63	2	1 / 30	B	**492631**
LW26 - 125Q		125	2	1 / 24	B	**492951**
LW26 - 160Q		160	2	1 / 27	B	**492961**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26GS - 20/04	Q11 three-poles switching over; motor starting and stopping; voltage turning on/off to the consumers; possibility for access control	20	2	1 / 100	B	**492207**
LW26GS - 25/04		25	2	1 / 100	B	**492257**
LW26GS - 32/04		32	2	1 / 72	B	**492327**
LW26GS - 63/04		63	2	1 / 30	B	**492637**





Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 20N	N11 3-position – 2 start positions and 1 stop;for motor reversing	20	3	1 / 100	B	**492202**
LW26 - 25N		25	3	1 / 100	B	**492252**
LW26 - 32N		32	3	1 / 64	B	**492322**
LW26 - 63N		63	3	1 / 48	B	**492632**
LW26 - 125N		125	3	1 / 24	B	**492952**
LW26 - 160N		160	3	1 / 18	B	**492962**





Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 25S	S19 3-position – 2 start positions and 1 stop; for two speed motor control; switching over between charging*	25	4	1 / 100	B	**492253**
LW26 - 63S		63	4	1 / 30	B	**492633**
LW26 - 125S		125	4	1 / 24	B	**492953**
LW26 - 160S		160	4	1 / 18	B	**492963**



Note: It is necessary that additional bridges be placed at switching over between charging



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 25 SD	S21 3-position switching on star/delta	25	4	1 / 100	B	**492025**
LW26 - 63 SD		63	4	1 / 30	B	**492063**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 32H 5881/3	H5881/3 – 85 for welding transformer windings switching over	32	3	1 / 64	B	**492324**
LW26 - 63H 5881/3		63	3	1 / 48	B	**492634**



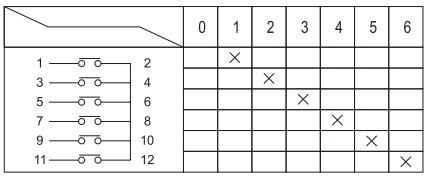



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 20 YH5/3	YH5/3 - 66 for voltage switching over	20	3	1 / 72	B	**492205**

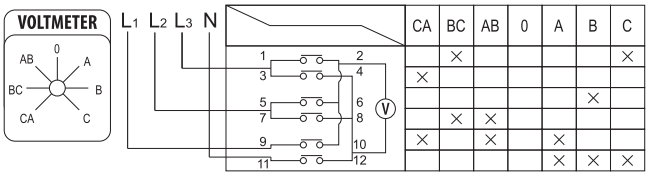



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 20 LH3/3	LH3/3 - 58 for amperemeter switching on to current transformers	20	3	1 / 100	B	**492206**



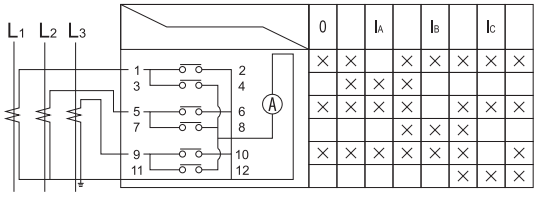



Type	Scheme	IP code:	Packing / Box (pcs)	Product category	Catalogue number
LW26 - 20-25-Q	Box for LW26-20/25	IP 42	1 / 68	B	**492037**
LW26 - 32-Q	Box for LW26-32	IP 42	1 / 30	B	**492038**
LW26 - 20-25-DIN	Adaptor for DIN-rail for LW26-20/25		15 / 1500	B	**492039**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 4.I7168/7	4.I7168/7	20	7	1 / 100	B	**492028**



4.I7168/7





Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW26 4.H6518/5	4.H6518/5	25	5	1 / 100	B	**492029**



4.H6518/5





Type	Scheme	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW30-20	LW30-20	20	3	1 / 32	B	**492030**
LW30-32	LW30-32	32	3	1 / 32	B	**492031**
LW30-40	LW30-40	40	3	1 / 32	B	**492033**
LW30-63	LW30-63	63	3	1 / 32	B	**492034**

* Possibility for access control

LW30-20-100A
ON/OFF switch 3 poles





Type	Scheme	IP code:	In (A)	Levels	Packing / Box (pcs)	Product category	Catalogue number
LW30-32	LW30-32	IP54	32	3	1 / 30	B	**492032**

* Possibility for access control

LW30-20-100A
ON/OFF switch 3 poles



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product: Standard: EN 60947-1; EN 60947-5-1

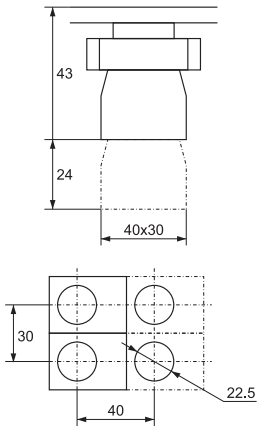

Overall dimensions
Diagram for drill the openings

BUTTONS AND LED INDICATORS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

These are devices used in control and indication systems, command boards and panels in industrial automation systems. They are manufactured to commutate controlling circuits and to control the switching on or off executive mechanisms such as relays, contactors, etc. The signal lamps and indicators find broad application in all industrial fields. The devices endure short time current overload up to 10A, and normally they can commutate thermal current up to 6A in their contact system. The connection to the contact terminals is through screw terminals to which operational conductors with section up to 2.5mm^2 can be joined.

DOCUMENTATION CORRESPONDING TO THE PRODUCT:
- Standard: EN 60947-1; EN 60947-5-1

TECHNICAL DATA:
- Insulation voltage: 660V; 50/60Hz
- Impulse voltage wear resistance: 6000V;
- Rated current: 6A (230V AC); 0.3A (230V DC)
- Short circuit protection: safety device 10A gG outside in the circuit
- Mechanical wear resistance: 1x106 commutation cycles
- Power of mechanical compression:
  - at closing: 20N
  - at opening: 8N
- Operating temperature: -20 - +65°C
- Humidity: 35 – 85%RH
- Tightening moment of the joining conductors: 0.15Nm
- Section of the conductor: 1x0.5; 1x0.75; 1x1; 1x1.5; 1x2.5mm^2

MOUNTING:
- to a flat metal or plastic surface with thickness: max 4mm
- opening with size: Ø 22.5mm



Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL-EA25	Button round with spring reverse	NO+NC	6	black	10/500	B	**401025**
EL-EA31		NO	6	green	10/500	B	**401030**
EL-EA42		NC	6	red	10/500	B	**401040**

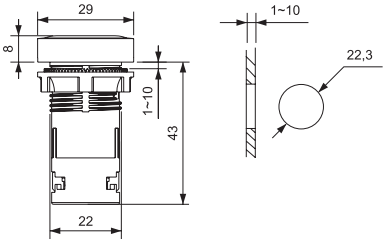



Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL-EA25	Button round with spring reverse and silicon lid- IP44	NO+NC	6	black	10/500	B	**401026**
EL-EA31		NO	6	green	10/500	B	**401033**
EL-EA42		NC	6	red	10/500	B	**401041**



Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL-ED25	Switch with arrest	NO+NC	6	black	10/500	B	**401425**

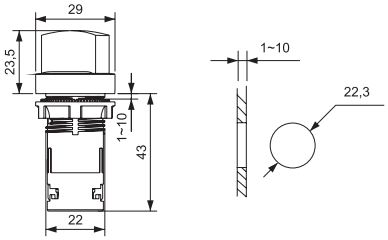

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Type of contacts	Rated current (A) at 230V	Colour	Diameter (mm)	Note	Packing / Box (pcs)	Product category	Catalogue number
EL-2211T	Button with head "mushroom" type	1NO+1NC	5	red	22	release with spinning	20/800	B	**401546**

Material: Stainless steel | Chromium plated brass| IP65





Type	Description	Type of contacts	Rated current (A) at 230V	Colour	Diameter (mm)	Packing / Box (pcs)	Product category	Catalogue number
EL-2211DZR	Button round with LED indicator-latching	1NO+1NC	5	red	22	20/800	B	**401547**
EL-2211DZG		1NO+1NC	5	green	22	20/800	B	**401548**

Material: Stainless steel | Chromium plated brass| IP65





Type	Description	Type of contacts	Rated current (A) at 230V	Diameter (mm)	Packing / Box (pcs)	Product category	Catalogue number
EL-2211F	Button round momentary	1NO+1NC	5	22	20/800	B	**401549**

Material: Stainless steel | Chromium plated brass| IP65



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Type of contacts	Rated current (A) at 230V	Colour	Diameter (mm)	Note	Packing / Box (pcs)	Product category	Catalogue number
EL-22X2	Two position Switch with arrest	1NO+1NC	5	red	22	release with spinning	20/800	B	**401550**

Material: Stainless steel | Chromium plated brass| IP65





Type	Description	Type of contacts	Rated current (A) at 230V	Colour	Diameter (mm)	Packing / Box (pcs)	Product category	Catalogue number
EL-22Y2	Two position Key Switch with arrest	1NO+1NC	5	red	22	20/800	B	**401551**
EL-22Y3	Three position Key Switch with arrest	2NO+2NC	5	green	22	20/800	B	**401552**

Material: Stainless steel | Chromium plated brass| IP65







Type	Description	Voltage (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
AD56-22-W-230		230V AC	white	10 / 500	B	**401123**
AD56-22-W-110		110V AC	white	10 / 500	B	**401111**
AD56-22-W-24		24V AC/DC	white	10 / 500	B	**401124**
AD56-22-A-110		110V AC	amber	10 / 500	B	**401211**
AD56-22-A-24		24V AC/DC	amber	10 / 500	B	**401224**
AD56-22-A-230		230V AC	amber	10 / 500	B	**401223**
AD56-22-PG-230		230V AC	green	10 / 500	B	**401323**
AD56-22-PG-110		110V AC	green	10 / 500	B	**401311**
AD56-22-PG-24	LED	24V AC/DC	green	10 / 500	B	**401324**
AD56-22-B-230	indicators	230V AC	blue	10 / 500	B	**401523**
AD56-22-B-110		110V AC	blue	10 / 500	B	**401511**
AD56-22-B-24		24V AC/DC	blue	10 / 500	B	**401524**
AD56-22-Y-230		230V AC	yellow	10 / 500	B	**401723**
AD56-22-Y-110		110V AC	yellow	10 / 500	B	**401711**
AD56-22-Y-24		24V AC/DC	yellow	10 / 500	B	**401724**
AD56-22-R-230		230V AC	red	10 / 500	B	**401423**
AD56-22-R-110		110V AC	red	10 / 500	B	**401411**
AD56-22-R-24		24V AC/DC	red	10 / 500	B	**401424**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BA 21	Button round with spring reverse	NO	6	black	20 / 300	B	**401021**
EL 2- BA 31		NO	6	green	20 / 300	B	**401031**
EL 2- BA 51		NO	6	yellow	20 / 300	B	**401051**
EL 2- BA 61		NO	6	blue	20 / 300	B	**401061**
EL 2- BA 42		NC	6	red	20 / 300	B	**401042**





Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BP 31	Button round with spring reverse	NO	6	green	IP=65 Provided from silicon lid	20 / 300	B	**401032**
EL 2- BP 42		NC	6	red	IP=65 Provided from silicon lid	20 / 300	B	**401043**



Type	Description	Voltage (V)	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BW3471	Button round with spring reverse and LED indicator	24V	6	red	20 / 200	B	**401474**
EL 2- BW3371		24V	6	green	20 / 200	B	**401374**
EL 2- BW3571		24V	6	yellow	20 / 200	B	**401574**
EL 2- BW3671		24V	6	blue	20 / 200	B	**401674**
EL 2- BW3471		110V	6	red	20 / 200	B	**401473**
EL 2- BW3371		110V	6	green	20 / 200	B	**401373**
EL 2- BW3571		110V	6	yellow	20 / 200	B	**401573**
EL 2- BW3671		110V	6	blue	20 / 200	B	**401673**
EL 2- BW3471		230V	6	red	20 / 200	B	**401471**
EL 2- BW3371		230V	6	green	20 / 200	B	**401371**
EL 2- BW3571		230V	6	yellow	20 / 200	B	**401571**
EL 2- BW3671		230V	6	blue	20 / 200	B	**401671**

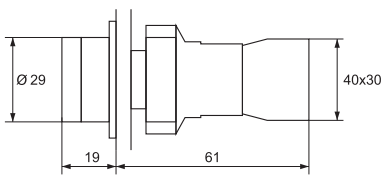

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BD 21	Switch with arrest	1NO	6	black	two-position	20 / 200	B	**401421**
EL 2- BD 33		2NO	6	black	three-position	20 / 200	B	**401433**





Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Note	Packing / Box (pcs)	Product category	Catalogue number
EL2-BS 142	Button with head "mushroom" type and with key	NC	6	red	release with spinning	15/150	B	**401142**





Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BC 42	Button with head "mushroom" type	1NC	6	red	spring reverse	15 / 150	B	**401642**





Type	Description	Type of contacts	Rated current (A) at 400V	Colour	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BS 545	Button with head "mushroom" type	1NC + 1NO	6	red	release with spinning	15 / 150	B	**401545**



Type	Description	Type of contacts	Rated current (A) at 400V	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BG 21	Change-over switch with switch	1NO	6	two-position with switch	20 / 200	B	**401121**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Type of contacts	Rated current (A) at 400V	Voltage (V)	Note	Packing / Box (pcs)	Product category	Catalogue number
EL 2- BW8475	Button double	1NO+1NC	6	24 AC	Green and red button + LED indicator	20 / 200	B	**401844**
EL 2-BW8475	Button double	1NO+1NC	6	230 AC	Green and red button+LED indicator	20/200	B	**401845**

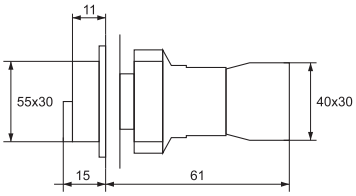



Type	Description	Type of contacts	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL02 - BE101	1	1 NO	green	100 / 1000	B	**401001**
EL02 - BE102	2	1 NC	red	100 / 1000	B	**401002**



UNTIL SUPPLY **LAST**

Type	Description	Voltage (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
XB2-BV75	Signal lamp	230V AC	yellow	20 / 200	F	**401975**
XB2-BV76	Signal lamp	230V AC	blue	20 / 200	F	**401976**
XB2-BV77	Signal lamp	230V AC	colourless	20 / 200	F	**401977**



UNTIL SUPPLY **LAST**

Type	Description	Voltage (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
XB7-EV45	Button	230V AC	yellow	20 / 200	F	**401004**



UNTIL SUPPLY **LAST**

Type	Description	Voltage (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
XB - BW - 3561	Button + LED indicator	230V AC	yellow	20 / 200	F	**401561**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Voltage (V)	Packing / Box (pcs)	Product category	Catalogue number
EL-1035	Glim indicator lamp	220 VAC	1	C	**M030015**

Shape and color of the indicator - oval, red | Dimensions - 10 mm x 30 mm | Base diameter: 10mm | Case colour: red | Conductor length: 20mm



BUTTONS

2+0 standard +extended | 2 YEAR TOTAL WARRANTY

Type	Description	Voltage (V)	Rated current (A)	LED colour	Packing / Box (pcs)	Product category	Catalogue number
ASW-13	Toggle Switch ON-OFF SPST	12 VDC	20	red	1	C	**M519114**

Function: ON/OF | Leads: 3 | Body dimensions: 30.5 x 13.5 x 22mm | Mounting hole diameter - 12 mm| Toggle height - 27 mm | Operating temperature -from - 25 ºC to + 85 ºC



Type	Description	Voltage (V)	Rated current (A)	Colour	Packing / Box (pcs)	Product category	Catalogue number
V 144/B	Switch ON-OFF	250 VAC	5	white	1	C	**M300001**

Function: ON/OF | Leads: 3 | Body dimensions: 26.2 x 12 x 14.5 mm | Mounting hole - 29 x 11 mm | Operating temperature - up to 105°C

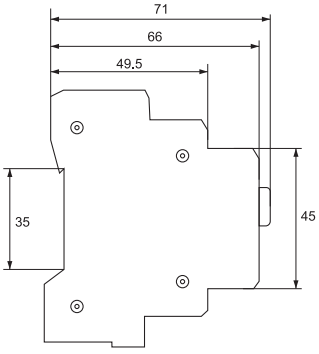

Documents corresponding to the product: Standard EN 60947-1
EN 60 947-5-1 t

DIN-RAIL BUTTONS AND LED INDICATORS

3+2 standard +extended | 5 YEAR TOTAL WARRANTY

These are devices used in control and indication systems adjusted for mounting in command boards and panels directly on DIN-rail. They are manufactured to commutate controlling circuits and to control the switching on or off executive mechanisms such as relays, contactors, etc. The signal lamps and indicators find broad application in all industrial fields. The devices endure short time current overload up to 20A, and normally they can commutate current up to 10A with their contact system. The connection to the contact terminals is through screw terminals to which operational conductors with section up to 2.5mm^2 can be joined. There are also designed buttons combined with lamps.

TECHNICAL DATA:
- Insulation voltage: 660V; 50/60Hz
- Impulse voltage wear resistance: 6000V;
- Rated current: up to 10A (230V AC)
- Short circuit protection: safety device 10A gG outside in the circuit
- Rated consumed current (for indicators and buttons combined with indicators): <20mA
- wear resistance (indicators): >2000h
- Mechanical wear resistance (buttons): 1x106 commutation cycles
- Power of mechanical compression:
  - at closing: 20N
  - at opening: 8N
- Operating temperature: -20 - +65°C
- Humidity: 35 – 85%RH
- Tightening moment of the joining conductors: 0.15Nm
- Section of the conductor: 1x0.5; 1x0.75; 1x1; 1x1.5; 1x2.5mm^2
- Plastic: UV rays wear resistance

MOUNTING:
- to a DIN-rail
- Altitude: up to 2000m



Type	Description	Voltage (V)	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
ELD-RG-DIN	lamp	230V	<20	red/green	12 / 240	B	**401559**



Type	Description	Voltage (V)	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
ELD-RGB-DIN	lamp	230V	<20	red/green/ blue	12 / 240	B	**401560**



Type	Description	Voltage (V)	Rated current (A) at 400V	Colour	Packing / Box (pcs)	Product category	Catalogue number
ELD - G - DIN	lamp	230V	<20	green	12 / 240	B	**401500**
ELD - R - DIN	lamp	230V	<20	red	12 / 240	B	**401501**
ELD - Y - DIN	lamp	230V	<20	yellow	12 / 240	B	**401502**
ELD - B - DIN	lamp	230V	<20	blue	12 / 240	B	**401503**
ELD -W - DIN	lamp	230V	<20	white	12 / 240	B	**401504**



UNTIL SUPPLY **LAST**

Type	Description	Rated current (A) at 400V	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
ELB - BL - DIN	button	<10	1NO+ 2 NC	black	12 / 240	F	**401506**
ELB - G -DIN	button	<10	1NO+ 2 NC	green	12 / 240	F	**401508**
ELB - Y - DIN	button	<10	2NO+ 1 NC	yellow	12 / 240	F	**401509**
ELB - Y - DIN	button	<10	1NO+ 2 NC	yellow	12 / 240	F	**401510**



UNTIL SUPPLY **LAST**

Type	Description	Voltage (V)	Rated current (A) at 400V	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
ELBD -G - DIN	button + lamp	230V	<20	1NO+ 2 NC	green	12 / 240	F	**401515**
ELBD - R - DIN	button + lamp	230V	<20	1NO+ 2 NC	red	12 / 240	F	**401517**
ELBD - Y - DIN	button + lamp	230V	<20	1NO+ 2 NC	yellow	12 / 240	F	**401519**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

BUTTONS AND SWITCHES WITH BOX

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Type	Description	IP code:	Overall dimensions (mm) L	H	W	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL1-B134	switching on 0-1	IP44	68	68	50	1 NO	black	1 / 100	B	**401134**



Type	Description	IP code:	Overall dimensions (mm) L	H	W	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL1-B102	1 button with spring return	IP44	68	68	50	1 NO	green	1 / 100	B	**401102**
EL1-BP102	1 button with spring return	IP65	68	68	50	1 NO	green	1 / 100	B	**401132**



Type	Description	IP code:	Overall dimensions (mm) L	H	W	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL1-B213	2 buttons with spring return	IP44	104	68	50	1 NC 1 NO	1 - red 1 - green	1 / 100	B	**401213**
EL1-BP213	2 buttons with spring return	IP65	104	68	50	1 NC 1 NO	1 - red 1 - green	1 / 100	B	**401233**



Type	Description	IP code:	Overall dimensions (mm) L	H	W	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL1-B339	3 buttons with spring return	IP44	134	68	50	1 NO 1 NC 1 NO	1 - green 1 - red 1 - green	1 / 50	B	**401339**
EL1-BP339	3 buttons with spring return	IP65	134	68	50	1 NO 1 NC 1 NO	1 - green 1 - red 1 - green	1 / 50	B	**401349**



Type	Description	IP code:	Overall dimensions (mm) L	H	W	Type of the contact	Colour	Packing / Box (pcs)	Product category	Catalogue number
EL1-B174	Emergency button with head "mushroom" type Ø40.Release through turning	IP44	68	68	50	1 NC	red	1 / 100	B	**401174**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DEVICES FOR TELPHER CONTROL MBP TYPE

3+2 standard +extended 5 YEAR TOTAL WARRANTY

They represent different combinations of START and STOP buttons mounted in plastic boxes in different sizes. They are connected to the operating circuits of cranes or telphers and serve as a remote control of their movement. They are connected directly to the operating cable of the telpher and send commands directly to the executive mechanisms. They are designed to provide protection from dust and moisture IP65.

TECHNICAL DATA:
- Supplying voltage: 230V; 50/60Hz
- Electrical wear resistance: 1x10^5 cycles
- Operating temperature: -10 +65°C
- Humidity: 35 – 85% RH
- Number of contacts: according to the number of the buttons
- Commuting capacity: up to 6A
- Plastic: UV rays wear resistance
- IP code: IP65
- Weight: according to the number of the contacts

MOUNTING:
- directly to the control cable of the telpher (crane)










Type	Number of buttons	Contact block and scheme		Packing / Box (pcs)	Product category	Catalogue number
		Emergency	For the directions			
MBP-A281	2	-	NO+NC	1/20	B	**46281**
MBP-A291 two speed	2	-	NO+NC	1/20	B	**46291**
MBP-A2813	2+1	emergency button	NO+NC	1/20	B	**46283**
MBP-A2813K	2+1	emergency button with switch	NO+NC	1/20	B	**46283K**
MBP-A2913 two speed	2+1	emergency button	NO+NC	1/20	B	**46294**
MBP-A2913K two speed	2+1	emergency button with switch	NO+NC	1/20	B	**46294K**
MBP-A481	4	-	NO+NC	1/20	B	**46481**
MBP-A491 two speed	4	-	NO+NC	1/20	B	**46491**
MBP-A4813	4+1	emergency button	NO+NC	1/20	B	**46483**
MBP-A4813K	4+1	emergency button with switch	NO+NC	1/20	B	**46483K**
MBP-A4913 two speed	4+1	emergency button	NO+NC	1/20	B	**46493**
MBP-A4913K two speed	4+1	emergency button with switch	NO+NC	1/20	B	**46493K**
MBP-A681	6	-	NO+NC	1/20	B	**46681**
MBP-A691 two speed	6	-	NO+NC	1/20	B	**46691**
MBP-A6813	6+1	emergency button	NO+NC	1/20	B	**46683**
MBP-A6813K	6+1	emergency button with switch	NO+NC	1/20	B	**46683K**
MBP-A6913 two speed	6+1	emergency button	NO+NC	1/20	B	**46693**
MBP-A6913K two speed	6+1	emergency button with switch	NO+NC	1/20	B	**46693K**
MBP-A881	8	-	NO+NC	1/20	B	**46881**
MBP-A891 two speed	8	-	NO+NC	1/20	B	**46891**
MBP-A8813	8+1	emergency button	NO+NC	1/20	B	**46883**
MBP-A8813K	8+1	emergency button with switch	NO+NC	1/20	B	**46883K**
MBP-A8913 two speed	8+1	emergency button	NO+NC	1/20	B	**46893**
MBP-8913K two speed	8+1	emergency button with switch	NO+NC	1/20	B	**46893K**

MBP-Axxxx
- stop button type
- button type – one-speed (x81) or two-speed (x91)
- number of buttons

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

WARNING LIGHTS AND TOWERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



The revolving warning lights and towers are devices intended for use as status indicators in the human-machine control systems. They are suitable for installation on control cabinets and panels or directly on machines. They are manufactured in different colour combinations to attract attention of operators working in a given production sector. Warning lights and towers are widely used in almost any industrial branch. They can be mounted on movable components or such, creating potential danger and can warn all workers for a critical situation with their blinking light and siren. These devices are electrically connected through cables, protruding out of the lamp casing.

TECHNICAL SPECIFICATION:

- Rated voltage: 12 VAC/230VAC; 50/60 Hz;
- Isolation voltage: 660V; 50/60 Hz;
- Impulse voltage stability: 6000V
- Rated power: see the tables below
- Short circuit protection: 1A gG external fuse
- Operating Temperature: - 20°C + 65°C
- Humidity: 35 – 85% RH
- Plastic cover: UV resistant polycarbonate not considered as being harmful to human health

INSTALLATION:

- Warning lights are fixed to the respective machine body with the studs protruding from the light plastic casing.







Type	Description	Voltage (VAC)	Rated Power (W)	Colour	Packing / Box (pcs)	Product category	Catalogue number
LTE1101 - R	Warning light	12	10	Red	1 / 30	B	**401525R**
LTE1101 - G	Warning light	12	10	Green	1 / 30	B	**401525G**
LTE1101 - Y	Warning light	12	10	Yellow	1 / 30	B	**401525Y**
LTE1101J - R	Warning light + siren	12	11	Red	1 / 30	B	**401526R**
LTE1101J - G	Warning light + siren	12	11	Green	1 / 30	B	**401526G**
LTE1101J - Y	Warning light + siren	12	11	Yellow	1 / 30	B	**401526Y**
LTE1101 - R	Warning light	230	8	Red	1 / 30	B	**402525R**
LTE1101 - G	Warning light	230	8	Green	1 / 30	B	**402525G**
LTE1101 - Y	Warning light	230	8	Yellow	1 / 30	B	**402525Y**
LTE1101J - R	Warning light + siren	230	9	Red	1 / 30	B	**402526R**
LTE1101J - G	Warning light + siren	230	9	Green	1 / 30	B	**402526G**
LTE1101J - Y	Warning light + siren	230	9	Yellow	1 / 30	B	**402526Y**
LTE1161 - R	Warning light	12	35	Red	1 / 8	B	**401527R**
LTE1161 - G	Warning light	12	35	Green	1 / 8	B	**401527G**
LTE1161 - Y	Warning light	12	35	Yellow	1 / 8	B	**401527Y**
LTE1161 - R	Warning light	230	28	Red	1 / 8	B	**402527R**
LTE1161 - G	Warning light	230	28	Green	1 / 8	B	**402527G**
LTE1161 - Y	Warning light	230	28	Yellow	1 / 8	B	**402527Y**
LTA205 - 1	Tower / flashing	12	4	1 - Red	1 / 20	B	**401528**
LTA205 - 2	Tower / flashing	12	8	2 - Red/Green	1 / 20	B	**401529**
LTA205 - 3	Tower / flashing	12	12	3 - Red/Yellow/Green	1 / 20	B	**401530**
LTA205 - 3J	Tower / flashing + siren	12	12	3 - Red/Yellow/Green	1 / 20	B	**401531**
LTA205 - 5	Tower / flashing	12	18	5 - Red/Yellow/Green/ Blue/Transparent	1 / 20	B	**401532**
LTA205 - 1	Tower / flashing	230	6	1 - Red	1 / 20	B	**402528**
LTA205 - 2	Tower / flashing	230	8	2 - Red/Green	1 / 20	B	**402529**
LTA205 - 3	Tower / flashing	230	10	3 - Red/Yellow/Green	1 / 20	B	**402530**
LTA205 - 3J	Tower / flashing + siren	230	11	3 - Red/Yellow/Green	1 / 20	B	**402531**
LTA205 - 5	Tower / flashing	230	14	5 - Red/Yellow/Green/ Blue/Transparent	1 / 20	B	**402532**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Description	Voltage (V)	Rated Power (W)	Sound level (dB)	Packing / Box (pcs)	Product category	Catalogue number
MS-290A	metal siren	230	60	100	1 / 24	B	**401533**
MS-290B	plastic siren	230	60	100	1 / 24	B	**401541**



Type	Description	Voltage (V)	Rated Power (W)	Sound level (dB)	Packing / Box (pcs)	Product category	Catalogue number
MS-390	siren	230	160	120	1 / 10	B	**401534**



Type	Description	Voltage (V)	Rated Power (W)	Sound level (dB)	Packing / Box (pcs)	Product category	Catalogue number
CB-4	alarm bell	12	-	85	1 / 50	B	**401535**
CB-4	alarm bell	24	-	85	1 / 50	B	**401536**
CB-4	alarm bell	110	-	85	1 / 50	B	**401537**
CB-4	alarm bell	230	-	85	1 / 50	B	**401538**



Type	Description	Voltage (V)	Rated Power (W)	Sound level (dB)	Packing / Box (pcs)	Product category	Catalogue number
FA-01	fire alarm	230	-	120	1 / 100	B	**401540**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60309-1; EN 60309-2



INDUSTRIAL PLUGS AND SOCKETS HT/HTN TYPE

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Made of special high quality plastic with alloys against aging at sun light exposing and for increasing the mechanical strength. They are designed in accordance with standard EN 60309 and provide reliable connection and high protection level against electrical current. They provide IP protection not less than IP 44/67. They are designed for surface or flush mounting, movable or fixed type.

TECHNICAL DATA:
- Rated voltage: 500V
- Rated short circuit current: according to the mounted protection in the boards
- Impulse voltage wear resistance: 8kV
- Mechanical wear resistance: 3000 cycles
- IP code: IP 44/67
- Plastic: UV rays wear resistance
- Ambient temperature: -5 to +65°C
- Altitude: up to 2000m
- Plugs and sockets: 6h



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-013	16		1P+N+E	230	121 / 84 / 53	44	2 / 10 / 100	C	**37013**
HT-023	32		1P+N+E	230	138 / 92 / 63	44	2 / 10 / 60	C	**37023**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-014	16		3P+E	400	121 / 84 / 51	44	2 / 10 / 100	C	**37014**
HT-024	32		3P+E	400	138 / 92 / 63	44	2 / 10 / 60	C	**37024**
HT-034	63		3P+E	400	230 / 109 / 36	44	2 / 10	C	**37034**
HT-044	125		3P+E	400	295 / 124 / 50	44	2 / 10	C	**37044**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-015	16		3P+N+E	400	129 / 92 / 62	44	2 / 10 / 60	C	**37015**
HT-025	32		3P+N+E	400	149 / 97 / 70	44	2 / 10 / 60	C	**37025**
HT-035	63		3P+N+E	400	230 / 109 / 36	44	2 / 10	C	**37035**
HT-045	125		3P+N+E	400	295 / 124 / 50	44	2 / 10	C	**37045**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOVABLE INDUSTRIAL SOCKETS HT TYPE IP44

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-213	16		1P+N+E	230	130 / 96	44	2 / 10 / 100	C	**37213**
HT-223	32		1P+N+E	230	149 / 90	44	2 / 10 / 60	C	**37223**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-214	16		3P+E	400	131 / 96	44	2 / 10 / 100	C	**37214**
HT-224	32		3P+E	400	149 / 90	44	2 / 10 / 60	C	**37224**
HT-234	63		3P+E	400	230/109	44	2 / 10	C	**37234**
HT-244	125		3P+E	400	290/124	44	2 / 10	C	**37244**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-215	16		3P+N+E	400	139 / 90	44	2 / 10 / 60	C	**37215**
HT-225	32		3P+N+E	400	154 / 100	44	2 / 10 / 60	C	**37225**
HT-235	63		3P+N+E	400	230/100	44	2 / 10	C	**37235**
HT-245	125		3P+N+E	400	290/124	44	2 / 10	C	**37245**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

FIXED INDUSTRIAL PLUGS HT TYPE IP44

5+0 standard +extended 5 YEAR TOTAL WARRANTY





Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-513	16		1P+N+E	230	121/79	44	2 / 10 / 60	C	**37513**
HT-523	32		1P+N+E	230	131/83	44	2 / 10 / 60	C	**37523**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT 514	16		3P+E	400	121/76	44	2 / 10 / 60	C	**37514**
HT 524	32		3P+E	400	131/83	44	2 / 10 / 60	C	**37524**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT 515	16		3P+N+E	400	123/79	44	2 / 10 / 60	C	**37515**
HT 525	32		3P+N+E	400	132/84	44	2 / 10 / 60	C	**37525**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

FIXED INDUSTRIAL SOCKETS HT TYPE IP44

5+0 standard +extended 5 YEAR TOTAL WARRANTY





Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-113	16		1P+N+E	230	126 / 86	44	2 / 10 / 60	C	**37113**
HT-123	32		1P+N+E	230	141 / 97	44	2 / 10 / 60	C	**37123**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-114	16		3P+E	400	132 / 91	44	2 / 10 / 60	C	**37114**
HT-124	32		3P+E	400	141 / 96	44	2 / 10 / 60	C	**37124**
HT-134	63		3P+E	400	193 / 122	44	2 / 10	C	**37134**
HT-144	125		3P+E	400	220 / 140	44	2 / 10	C	**37144**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HT-115	16		3P+N+E	400	129 / 96	44	2 / 10 / 60	C	**37115**
HT-125	32		3P+N+E	400	141 / 98	44	2 / 10 / 60	C	**37125**
HT-135	63		3P+N+E	400	193 / 122	44	2 / 10	C	**37135**
HT-145	125		3P+N+E	400	220 / 140	44	2 / 10	C	**37145**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOVABLE INDUSTRIAS PLUGS HTN TYPE IP67

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 0131	16		1P+N+E	230	120/71/12	67	1 / 60	C	**37131**
HTN 0231	32		1P+N+E	230	150/93/17	67	1 / 40	C	**37231**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 0141	16		3P+E	400	125/79/12	67	2 / 60	C	**37141**
HTN 0241	32		3P+E	400	150/93/17	67	2 / 40	C	**37241**
HTN 0341	63		3P+E	400	230/109/36	67	10	C	**37341**
HTN 0441	125		3P+E	400	230/109/36	67	10	C	**37441**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 0151	16		3P+N+E	400	133/87/12	67	2 / 60	C	**37151**
HTN 0251	32		3P+N+E	400	155/99.5/17	67	2 / 40	C	**37251**
HTN 0351	63		3P+N+E	400	230/109/36	67	10	C	**37351**
HTN 0451	125		3P+N+E	400	295/124/50	67	10	C	**37451**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOVABLE INDUSTRIAL SOCKET HTN TYPE IP67

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HTN 2131	16		1P+N+E	230	131/90	67	2 / 60	C	**37831**
HTN 2231	32		1P+N+E	230	149/90	67	2 / 40	C	**37931**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HTN 2141	16		3P+E	400	131/76	67	2 / 60	C	**37841**
HTN 2241	32		3P+E	400	149/90	67	2 / 40	C	**37941**
HTN 2341	63		3P+E	400	271/115	67	10	C	**37942**
HTN 2441	125		3P+E	400	295/137	67	6	C	**37943**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A/C	IP code:	Packing/Box	Product category	Catalogue number
HTN 2151	16		3P+N+E	400	139/90	67	2 / 60	C	**37851**
HTN 2251	32		3P+N+E	400	154/100	67	2 / 40	C	**37951**
HTN 2351	63		3P+N+E	400	240/112	67	10	C	**37952**
HTN 2451	125		3P+N+E	400	300/126	67	6	C	**37953**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

FIXED INDUSTRIAL SOCKET HTN TYPE IP67

5+0 standard +extended 5 YEAR TOTAL WARRANTY





Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 1131	16		1P+N+E	230	101/150/93.5	67	2 / 40	C	**37731**
HTN 1231	32		1P+N+E	230	114/162/93.5	67	2 / 40	C	**37631**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 1141	16		3P+E	400	104/150/93.5	67	2 / 40	C	**37741**
HTN 1241	32		3P+E	400	116/162/93.5	67	2 / 40	C	**37641**
HTN 1341	63		3P+E	400	171/170/230	67	1 / 10	C	**37842**
HTN 1441	125		3P+E	400	171/170/230	67	1 / 6	C	**37844**



Model	In (A)		Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HTN 1151	16		3P+N+E	400	107/150/93.5	67	2 / 40	C	**37751**
HTN 1251	32		3P+N+E	400	116/162/93.5	67	2 / 40	C	**37651**
HTN 1351	63		3P+N+E	400	171/170/230	67	10	C	**37852**
HTN 1451	125		3P+N+E	400	171/170/230	67	6	C	**37854**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

INDUSTRIAL SOCKETS FOR FLUSH MOUNTING HT TYPE IP44

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Model	In (A)	Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-413	16	1P+N+E	230	70/60/67	44	2 / 10 / 60	C	**37413**
HT-423	32	1P+N+E	230	80/95/79	44	2 / 10 / 60	C	**37423**



Model	In (A)	Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-414	16	3P+E	400	75/86/75	44	2 / 10 / 60	C	**37414**
HT-424	32	3P+E	400	80/95/79	44	2 / 10 / 60	C	**37424**



Model	In (A)	Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-415	16	3P+N+E	400	75/85/70	44	2 / 10 / 60	C	**37415**
HT-425	32	3P+N+E	400	98/98/83	44	2 / 10 / 60	C	**37425**



Model	In (A)	Poles	Un (V)	Dimensions (mm) A /B /C	IP code:	Packing/Box	Product category	Catalogue number
HT-105SR	16	German type	230	50/63/42	44	500	C	**37105**



German type socket for DIN rail mounting
It provides plug presence in electric boards and easy cabling.
* Supply voltage: 230V
* Computing option: up to 16A

* Operation temperature: from -10 up to +65°C
* Humidity: up to 85%RH
Mounting method:
* DIN rail

Type	Poles	Packing / Box (pcs)	Product category	Catalogue number
German type socket for DIN rail	German type	5 / 100	C	**37004**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard IEC60670; CEI 23-48; CEI 23-49; EN 50102



INDUSTRIAL BOARD SYSTEM EC690 SERIES

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Distribution boards 690 series can be safely used for temporary installation such as construction sites, markets, fairs, etc. They are entirely made up of UV-resistant halogen free technopolymer on ABS- base. They are suitable for outdoor use, thanks to the high impact resistance. The distribution boards are fit to use in different options- movable with handle or fixed on the wall. The distribution boards are suitable with sockets with mounting flange with screw hole center distance 60x60mm.

TECHNICAL DATA:
- Material: shock resistant, halogen free technopolymer on ABS base with resistance to UV rays.
- Colour: grey RAL 7035
- IP code: IP65
- Resistance to mechanical shock: IK08-IK10(shocks up to 6-20j)
- Resistance to abnormal heat: up to 650°C(Glow Wire Test, Reference Standard IEC 695-2-1
- Installation temperature range: min-15°C, max+60°C
- DIN rail material: galvanized steel
- Pre-cuts for conduit or cable inlet of different sizes.
- Standards: IEC60670; CEI 23-48; CEI 23-49; EN 50102
- RoHS 2002/95/CE

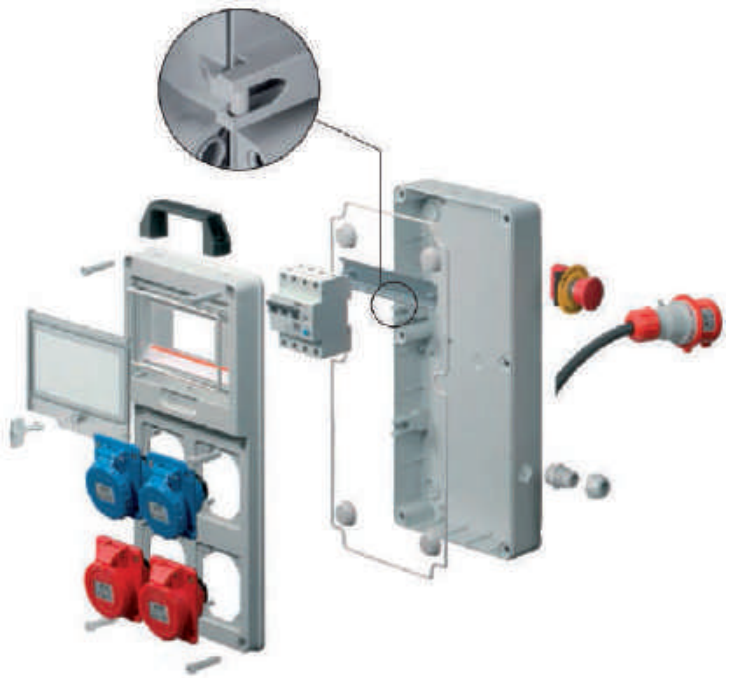



EMPTY DISTRIBUTION BOARD EC690 SERIES 2 VERTICAL SOCKETS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Type	Number of modules	IP code	W	H	D	Packing pcs/ box	Product category	Catalogue number
EC69021	4	65	105	337	95	1/15	C	**53EC69021**

For sockets with 60x60mm hole center distance

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



EMPTY DISTRIBUTION BOARD EC690 SERIES 3 VERTICAL SOCKETS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Type	Number of modules	IP code	W	H	D	Packing pcs/ box	Product category	Catalogue number
EC69022	4	65	105	430	95	1/13	C	**53EC69022**

For sockets with 60x60mm hole center distance



EMPTY DISTRIBUTION BOARD EC690 SERIES 4 SOCKETS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Type	Number of modules	IP code	W	H	D	Packing pcs/ box	Product category	Catalogue number
EC69023	8	65	200	430	95	1/10	C	**53EC69023**

For sockets with 60x60mm hole center distance



EMPTY DISTRIBUTION BOARD EC690 SERIES 6 SOCKETS

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Type	Number of modules	IP code	W	H	D	Packing pcs/ box	Product category	Catalogue number
EC69025	12	65	320	510	135	1	C	**53EC69025**

For sockets with 60x60mm hole center distance

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



Dimensions W x H x D: 105 x 337 x 95mm

ASSEMBLED DISTRIBUTION BOARD 690 SERIES 2 VERTICAL SOCKETS, 4 MODULES

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Empty board type	German type	1P+N+E	3P+N	3P+N+E	IP code	Product category	Catalogue number
EC69021		1x16A+1x32A			44	C	**53EC690212A1**
EC69021		1x16A		1x16A	44	C	**53EC690212A2**
EC69021		1x16A	1x16A		44	C	**53EC690212A3**
EC69021	2x16A				44	C	**53EC690212A4**
EC69021		1x16A+1x32A			67	C	**53EC690212B1**
EC69021		1x16A		1x16A	67	C	**53EC690212B2**
EC69021		1x16A	1x16A		67	C	**53EC690212B3**



Dimensions W x H x D: 105 x 430 x 95mm

ASSEMBLED DISTRIBUTION BOARD 690 SERIES 3 VERTICAL SOCKETS, 4 MODULES

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Empty board type	German type	1P+N+E	3P+N	3P+N+E	IP code	Product category	Catalogue number
EC69022		1x16A+1x32A		1x16A	44	C	**53EC690223A1**
EC69022		1x32A		1x16A+1x32A	44	C	**53EC690223A2**
EC69022		1x16A+1x32A	1x16A		44	C	**53EC690223A3**
EC69022		1x32A	1x16A+1x32A		44	C	**53EC690223A4**
EC69022	2x16A	1x16A			44	C	**53EC690223A5**
EC69022		1x16A+1x32A		1x16A	67	C	**53EC690223B1**
EC69022		1x32A		1x16A+1x32A	67	C	**53EC690223B2**
EC69022		1x16A+1x32A	1x16A		67	C	**53EC690223B3**
EC69022		1x32A	1x16A+1x32A		67	C	**53EC690223B4**



Dimensions W x H x D: 200 x 430 x 95mm

ASSEMBLED DISTRIBUTION BOARD 690 SERIES 4 SOCKETS, 8 MODULES

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Empty board type	German type	1P+N+E	3P+N	3P+N+E	IP code	Product category	Catalogue number
EC69023		1x16A+1x32A		1x16A+1x32A	44	C	**53EC690234A1**
EC69023		2x32A		2x16A	44	C	**53EC690234A2**
EC69023		1x16A+1x32A	1x16A+1x32A		44	C	**53EC690234A3**
EC69023		2x32A	2x16A		44	C	**53EC690234A4**
EC69023	2x16A	1x16A+1x32A			44	C	**53EC690234A5**
EC69023	2x16A		1x16A+1x32A		44	C	**53EC690234A6**
EC69023		1x16A+1x32A		1x16A+1x32A	67	C	**53EC690234B1**
EC69023		2x32A		2x16A	67	C	**53EC690234B2**
EC69023		1x16A+1x32A	1x16A+1x32A		67	C	**53EC690234B3**
EC69023		2x32A	2x16A		67	C	**53EC690234B4**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Dimensions W x H x D: 320 x 510 x 135mm

ASSEMBLED DISTRIBUTION BOARD 690 SERIES 6 SOCKETS, 12 MODULES

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Empty board type	German type	1P+N+E	3P+N	3P+N+E	IP code	Product category	Catalogue number
EC69025		2x16A+1x32A		2x16A+1x32A	44	C	**53EC690256A1**
EC69025		1x16A+2x32A		1x16A+2x32A	44	C	**53EC690256A2**
EC69025		2x16A+1x32A	2x16A+1x32A		44	C	**53EC690256A3**
EC69025		1x16A+2x32A	1x16A+2x32A		44	C	**53EC690256A4**
EC69025	3x16A	2x16A+1x32A			44	C	**53EC690256A5**
EC69025	2x16A	1x16A	2x16A+1x32A		44	C	**53EC690256A6**
EC69025		2x16A+1x32A		2x16A+1x32A	67	C	**53EC690256B1**
EC69025		1x16A+2x32A		1x16A+2x32A	67	C	**53EC690256B2**
EC69025		2x16A+1x32A	2x16A+1x32A		67	C	**53EC690256B3**
EC69025		1x16A+2x32A	1x16A+2x32A		67	C	**53EC690256B4**



SPARE FLANGE WITH SCREWS AND GASKETS

Type	W	H	D	Packing pcs/box	Product category	Catalogue number
EC690F1	85	74		1/10	C	**53EC690F1**

The flange mounted is used for closing of the factory maid openings,in case there is no switch for it at the moment,and assures the necessary IP of the board. Another function is assuring the possibility for mounting of great number of additional appliances within assembling the board when making a suitable opening in the flange.



Spare flange with mounted limit switch



Limit switch
Page 127



Spare flange with mounted stop button



Stop button
Page 133

HANDLE WITH SCREWS



Type	W	H	D	Packing pcs/box	Product category	Catalogue number
EC690MA	134	42	25.6	1/10	C	**53EC690MA**

It assures a convenience when carrying the board.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

METAL CONSUMER UNITS - SIGMA SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY





TECHNICAL DATA:

- Material: High quality electro-galvanized steel sheet
- Modules: 8; 12; 16; 22
- Steel thickness: 1,0mm (8; 12 modules); 1,2mm (16; 22 modules)
- Row: single
- Rated voltage In (A): 100A
- Protected with epoxy polyester coating
- Colour of body: White RAL9003
- Colour of door: White RAL9003
- IP code: IP40
- Fire resistance: 960°C/30s
- Humidity: Max.95%
- Storage temperature: -40+75°C
- Specification: CE, ROHS, BS, EN,EIC60439-3



Modern design and aesthetic look

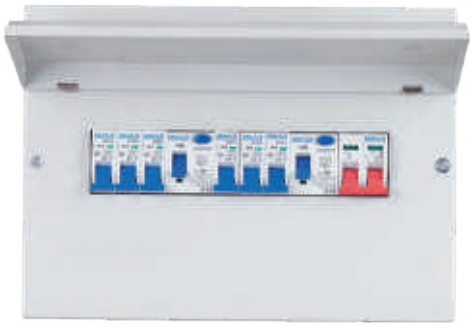

Different variants of assembling



DIN, zero and ground terminals included



Defense of the electrical parts
from direct contact



Metal consumer unit enclosures, Sigma series

Type	№ of ways	Construction Material	№ of ROWS	Dimensions (mm)			Product category	Catalogue number
				L (mm)	W (mm)	H (mm)		
Sigma	8	Steel	1	303	257	110	C	**61088**
Sigma	12	Steel	1	375	257	110	C	**61128**
Sigma	16	Steel	1	447	257	110	C	**61168**
Sigma	22	Steel	1	555	257	110	C	**61228**



Metal consumer units with 100A main switch, Sigma series

Type	№ of ways when empty	Construction Material	№ of ways	Main Switch	Power Voltage Supply	Dimensions (mm)			Product category	Catalogue number
						L (mm)	W (mm)	H (mm)		
Sigma	8	Steel	6	100A	240V	303	257	110	C	**61088SI**
Sigma	12	Steel	10	100A	240V	375	257	110	C	**61128SI**
Sigma	16	Steel	14	100A	240V	447	257	110	C	**61168SI**
Sigma	22	Steel	20	100A	240V	555	257	110	C	**61228SI**



Metal domestic consumer unit with 100A main switch and RCD's, Sigma series

Type	№ of ways when empty	Construction Material	№ of ways	№ of RCD's Supplied	Main Switch	Dimensions (mm)			Product category	Catalogue number
						L (mm)	W (mm)	H (mm)		
Sigma	12	Steel	6	2x63A 30mA	1x100A	375	257	110	C	**61128SR**
Sigma	16	Steel	10	2x63A 30mA	1x100A	447	257	110	C	**61168SR**
Sigma	22	Steel	16	2x63A 30mA	1x100A	555	257	110	C	**61228SR**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Product Contents: 1x Enclosure,1x 63A 30mA RCD, 6xMCB's 6kA CurveB (3x6A, 1x16A and 2x20A), busbar and cables

Sigma 6-way metal consumer unit

Type	№ of ways when empty	Construction Material	№ of ways	№ of MCB's Supplied	№ of RCD's Supplied	Amp Rating	Amp Rating L (mm)	H (mm)	W (mm)	Product category	Catalogue number
Sigma	8	Steel	6	6	1	63A	244	230	90	C	**61088S**



Product Contents: 1x Enclosure,1x 100A Main Switch, 2x 63A 30mA RCD's, 6xMCB's 6kA CurveB (3x6A, 1x16A, 2x32A, 1x40), busbar and cables

Sigma 6-way dual RCD's metal consumer unit

Type	№ of ways when empty	Construction Material	№ of ways	№ of MCB's Supplied	№ of RCD's Supplied	Main Switch	Amp Rating	Amp Rating L (mm)	H (mm)	W (mm)	Product category	Catalogue number
Sigma	12	Steel	6	6	2	1	63A	316	230	90	C	**61128S**



Product Contents: 1x Enclosure,1x 100A Main Switch, 2x 63A 30mA RCD's, 10xMCB's 6kA Curve B (3x6A, 2x16A, 4x32A, 1x40), busbar and cables

Sigma 10-way dual RCD's metal consumer unit

Type	№ of ways when empty	Construction Material	№ of ways	№ of MCB's Supplied	№ of RCD's Supplied	Main Switch	Amp Rating	Amp Rating L (mm)	H (mm)	W (mm)	Product category	Catalogue number
Sigma	16	Steel	10	10	2	1	63A	388	230	90	C	**61168S**



Product Contents: 1x Enclosure,1x 100A Main Switch, 2x 63A 30mA RCD's, 12xMCB's 6kA CurveB (3x6A, 1x10A, 2x16A, 4x32A, 1x40, 1x50A), busbar and cables

Sigma 16-way dual RCD's metal consumer unit

Type	№ of ways when empty	Construction Material	№ of ways	№ of MCB's Supplied	№ of RCD's Supplied	Main Switch	Amp Rating	Amp Rating L (mm)	H (mm)	W (mm)	Product category	Catalogue number
Sigma	22	Steel	16	12	2	1	63A	496	230	90	C	**61228S**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DOCUMENTS CORRESPONDING TO THE PRODUCT:
Standard IEC60439-3

METAL DISTRIBUTION BOXES FOR SURFACE MOUNTING- DELTA SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The metal distribution boxes have wide range of application for mounting in buildings under construction or new communal objects, offices, shops, house facilities. Inside the box, could be mounted circuit elements for protection in the electrical installation. They are made of high quality electro-galvanized steel sheet and provide proper prevention from fire. They are shock-proof as well. The box is also equipped with zero and ground terminals.

TECHNICAL DATA:
- Material: High quality electro-galvanized steel sheet
- Maximum insulation voltage: 690V; 50Hz
- Single phase: 4; 8; 12; 16 modules
- Triple phase: 4; 6; 8; 10; 12 modules
- Steel thickness: 1,0mm
- MCB mounting design: Din-rail
- Main switch rated current: MCB125A
- Mounting type: Surface
- Colour of body: grey
- IP code: IP40
- Fire resistance: 960°C/30s
- Humidity: Max.95%
- Storage temperature: -40+75°C
- Specification: CE, ROHS, BS, EN,EIC60439-3



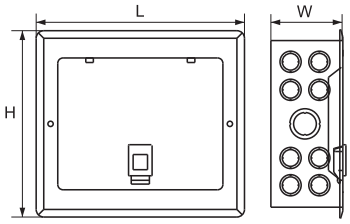

Single phase metal distribution boxes, Delta series

Type	Construction Material	№ of poles	Module capacity	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
Delta 1/4	Metal	1	4	226	226	95	1/10	C	**600104N**
Delta 1/8	Metal	1	8	298	226	95	1/10	C	**600108N**
Delta 1/12	Metal	1	12	370	226	95	1/10	C	**600112N**
Delta 1/16	Metal	1	16	442	226	95	1/10	C	**600116N**





Three phase metal distribution boxes, Delta series

Type	Construction Material	№ of poles	Module capacity	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
Delta 3/4	Metal	3	4	506	350	105	1/10	C	**600304N**
Delta 3/6	Metal	3	6	560	350	105	1/10	C	**600306N**
Delta 3/8	Metal	3	8	614	350	105	1/10	C	**600308N**
Delta 3/10	Metal	3	10	668	350	105	1/10	C	**600310N**
Delta 3/12	Metal	3	12	722	350	105	1/10	C	**600312N**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DOCUMENTS CORRESPONDING TO THE PRODUCT:
Standard IEC60439-3





Zero and ground terminals included

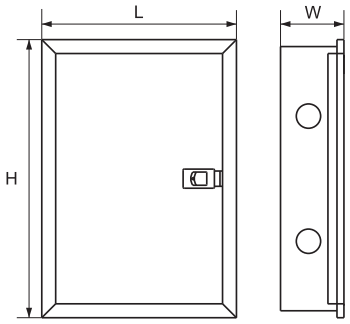

METAL CONSUMER UNITS - ZETA SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The metal distribution boxes have wide range of application for mounting in buildings under construction or new communal objects, offices, shops, house facilities. Inside the box, could be mounted circuit elements for protection in the electrical installation. They are made of high quality electro-galvanized steel sheet and provide proper prevention from fire. They are shock-proof as well. The box is also equipped with zero and ground terminals.

TECHNICAL DATA:
- Material: High quality electro-galvanized steel sheet
- Modules: 30; 36; 45; 60; 72
- Steel thickness: 1,2mm
- Rated voltage In (A): 100A
- Mounting type: Surface
- Colour of body: White RAL7035
- Colour of door: White RAL7035
- IP code: IP40
- Fire resistance: 960°C/30s
- Humidity: Max.95%
- Storage temperature: -40+75°C
- Specification: CE, ROHS, EIC60439-3

Metal consumer unit enclosures, Zeta series

Type	Construction Material	№ of ROWS	№ of ways	Dimensions (mm)			Product category	Catalogue number
				L (mm)	H (mm)	W (mm)		
Zeta 30	Metal	2	30	428	428	110	C	**55030**
Zeta 36	Metal	2	36	482	428	110	C	**55036**
Zeta 45	Metal	3	45	428	578	110	C	**55045**
Zeta 60	Metal	4	60	428	728	110	C	**55060**
Zeta 72	Metal	4	72	482	728	110	C	**55072**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 62208;
EN 60439-1; EN 60 439-3







METAL DISTRIBUTION BOARDS JXF SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Supplied with a special lock, metal plate for fixing of electrical devices, lid for the input-output conductors, grounded dowel pin, gaskets, etc. Option to change the opening direction. Made of single steel sheet, treated with decorative powder coating.

TECHNICAL DATA:
- Rated voltage: up to 1000V
- Maximum current: up to 1250A
- Material: steel
- RAL 7032
- Coating: powder style painting
- IP code: IP 65

MOUNTING:
- vertically on flat surface

Type	Thickness of metal sheet mm)	Metal box dimensions (mm)			Nominal working current In (A)	Packing / Box	Product category	Catalogue number
		H (height)	L (width)	W (depth)				
JXF 25/25/15	1.0	250	250	150	80	1	C	**53025**
JXF 25/30/15	1.0	250	300	150	100	1	C	**53026**
JXF 30/25/15	1.0	300	250	150	100	1	C	**53030**
JXF 30/40/20	1.0	300	400	200	160	1	C	**53031**
JXF 40/30/20	1.0	400	300	200	160	1	C	**53040**
JXF 40/50/20	1.2	400	500	200	250	1	C	**53041**
JXF 40/40/20	1.2	400	400	200	250	1	C	**53044**
JXF 50/40/20	1.2	500	400	200	250	1	C	**53050**
JXF 40/60/20	1.2	400	600	200	250	1	C	**53051**
JXF 60/40/20	1.2	600	400	200	250	1	C	**53060**
JXF 60/60/20	1.2	600	600	200	250	1	C	**53066**
JXF 70/50/20	1.2	700	500	200	350	1	C	**53070**
JXF 80/60/25	1.5	800	600	250	400	1	C	**53080**
JXF 100/80/30	1.5	1000	800	300	630	1	C	**53100**
JXF 120/80/30	1.5	1200	800	300	630	1	C	**53120**
JXF 140/80/30	1.5	1400	800	300	800	1	C	**53140**
JXF 180/80/30	1.5	1800	800	300	1000	1	C	**53188**
JXF 180/100/30*	1.5	1800	1000	300	1250	1	C	**53180**

Note: *Metal boxes with double door

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 62 208;
EN 60439-1; EN 60 439-3







STAINLESS STEEL METAL BOARDS SXF SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Supplied with a special lock, metal plate for fixing of electrical devices, lid for the input-output conductors, grounded dowel pin, gaskets, etc. Option to change the opening direction. Made of single stainless steel sheet. The mouting plate is treated with anti-corrosion and decorative powder coating. They are used in case of special requirements regarding the exposure of corrosion.

TECHNICAL DATA:
- Rated voltage: up to 1000V
- Maximum current: up to 800A
- Material: stainless steel
- IP code: IP 65

MOUNTING:
- vertically on flat surface

Type	Thickness of metal sheet (mm)	Metal box dimensions (mm)			Packing / Box	Product category	Catalogue number
		H (height)	L (width)	W (depth)			
SXF 25/25/15	1.0	250	250	150	1	C	**54025**
SXF 30/25/15	1.0	300	250	150	1	C	**54030**
SXF 40/30/20	1.0	400	300	200	1	C	**54040**
SXF 50/40/20	1.2	500	400	200	1	C	**54050**
SXF 60/40/20	1.2	600	400	200	1	C	**54060**
SXF 70/50/20	1.2	700	500	200	1	C	**54070**
SXF 80/60/25	1.5	800	600	250	1	C	**54080**
SXF 100/80/30	1.5	1000	800	300	1	C	**54100**
SXF 120/80/30	1.5	1200	800	300	1	C	**54120**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60439-1;
EN 60 439-3

ELECTRIC SWITCHBOARDS WITH TYPE-APPROVAL CERTIFICATES

The company has produced and successfully passed the type-approval procedures for the following metal and plastic electric control boxes and boards with ELMARK automation:

- Tower Mounted Switchgear
- Low Voltage Meter Box
- Low Voltage Main Switchboard
- Distribution Switchboard
- Power Compensation System



Low Voltage Meter Box Type TEPO





Low Voltage Main Switchboard Type GRT



Tower Mounted Switchgear Type MTT





Power Compensation System Type CCU



Distribution Switchboard Type KRSH





Documents corresponding to the product:
Standard EN 60670-24

PLASTIC DISTRIBUTION BOXES FOR SURFACE AND FLUSH MOUNTING ATTIS SERIES, IP40

3+0 standard +extended 3 YEAR TOTAL WARRANTY







Zero and ground terminals included

The distribution boxes are designed for mounting in newly built buildings or buildings in reconstruction. They are a module box with mounted protective devices of the given flats electrical current circuit circles. They are supplied with transparent door for each row opening upwards to 90°. They are made of white self-extinguishing plastic, resistant to heat and high temperature with IP code: IP 40. The mounted device in the box is protected from direct contact to the current leading parts. They are offered with DIN-rail for device mounting and terminal strips for the neutral and earthing conductor joining. Mounted directly on the walls with screws.

TECHNICAL DATA:

- Maximum insulation voltage: 690V; 50Hz
- Door colour: Transparent
- Mounting type: Surface;Flush
- Modules (№): 6; 9; 12; 16; 24; 36
- IP code: IP40
- Row: Single row for 6, 9, 12 and 16 modules
- Double rows for 16; 24 and 36 modules
- Material: ABS for body and PC for door
- Fire resistance: 360°C/30s

Plastic distribution boxes for surface mounting- ATTIS series, IP40

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm)			Packing / Box	Product category	Catalogue number
			L	H	W			
Attis 6	1	6	185	140	90	1/30	C	**60025**
Attis 9	1	9	220	164	90	1/20	C	**60095**
Attis 12	1	12	305	205	90	1/16	C	**60125**
Attis 16	1	16	355	220	90	1/16	C	**60165**
Attis 16	2	16	231	285	90	1/16	C	**60175**
Attis 24	2	24	313	345	96	1/8	C	**60245**
Attis 36	3	36	315	440	96	1/5	C	**60365**

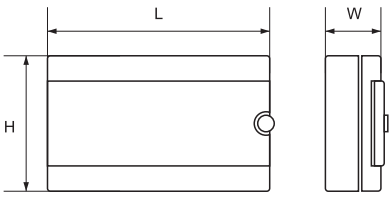

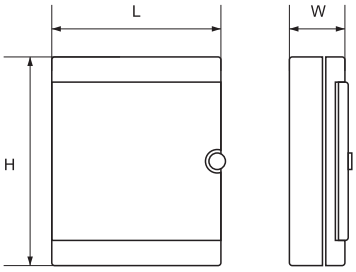

Plastic distribution boxes for flush mounting- ATTIS series, IP40

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm)			Packing / Box	Product category	Catalogue number
			L	H	W			
Attis 6	1	6	185	140	90	1/30	C	**60026**
Attis 9	1	9	220	164	90	1/20	C	**60096**
Attis 12	1	12	305	205	90	1/16	C	**60126**
Attis 16	1	16	355	220	90	1/16	C	**60166**
Attis 16	2	16	231	285	90	1/16	C	**60176**
Attis 24	2	24	313	345	96	1/8	C	**60246**
Attis 36	3	36	315	440	96	1/5	C	**60366**

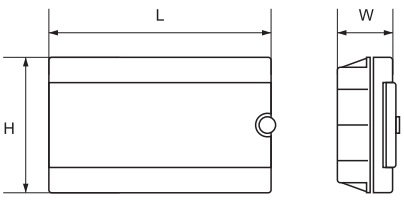

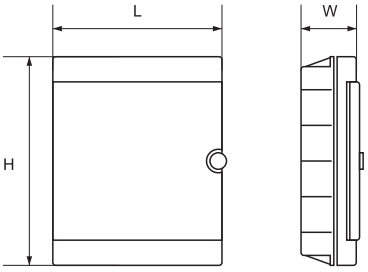

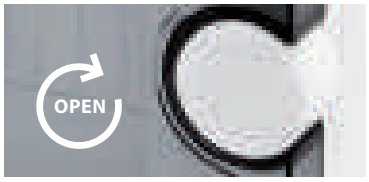

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

Documents corresponding to the product:
Standard EN 60670-24

PLASTIC DISTRIBUTION BOXES FOR SURFACE MOUNTING MINI SERIES, IP40

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Plastic distribution boxes for surface mounting, MINI series

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
Mini 1	1	1	40	150	65	1/120	C	**60106**
Mini 2	1	2	55	150	65	1/84	C	**60107**
Mini 4	1	4	95	150	65	1/48	C	**60108**

PLASTIC DISTRIBUTION BOXES FOR SURFACE AND FLUSH MOUNTING PDB1 SERIES, IP40

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Boxes for surface mounting

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
PDB1-4	1	4	110	205	75	1 / 20	C	**60040**
PDB1-6	1	6	150	205	75	1 / 20	C	**60060**
PDB1-8	1	8	190	205	75	1 / 20	C	**60080**

Boxes for flush mounting



Type	Number of rows	Module capacity (number of devices)	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
PDB1-4	1	4	110	205	75	1 / 20	C	**60041**
PDB1-6	1	6	150	205	75	1 / 20	C	**60061**
PDB1-8	1	8	190	205	75	1 / 20	C	**60081**



UNTIL SUPPLY LAST

Plastic distribution boxes for surface and flush mounting IP40 *

Type	Number of rows	Module capacity (number of devices)	Mounting type	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
PDB1-4*	1	4	Flush	136	222	60	1/20	F	**80041**
PDB1-6*	1	6	Flush	170	222	60	1/20	F	**80061**
PDB1-36*	3	36	Flush	300	484	66	1/5	F	**80361**
PDB1-36*	3	36	Surface	271	462	66	1/5	F	**80360**

*3 year standard+0 year extended warranty

In case of insufficient quantity in stock for BOXES MINI SERIES, the delivery time after order confirmation will be 45 days, and for PDB1 will be 90 days.

Documents corresponding to the product:
Standard EN 62 208;
EN 60439-1; EN 60 439-3



PLASTIC DISTRIBUTION BOXES FOR SURFACE MOUNTING IP40 - BLUE SERIES

3+2 standard +extended 5 YEAR TOTAL WARRANTY

The distribution boxes are designed for mounting in newly built buildings or buildings in reconstruction. They are a module box with mounted protective devices of the given flats electrical current circuit circles. They are supplied with transparent door for each row opening upwards to 90°. They are made of white self-extinguishing plastic, resistant to heat and high temperature with IP code: IP 40. The mounted device in the box is protected from direct contact to the current leading parts. They are offered with DIN-rail for device mounting and terminal strips for the neutral and earthing conductor joining. Mounted directly on the walls with screws.

TECHNICAL DATA:
- Door colour: Transparent blue
- Mounting type: Surface;Flush
- Modules (№): 12; 18; 24; 28; 36
- IP code: IP40
- Row: Single row for 12 and 18 modules
- Double rows for 24; 28 and 36 modules
- Material: ABS for body and PC for door
- Fire resistance: 650°C/30s
- Ambient temperature(°C): -5 +65°C, max. 95% humidity
- Colour: White RAL 9003
- Storage temperature(°C): -40 +75°C



Boxes for surface mounting, BLUE series

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
Blue 12	1	12	300	204	102	1/10	C	**60122**
Blue 18	1	18	410	204	102	1/10	C	**60182**
Blue 24	2	24	300	294	109	1/5	C	**60242**
Blue 28	2	28	310	354	109	1/5	C	**60282**
Blue 36	2	36	410	294	109	1/5	C	**60362**





Boxes for flush mounting, BLUE series

Type	Number of rows	Module capacity (number of devices)	Dimensions (mm) L	H	W	Packing / Box	Product category	Catalogue number
Blue 12	1	12	317	220	102	1/10	C	**60123**
Blue 18	1	18	426	220	102	1/10	C	**60183**
Blue 24	2	24	317	310	109	1/5	C	**60243**
Blue 28	2	28	294	338	109	1/5	C	**60283**
Blue 36	2	36	426	310	109	1/5	C	**60363**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 62 208;
EN 60439-1; EN 60 439-3

MOISTURE-PROOF DISTRIBUTION BOXES FOR SURFACE MOUNTING - BETA SERIES IP55 AND GAMMA SERIES IP65

3+2 standard +extended 5 YEAR TOTAL WARRANTY



The distribution boxes are designed for mounting in newly built buildings or buildings in reconstruction. They are a module box with mounted protective devices of the given flats electrical installation current circles. They are supplied with transparent door for each row opening upwards to 90°. They are made of white non-self-extinguishing plastic, resistant to heat and high temperature. The special design of the lids and gaskets provides IP code: IP55; IP65. The mounted device in the box is protected from indirect contact to the current leading parts. They are offered with DIN-rail for device mounting and terminal strips for the neutral and earthing conductor joining. For direct wall moutining with screws.

TECHNICAL DATA:
- Maximum insulation voltage: 690V; 50Hz
- Flame retardance: UL94 V-O
- IP code: IP55; IP65
- Door colour: Transparent
- Mounting type: Surface



Moisture-proof distribution boxes for surface mounting - Beta series, IP 55

Type	Number of rows	Module capacity (number of devices)	IP	Dimensions (mm)			Packing / Box	Product category	Catalogue number
				L	H	W			
Beta 4	1	4	55	127	214	93	1 / 20	C	**60100**
Beta 6	1	6	55	162	214	93	1 / 20	C	**60101**
Beta 8	1	8	55	216	214	93	1 / 20	C	**60102**
Beta 12	1	12	55	270	214	93	1 / 12	C	**60103**
Beta 18	1	18	55	378	233	93	1 / 8	C	**60104**
Beta 24	2	24	55	340	288	93	1 / 8	C	**60105**



Moisture-proof distribution boxes for surface mounting - Gamma series, IP 65

Type	Number of rows	Module capacity (number of devices)	IP	Dimensions (mm)			Packing / Box	Product category	Catalogue number
				H	L	W			
Gamma 4	1	4	65	210	140	100	1/30	C	**60004**
Gamma 8	1	8	65	210	215	100	1/20	C	**60008**
Gamma 12	1	12	65	260	300	140	1/10	C	**60012**
Gamma 18	1	18	65	285	410	140	1/5	C	**60018**
Gamma 24	2	24	65	300	415	140	1/5	C	**60024**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Documents corresponding to the product:
Standard EN 60439 -1
EN 60439 -5



PLASTIC DISTRIBUTION BOARDS ABS- PP SERIES, IP65

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Plastic distribution boards of various sizes. Intended for extension or distribution of cable lines. They can also be used as meter boxes. They are resistant to chemical agents, thermal and UV rays.

TECHNICAL SPECIFICATIONS:
- Resistance: chemical agents, weak acids, alkali, oils, salts, etc.
- Rated Voltage: up to 690V
- Maximum Current: up to 800A
- Thermal Deformation: over 240°C
- Operating Temperature: -35°C + 65°C
- Material: ABS
- IP code: IP65
- Colour: RAL7035 grey
- Recyclable
- adjustable mounting plate position

MOUNTING:
- Vertically on flat surface



ABS halogen free distribution boards PP series - gray door

Board Type	Material Type	H (mm)	L (mm)	W (mm)	Packing / Box	Product category	Catalogue number
PP 3001	ABS	300	200	130	1	C	**5312030130**
PP 3002	ABS	350	250	150	1	C	**5312535150**
PP 3004	ABS	400	300	170	1	C	**5313040170**
PP 3005	ABS	400	300	220	1	C	**5313040220**
PP 3006	ABS	500	350	190	1	C	**5313550190**
PP 3007	ABS	500	400	240	1	C	**5314050240**
PP 3008	ABS	600	400	200	1	C	**5314060190**

Note: Open door angle 180°



ABS halogen free distribution boards PP series- transparent door

Board Type	Material Type	H (mm)	L (mm)	W (mm)	Packing / Box	Product category	Catalogue number
PP 3011	ABS	300	200	130	1	C	**5342030130**
PP 3012	ABS	350	250	150	1	C	**5342535150**
PP 3014	ABS	400	300	170	1	C	**5343040170**
PP 3015	ABS	400	300	220	1	C	**5343040220**
PP 3016	ABS	500	350	190	1	C	**5343550190**
PP 3017	ABS	500	400	240	1	C	**5344050240**
PP 3018	ABS	600	400	200	1	C	**5344060190**
PP 3020	ABS	700	500	250	1	C	**5345070250**



ABS halogen free distribution module boards PP series- transparent door

Board Type	Material Type	H (mm)	L (mm)	W (mm)	Packing / Box	Product category	Catalogue number
PP 3112-18modules	ABS	350	250	150	1	C	**5322535150**
PP 3114-24modules	ABS	400	300	170	1	C	**5323040170**
PP 3116-45modules	ABS	500	350	190	1	C	**5323550190**
PP 3118-60modules	ABS	600	400	200	1	C	**5324060190**

Note: Transperent door

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

SURFACE MOUNTING POLYESTER BOARDS EC SERIES IP65

UNTIL SUPPLY LAST

3+2 standard +extended 5 YEAR TOTAL WARRANTY

TECHNICAL SPECIFICATIONS:

- Colour: grey RAL 7035.
- IP65 protection degree.
- Material: made of halogen free reinforced fiberglass polyester, self-extinguishing V0 degree according to UL94.
- Double insulation, shock resistance: IK10, 20j, according to EN 62262.
- Application temperature: minimum –25°, maximum +65°.
- Resistance to abnormal heat (GWT)- board with blank door up to 960°C - board with transparent window up to 650°C.
- Application voltage 1000V, suitable for photovoltaic plants.
- Right or left reversible door with stainless steel pins – it can be opened more than 180°.
- Plain and smooth headboards for easy opening and conduit inlet.



Halogen free polyester boards EC series- transparent door

Type	Material	H (mm)	L (mm)	W (mm)	Packing /Box	Product category	Catalogue number
PBTD 5001	Polyester	305	270	170	1	F	**5362730170**
PBTD 5002	Polyester	430	325	185	1	F	**5363243185**
PBTD 5004	Polyester	655	435	215	1	F	**5364365215**



Polyester hinger counterdoor EC

Type	Material	Used for type boards	Packing /Box	Product category	Catalogue number
CD 5002	Polyester	PBTD/PBBD 5002	1	F	**53502CD**
CD 5004	Polyester	PBTD/PBBD 5004	1	F	**53504CD**
CD 5005	Polyester	PBTD/PBBD 5005	1	F	**53505CD**



Blank cover module EC

Type	Heigth of single/ double cover (mm)	Used for type boards	Packing / Box	Product category	Catalogue number single cover	Catalogue number double cover
Blank cover module	125/250	PBTD/PBBD 5002	1	F	**53502S**	
	150/300	PBTD/PBBD 5003/5004	1	F	**53503S**	**53503D**
	150/300	PBTD/PBBD 5005	1	F		**53505D**
	150/300	PBTD/PBBD 5006	1	F		**53506D**



Spare brass and brackets for fixing- galvanized EC

Type	Used for type boards	Packing /Box	Product category	Catalogue number
Spare brass insert kit	All type	1 kit (10 pcs)	F	**53512**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CONNECTION TUBES - GTY TYPE

Copper pipes with galvanic tin coating, used for joining of copper rigid or multicore conductors with different sections. The assembling is made by mechanical pressing with crimping tool.

TECHNICAL DATA:
- Material: copper alloy
- Coating: tin
- Application: general



Type	Length L (mm)	Outer diameter D (mm)	Inner diameter d (mm)	Cable (mm²)	Packing / Box (pcs)	Product category	Catalogue number
GTY-4	20	5	3	4	1000 / 16000	C	**59213**
GTY-6	25	5.3	3.7	6	500 / 1500 / 12000	C	**59201**
GTY-10	30	6.3	4.5	10	500 / 1500 / 12000	C	**59202**
GTY-16	35	7.5	5.7	16	100 / 200 / 4800	C	**59203**
GTY-25	40	9	7.2	25	100 / 500 / 2000	C	**59204**
GTY-35	45	10.8	8.5	35	100 / 200 / 1600	C	**59205**
GTY-50	50	12.5	9.8	50	20 / 200 / 1600	C	**59206**
GTY-70	55	14.5	11.5	70	10 / 100 / 800	C	**59207**
GTY-95	60	17	13.7	95	10 / 80 / 640	C	**59208**
GTY-120	65	19	15	120	10 / 60 / 480	C	**59209**
GTY-150	70	21	16.7	150	10 / 50 / 400	C	**59210**
GTY-185	75	23	18.5	185	10 / 40 / 320	C	**59211**
GTY-240	80	26	21	240	10 / 30 / 240	C	**59212**



BIMETALLIC CONNECTION TUBE - GTL TYPE

Pipes made of two metals – copper and aluminum without galvanic coating. They are designed for joining copper and aluminum conductors – rigid or multicore conductors with different section. The connection is accomplished through crimping pliers, through mechanical pressing of the butt terminals and the conductor. They are used for protection against electrochemical corrosion got at two metals contact with different chemical properties and conductivity at electrical current feed. They are manufactured under modern technology and have high quality and long exploitation period.

TECHNICAL DATA:
- Material: copper aluminum alloy
- Coating: none
- Application: general for joining of two types of conductors



Type	d1	D1	d2	D2	l1	l2	L	Packing / Box (pcs)	Product category	Catalogue number
GTL - 16	5	9	6	10	30	30	75	20 / 200 / 1200	C	**59214**
GTL - 25	6	10	7	12	30	33	82	20 / 400 / 1500	C	**59215**
GTL - 35	7	11	8.5	14	30	40	90	20 / 300 / 1000	C	**59216**
GTL - 50	8.5	13	9.8	16	32	42	95	20 / 800	C	**59217**
GTL - 70	9.5	15	11.5	18	38	50	105	10 / 600	C	**59218**
GTL - 95	11.5	17	13.5	21	40	50	110	10 / 500	C	**59219**
GTL - 120	13.5	19	15	23	42	55	112	10 / 400	C	**59220**
GTL - 150	15	21	17	25	44	55	118	10 / 350	C	**59221**
GTL - 185	17	23	18.5	27	46	60	125	10 / 300	C	**59222**
GTL - 240	19	26	21	30	54	60	130	10 / 200	C	**59223**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

CABLE TERMINALS NON-ISOLATED - JM TYPE



They are used for joining copper conductors - multicore conductors with different section to electrical devices or connections to combine all cores of the conductor, to provide safe connection at tightening in terminals and safe connection at the base of the terminal. Thus the connection stability against vibrations is increased and the possibility for short circuit is decreased. They are made of copper alloy with galvanic tin coating. The connection is realized through crimping pliers, through mechanic pressing of the terminal and conductor. Two types are offered with standard length SC and extended base JM. They are manufactured under modern technology and have high quality and long exploitation period.

TECHNICAL DATA:

- Material: copper alloy
- Coating: tin
- Application: general for joining conductors to electrical devices.



Type	d1 (mm)	D (mm)	d2 (mm)	L (mm)	Packing / Box (pcs)	Product category	Catalogue number
JM - 2.5/6	2.2	4.5	6	24	1000 / 3000 / 24000	C	**59240**
JM - 4/6	3.0	4.8	6	24	1000 / 2000 / 16000	C	**59241**
JM - 6/6	3.8	5.5	6	24	500 / 2000 / 16000	C	**59035**
JM - 6/8	3.8	5.5	8	2 4	500 / 2000 / 16000	C	**59059**
JM - 10/6	4.8	6.8	6	25.5	100 / 1500 / 12000	C	**59036**
JM - 10/8	4.8	6.8	8	25.5	500 / 1500 / 12000	C	**59037**
JM - 16/6	5.5	7.5	6	30.5	400 / 800 / 6400	C	**59038**
JM - 16/8	5.5	7.5	8	30.5	400 / 800 / 6400	C	**59039**
JM - 16/10	5.5	7.5	10	30.5	400 / 800 / 6400	C	**59040**
JM - 25/8	7	9	8	34	100 / 500 / 4000	C	**59041**
JM - 25/10	7	9	10	34	250 / 500 / 4000	C	**59042**
JM - 35/8	8.2	10.5	8	38	200 / 400 / 3200	C	**59043**
JM - 35/10	8.2	10.5	10	38	200 / 400 / 3200	C	**59044**
JM - 35/12	8.2	10.5	12	38	200 / 400 / 3200	C	**59045**
JM - 50/8	9.8	12.5	8	45	100 / 200 / 1600	C	**59046**
JM - 50/10	9.8	12.5	10	45	100 / 100 / 1600	C	**59047**
JM - 50/12	9.8	12.5	12	45	100 / 200 / 1600	C	**59048**
JM - 70/10	11.5	14.5	10	50	80 / 100 / 1280	C	**59049**
JM - 70/12	11.5	14.5	12	50	80 / 100 / 1280	C	**59050**
JM - 95/10	13.8	17.5	10	55.5	50 / 200 / 800	C	**59051**
JM - 95/12	13.8	17.5	12	55.5	50 / 200 / 800	C	**59052**
JM - 120/10	15.5	19.5	10	63	30 / 60 / 480	C	**59053**
JM - 120/12	15.5	19.5	12	63	30 / 60 / 480	C	**59054**
JM - 150/12	16.5	21	12	71	10 / 50 / 400	C	**59055**
JM - 185/12	18.8	23.5	12	78	10 / 40 / 320	C	**59056**
JM - 185/16	18.8	23.5	16	78	10 / 40 / 320	C	**59057**
JM - 240/16	21.3	26.5	16	92	10 / 30 / 240	C	**59058**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

BIMETALIC NON-ISOLATED CABLE TERMINALS FOR CRIMPING DTL



They are used for joining aluminum conductors - multicore conductors with different section to electrical devices or connections to combine all cores of the conductor, to provide safe connection at tightening in terminals and safe connection at the base of the terminal. Thus the connection stability against vibrations is increased and the possibility for short circuit is decreased. They are made of copper and aluminum alloys as in the aluminum billet is made under special technology the copper terminal formed like an ear. The connection is realized through crimping pliers, through mechanic pressing of the terminal and conductor.

TECHNICAL DATA: Material: copper aluminum; Application: general for joining conductors to electrical devices.





Type	d1 (mm)	D (mm)	d2 (mm)	L (mm)	l (mm)	B (mm)	Packing / Box (pcs)	Product category	Catalogue number
DTL - 1 - 16	6	11	8	70	30	16	20 / 200 / 1440	C	**59224**
DTL - 1 - 25	7	12	8	75	34	18	20 / 180 / 1080	C	**59225**
DTL - 1 - 35	8.5	14	10	85	38	20.5	20 / 100 / 600	C	**59226**
DTL - 1 - 50	9.8	16	10	90	40	23	20 / 70 / 420	C	**59227**
DTL - 1 - 70	11.5	18	12	102	48	26	10 / 60 / 360	C	**59228**
DTL - 1 - 95	13.5	21	12	112	50	28	10 / 40 / 180	C	**59229**
DTL - 1 - 120	15	23	14	120	53	30	10 / 30 / 120	C	**59230**
DTL - 1 - 150	16.5	25	14	126	56	34	5 / 25 / 120	C	**59231**
DTL - 1 - 185	18.5	27	16	133	58	37	5 / 20 / 120	C	**59232**
DTL - 1 - 240	21	30	16	140	60	40	4 / 12 / 72	C	**59233**

COPPER CABLE WIRE FORK TERMINAL CONNECTOR



Type	Length (mm)	Colour	Conductor (mm^2)	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
SVS1.25-4	21.2	Red	0.5-1.0	100	10 / 240	C	**59080**
SVS1.25-5	21.2	Red	0.5-1.0	100	15 / 180	C	**59081**
SVS1.25-6	21.2	Red	0.5-1.0	100	15 / 180	C	**59082**
SVS 2-4	21.0	Blue	1.5-2.5	100	15 / 180	C	**59083**
SVS 2-5	22.5	Blue	1.5-2.5	100	15 / 180	C	**59084**
SVS 2-6	27,6	Blue	1.5-2.5	100	10 / 120	C	**59085**
SVS 5,5-4	24.5	Yellow	4.0-6.0	100	5 / 60	C	**59086**
SVS 5,5-5	27,9	Yellow	4.0-6.0	100	5 / 60	C	**59087**
SVS 5,5-6	27,9	Yellow	4.0-6.0	100	5 / 60	C	**59088**

ISOLATED CABLE TERMINALS - CHS TYPE



Type	Length (mm)	Conductor (mm^2)	Packing / Box (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
CHS3	18.1	0.25-1.5	100	250	C	**59115**
CHS4	20.1	1.5-2.5	100	200	C	**59116**
CHS5	25.5	4.0-6.0	100	200	C	**59117**
CHS6	27.3	8.0	100	100	C	**59118**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ISOLATED CABLE JOINTS



Metal pipes with outside PVC insulation. They are used for joining/extending multicore conductors with section up to 6mm^2. It increases the connection stability against vibrations and decreases the possibility for short circuit. The connection is realized through crimping pliers, through mechanic pressing of the terminal and conductor. The different insulation colour corresponds to different conductor sections.

TECHNICAL DATA:
- Material: copper alloy
- Coating: polyvinylchloride
- Application: general for joining of copper conductors

Type	Length (mm)	Colour	Conductor (mm^2)	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
PVT 1.25	16	red	0.5-1.0	100	15 / 300	C	**59015**
BV 1.25	25	red	0.5-1.0	100	10 / 120	C	**59001**
PVT 2	16	blue	1.5-2.5	100	15 / 300	C	**59034**
BV 2	25	blue	1.5-2.5	100	10 / 60	C	**59002**
PVT 5.5	20	yellow	4.0-6.0	100	5 / 60	C	**59014**
BV 5.5	25	yellow	4.0-6.0	100	5 / 60	C	**59003**

ISOLATED CABLE TERMINALS - MDD/FDD TYPES



They represent a cable terminal made of brass alloy with galvanic tin coating and insulated with polyvinylchloride. They are used as non-insulated terminals, as the insulated part protects the cores from bending and breaking in the joining point and at the same time it protects the staff from direct contact to the current - carrying parts. They are used for conductors with section up to 6 mm. The connection is realized through crimping pliers, through mechanic pressing of the terminal and cable. The different insulation colour corresponds to different conductor sections. They are manufactured under modern technology and have high quality and long exploitation period.
All insulated cable terminals are being offered in 100 pcs. packing

TECHNICAL DATA:
- Material: copper alloy
- Coating: polyvinylchloride
- Application: general for joining copper conductors
- Ambient temperature: -10 to +75°C

Type	Shape	Colour	Conductor (mm^2)	Shoe width	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
MDD 1.25 - 187	male	red	0.5-1.0	187	100	10 / 240	C	**59012**
MDD 1.25 - 250	male	red	0.5-1.0	250	100	10 / 240	C	**59009**
MDD 2 - 187	male	blue	1.5-2.5	187	100	10 / 240	C	**59013**
MDD 2 - 250	male	blue	1.5-2.5	250	100	10 / 180	C	**59011**
MDD 5.5 - 250	male	yellow	4.0-6.0	250	100	10 / 120	C	**59010**
FDD 1.25 - 187	female	red	0.5-1.0	187	100	20 / 240	C	**59008**
FDD 1.25 - 187	female	red	0.5-1.0	250	100	15 / 180	C	**59006**
FDD 2 - 187	female	blue	1.5-2.5	187	100	20 / 240	C	**59007**
FDD 2 - 250	female	blue	1.5-2.5	250	100	10 / 180	C	**59004**
FDD 5.5 - 250	female	yellow	4.0-6.0	250	100	10 / 120	C	**59005**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ISOLATED CABLE TERMINALS - E TYPE

Type	Colour	Terminal length (mm)	Conductor (mm^2)	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
E0508	white	8	0.5	100	50 / 600	C	**59023**
E7508	blue	8	0.75	100	50 / 600	C	**59024**
E1008	red	8	1.0	100	50 / 600	C	**59025**
E1510	black	10	1.5	100	30 / 360	C	**59026**
E2512	grey	12	2.5	100	30 / 300	C	**59027**
E4012	orange	12	4.0	100	20 / 240	C	**59028**
E6018	green	18	6.0	100	5 / 120	C	**59029**
E10-18	dark green	18	10	100	8 / 96	C	**59030**
E16-18	milky yellow	18	16	100	6 / 60	C	**59031**
E25-16	black	16	25	100	5 / 36	C	**59032**
E35-25	grey-yellow	25	35	100	2 / 24	C	**59033**



TWIN ISOLATED CABLE TERMINALS- TE TYPE

Type	Colour	Terminal length (mm)	Conductor (mm^2)	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
TE0508	white	8	2x0.5	100	50 / 600	C	**59023TE**
TE7508	Blue	8	2x0.75	100	50 / 600	C	**59024TE**
TE1008	Red	8	2x1.0	100	50 / 600	C	**59025TE**
TE1508	black	8	2x1.5	100	30 / 360	C	**59026TE**
TE2510	grey	10	2x2.5	100	30 / 300	C	**59027TE**
TE4010	orange	10	2x4.0	100	20 / 240	C	**59028TE**
TE6014	green	14	2x6.0	100	5 / 120	C	**59029TE**
TE10-14	dark green	14	2x10.0	100	8 / 96	C	**59030TE**
TE16-14	milky yellow	14	2x16.0	100	6 / 60	C	**59031TE**



ISOLATED CABLE TERMINALS - PTV TYPE

Type	Shape	Colour	Conductor (mm^2)	Shoe width	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
PTV 1.25 - 10	male	red	0.25-1.0	1.9	100	20 / 240	C	**59101**
PTV 1.25 - 12	male	red	0.25-1.0	1.9	100	20 / 240	C	**59102**
PTV 2 - 10	male	blue	1.5-2.5	1.9	100	20 / 240	C	**59103**
PTV 2 - 12	male	blue	1.5-2.5	1.9	100	15 / 180	C	**59104**
PTV 5.5 - 13	male	yellow	4.0-6.0	2.9	100	8 / 96	C	**59105**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ISOLATED CABLE TERMINALS - RVL TYPE



Type	Size of the opening (mm)	Colour	Conductor (mm^2)	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
RVL 1.25-4	4	red	0.5-1.0	100	20 / 240	C	**59021**
RVL 1.25-5	5	red	0.5-1.0	100	15 / 180	C	**59022**
RVL 2-4	4	blue	1.5-2.5	100	15 / 180	C	**59018**
RVL 2-5	5	blue	1.5-2.5	100	10 / 120	C	**59019**
RVL 5.5-4	4	yellow	4.0-6.0	100	8 / 96	C	**59020**
RV 5.5-5	5	yellow	4.0-6.0	100	8 / 96	C	**59016**
RV 5.5-6	6	yellow	4.0-6.0	100	8 / 96	C	**59017**

ISOLATED CABLE TERMINALS - PBDD TYPE



Type	Shape	Colour	Conductor (mm^2)	Shoe width	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
PBDD 1.25 - 250	male	red	0.25-1.0	6.3	100	5 / 60	C	**59106**
PBDD 2 - 250	male	blue	1.5-2.5	6.3	100	5 / 60	C	**59107**
PBDD 5.5 - 250	male	yellow	4.0-6.0	6.3	100	5 / 60	C	**59108**

ISOLATED CABLE TERMINALS - MPD TYPE



Type	Shape	Colour	Conductor (mm^2)	Shoe width	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
MPD 1.25 - 156	male	red	0.25-1.0	6.3	100	10 / 240	C	**59109**
MPD 2 - 195	male	blue	1.5-2.5	6.3	100	10 / 120	C	**59110**
MPD 5.5 - 195	male	yellow	4.0-6.0	6.3	100	10 / 120	C	**59111**

ISOLATED CABLE TERMINALS - MDFN/FDFNY



Type	Shape	Colour	Conductor (mm^2)	Shoe width	Packing (pcs.)	Packing / Box (pcs.)	Product category	Catalogue number
MDFN 1.0 - 250	male	red	0.25-1.0	4	100	5 / 60	C	**59112**
MDFN 2 - 250	male	blue	1.5-2.5	4	100	5 / 60	C	**59113**
MDFN 5 - 250	male	yellow	4.0-6.0	5	100	4 / 48	C	**59114**
FDFNY 1.0 - 250	female	red	0.25-1.0	4	100	10 / 60	C	**59242**
FDFNY 2 - 250	female	blue	1.5-2.5	4	100	10 / 60	C	**59243**
FDFNY 5 - 250	female	yellow	4.0-6.0	5	100	10 / 60	C	**59244**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PLASTIC CABLE TRUNKING CT2

Cable trunkings are practical solution of organizing power and communication cables in office and residential buildings. They increase the reliability in operation of the electrical systems and allow quick adaptation if necessary to rearrange the interior. Fast and simple installation. In combination with a wide range of accessories, building irregularities are quickly overcome. Non- flammable material, easy to cut and paint.

Type	Size (mm)	Length	Colour	Packing (pcs)	Product category	Catalogue number
PLASTIC CABLE TRUNKING CT2	12x12	2m	white	100	C	**5621212**
PLASTIC CABLE TRUNKING CT2	15X10	2m	white	100	C	**5621510**
PLASTIC CABLE TRUNKING CT2	16X16	2m	white	100	C	**5621616**
PLASTIC CABLE TRUNKING CT2	20X10	2m	white	100	C	**5622010**
PLASTIC CABLE TRUNKING CT2	25X16	2m	white	80	C	**5622516**
PLASTIC CABLE TRUNKING CT2	30X16	2m	white	70	C	**5623016**
PLASTIC CABLE TRUNKING CT2	25X25	2m	white	50	C	**5622525**
PLASTIC CABLE TRUNKING CT2	40X16	2m	white	50	C	**5624016**
PLASTIC CABLE TRUNKING CT2	40X25	2m	white	50	C	**5624025**
PLASTIC CABLE TRUNKING CT2	40X40	2m	white	40	C	**5624040**
PLASTIC CABLE TRUNKING CT2	60X40	2m	white	30	C	**5626040**
PLASTIC CABLE TRUNKING CT2	60X60	2m	white	32	C	**5626060**
PLASTIC CABLE TRUNKING CT2	80X40	2m	white	18	C	**5628040**
PLASTIC CABLE TRUNKING CT2	80X60	2m	white	24	C	**5628060**
PLASTIC CABLE TRUNKING CT2	100X40	2m	white	16	C	**56210040**
PLASTIC CABLE TRUNKING CT2	100X60	2m	white	16	C	**56210060**



SWITCHES AND SOCKETS FRAMES FOR CABLE TRUNKING

Cable trunking frames are decorative solution for installation of switches and sockets on places where their normal mounting is not possible. The assembly set includes subframe and main white frame. Universal sizes, suitable for mounting of switches and sockets from different manufacturers. Single, double and triple frames are offered.

Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
SINGLE FRAME	100X40/100X60	White	20	C	**562100441**
DOUBLE FRAME	100X40/100X60	White	14	C	**562100442**
TRIPLE FRAME	100X40/100X60	White	5	C	**562100443**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

OUTSIDE CORNER



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
OUTSIDE CORNER	12x12	white	50	C	**56212121**
OUTSIDE CORNER	15X10	white	50	C	**56215101**
OUTSIDE CORNER	16X16	white	50	C	**56216161**
OUTSIDE CORNER	25X16	white	30	C	**56225161**
OUTSIDE CORNER	30X16	white	48	C	**56230161**
OUTSIDE CORNER	25X25	white	30	C	**56225251**
OUTSIDE CORNER	40X16	white	30	C	**56240161**
OUTSIDE CORNER	40X25	white	30	C	**56240251**
OUTSIDE CORNER	40X40	white	30	C	**56240401**
OUTSIDE CORNER	60X40	white	10	C	**56260401**
OUTSIDE CORNER	60X60	white	10	C	**56260601**
OUTSIDE CORNER	80X40	white	8	C	**56280401**
OUTSIDE CORNER	80X60	white	8	C	**56280601**
OUTSIDE CORNER	100X40	white	6	C	**562100401**
OUTSIDE CORNER	100X60	white	6	C	**562100601**

INSIDE CORNER



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
INSIDE CORNER	12x12	white	50	C	**56212122**
INSIDE CORNER	15X10	white	50	C	**56215102**
INSIDE CORNER	16X16	white	50	C	**56216162**
INSIDE CORNER	25X16	white	30	C	**56225162**
INTSIDE CORNER	30X16	white	35	C	**56230162**
INSIDE CORNER	25X25	white	30	C	**56225252**
INSIDE CORNER	40X16	white	30	C	**56240162**
INSIDE CORNER	40X25	white	30	C	**56240252**
INSIDE CORNER	40X40	white	30	C	**56240402**
INSIDE CORNER	60X40	white	10	C	**56260402**
INSIDE CORNER	60X60	white	10	C	**56260602**
INSIDE CORNER	80X40	white	8	C	**56280402**
INSIDE CORNER	80X60	white	8	C	**56280602**
INSIDE CORNER	100X40	white	6	C	**562100402**
INSIDE CORNER	100X60	white	6	C	**562100602**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

T- CORNER



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
T- corner	12x12	white	50	C	**56212123**
T- corner	15X10	white	50	C	**56215103**
T- corner	16X16	white	50	C	**56216163**
T- corner	25X16	white	20	C	**56225163**
T-corner	30X16	white	40	C	**56230163**
T- corner	25X25	white	20	C	**56225253**
T- corner	40X16	white	30	C	**56240163**
T- corner	40X25	white	30	C	**56240253**
T- corner	40X40	white	30	C	**56240403**
T- corner	60X40	white	16	C	**56260403**
T- corner	60X60	white	16	C	**56260603**
T- corner	80X40	white	8	C	**56280403**
T- corner	80X60	white	8	C	**56280603**
T- corner	100X40	white	8	C	**562100403**
T- corner	100X60	white	8	C	**562100603**

L- CORNER



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
L- corner	12x12	white	50	C	**56212124**
L- corner	15X10	white	50	C	**56215104**
L- corner	16X16	white	50	C	**56216164**
L- corner	25X16	white	30	C	**56225164**
L-corner	30X16	white	50	C	**56230164**
L- corner	25X25	white	30	C	**56225254**
L- corner	40X16	white	30	C	**56240164**
L- corner	40X25	white	30	C	**56240254**
L- corner	40X40	white	30	C	**56240404**
L- corner	60X40	white	16	C	**56260404**
L- corner	60X60	white	16	C	**56260604**
L- corner	80X40	white	12	C	**56280404**
L- corner	80X60	white	12	C	**56280604**
L- corner	100X40	white	8	C	**562100404**
L- corner	100X60	white	8	C	**562100604**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

CONNECTOR



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
Connector	12x12	white	50	C	**56212125**
Connector	15X10	white	50	C	**56215105**
Connector	16X16	white	50	C	**56216165**
Connector	25X16	white	30	C	**56225165**
Connector	30X16	white	100	C	**56230165**
Connector	25X25	white	30	C	**56225255**
Connector	40X16	white	30	C	**56240165**
Connector	40X25	white	30	C	**56240255**
Connector	40X40	white	30	C	**56240405**
Connector	60X40	white	25	C	**56260405**
Connector	60X60	white	25	C	**56260605**
Connector	80X40	white	50	C	**56280405**
Connector	80X60	white	50	C	**56280605**
Connector	100X40	white	50	C	**562100405**
Connector	100X60	white	30	C	**562100605**

END CAP



Type	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
End cap	12x12	white	50	C	**56212126**
End cap	15X10	white	50	C	**56215106**
End cap	16X16	white	50	C	**56216166**
End cap	25X16	white	50	C	**56225166**
End cap	30X16	white	100	C	**56230166**
End cap	25X25	white	50	C	**56225256**
End cap	40X16	white	30	C	**56240166**
End cap	40X25	white	30	C	**56240256**
End cap	40X40	white	30	C	**56240406**
End cap	60X40	white	50	C	**56260406**
End cap	60X60	white	50	C	**56260606**
End cap	80X40	white	60	C	**56280406**
End cap	80X60	white	60	C	**56280606**
End cap	100X40	white	50	C	**562100406**
End cap	100X60	white	50	C	**562100606**

SEPARATOR



Type	Length (m)	Used for cable trunking	Colour	Packing (pcs)	Product category	Catalogue number
SEPARATOR 40	2	100x40	white	40	C	**56261111**
SEPARATOR 60	2	100x60	white	40	C	**56261112**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



PLASTIC CABLE TRUNKING SELF-ADHESIVE

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
Plastic cable trunking self-adhesive	12x12	2m	white	250/125	C	**5621212A**
	15x10	2m	white	250/125	C	**5621510A**
	16x16	2m	white	250/125	C	**5621616A**
	20x10	2m	white	200/100	C	**5622010A**
	25x16	2m	white	100/50	C	**5622516A**
	30X16	2m	white	140/70	C	**5623016A**
	25x25	2m	white	100/50	C	**5622525A**
	40x16	2m	white	50/25	C	**5624016A**
	40x25	2m	white	80/40	C	**5624025A**
	40x40	2m	white	80/40	C	**5624040A**



PLASTIC CABLE TRUNKING - DARK WALNUT

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
Plastic cable trunking dark walnut	12x12	2m	dark walnut	250/125	C	**5621212DW**
	15x10	2m	dark walnut	250/125	C	**5621510DW**
	16x16	2m	dark walnut	250/125	C	**5621616DW**
	25x16	2m	dark walnut	150/75	C	**5622516DW**
	25x25	2m	dark walnut	100/50	C	**5622525DW**
	40x25	2m	dark walnut	80/40	C	**5624025DW**



PLASTIC CABLE TRUNKING - LIGHT BEECH

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
Plastic cable trunking light beech	12x12	2m	light beech	250/125	C	**5621212LB**
	15x10	2m	light beech	250/125	C	**5621510LB**
	16x16	2m	light beech	250/125	C	**5621616LB**
	25x16	2m	light beech	150/75	C	**5622516LB**
	25x25	2m	light beech	100/50	C	**5622525LB**
	40x25	2m	light beech	80/40	C	**5624025LB**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



PLASTIC CABLE TRUNKING - PEAR

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
Plastic cable trunking pear	12x12	2m	pear	250/125	C	**5621212P**
	15x10	2m	pear	250/125	C	**5621510P**
	16x16	2m	pear	250/125	C	**5621616P**
	25x16	2m	pear	150/75	C	**5622516P**
	25x25	2m	pear	100/50	C	**5622525P**
	40x25	2m	pear	80/40	C	**5624025P**



SLOTTED PLASTIC CABLE TRUNKING CT2

Type	Size (mm)	Length	Colour	Packing (pcs)	Product category	Catalogue number
Slotted plastic cable trunking CT2	25x25	2m	grey	196	C	**5622525S**
	25x40	2m	grey	64	C	**5622540S**
	40x40	2m	grey	64	C	**5624040S**
	40x60	2m	grey	60	C	**5624060S**
	60x40	2m	grey	60	C	**5626040S**
	60x60	2m	grey	48	C	**5626060S**
	80x60	2m	grey	40	C	**5628060S**
	100x60	2m	grey	32	C	**56210060S**



FLOOR TYPE PLASTIC CABLE TRUNKING CT2

Type	Size (mm)	Length	Colour	Packing (pcs)	Product category	Catalogue number
Floor type plastic cable trunking CT2	75x20	2m	grey	40	C	**5627520F**
	90x20	2m	grey	20	C	**5629020F**
	60x15	2m	white	60	C	**5626015F/WH**
	75x20	2m	white	40	C	**5627520F/WH**
	90x20	2m	white	20	C	**5629020F/WH**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





AIR CONDITIONING TRUNKING

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
PLASTIC TRUNKING	75x60	2	White	15/30	C	**5627560**


56275608


56275608


56275607


56275607


56275602


56275602


56275601


56275601


56275606


56275606


56275604


56275605

AIR CONDITIONING TRUNKING ACCESSORIES

Type	Used for cable trunking	Colour	Packing pcs	Product category	Catalogue number
OUTSIDE CORNER	75x60	White	24	C	**56275601**
INSIDE CORNER	75x60	White	24	C	**56275602**
L- CORNER	75x60	White	18	C	**56275604**
CONNECTOR	75x60	White	40	C	**56275605**
INTERNAL CAP	75x60	White	30	C	**56275606**
EXTERNAL CAP	75x60	White	18	C	**56275607**
WALL PENETRATION	75x60	White		C	**56275608**
CABLE HOLDER	75x60	White		C	**56275609**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CORNER TRUNKING

Type	Size (mm)	Length	Colour	Packing m/pcs	Product category	Catalogue number
Plastic cable trunking	23X23	2	White	60/120	C	**5622323**



CORNER TRUNKING ACCESSORIES

Type	Used for cable trunking	Colour	Packing pcs	Product category	Catalogue number
T- corner	23X23	White	60	C	**56223233**
L- corner	23X23	White	60	C	**56223234**
Connector	23X23	White	100	C	**56223235**
End cap	23X23	White	100	C	**56223236**



KITCHEN COUNTER CORNER CABLE TRUNKIN

Type	Size	Length (m)	Colour	Packing pcs	Product category	Catalogue number
PLASTIC TRUNKING	25	2	White	30	C	**56225K**



FLEXIBLE DOUBLECOAT CORRUGATED PIPE

TECHNICAL DATA:
Material- HDPE;
Compresion resistance- 450 N/ 5 cm;
Colour- red
Minimum bending radius: 350 mm;
Temperature assembly resistance: -5 - +60 °C;
Halogen free

Type	Inner Diameter Φ (mm)	Outer Diameter Φ (mm)	Packing (m)	Product category	Catalogue number
Flexible doublecoat corrugated pipe	52	63	25	C	**M006017**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

SELF-EXTINGUISHING PLIABLE CONDUITS EC



TECHNICAL DATA:
Material- technopolymer on PVC base, Self extinguishing V0 degree to UL94;
Compresion resistance- 320N; Standard- EN 61386-1; EN61386-22; RAL- 7035

Type	Inner Diameter Φ (mm)	Outer Diameter Φ (mm)	Packing (m)	Product category	Catalogue number
Self-extinguishing pliable conduits	10,7	16	100	C	**500M16**
Self-extinguishing pliable conduits	14,1	20	100	C	**500M20**
Self-extinguishing pliable conduits	18,2	25	50	C	**500M25**
Self-extinguishing pliable conduits	24,3	32	25	C	**500M32**
Self-extinguishing pliable conduits	32,3	40	25	C	**500M40**
Self-extinguishing pliable conduits with draw tape	10,7	16	100	C	**500N16**
Self-extinguishing pliable conduits with draw tape	14,1	20	100	C	**500N20**
Self-extinguishing pliable conduits with draw tape	18,2	25	50	C	**500N25**
Self-extinguishing pliable conduits with draw tape	24,3	32	25	C	**500N32**
Self-extinguishing pliable conduits with draw tape	32,3	40	25	C	**500N40**

SPIRAL FLEXIBLE PVC CONDUITS- UV RAYS RESISTANT EC



TECHNICAL DATA:
Material (spiral+cover)- shock resistance technopolymer on PVC base; Self extinguishing V0 degree to UL94;
Compresion resistance- 320N; Instalation temperature: -15/+70°C; Operating temperature: -5/+65°C; Type: UV rays resistance

Type	Inner Diameter Φ (mm)	Outer Diameter Φ (mm)	Packing (m)	Product category	Catalogue number
UV flexible pvc conduit	12	16,2	30	C	**500UV12**
	14	18,2	30	C	**500UV14**
	16	20,2	30	C	**500UV16**
	20	24,2	30	C	**500UV20**
	25	29,6	30	C	**500UV25**
	32	37,2	30	C	**500UV32**

SPIRAL FOR CABLES





Type	Colour	Internal diameter (mm)	External diameter (mm)	Coil length (m)	Product category	Catalogue number
Spiral 6x8mm	transparent	6	8	25	C	**500SP6T**
Spiral 6x8mm	black	6	8	25	C	**500SP6B**
Spiral 10x12mm	transparent	10	12	25	C	**500SP10T**
Spiral 10x12mm	black	10	12	25	C	**500SP10B**
Spiral 14x16mm	transparent	14	16	20	C	**500SP14T**
Spiral 14x16mm	black	14	16	20	C	**500SP14B**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



NYLON CABLE DRAW TAPE EC

Type	Diameter Φ (mm)	Length (m)	Colour	Packing (pcs)	Product category	Catalogue number
Nylon cable draw tape	3	5	Transparent	1/340	C	**500305**
	3	15	Transparent	1/120	C	**500315**



PVC INSULATED STEEL SPIRALS

TECHNICAL DATA:
Material - Galvanized steel, helically wound, flexible steel conduit with PVC coating
PVC-resistance against corrosion
Colour- black
Operating temperature: -5/+65

Type	Inner Diameter Φ (mm)	Outer Diameter Φ (mm)	Packing (m)	Product category	Catalogue number
PVC insulated steel spirals	11	15,2	50	C	**500P11**
	14	18,4	50	C	**500P14**
	16	20,4	50	C	**500P16**
	18	22,4	50	C	**500P18**
	26	30,4	25	C	**500P26**
	37	42,4	25	C	**500P37**



PVC SELF-EXTIGUISHING RIGID INSULATING CONDUIT EC

Rigid insulating conduit are practical solution of organizing power and communication cables in office and residential buildings. They increase the reliability in operation of the electrical systems. Fast and simple installation. In combination with a wide range of accessories, building irregularities are quickly overcome. Non-flammable material, easy to cut and paint.

TECHNICAL DATA:
Material - shock resistance technopolymer on rigid PVC base
Self extinguishing V0 degree to UL94
Compresion resistance- 320N
Standard- EN 61386-1; EN 61386-21

Type	External diameter Ø (mm)	Length (m)	Colour	IP code	Packing (pcs)	Product category	Catalogue number
Plastic cable conduit, with sleeve	16	3	GREY	40	34	C	**50016**
	20	3	GREY	40	34	C	**50020**
	25	3	GREY	40	20	C	**50025**
	32	3	GREY	40	10	C	**50032**
	40	3	GREY	40	10	C	**50040**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

ACCESSORIES FOR PVC SELF-EXTIGUISHING RIGID INSULATING CONDUITS AND FLEXIBLE SPIRAL CONDUITS, IP 65 EC

TECHNICAL DATA:
Material- shock resistant technopolymer on PVC base
Self-extinguishing V0 degree to UL94
Glow wire test: up to 960°C
O-ring to compensate the conduit tolerances
Standard- EN 61386-1; EN61386-21
RAL- 7035



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC bend flexible	16	65	GREY	50/200	C	**500FB16**
	20	65	GREY	50/200	C	**500FB20**
	25	65	GREY	35/140	C	**500FB25**
	32	65	GREY	20/80	C	**500FB32**



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC bend 90°	16	65	GREY	100/1000	C	**500BB16**
	20	65	GREY	50/600	C	**500BB20**
	25	65	GREY	25/300	C	**500BB25**
	32	65	GREY	100	C	**500BB32**
	40	65	GREY	100	C	**500BB40**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
Conduit-conduit PVC joint	16	65	GREY	10/350	C	**500CM16**
	20	65	GREY	10/350	C	**500CM20**
	25	65	GREY	10/200	C	**500CM25**
	32	65	GREY	10/100	C	**500CM32**
	40	65	GREY	5/80	C	**500CM40**



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
Conduit-box PVC joint	16	65	GREY	10/350	C	**500CB16**
	20	65	GREY	10/350	C	**500CB20**
	25	65	GREY	10/200	C	**500CB25**
	32	65	GREY	10/100	C	**500CB32**
	40	65	GREY	5/80	C	**500CB40**



Type	Conduit diameter (mm)	Flexible spiral diameter (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC rigid conduit - flexible spiral conduits joint	16	12	65	GREY	10/350	C	**500DD16**
	20	16	65	GREY	10/350	C	**500DD20**
	25	20	65	GREY	10/200	C	**500DD25**
	32	25	65	GREY	10/100	C	**500DD32**
	40	32	65	GREY	5/100	C	**500DD40**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

ACCESSORIES FOR PVC SELF-EXTIGUISHING RIGID INSULATING CONDUITS AND FLEXIBLE SPIRAL CONDUITS, IP 40 EC

TECHNICAL DATA:
Material- shock resistant technopolymer on PVC base
Self-extinguishing V0 degree to UL94
Glow wire test: up to 960°C
Standard- EN 61386-1; EN61386-21
RAL- 7035



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC bend flexible	16	44	GREY	50/200	C	**500FK16**
	20	44	GREY	50/200	C	**500FK20**
	25	44	GREY	35/140	C	**500FK25**
	32	44	GREY	20/80	C	**500FK32**



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC bend 90°	16	40	GREY	100/1000	C	**500BK16**
	20	40	GREY	50/600	C	**500BK20**
	25	40	GREY	25/300	C	**500BK25**
	32	40	GREY	100	C	**500BK32**
	40	40	GREY	100	C	**500BK40**



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
Plastic bend small 90°	16	40	GREY	100/400	C	**500SK16**
	20	40	GREY	100/300	C	**500SK20**
	25	40	GREY	100/200	C	**500SK25**
	32	40	GREY	50/150	C	**500SK32**



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC T-joint	16	40	GREY	100/300	C	**500T16**
	20	40	GREY	100/200	C	**500T20**
	25	40	GREY	50/100	C	**500T25**
	32	40	GREY	50/100	C	**500T32**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



Type	Used for cable conduit ϕ (mm)	IP code	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC coupling	16	40	GREY	100/1200	C	**500C16**
	20	40	GREY	100/800	C	**500C20**
	25	40	GREY	50/500	C	**500C25**
	32	40	GREY	25/250	C	**500C32**
	40	40	GREY	25/150	C	**500C40**



Type	Used for cable conduit ϕ (mm)	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC conduit clips	16	GREY	100/1500	C	**500CC16**
	20	GREY	100/1000	C	**500CC20**
	25	GREY	100/1000	C	**500CC25**
	32	GREY	50/800	C	**500CC32**
	40	GREY	50/400	C	**500CC40**



Type	Used for cable conduit ϕ (mm)	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC conduit clips with plug and steel screw	16	GREY	100/1000	C	**500CS16**
	20	GREY	100/1000	C	**500CS20**
	25	GREY	100/800	C	**500CS25**
	32	GREY	50/400	C	**500CS32**



Type	Used for cable conduit ϕ (mm)	Colour	Packing/Box (pcs)	Product category	Catalogue number
PVC collar conduit clips	16	GREY	100/1000	C	**500CO16**
	20	GREY	100/1000	C	**500CO20**
	25	GREY	100/800	C	**500CO25**
	32	GREY	50/500	C	**500CO32**



Type	Length (mm)	Colour	Packing	Product category	Catalogue number
PVC modular fixing guide for clips	200	GREY	400	C	**500BC**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

METAL CABLE TRAYS AND ACCESSORIES



The universal cable support systems are used for construction of cable link in closed production premises for direct mounting on even vertical surfaces. They are perforated metal grates and accessories with standard lengths and sizes. They allow quick construction of cable systems with many angles and derivations.

Type	Size (mm)	Tickness	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
CT1 UT CABLE TRAY	40x50	0,8	2500	1	C	**56050825U**
CT1 UT CABLE TRAY	40x100	0,8	2500	1	C	**56100825U**
CT1 UT CABLE TRAY	40x150	0,8	2500	1	C	**56150825U**
CT1 UT CABLE TRAY	40x200	0,8	2500	1	C	**56200825U**
CT1 UT CABLE TRAY	40x300	0,8	2500	1	C	**56300825U**
CT1 UT CABLE TRAY	60x100	0,8	2500	1	C	**56100826U**
CT1 UT CABLE TRAY	60x200	0,8	2500	1	C	**56200826U**
CT1 UT CABLE TRAY	60x300	0,8	2500	1	C	**56300826U**



Type	Size (mm)	Tickness	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
CT1 CABLE TRAY COVER	10x50	0,8	2500	1	C	**56050825C**
CT1 CABLE TRAY COVER	10x100	0,8	2500	1	C	**56100825C**
CT1 CABLE TRAY COVER	10x150	0,8	2500	1	C	**56150825C**
CT1 CABLE TRAY COVER	10x200	0,8	2500	1	C	**56200825C**
CT1 CABLE TRAY COVER	10x300	0,8	2500	1	C	**56300825C**



Type	Size (mm)	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
CT1 COUPLER FOR TRAYS WITH THE SAME SIZE	40	250	1	C	**56250C**



Type	Tickness	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
CT1 HANGING SUPPORT	1,5	100	1	C	**56100HSW**
CT1 HANGING SUPPORT	1,5	150	1	C	**56150HSW**
CT1 HANGING SUPPORT	1,5	200	1	C	**56200HSW**
CT1 HANGING SUPPORT	1,5	300	1	C	**56300HSW**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Type	Tickness	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
ANGLE 90D	1.5	100X100	1	C	**5690100**
ANGLE 90D	1.5	150X150	1	C	**5690150**
ANGLE 90D	1.5	200X200	1	C	**5690200**
ANGLE 90D	1.5	300X300	1	C	**5690300**



Type	Metric bolt diameters	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
ANGLE COVER 90D	1.5	100x100	1	C	**5690100C**
ANGLE COVER 90D	1.5	150x150	1	C	**5690150C**
ANGLE COVER 90D	1.5	200x200	1	C	**5690200C**
ANGLE COVER 90D	1.5	300x300	1	C	**5690300C**



Type	Tickness	Usage	Packing/Box (pcs)	Product category	Catalogue number
CT1 HOLDER	1,5	for cable trays from 50-200mm	1	C	**56200HOL**
CT1 HOLDER	1,5	for cable trays 300mm	1	C	**56300HOL**



Type	Thread	Length (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
THREADED HANGING ROD	M6	1000	4.8	100	C	**M517079**
THREADED HANGING ROD	M8	1000	4.8	50	C	**M517080**
THREADED HANGING ROD	M10	1000	4.8	40	C	**M517078**

Application: Suitable for fixing skirting, stud battens to wall and long runs of shelf support

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



AIR-TERMINATION ROD

Suitable for wind loads according to Eurocode 1: DIN EN 50164 - 2. Last metre is tapered from Ø 16 mm to Ø 10 mm, material: AlMgSi. Matches stand system FangFix. Material: Aluminium

Model	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
101 VL2000	2000	10/16	1/10	G	**ME014066**
101 VL2500	2500	10/16	1/10	G	**ME014071**
101 VL3000	3000	10/16	1/10	G	**ME014063**
101 VL3500	3500	10/16	1/10	G	**ME014069**



STAND FOR AIR-TERMINATION ROD, FANGFIX SYSTEM

System consists of FangFix stone with base and clamp. FangFix clamp made of VA. Lightning current tested with 100 kA (10/350). 16 kg stone with high level of stability. Quick and easy mounting of interception rod using anchors. Concrete, frost-resistant. The FangFix stone can be stacked

Model	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
F-FIX-16	373	84/119	1	G	**M014102**



PROFILE EARTHING ROD WITH CONNECTION LUG

Cross-profile 50 x 50 x 3 mm. With connecting strap. Hot-dip galvanized. 1 through hole with diameter 13 mm. 2 through holes with diameter 11 mm. For the construction of earthing systems e.g. antenna or earthing of building site distribution boards. Material: Steel

Model	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
213 1500 DIN	1500	1	G	**M014007**



EARTHING ROD WITH STRIP

Cold galvanized: have been coated in zinc to make them corrosion resistant. Material: Steel

Model	Rog length (mm)	Strip length (mm)	Rog thickness (mm)	Strip thickness (mm)	Rog width (mm)	Strip width (mm)	Product category	Catalogue number
50/50/5	1500	1500	5	3	50	30	G	**M014048**
60/60/6	1500	1500	6	3	60	40	G	**M014012**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

COPPER-BONDED EARTHING ROD, THREADED



It guarantees trouble-free removal of energy up to 50 years since the copper layer does not allow corrosion.
Can be extended to the desired length with brass couplers. 99.9% pure electrolytic copper coating 300µm
Rods have a high steel Q 235 core and tip that provide superior strength when driving
Copper coating will not crack when bent or tear when driven

Model	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-ER17	1500	17.2	1/10	G	**ME014011**

COUPLERS FOR THREADED RODS



To connection two or many threaded copper-bonded ground rods

Model	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-CTR	68	1	G	**ME014012**

DRIVING STUD FOR COPPER-BONDED THREADED RODS



Material: Tempered steel.
Depending on the hardness of the soil, usually 1pc. enough for an object.

Model	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-DS	58	1	G	**ME014013**

CONNECTORS EARTHING ROD TO STRIP / CONDUCTOR



Material: stainless steel 304
Conductor size: 50mm^2 stranded
Strip size: 40x4mm max

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-1204	65	65	1/45	G	**ME014014**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



HOT-DIP GALVANIZED STRIP FOR EARTH

Continuosly hot dip galvanized Earthing strip, DD11
Zinc coating: 500g/m2 =80mk
For lightning protection, earthing systems and ring equipotential bonding
Material: Steel

Model	Length (mm)	Thickness (mm)	Width mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-EP 30x3	48.6	3	30	1	G	**ME301089**
EL-EP 40x4	39.6	4	40	1	G	**ME301090**



COLD GALVANIZED STRIP FOR EARTH

Coated in zinc to make them corrosion resistant
Material: Steel

Model	Length (mm)	Thickness (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
40/4	6	4	40	1	G	**M014008**



ALUMINIUM ROUND CONDUCTOR

Conductor material: AlMgSi
EL-LP 8 - without isolation
EL-LP 11- with not flammable halogen free isolation

Model	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-LP 8	140	8	1/140	G	**ME301092**
EL-LP 11	100	11	1/100	G	**ME301096**



CABLE HOLDER FOR FLAT ROOFS

Fixing the wire on flat roofs
Plastic stabilized PE against UV radiation with inserted concrete block

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL- RCH	144	92	66	1	G	**ME301082**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

EQUIPOTENTIAL BONDING BAR



Equipotential busbar for equipotential bonding to DIN VDE 0100-410/-540 and DIN 62561-15.
Material of bar: Ms. Material of clamps: St galvanized
Connection options: 7 single or multi-wire cables 25mm² or fine-wire cables to 16 mm² (max. D- 7 mm)
1 D8-12mm
1 up to 30x5 / D8-12mm

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-EBR	182	52	42	1	G	**ME301084**

VARIABLE EARTHING CONNECTOR FOR ALUMINIUM CONDUCTORS



Aluminium- AlCu4MgSi(A)
Suitable for conductors with diameter 8 and 11mm. Type of fastening screw: Hexagonal bolt

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-V	38	40	1	G	**ME301088**

SCREWLESS CABLE BRACKET FOR EARTHING CONDUCTORS



Suitable for conductors with diameter 8 mm & 11 mm

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-VA	24.2	22	33.4	1/50	G	**ME301006**

ATTACING CLAMP



Attaching the round conductors to metal parts of the premises

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-AC	78	40	36	1/100	G	**ME014070**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

ROOF GUTTER CLAMP



Suitable for all bulge and bead thicknesses
Suitable for conductors with diameter 8 and 11mm
Material: Steel

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-RGC	50	45	1/100	G	**ME301008**

CROSSBAR FOR EARTHING CONDUCTOR



Suitable for conductors with diameter 8 and 11mm. Hot-dip galvanized
Material: Steel

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
156 K8-10 ST	43	20	1/100	G	**M301083**

ROD HOLDER



For interception and earth entry rods 101 VL. Installed with crossbar and hexagonal bolts M6 x 16.
With female thread M8 or through hole with D- 7 mm
Material: Die-cast zinc, Galvanized

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
113 Z-16	56	20	1/10	G	**M014014**

BRIDGE CONNECTOR FOR ROD HOLDER



For fitting round conductors with D 8 and 10 mm to earthing rods or flat strip 30x3.5. Including 2 hexagonal bolts M8 x 20 high-grade stainless steel (V2A). Conforms to the requirements according to VDE 0185-305 (IEC 62305)
Material: Steel, Hot-dip Galvanized

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
226 8-10	70	30	1/20	G	**M014054**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

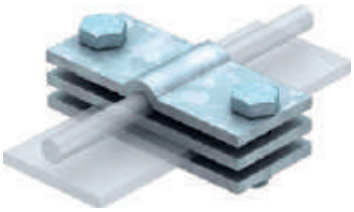

EARTH CONNECTION TERMINAL FOR CONDUCTOR TO STRIP

For round conductor and flat strips. Suitable for cable 50 mm^2 and strips with width 40 mm.
With 2 hexagonal bolts M6 x 20 mm
Material: Steel, Hot-dip galvanized

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
937 50	60	25	1/10	G	**M031239**



CROSS-CONNECTORS FOR STRIPS AND CONDUCTORS

Material: stainless steel 304
Conductor size: 50mm^2 stranded
Strip size: 40x4mm max

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
EL-1203	65	65	1/45	G	**ME301087**



SPACER CLIP FOR STRIPS

Suitable for strips with width 40 mm
With thread M6 and 2 hexagonal bolts M6 x 16 (F)
Hot-dip galvanized
Material: Steel

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
831 40 M6	65	14	14	1/10	G	**M301059**



BRIDGE CONNECTOR FOR ROD HOLDER

With 1 attaching hole with D- 11 mm
With 2 x 4 mounting hole with D- 5.2 mm
With 2 x 2 mounting hole with D- 6.9 mm
Material: Aluminium

Model	Length (mm)	Width (mm)	Packing/Box (pcs)	Product category	Catalogue number
288 DIN	170	30	1/20	G	**M014017**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



INSPECTION DOOR

Lightweight design for flush-mounted separation points
Claw length approx. 80 mm
Strip galvanized
Material: Steel

Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
5800 VZ	180	13.5	230	1	G	**M500684**



FLUSH MOUNTING JUNCTION BOX EC350 SERIES

TECHNICAL DATA:
Rated voltage: up to 1000V
Box material: Shock resistant technopolymer
Screw material: Anticorrosive galvanized steel
For quick and easy cables or conduits inlet- Side are pre-cutting
By the separator it is possible to divide the box into separate sections for different circuits
IP code: IP40



Type	Description	Box dimensions (mm)			Packing / Box	Product category	Catalogue number
		L	H	W			
EC350C4	Junction box	152	100	70	1/80	C	**1927410**
EC350C6	Junction box	196	152	70	1/40	C	**1927411**
EC350C7	Junction box	294	152	70	1/28	C	**1927412**
EC350C8	Junction box	392	152	70	1/20	C	**1927413**
EC3500S	Separator				10/100	C	**1927415**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CONSOLE BOX FOR PLASTERBOARD

Type	Packing (pcs)	Product category	Catalogue number
Single	240	C	**19274**
Double	120	C	**19275**
Triple	60	C	**19276**



UNIVERSAL CONSOLE BOX-FLUSH MOUNTING

Type	d (mm)	Packing (pcs)	Product category	Catalogue number
Console box- Φ65	65	300	C	**1927302**



CONSOLE BOX MULTI

Type	d (mm)	Packing (pcs)	Product category	Catalogue number
Console box multi- Ø65	65	250	C	**1927301**



CONSOLE FOR BRICK AND CONCRETE ITALIAN TYPE

Type	Packing (pcs)	Product category	Catalogue number
Triple Console box for brick and concrete	10/300	C	**24203**
Quadruple Console box for brick and concrete	10/200	C	**71304**
Sixfold Console box for brick and concrete	10/200	C	**68206**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days and for ITALIAN TYPE will be 90 days.



CONSOLE BOX FOR PLASTERBOARD ITALIAN TYPE

Type	Packing (pcs)	Product category	Catalogue number
Triple Console box for plasterboard	160	C	**24205**
Quadruple Console box for plasterboard	150	C	**24206**



CONSOLE BOX FOR PLASTERBOARD ITALIAN TYPE

Type	Packing (pcs)	Product category	Catalogue number
Sixfold Console box for plasterboard	10/160	C	**26636**



DISTRIBUTION BOXES-SQUARE TYPE

Type	Size			Packing (pcs)	Product category	Catalogue number
	L	W	H			
80/80/50	80	80	50	100	C	**1927402**
100/100/50 without screws	100	100	50	40	C	**1927400**



DB FOR PLASTERBOARD-SQUARE TYPE

Type	Size			Packing (pcs)	Product category	Catalogue number
	L	W	H			
Distribution Box 80/80/45	80	80	45	100	C	**1927405**
Distribution Box 100/100/45	100	100	45	100	C	**1927404**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days and for ITALIAN TYPE will be 45 days.



DB FOR PLASTERBOARD-ROUND TYPE

Type	d (mm)	Packing (pcs)	Product category	Catalogue number
Distribution Box Φ65	65	240	C	**1927403**
Distribution Box Φ70	70	200	C	**1927407**
Distribution Box Φ80	80	100	C	**1927409**



DISTRIBUTION BOXES - ROUND TYPE

Type	d (mm)	Packing (pcs)	Product category	Catalogue number
Distribution Box Φ70	70	300	C	**1927406**
Distribution Box Φ80	80	200	C	**1927408**



CAP WITH FASTENING CLIPS

Type	Suitable for holes with a diameter (mm)	Packing (pcs)	Product category	Catalogue number
Cap with clips	60-90	1/200	C	**19277**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days and for ITALIAN TYPE will be 45 days.

WATERPROOF JUNCTION BOXES IP44



Plastic junction boxes with different shapes and dimensions. Designed for cable lines extension or tapping at cable installations laying. Made of ABS material with openings for input - output conductors, with rubber gasket to provide the corresponding IP code. Resistant to chemical, thermal and UV rays. Direct wall mounting with screws.
Documentation corresponding to the product:
Standard: EN 60670-1



TECHNICAL DATA:
* Rated voltage: up to 1000V
* Material: ABS
* IP code: IP 44



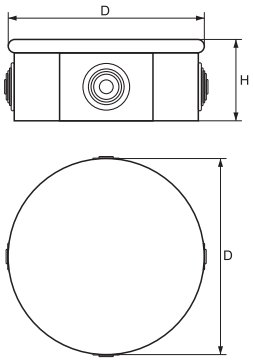



Box type	Box dimensions (mm)				Gasket dimensions (mm)		IP code	Packing / Box	Product category	Catalogue number
	D	L	H	W	d	C				
WB50/50	50	-	-	50	22.5	17	44	320	C	**8070**
WB80/50	80	-	-	50	22.5	17	44	240	C	**8071**
WB85/85/50	-	85	85	50	22.5	18.5	44	200	C	**8072**

WATERPROOF JUNCTION BOXES IP65



Box type	Box dimensions (mm)				Hole/pcs	IP code	Packing / Box	Product category	Catalogue number
	L	H	W	d					
WBG 100/100/70	100	100	70	27	7	65	100	C	**8001**
WBG 150/110/70	150	110	70	27	10	65	60	C	**8002**
WBG 150/150/70	150	150	70	27	7	65	60	C	**8003**
WBG 200/100/70	200	100	70	27	8	65	50	C	**8004**
WBG 200/155/80	200	155	80	35	10	65	30	C	**8005**
WBG 200/200/80	200	200	80	35	12	65	30	C	**8006**
WBG 255/200/80	255	200	80	35	12	65	30	C	**8007**
WBG 300/250/120	300	250	120	35	12	65	20	C	**8008**
WBG 400/350/120	400	350	120	35	16	65	5	C	**8009**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

WATERPROOF JUNCTION BOXES IP66 WITH TRANSPARENT COVER



Box type	Box dimensions (mm)			IP code	Packing / Box	Product category	Catalogue number
	L	H	W				
WBT 65/95/55	65	95	55	66	200	C	**8010**
WBT 100/100/50	100	100	50	66	150	C	**8011**
WBT 80/110/70	80	110	70	66	100	C	**8012**
WBT 80/130/85	80	130	85	66	100	C	**8013**
WBT 80/180/70	80	180	70	66	86	C	**8014**
WBT 80/250/85	80	250	85	66	60	C	**8015**
WBT 125/125/75	125	125	75	66	48	C	**8016**
WBT 125/125/100	125	125	100	66	36	C	**8022**
WBT 125/175/100	125	175	100	66	40	C	**8017**
WBT 150/200/100	150	200	100	66	24	C	**8018**
WBT 150/250/130	150	250	130	66	18	C	**8019**
WBT 200/200/130	200	200	130	66	27	C	**8020**
WBT 280/190/130	280	190	130	66	18	C	**8021**

JUNCTION BOXES B SERIES, IP54



Model	Box dimensions (mm)			Colour	Packing / Box	Product category	Catalogue number
	L	H	W				
B8	80	80	45	Grey	100	C	**8030**
B10	100	100	45	Grey	100	C	**8031**

THERMOPLASTIC CABLE JUNCTION BOX, A SERIES, IP54



Model	Box dimensions (mm)			Colour	Packing / Box	Product category	Catalogue number
	L	H	W				
A6	80	43	34	Grey	10/100	G	**M008128**
A8	75	75	36	Grey	10/150	G	**M008129**
A11	85	85	40	Grey	10/80	G	**M008106**
A14	100	100	38	Grey	10/100	G	**M008107**
A18	125	100	38	Grey	10/80	G	**M008091**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

THERMOPLASTIC CABLE JUNCTION BOXES, T SERIES WITH PLUG-IN SEAL, IP66



Model	Box dimensions (mm)			Colour	Packing / Box	Product category	Catalogue number
	L	H	W				
T25 (round)	80	80	51	Grey	5/125	G	**M008140**
T40	90	90	52	Grey	5/80	G	**M008127**
T60	114	114	57	Grey	6/60	G	**M008125**
T100	150	116	67	Grey	1/40	G	**M008123**
T160	190	150	77	Grey	1/20	G	**M008058**
T250	240	190	95	Grey	1/8	G	**M008118**
T350	285	201	120	Grey	1/5	G	**M008141**

THERMOPLASTIC CABLE JUNCTION BOXES, T OE SERIES, ENCLOSED, IP66



Model	Box dimensions (mm)			Colour	Packing / Box	Product category	Catalogue number
	L	H	W				
T60 OE	114	114	57	Grey	6/60	G	**M008105**
T100 OE	150	116	67	Grey	1/40	G	**M008055**
T160 OE	190	150	77	Grey	1/20	G	**M008124**
T250 OE	240	190	95	Grey	1/8	G	**M008142**
T350 OE	285	201	120	Grey	1/5	G	**M008143**

JUNCTION BOX WITH PERFORATION MEMBRANE B 9/T, IP67



Model	Box dimensions (mm)			Colour	Packing / Box	Product category	Catalogue number
	L	H	W				
B 9/T	110	110	50	Grey	5/40	G	**M008144**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



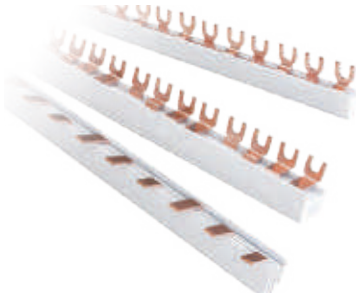





SUPPLY BUSBAR

FUNCTIONS:
- enables the supply of a group of conductors
- provides simultaneous supply
- conducting section – electrotechnical copper
- insulation of the conducting section

TECHNICAL DATA:
- Rated operating voltage: 230/400V
- Isolating voltage: 500V
- Abnormal heating wear resistance and fire of the outer parts: 960°C/3sec.
- Rated current (phase): 63/100A

CONNECTING:
- to the joining terminal of the breaker

Type (copper busbar)	Length (m)	Poles (number)	In with one point of power supply	In with two points of power supply	Packing / Box (pcs)	Product category	Catalogue number
1P 63	1	54	63A	90A	20 / 100	C	**14163**
1P 100	1	54	100A	120A	20 / 100	C	**14190**
2P 63	1	28	63A	90A	10 / 50	C	**14263**
3P 63	1	18	63A	90A	6 / 30	C	**14363**
3P 100	1	18	100A	120A	5 / 50	C	**14390**
DP 1N	1	56	63A	90A	10 / 50	C	**14463**
C100 1P	1	-	125A	150A	20 / 100	C	**14190T**
C100 2P	1	-	125A	150A	10 / 50	C	**14290T**
C100 3P	1	-	125A	159A	5 / 20	C	**14390T**
U 1P 63	1	54	63A	90A	20 / 100	C	**14163U**
U 2P 63	1	28	63A	90A	10 / 50	C	**14263U**
U 3P 63	1	18	63A	90A	6 / 30	C	**14363U**
U 4P 63	1	13	63A	90A	5 / 20	C	**14463U**

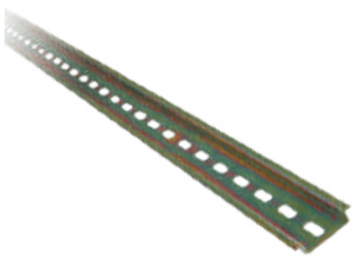



MOUNTING (DIN) RAIL

FUNCTIONS:
- serves for mounting breakers, residual current devices, contactors and other elements
- provides a firm fixation of the elements

TECHNICAL DATA:
- brass alloy with galvanic cover
- factory drilled mounting openings
- length up to 1m

CONNECTING:
- with bolts or other fixing elements to the mounting surface

Length (m)	Packing / Box (pcs)	Product category	Catalogue number
1m	20 / 100	C	**14001**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ZERO TERMINALS



Rail type	L (mm)	H (mm)	W (mm)	M	Packing / Box (pcs)	Product category	Catalogue number
SP 029-4	82.9	21.5	12	5x10	10 / 500	C	**14204**
SP 029-6	100.9	21.5	12	5x10	10 / 800	C	**14206**
SP 029-8	118.9	21.5	12	5x10	20 / 300	C	**14208**
SP 029-10	136.9	21.5	12	5x10	20 / 300	C	**14210**
SP 029-12	182.4	21.5	12	5x10	20 / 250	C	**14212**
SP 031-4	59.5	31.5	12.4	5x10	5 / 400	C	**14304**
SP 031-6	76.5	31.5	12.4	5x10	5 / 400	C	**14306**
SP 031-8	93	31.5	12.4	5x10	5 / 400	C	**14308**
SP 031-10	111	31.5	12.4	5x10	5 / 400	C	**14310**
SP 031-12	128	31.5	12.4	5x10	5 / 300	C	**14312**

ZERO RAILS



They represent a brass rail with rectangular section with factory made openings for the conductors and bolts for clamping of the conductor. They are offered in types with insulated and non-insulated rail. They are used in the electrical distribution boxes for zeroing and earthing.

TECHNICAL DATA:
- Material: brass for the current leading elements
- Insulation material: plastic
- Colour: gray/blue
- Application: general
- Ambient temperature: -40 to +65°C

Rail type	Length L (mm)	Height H (mm)	Width W (mm)	Ø D (mm)	Bolt	Number of terminals	Packing / Box (pcs)	Product category	Catalogue number
BRASS	1000	7.8	6	5	M4	54	100	C	**14002**
ZERO insulated	250	-	-	5	M4	16	200	C	**14012**

TERMINAL BLOCKS TBH TYPE



Type	Pieces in a strip	In (A)	Un (V)	Colour	Section of the conductor (mm^2)	Packing / Box (pcs)	Product category	Catalogue number
TBH 3A	12	3	660	semitransparent	to 1.5	10 / 1000	C	**31003**
TBH 6A	12	6	660	semitransparent	to 4	10 / 1000	C	**31006**
TBH 10A	12	10	660	semitransparent	to 6	10 / 500	C	**31010**
TBH 15A	12	15	660	white	to 6	10 / 500	C	**31015**
TBH 20A	12	20	660	white	to 10	10 / 400	C	**31020**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FIXED TERMINAL BLOCKS - LTU2 UK SERIES

Fixed terminal blocks with universal application into electrical distribution boxes. For DIN-rail mounting. Variety of sizes for optimum using of available space by selection of appropriate terminals for the corresponding conductors. Made of non-flammable insulation polymeric material.



Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
LTU2UK 3N	0.2-4	0.2-2.5	42.5	47	5.2	32	800	grey	50 / 3000	C	**31033**
LTU2UK 3N	0.2-4	0.2-2.5	42.5	47	5.2	32	800	red	50 / 3000	C	**31032**
LTU2UK 3N	0.2-4	0.2-2.5	42.5	47	5.2	32	800	black	50 / 3000	C	**31031**
LTU2UK 3N	0.2-4	0.2-2.5	42.5	47	5.2	32	800	blue	50 / 3000	C	**31035**





Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
LTU2UK 5N	0.2-6	0.2-4	42.5	47	6.2	41	800	grey	50 / 2000	C	**31053**
LTU2UK 5N	0.2-6	0.2-4	42.5	47	6.2	41	800	red	50 / 2000	C	**31052**
LTU2UK 5N	0.2-6	0.2-4	42.5	47	6.2	41	800	black	50 / 2000	C	**31051**
LTU2UK 5N	0.2-6	0.2-4	42.5	47	6.2	41	800	blue	50 / 2000	C	**31055**





Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
LTU2UK 6N	0.2-10	0.2-6	42.5	47	8.2	57	800	grey	50 / 1000	C	**31063**
LTU2UK 6N	0.2-10	0.2-6	42.5	47	8.2	57	800	red	50 / 1000	C	**31062**
LTU2UK 6N	0.2-10	0.2-6	42.5	47	8.2	57	800	black	50 / 1000	C	**31061**
LTU2UK 6N	0.2-10	0.2-6	42.5	47	8.2	57	800	blue	50 / 1000	C	**31065**







Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
LTU2UK 10N	0.5-16	0.5-10	42.5	47	10.2	76	800	grey	50 / 1000	C	**31103**
LTU2UK 10N	0.5-16	0.5-10	42.5	47	10.2	76	800	red	50 / 1000	C	**31102**
LTU2UK 10N	0.5-16	0.5-10	42.5	47	10.2	76	800	black	50 / 1000	C	**31101**
LTU2UK 10N	0.5-16	0.5-10	42.5	47	10.2	76	800	blue	50 / 1000	C	**31105**





In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
LTU2UIK 16	2.5-25	4-16	42.5	47	12.2	101	800	grey	30 / 1200	C	**31163**
LTU2UIK 35	10-35	10-35	55	62	15.2	125	800	grey	20 / 400	C	**31353**







FIXED TERMINAL BLOCKS - JD SERIES

Two-sided insulated fixed terminal blocks designed to connect groundes conductors. Made of non-flammable insulation polymeric material.

Type	Section of the conductor (mm^2)		Size of the terminal (mm)			In (A)	Un (V)	Colour	Packing / Box (pcs)	Product category	Catalogue number
	single-core	multicore	L	H	W						
5JD	0.2-4	0.2-4	42.5	47	6.2	34	800	yellow-green	50 / 1000	C	**31054**
6JD	0.2-10	0.2-6	42.5	47	8.2	37	800	yellow-green	50 / 1000	C	**31064**
10JD	0.5-10	0.5-6	42.5	47	8.2	61	800	yellow-green	50 / 1000	C	**31104**
16JD	2.5-25	2.5-16	42.5	47	12.2	108	800	yellow-green	50 / 600	C	**31164**
35JD	2.5-35	2.5-35	42.5	47	15	135	800	yellow-green	20 / 400	C	**31354**







MARKING TAGS - ZB TYPE

Accessories for marking and separation of different electrical circuits, different voltages and fixing of elements for DIN-rail mounting.

Type	Pieces in a strip	Colour	Size (mm)	Packing / Box (pcs)	Product category	Catalogue number
ZB6	20	white	6	100 / 1200	C	**31906**
ZB8	10	white	8	100 / 1200	C	**31908**



END COVER

Type	Colour	Thickness (mm)	Packing / Box (pcs)	Product category	Catalogue number
EC	grey	8	200 / 6000	C	**31901**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



UNIVERSAL END FIXED PIECES E/UK TYPE

Type	Colour	Thickness (mm)	Packing / Box (pcs)	Product category	Catalogue number
E/UK	grey	5	200 / 2400	C	**31902**



DOUBLE DECK TERMINAL BLOKS

Type	Section of the conductor (mm^2)		Rated current (A)	Rated voltage (V)	Colour	Dimmensions (mm)			Packing (pcs.)	Product category	Catalogue number
	single-core	multicore				L	H	W			
DDTB4/5N	0.2-6	0.2-4	32	500	baige	59.9	54	6	50/1000	C	**31056D**
DDTB4/5N	0.2-6	0.2-4	32	500	grey	59.9	54	6	50/1000	C	**31053D**
End cover for DDTB4/5N					grey	54	43.5	1.5	200/6000	C	**31901D**



INSULATING MOUNTING TERMINAL - TB25

FUNCTIONS:
- provides a firm joining of rigid or flexible conductors up to $35mm^2$ to power supply busbar
- provides a firm joining of the power supply conductor to the breaker
- provides enough contact surface of the conductor
- Brass alloy with galvanic cover
- Fabric isolated with plastic cover
- Appropriate for joining to copper or aluminum cables
- Rated voltage: 230V
- Rated current: up to 63A
- Isolating voltage: ≥500V
- IP code: IP>20
- Section of power supply conductor: up to $35mm^2$



Type	Section of the conductor (mm^2)	Rated current In (A)	Packing / Box (pcs)	Product category	Catalogue number
TB 25	2.5 to 35	63	20 / 2000	C	**31025**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



UNIPOLAR DISTRIBUTION TERMINAL BLOCKS FOR COPPER AND ALUMINIUM CONDUCTORS

TECHNICAL DATA:

- Housing material: PA Nylon
- Terminal material: tin plated brass
- Grade of flame retardant: UL94v-0
- Mounting: DIN rail or screw fixing

Type	Current (A)	Quantity cross sections mm²	Dimmensions (mm)			Packing (pcs.)	Product category	Catalogue number
			L	H	W			
PPDTB80	80A	1x 6-16 mm² 4x 2.5-6 mm² 2x 2.5-16 mm²	30	69	49		C	**319080**
PPDTB125	125A	1x 10-35 mm² 6x 2.5-16 mm²	29	77	46		C	**319125**
PPDTB160	160A	1x 10-70 mm² 6x 2.5-16 mm²	29	77	46		C	**319160**
PPDTB250	255A	1x 35-120 mm² 8x 2.5-16 mm² 4x 2.5-10 mm²	47	96	50		C	**319250**
PPDTB400	400A	1x 95-185 mm² 8x 2.5-16 mm² 4x 2.5-10 mm²	47	96	50		C	**319400**





TERMINAL BLOCKS TBF TYPE

Type	Pieces in a terminal	Section of the conductor (mm²)	Rated current (A)	Rated voltage (V	Dimmensions (mm)			Product category	Catalogue number
					L	H	W		
two terminal block	2	4 mm²	32	400	12.4	14.5	20.5	C	**31021**
three terminal block	3	4 mm²	32	400	17.0	14.5	20.5	C	**31022**
five terminal block	5	4 mm²	32	400	26.6	14.5	20.5	C	**31023**

FAST LIGHTING CABLE CONNECTOR

Type	Pieces in a terminal	Section of the conductor (mm²)	Rated current (A)	Rated voltage (V	Dimmensions (mm)			Product category	Catalogue number
					L	H	W		
lighting connector	3	1.0-2.5 mm²/0.5-2.5 mm²	25	400				C	**31024**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

QUICK CONNECTION TEMINAL BLOCK



Type	Pieces in a terminal	Section of the conductor (mm^2)	Rated current (A)	Rated voltage (V	Dimmensions (mm) L	W	H	Packing (pcs.)	Product category	Catalogue number
2P- 2 in/ 2 out	4	0,75mm^2- 4mm^2	32	250	41.4	25.5	14.4	1/100	C	**31026**
3P- 3 in/ 3 out	6	0,75mm^2- 4mm^2	32	250	41.4	30.5	14.4	1/70	C	**31027**
5P- 5 in/ 5 out	10	0,75mm^2- 4mm^2	32	250	41.4	40.5	14.4	1/50	C	**31028**

QUICK CONNECTION TEMINAL BLOCK



Type	Pieces in a terminal	Section of the conductor (mm^2)	Rated current (A)	Rated voltage (V	Dimmensions (mm) L	W	H	Packing (pcs.)	Product category	Catalogue number
2P- 2 in/ 4 out	6	0,75mm^2- 4mm^2	32	250	41.4	25.9	14.55	1/50	C	**31029**
2P- 2 in/ 6 out	8	0,75mm^2- 4mm^2	32	250	41.4	35.9	14.55	1/50	C	**31030**

QUICK CONNECTION TEMINAL BLOCK



Type	Pieces in a terminal	Section of the conductor (mm^2)	Rated current (A)	Rated voltage (V	Dimmensions (mm) L	W	H	Packing (pcs.)	Product category	Catalogue number
3P- 3 in/ 6 out	9	0,75mm^2- 4mm^2	32	250	41.4	35.9	14.6	1/50	C	**31034**
3P- 3 in/ 9 out	12	0,75mm^2- 4mm^2	32	250	41.4	48.5	14.6	1/50	C	**31036**

MODULE TERMINAL BLOCK FOR QUICK CABLE CONNECTION



Type	Pieces in a terminal	Section of the conductor (mm^2)	Rated current (A)	Rated voltage (V	Dimmensions (mm) L	W	H	Packing (pcs.)	Product category	Catalogue number
1P- 1 in/ 1 out	2	0,75mm^2- 4mm^2	32	250	39.3	8.5	14.5	1/100	C	**31037**



Standard: EN 60 423; 48580-81



CABLE GLANDS PG TYPE

Plastic pipes supplied with the corresponding gaskets and nuts. Designed to provide necessary IP code on the points where conductors pass through the walls of the electric distribution boxes. All cable gland elements are made of high quality plastic (PE) and rubber.

- Material: polyethylene (PE)
- Colour: gray
- Application: general
- Ambient temperature: -40 to +65°C
- IP code: IP 68

TECHNICAL DATA:

Type	Overlapping field	T (mm)	B (mm)	d (mm)	D (mm)	L1 (mm)	L2 (mm)	Packing / Box (pcs)	Product category	Catalogue number
PG-7	3.5-6.8	16.3	18	12	6.6	10	22	100 / 4000	C	**500070**
PG-9	5-8	18.9	21.7	15.5	8.5	10	25	100 / 4000	C	**500090**
PG-11	6-10	21.7	23.5	18.5	10.4	8.5	29	100 / 3000	C	**500110**
PG-13.5	7-12	23.6	26.5	20	13	10	29	100 / 2000	C	**500135**
PG-16	8-14	26.5	29.3	21.5	14	9	29	100 / 2000	C	**500160**
PG-19	9-17	29	32	23	17	12	29	100 / 2000	C	**500190**
PG-21	10-18	32.3	35.6	28	19	12	35	100 / 1000	C	**500210**
PG-25	15-22	32.6	32.6	29.8	24	13	31	100 / 1000	C	**500250**
PG-29	16-24	41.1	45.4	36	26	12.5	40	50 / 500	C	**500290**
PG-36	18-28	52	58	46	31.5	12.5	45	50 / 350	C	**500360**
PG-42	26-36	57.4	61.9	51	37.6	17.5	47	20 / 200	C	**500420**
PG-48	32-39	65.2	70.7	58	43	21	50	20 / 200	C	**500480**



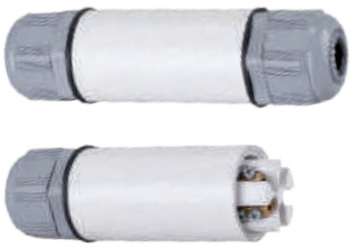

CABLE CONNECTOR

The cable connectors are hopeful way for assembling both cables. The high-temperature and water resistant stability assure to the connector assure a high degree of security even in extreme conditions.

Type	Section of the conductor (mm^2)	Length (mm)	Φ (mm)	Cable glands type	IP code	Packing / Box (pcs)	Product category	Catalogue number
CABLE CONNECTOR 11	2x0,5-2,5	78,3	26,2	PG11	68	50	C	**31072**
CABLE CONNECTOR 16	5x1,5- 2,5	115	26,5	PG16	67	50	C	**59245**
CABLE CONNECTOR 21	5x4-6	124	33,5	PG21	67	50	C	**59246**



Terminal box IP65



Terminal box IP44

WATERPROOF TERMINAL BOX

Type	Section of the conductor (mm^2)	Rated current (A)	Voltage (V)	Material	Product category	Catalogue number
TERMINAL BOX IP44	0.5-4.0	6	450	Polycarbonate	C	**31071**
TERMINAL BOX IP65	0.5-2.5	10	450	Polycarbonate	C	**31070**



SUPPORT INSULATOR FOR LOW VOLTAGE





Support insulators are used in control and distribution cabinets mounting when bars isolation is required. Provides reliable insulation of live parts.

TECHNICAL SPECIFICATION:
- Rated voltage: 1000V
- Insulating voltage: 5000 V
- Ambient temperature : -40 to +65°C

Type	Impulse voltage kV	Strength	Fasting strength	Bolt	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
					H	W	a	ø			
SM 25	6	500	6	6	25	30	13	23	10 / 600	C	**31725**
SM 30	8	550	8	8	30	32	10	27	10 / 500	C	**31730**
SM 35	10	600	10	8	35	32	10	28	10 / 400	C	**31735**
SM 40	12	650	12	8	40	40	10	33	10 / 240	C	**31740**
SM 51	15	1000	20	8	51	50	12	28	10 / 240	C	**31751**
SM 76	25	1500	40	10	76	45	16	34	10 / 120	C	**31776**

CABLE FIXING CLIPS



Support insulators are used in control and distribution cabinets mounting when bars isolation is required. Provides reliable insulation of live parts.

TECHNICAL SPECIFICATION:
- Rated voltage: 1000V
- Insulating voltage: 5000 V
- Ambient temperature : -40 to +65°C

Type	Diameter Ø (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
CHR-4	4	100	100/500	C	**500004**
CHR-5	5	100	100/ 500	C	**500005**
CHR-6	6	100	100/ 300	C	**500006**
CHR-7	7	100	100/ 300	C	**500007**
CHR-8	8	100	100/ 250	C	**500008**
CHR-9	9	100	100/ 200	C	**500009**
CHR-10	10	100	100/ 200	C	**500010**
CHR-12	12	100	100/ 100	C	**500012**
CHR-14	14	100	100/ 50	C	**500014**
CHR-16	16	100	100/ 50	C	**500016**

PVC INSULATING TAPE



Colour	Thickness (mm)	Width (mm)	Length (m)	Packing / Box (pcs)	Product category	Catalogue number
Black	0.15	19	9,14	10 / 200	C	**51007**
Blue	0.15	19	9,14	10 / 200	C	**51009**
Red	0.15	19	18,28	10 / 200	C	**51002**
White	0.15	19	18,28	10 / 200	C	**51005**
Blue	0.15	19	18,28	10 / 200	C	**51006**

PVC INSULATING TAPE



Soft, flexible with good adhesiveness and flame retardant. Working temperature: 0-80°C. Electrical strength: 40kV/mm

Colour	Thickness (mm)	Width (mm)	Length (m)	Packing / Box (pcs)	Product category	Catalogue number
Black	0.15	19	10	1/300	C	**51011**
White	0.15	19	10	1/300	C	**51012**
Blue	0.15	19	10	1/300	C	**51013**
Red	0.15	19	10	1/300	C	**51014**
Yellow / Green	0.15	19	10	1/300	C	**51015**
Black	0.15	19	20	1/200	C	**51021**
White	0.15	19	20	1/200	C	**51022**
Blue	0.15	19	20	1/200	C	**51023**
Red	0.15	19	20	1/200	C	**51024**
Yellow / Green	0.15	19	20	1/200	C	**51025**

PVC INSULATING TAPE 3M TEMFLEX 1500



Colour	Thickness (mm)	Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
Black	0.15	19	20	10/100	G	**M151016**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BLACK SELF - AMALGAMATING HIGH VOLTAGE TAPE BISHOP 963

69kV | Waterproof | UV-Resistant| Moisture, corrosion and chemical resistance

Colour	Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
Black	19	9	1	G	**M051004**



ALUMINIUM TAPE

Ideal for temporary exhaust pipe repair heating, ventilation - electrics and electronics insulation and construction industries

Colour	Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
Aluminium	50	10	1	G	**M499469**



DUCT TAPE

Ideal for temporary exhaust pipe repair heating, ventilation - electrics and electronics insulation and construction industries

Colour	Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
Grey	50	25	1	C	**51055**
Black	50	25	1	G	**M499153**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

MASKING TAPE



Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
25	50	1	G	**M516400**
50	50	1	G	**M516401**

DOUBLE SIDED MOUNTING TAPE



Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
25	5	1	G	**M516402**
50	25	1	G	**M516403**

HAZARD TAPE



Width (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
50	100	1	G	**M500179**

HEAT SHRINKAGE TUBES WITH GLUE GL TYPE





Type	colour	Diameter before shrinking (mm)	Wall thikness (mm)	Shrinkage ratio	Packing (pcs; m)	Product category	Catalogue number
GL	black	D2.4 (≥2.4)	0.7±0.15	3:1	200	C	**3010024GL**
GL	black	D3.2 (3.5±0.3)	0.9±0.15	3:1	200	C	**3010032GL**
GL	black	D4.8 (5.2±0.3)	1.0±0.15	3:1	100	C	**3010048GL**
GL	black	D6.4 (6.8±0.4)	1.2±0.15	3:1	100	C	**3010064GL**
GL	black	D7.9 (8.4±0.4)	1.3±0.15	3:1	100	C	**3010079GL**
GL	black	D9.5 (9.9±0.4)	1.4±0.15	3:1	1,22	C	**3010095GL**
GL	black	D12.7 (13.2±0.5)	1.6±0.20	3:1	1,22	C	**3010127GL**
GL	black	D15.0 (15.6±0.5)	1.8±0.20	3:1	1,22	C	**3010150GL**
GL	black	D19.1 (19.6±0.5)	2.0±0.20	3:1	1,22	C	**3010191GL**
GL	black	D25.4 (25.4±0.8)	2.1±0.20	3:1	1,22	C	**3010254GL**
GL	black	D30.0 (≥30)	2.2±0.20	3:1	1,22	C	**3010300GL**
GL	black	D39 (≥40)	2.4±0.20	3:1	1,22	C	**3010390GL**
GL	black	D50 (≥50)	2.7±0.25	3:1	1,22	C	**3010500GL**
GL	black	D64 (≥60)	3.0±0.25	3:1	1,22	C	**3010640GL**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days, and for Glue GL will be 90 days.



Standard: EN 60 684

HEAT SHRINKAGE TUBES ZDG TYPE

Thin-wall heat shrinkage tubes are used for insulation of cable connection, at conductors repair to protect the cable head from corrosion, for protection of the cable insulation from water and moisture, for restoring the cable insulation integrity, etc. It is a plastic thin wall pipe which at temperature higher than 120°C shrinks its initial diameter to a certain degree. The material has high temperature and UV rays wear resistance. The material represents the so called permanently netted plastic. This material is obtained as the plastic billet is processed with the help of high energy electron rays so that inner molecular bonds between adjacent molecules are formed. After that the pipe is heated to the boiling point, the pipe inflates, so do the inner molecular bonds. Then the pipe is sharply refrigerated and the molecules stay in the condition of inflated bonds for indefinite long time. Heating the pipe repeatedly (after being mounted to the given cable) the crystals melt again but due to the net structure, they resume the initial pipe diameter and take the form of the cable, pressing it and not allowing the moisture to get under the pipe.

TECHNICAL DATA:

- Material: triple cross - linked polyolefin
- Colours: blue, black, red, yellow, yellow-green, green, white
- Shrinkage ratio: min 2 : 1
- Ambient temperature: -40 to + 100°C
- Shrinkage temperature: min 120°C
- Condition of the material during fire exposure: slight burning
- The material does not emit hazardous substances
- Insulation resistance: 1x 10 12 Ω/cm
- Application: general
- Insulating voltage 1000 V



Type	D1 (mm)	D2 (mm)	S (mm)	Packing / Box (m)	Product category	Catalogue number *
ZDG	1	0.5	0.04	200 / 4000	C	**301001X**
ZDG	1.5	0.75	0.04	200 / 4000	C	**301115X**
ZDG	2	1.0	0.05	200 / 4000	C	**301002X**
ZDG	3	1.5	0.05	200 / 2000	C	**301003X**
ZDG	4	2.0	0.08	100 / 1700	C	**301004X**
ZDG	5	2.5	0.08	100 / 1200	C	**301005X**
ZDG	6	3.0	0.08	100 / 1000	C	**301006X**
ZDG	7	3.5	0.08	100 / 1000	C	**301007X**
ZDG	8	4.0	0.08	100 / 1500	C	**301008X**
ZDG	9	4.5	0.08	100 / 1500	C	**301009X**
ZDG	10	5.0	0.08	100 / 1500	C	**301010X**
ZDG	11	5.5	0.08	100 / 1500	C	**301011X**
ZDG	12	6.0	0.08	100 / 1200	C	**301012X**
ZDG	13	6.5	0.08	100 / 1200	C	**301013X**
ZDG	14	7.0	0.08	100 / 1200	C	**301014X**
ZDG	15	7.5	0.08	100 / 1200	C	**301015X**
ZDG	16	8.0	0.08	100 / 1200	C	**301016X**
ZDG	18	9.0	0.08	50 / 600	C	**301018X**
ZDG	20	10	0.08	50 / 500	C	**301020X**
ZDG	22	11	0.08	50 / 500	C	**301022X**
ZDG	25	12.5	0.08	25 / 600	C	**301025X**
ZDG	28	14	0.08	25 / 300	C	**301028X**
ZDG	30	15	0.08	25 / 300	C	**301030X**
ZDG	35	17.5	0.08	25 / 300	C	**301035X**
ZDG	40	20	0.08	25 / 250	C	**301040X**
ZDG	50	25	0.08	25 / 200	C	**301050X**
ZDG	60	30	0.08	25 / 300	C	**301060X**
ZDG	70	35	0.08	25 / 250	C	**301070X**
ZDG	80	40	0.08	25 / 100	C	**301080X**
ZDG	90	45	0.08	25 / 150	C	**301090X**
ZDG	100	50	0.08	25 / 100	C	**301100X**
ZDG	120	60	0.08	25 / 200	C	**301120X**
ZDG	150	75	0.08	25 / 100	C	**301150X**

Note: * At orders after the catalogue number of the corresponding diameter a letter showing the colour must be added: B – blue; R – red; K - black; G - green; Y – yellow;

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABLE TAGS – SETS

Type	Section (mm)	Number in a roller	Packing / Box (pcs)	Product category	Catalogue number
EC-0-0	1.5 - 3.2	1000	100	C	**318000**
EC-0-1	1.5 - 3.2	1000	100	C	**318001**
EC-0-2	1.5 - 3.2	1000	100	C	**318002**
EC-0-3	1.5 - 3.2	1000	100	C	**318003**
EC-0-4	1.5 - 3.2	1000	100	C	**318004**
EC-0-5	1.5 - 3.2	1000	100	C	**318005**
EC-0-6	1.5 - 3.2	1000	100	C	**318006**
EC-0-7	1.5 - 3.2	1000	100	C	**318007**
EC-0-8	1.5 - 3.2	1000	100	C	**318008**
EC-0-9	1.5 - 3.2	1000	100	C	**318009**
EC-0-a	1.5 - 3.2	1000	100	C	**31800A**
EC-0-b	1.5 - 3.2	1000	100	C	**31800B**
EC-0-R	1.5 - 3.2	1000	100	C	**31800R**
EC-0-S	1.5 - 3.2	1000	100	C	**31800S**
EC-0-T	1.5 - 3.2	1000	100	C	**31800T**
EC-0-N	1.5 - 3.2	1000	100	C	**31800N**
EC-0-P	1.5 - 3.2	1000	100	C	**31800P**
EC-0-E	1.5 - 3.2	1000	100	C	**31800E**
EC-0-A	1.5 - 3.2	1000	100	C	**31800A**
EC-0-B	1.5 - 3.2	1000	100	C	**31800B**
EC-0-C	1.5 - 3.2	1000	100	C	**31800C**
EC-0-Q	1.5 - 3.2	1000	100	C	**31800Q**

Type	Section (mm)	Number in a roller	Packing / Box (pcs)	Product category	Catalogue number
EC-1-0	2.6 - 4.2	1000	150	C	**318010**
EC-1-1	2.6 - 4.2	1000	150	C	**318011**
EC-1-2	2.6 - 4.2	1000	150	C	**318012**
EC-1-3	2.6 - 4.2	1000	150	C	**318013**
EC-1-4	2.6 - 4.2	1000	150	C	**318014**
EC-1-5	2.6 - 4.2	1000	150	C	**318015**
EC-1-6	2.6 - 4.2	1000	150	C	**318016**
EC-1-7	2.6 - 4.2	1000	150	C	**318017**
EC-1-8	2.6 - 4.2	1000	150	C	**318018**
EC-1-9	2.6 - 4.2	1000	150	C	**318019**
EC-1-a	2.6 - 4.2	1000	150	C	**31801A**
EC-1-b	2.6 - 4.2	1000	150	C	**31801B**
EC-1-R	2.6 - 4.2	1000	150	C	**31801R**
EC-1-S	2.6 - 4.2	1000	150	C	**31801S**
EC-1-T	2.6 - 4.2	1000	150	C	**31801T**
EC-1-N	2.6 - 4.2	1000	150	C	**31801N**
EC-1-P	2.6 - 4.2	1000	150	C	**31801P**
EC-1-E	2.6 - 4.2	1000	150	C	**31801E**
EC-1-A	2.6 - 4.2	1000	150	C	**31801A**
EC-1-B	2.6 - 4.2	1000	150	C	**31801B**
EC-1-C	2.6 - 4.2	1000	150	C	**31801C**
EC-1-Q	2.6 - 4.2	1000	150	C	**31801Q**

Type	Section (mm)	Number in a roller	Packing / Box (pcs)	Product category	Catalogue number
EC-2-0	3.6 - 5.2	500	150	C	**318020**
EC-2-1	3.6 - 5.2	500	150	C	**318021**
EC-2-2	3.6 - 5.2	500	150	C	**318022**
EC-2-3	3.6 - 5.2	500	150	C	**318023**
EC-2-4	3.6 - 5.2	500	150	C	**318024**
EC-2-5	3.6 - 5.2	500	150	C	**318025**
EC-2-6	3.6 - 5.2	500	150	C	**318026**
EC-2-7	3.6 - 5.2	500	150	C	**318027**
EC-2-8	3.6 - 5.2	500	150	C	**318028**
EC-2-9	3.6 - 5.2	500	150	C	**318029**
EC-2-a	3.6 - 5.2	500	150	C	**31802A**
EC-2-b	3.6 - 5.2	500	150	C	**31802B**
EC-2-R	3.6 - 5.2	500	150	C	**31802R**
EC-2-S	3.6 - 5.2	500	150	C	**31802S**
EC-2-T	3.6 - 5.2	500	150	C	**31802T**
EC-2-N	3.6 - 5.2	500	150	C	**31802N**
EC-2-P	3.6 - 5.2	500	150	C	**31802P**
EC-2-E	3.6 - 5.2	500	150	C	**31802E**
EC-2-A	3.6 - 5.2	500	150	C	**31802A**
EC-2-B	3.6 - 5.2	500	150	C	**31802B**
EC-2-C	3.6 - 5.2	500	150	C	**31802C**
EC-2-Q	3.6 - 5.2	500	150	C	**31802Q**

Type	Section (mm)	Number in a roller	Packing / Box (pcs)	Product category	Catalogue number
EC-3-0	5 - 7.2	250	150	C	**318030**
EC-3-1	5 - 7.2	250	150	C	**318031**
EC-3-2	5 - 7.2	250	150	C	**318032**
EC-3-3	5 - 7.2	250	150	C	**318033**
EC-3-4	5 - 7.2	250	150	C	**318034**
EC-3-5	5 - 7.2	250	150	C	**318035**
EC-3-6	5 - 7.2	250	150	C	**318036**
EC-3-7	5 - 7.2	250	150	C	**318037**
EC-3-8	5 - 7.2	250	150	C	**318038**
EC-3-9	5 - 7.2	250	150	C	**318039**
EC-3-a	5 - 7.2	250	150	C	**31803A**
EC-3-b	5 - 7.2	250	150	C	**31803B**
EC-3-R	5 - 7.2	250	150	C	**31803R**
EC-3-S	5 - 7.2	250	150	C	**31803S**
EC-3-T	5 - 7.2	250	150	C	**31803T**
EC-3-N	5 - 7.2	250	150	C	**31803N**
EC-3-P	5 - 7.2	250	150	C	**31803P**
EC-3-E	5 - 7.2	250	150	C	**31803E**
EC-3-A	5 - 7.2	250	150	C	**31803A**
EC-3-B	5 - 7.2	250	150	C	**31803B**
EC-3-C	5 - 7.2	250	150	C	**31803C**
EC-3-Q	5 - 7.2	250	150	C	**31803Q**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

CABLE TIE HOLDER

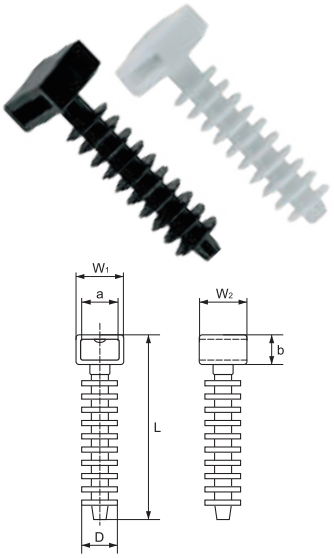

Type	colour	Bore diameter (mm)	a (mm)	b (mm)	D (mm)	W1 (mm)	W2 (mm)	L (mm)	Packing (pcs)	Product category	Catalogue number
MT-8	black	ϕ8	9,7	6,3	9,9	12,7	12,6	43	100	C	**500046**
MT-8	white	ϕ8	9,7	6,3	9,9	12,7	12,6	43	100	C	**500047**

CABLE TIE MOUNTS-ADHESIVE

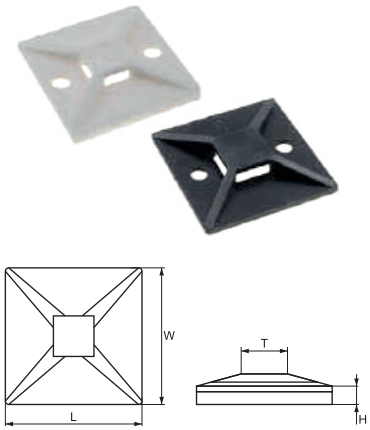

Type	colour	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
		L	W	H	T			
MT-25	white	25	25	7,5	6,2	100	C	**500041**
MT-25	black	25	25	7,5	6,2	100	C	**500042**
MT-30	white	30	30	8,7	6,4	100	C	**500043**
MT-30	black	30	30	8,7	6,4	100	C	**500039**

CABLE TIE BASES FIXED WITH SCREWS

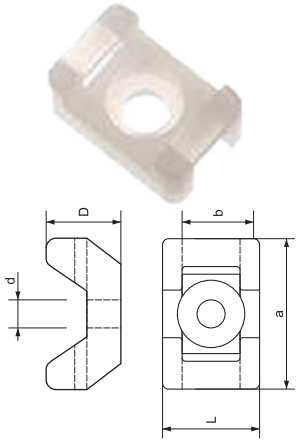

Type	Color	a (mm)	b (mm)	L (mm)	d (mm)	D (mm)	Packing (pcs)	Product category	Catalogue number
CTH-2C	white	22	16,5	9	5,8	9,5	100	C	**500048**
CTH-2C	black	22	16,5	9	5,8	9,5	100	C	**500038**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days, and for CTH-2C will be 90 days.



CABLE TIES - WHITE

Type	Length (mm)	Colour	Width (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
Cable ties	100	white	2.5	100	10 / 800	C	**500100**
Cable ties	150	white	2.5	100	10 / 500	C	**500152**
Cable ties	160	white	2.5	100	10 / 500	C	**500162**
Cable ties	200	white	2.5	100	10 / 400	C	**500202**
Cable ties	250	white	3.5	100	10 / 250	C	**500253**
Cable ties	280	white	3.5	100	10 / 200	C	**500283**
Cable ties	300	white	3.5	100	10 / 200	C	**500303**
Cable ties	300	white	4.8	100	10 / 120	C	**500304**
Cable ties	370	white	3.5	100	10 / 120	C	**500373**
Cable ties	380	white	4.8	100	10 / 100	C	**500384**
Cable ties	450	white	4.8	100	10 / 70	C	**500454**
Cable ties	500	white	7.9	100	5 / 40	C	**500507**



CABLE TIES - BLACK

Type	Length (mm)	Colour	Width (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
Cable ties	150	black	2.5	100	10 / 500	C	**500151**
Cable ties	160	black	2.5	100	10 / 500	C	**500161**
Cable ties	250	black	3.5	100	10 / 250	C	**500251**
Cable ties	280	black	3.5	100	10 / 200	C	**500281**
Cable ties	300	black	3.5	100	10 / 200	C	**500301**
Cable ties	500	black	7.9	100	40	C	**500501**



CABLE HOLDER WITH TIE

Type	Color	a (mm)	b (mm)	c (mm)	d (mm)	Packing (pcs)	Product category	Catalogue number
cable holder with tie	black	27	14	140	0,5	20	C	**500444**
cable holder with tie	grey	27	14	140	0,5	20	C	**500445**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days, and for CABLE HOLDER will be 30 days.



WALL PLUG WITH CABLE TIE

Type	Color	Bore diameter (mm)	Tie Length (mm)	Packing (pcs)	Product category	Catalogue number
wall plug with cable tie	black	Ø6	95	50	C	**500427**
wall plug with cable tie	black	Ø8	95	50	C	**500425**



WIRE GRIP BAND FOR FLAT CABLE

Type	Color	Bore diameter (mm)	width of the head	Packing (pcs)	Product category	Catalogue number
wire grip band for flat cable 1	white	6-7	18	50	C	**500432**
wire grip band for flat cable 2	white	6-7	12	50	C	**500434**
wire grip band for flat cable 3	white	6-7	10	50	C	**500436**

Wire grip band 1 is Suitable for flat cables with section- 2x1.0; 2x1.5mm^2
Wire grip band 2 is Suitable for flat cables with section- 2x2.5; 3x1.0
Wire grip band 3 is Suitable for flat cables with section- 2x4; 2x6; 3x1.5; 3x2.5mm^2



WIRE GRIP BAND FOR ROUND CABLE

Type	Color	Bore diameter (mm)	width of the head	Packing (pcs)	Product category	Catalogue number
wire grip band for round cable 4	white	6-7	6	50	C	**500438**
wire grip band for round cable 5	white	6-7	8	50	C	**500440**
wire grip band for round cable 6	white	6-7	10	50	C	**500439**
wire grip band for round cable 7	white	6-7	14	50	C	**500441**
wire grip band for round cable 8	white	8-9	20	50	C	**500442**

Wire grip band 4 is Suitable for round cables with section- 2x1.0; 2x1.5; 3x1.0; 3x2.5mm^2; RG6
Wire grip band 5 is Suitable for round cables with section- 2x0.5; 2x0.75; UTP; FTP
Wire grip band 6 is Suitable for round cables with section- 2x2.5; 3x1.5; 4x1
Wire grip band 7 is Suitable for round cables with section- 3x6; 4x4; 5x2.5
Wire grip band 8 is Suitable for round cables with diameter D20mm



HARDENED STEEL NAILS, SIKO

Model	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
Siko 16	16	2	100/2000	G	**M499108**
Siko 30	30	2	100/1000	G	**M499489**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
			Diameter	Width	Height	d			
Lamp holder	GU10	ceramic	27	20	16	3.4	100	C	**99292**

Length of the cable: 140 mm



LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
			Diameter	Width	Height	d			
Lamp holder	G 4 / G 5.3 / GY 6.35	ceramic	16	11	10	3.4	200	C	**99293**

Length of the cable: 90 mm



CERAMIC LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
			Length	Diameter	Width	d			
Lamp holder	E 14	ceramic	44	33	20	4,3	40/400	C	**99296**
Lamp holder	E 27	ceramic	48	41	20	4,3	40/400	C	**99294**
Lamp holder with support	E 27	ceramic	48	41	20	4,3	16/320	C	**99295**
Lamp holder	E 40	ceramic	72	56	23	4,3	100	C	**99298**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HANGING LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)		Section of power supply conductors	Product category	Catalogue number
			Diameter	Length			
Screw	E27	bakelite	38.5	55	0.5-2.5mm²	C	**99196**



HANGING LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)		Section of power supply conductors	Product category	Catalogue number
			Diameter	Length			
Screw	E27	bakelite	38.5	55	0.5-2.5mm²	C	**99197**



HANGING LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)		Section of power supply conductors	Product category	Catalogue number
			Diameter	Length			
Screwless	E14	plastic	44	56,3	0.5-2.5mm²	C	**99194**



HANGING LAMP HOLDER

Type	Lamp	Material	Dimmensions (mm)		Section of power supply conductors	Product category	Catalogue number
			Diameter	Length			
Screwless	E27	plastic	55	62,5	0.5-2.5mm²	C	**99195**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LAMP BASES

Type	Lamp	Material	Rated current	Diameter (mm)	Length (mm)	Section of power supply conductors	Product category	Catalogue number
Oblique	E27	plastic	4A	78	38	0.5-2.5mm²	C	**99200**
Straight	E27	plastic	4A	63	40	0.5-2.5mm²	C	**99199**



TWIN SOCKET LAMP HOLDER

Type	Lamp	Material	Rated current	Diameter (mm)	Length (mm)	Section of power supply conductors	Product category	Catalogue number
E27-2xE27	E27	Iron + PBT	4A	76	74	0.5-2.5mm²	C	**99198**





LAMP HOLDER ADAPTORS TO E27

Type	Voltage	Rated current (A)	Used for holder	Convert to lamp socket	Material	Packing (pcs.)	Product category	Catalogue number
E40/E27	250V	4A	E40	E27	iron/plastic	15/500	C	**192168**
G24/E27	250V	4A	G24-4 pin	E27	PBT+ copper	25/300	C	**192169**

Ambient temperature: 85°C





INTERMEDIATE SWITCH

Type	Voltage	Rated current (A)	Colour	Packing (pcs.)	Product category	Catalogue number
IS-RW	250V	6	red & white	1	G	**M300018**
IS-B	250V	6	black	1	G	**M300002**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days, and for Intermediate switches will be 30 days.



INFRARED MOTION SENSOR ST02A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	Width	Height	Packing (pcs.)	Product category	Catalogue number
ST02A	160°	LED - 200W IL-500W	max.9m	white	80	54	59.9	100	C	**99DS100**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3-2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s; Two wire line; Installation height: 1 - 1.8m



INFRARED MOTION SENSOR ST42

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	d1	d2	Packing (pcs.)	Product category	Catalogue number
ST42	360°	LED - 300W IL - 1200W	max.6m	white	75,6	76	100	50	C	**99DS104**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m



INFRARED MOTION SENSOR ST41

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	d1	d2	Packing (pcs.)	Product category	Catalogue number
ST41	360°	LED - 300W IL - 1200W	max.6m	white	75,6	61,5	76	50	C	**99DS103**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m



INFRARED MOTION SENSOR ST40

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	d1	d2	Packing (pcs.)	Product category	Catalogue number
ST40	360°	LED - 800W IL - 1200W	max.6m	white	50	50	35	50	C	**99DS402**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INFRARED MOTION SENSOR ST11

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	Width	Height	Packing (pcs.)	Product category	Catalogue number
ST11	180°	LED - 500W IL - 800W	max.12m	white	80	55	65	50	C	**99DS403**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m



INFRARED MOTION SENSOR ST07

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Height	Diameter	Packing (pcs.)	Product category	Catalogue number
ST07	380°	LED - 300W IL - 1200W	max.6m	white	58	115	50	C	**99DS101**
ST07	380°	LED - 300W IL - 1200W	max.6m	black	58	115	50	C	**99DS102**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable); Detection motion speed: 0.6 - 1.5m/s ; Installation height: 2.2 - 4m



INFRARED MOTION SENSOR ST24

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm) Length	Width	Height	Packing (pcs.)	Product category	Catalogue number
ST24	120°/360°	LED - 200W IL - 800W	max.6m	white	55.8	34	24.6	100	C	**99DS109**

Time Delay: 5s, 30s, 1min, 3min, 5min, 8min(choice); Ambient Light: 10LUX/2000LUX (choice)
Detection Distance: 3m/6m(choice) (<24oC); Detection motion speed: 0.6 - 1.5m/s

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MICROWAVE SENSOR ST701F

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Colour body	Size (mm)			Packing (pcs.)	Product category	Catalogue number
				Length	Width	Height			
ST701F	180°/360°	LED - 200W IL - 500W	white	58	40.5	25.5	100	C	**99DS400**

Time Delay: 10sec ± 3sec to 12min ± 1min (adjustable); Ambient Light: <3 - 2000LUX (adjustable)
HF System: 5.8GHz CW radar,ISM band; Detection Distance: Wall: 5 - 15m (adjustable); Ceilling: 2 - 8m(radius), adjustable; Installation Height: Wall:1.5 - 3.5m; Ceiling: 2 - 10m



INFRARED MOTION SENSOR ST15

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm)			Packing (pcs.)	Product category	Catalogue number
					Length	Width	Height			
ST15	180°	LED - 300W IL - 1200W	max.12m	white	80	117,2	31,5	50	C	**99DS108**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable)
Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m IP65



INFRARED MOTION SENSOR ST10A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Detection range	Rated load	Detection distance	Colour body	Size (mm)			Packing (pcs.)	Product category	Catalogue number
					Length	Width	Height			
ST10A	180°	LED - 300W IL - 1200W	5-12m	white	87,4	120	144	50	C	**99DS107**

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable); Ambient light: <3 - 2000lux (adjustable)
Detection motion speed: 0.6 - 1.5m/s; Installation height: 2.2 - 4m IP44



INFRARED MOTION SENSOR ST05CA

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated load	Time-Delay	Ambient Light	Height (mm)	Diameter (mm)	Product category	Catalogue number
ST05CA	LED - 300W, IL - 800W	10s to 15min	<3 - 2000LUX	24.9	102	C	**99DS110**

Detection Distance: max 6m.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIGHT-CONTROL SENSOR ST300, IP44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Colour body	Size (mm)		Packing (pcs.)	Product category	Catalogue number
			Length	Height			
ST300	10A	white	35	108,6	50	C	**99DS404**

Ambient light: 3-500 lux (adjustable) IP44; Timer Built-in from 1-9 hours



LIGHT-CONTROL SENSOR ST306, IP44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Colour body	Size (mm)		Packing (pcs.)	Product category	Catalogue number
			Length	Height			
ST306	6A	black/white	100	200	50	C	**99DS405**

Ambient light: <5 - 15lux (adjustable) IP44



LIGHT-CONTROL SENSOR ST303, IP44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Colour body	Size (mm)		Packing (pcs.)	Product category	Catalogue number
			Height	Diameter			
ST303	25A	white	70,5	78,3	50	C	**99DS300**

Ambient light: <5 - 50lux (adjustable) IP44



LIGHT-CONTROL SENSOR ST302, IP44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Colour body	Size (mm)		Packing (pcs.)	Product category	Catalogue number
			Height	Diameter			
ST302	10A	white	76,7	63	100	C	**99DS301**

Ambient light: <5 - 50lux (adjustable) IP44

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIGHT-CONTROL SENSOR ST308, IP65

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Colour body	Size (mm)			Packing (pcs.)	Product category	Catalogue number
			Length	Width	Height			
ST308	20A	white	35	66	90	100	C	**99DS302**

Ambient light: <2 - 100lux (adjustable) IP65



TOUCHING SENSOR ST125

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated load	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Product category	Catalogue number
ST125	LED - 200W, IL - 500W	89.7	40.2	16.8	-	C	**99DS115**



ON-OFF MOVING HAND SENSOR ST122

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Rated current	Size (mm)			Product category	Catalogue number
		Length	Width	Height		
ST122	500W	78.2	35.5	20	C	**99DS122**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABLE REEL WITH THERMAL PROTECTION - MAK - 2A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
H05VV-F	3 x 1.5mm²	10	4	E	**47911**



CABLE REEL WITH THERMAL PROTECTION - MAK - 3

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
H05VV-F	3 x 1.5mm²	20	4	E	**47921**



CABLE REEL WITH THERMAL PROTECTION - MAK - 4

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
H05VV-F	3 x 1.5mm²	25	2	E	**47927**
H05VV-F	3 x 1.5mm²	40	1	E	**47940**
H05VV-F	3 x 1.5mm²	50	2	E	**47950**



CABLE REEL - HJR TYPE, IP 44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
HJR - 10AP	H07RN-F	3 x 1.5mm²	25	2	E	**47960**
HJR - 10P	H07RN-F	3 x 1.5mm²	50	1	E	**47959**



EMPTY CABLE REEL 029A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Suitable for cable type	Outlets	Product category	Catalogue number
H05VV-F 3G1.5mm2- max 40m / 3G1.0mm2- max 50m	4 socket 16A/230V	E	**47910**



EXTENSION CORDS

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Cable colour	Product category	Catalogue number
Extension cord	H05VV-F	3G1.5mm²	10	orange	E	**47333**
Extension cord	H05VV-F	3G1.5mm²	15	orange	E	**47334**

Rated current: 16A, Voltage: 230VAC



MULTIPLUGS 3 HOLES WITH KEY

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
3 holes	H05VV-F	3G1.5mm²	2	1/40	E	**47332**



MULTIPLUGS 4 HOLES WITH KEY

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
4 holes	H05VV-F	3G1.5mm²	2	1/40	E	**47432**



MULTIPLUGS 6 HOLES WITH KEY

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
6 holes	H05VV-F	3G1.5mm²	2	1/25	E	**47632**



MULTIPLUGS 8 HOLES WITH KEY

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing / Box (pcs)	Product category	Catalogue number
8 holes	H05VV-F	3G1.5mm²	2	1/25	E	**47732**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MULTIPLUG - HX-3N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HX-3N	H05VV-F	3 x 1.0mm²	1.5m	40	E	**47031**
HX-3N	H05VV-F	3 x 1.5mm²	3.0m	5 / 40	E	**47080**
HX-3N	H05VV-F	3 x 1.5mm²	5.0m	5 / 40	E	**47081**

Max.3500W,16/250~



MULTIPLUG - HX-4N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HX-4N	H05VV-F	3 x 1.0mm²	1.5m	50	E	**47041**
HX-4N	H05VV-F	3 x 1.5mm²	3.0m	30	E	**47082**
HX-4N	H05VV-F	3 x 1.5mm²	5.0m	25	E	**47083**

Max.3500W,16/250~



MULTIPLUG - HX-6N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HX-6N	H05VV-F	3 x 1.0mm²	1.5m	50	E	**47061**
HX-6N	H05VV-F	3 x 1.5mm²	3.0m	40	E	**47063**
HX-6N	H05VV-F	3 x 1.5mm²	5.0m	40	E	**47065**

Max.3500W,16/250~



UNTIL SUPPLY LAST

MULTIPLUG - ODL, IP44

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
ODL - PYX - 2E	H07RN-F	3 x 1.5mm²	1.5m	40	F	**47802**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MULTIPLUG WITH KEY
HKX-3N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HKX-3N	H05VV-F	3 x 1.0mm²	1.5m	5 / 40	E	**47131**
HKX-3N	H05VV-F	3 x 1.5mm²	3.0m	5 / 30	E	**47133**
HKX-3N	H05VV-F	3 x 1.5mm²	5.0m	5 / 25	E	**47135**

Max.3500W,16/250~



MULTIPLUG WITH KEY
HKX-4N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HKX-4N	H05VV-F	3 x 1.0mm²	1.5m	5 / 40	E	**47142**
HKX-4N	H05VV-F	3 x 1.5mm²	3.0m	5 / 30	E	**47143**
HKX-4N	H05VV-F	3 x 1.5mm²	5.0m	5 / 25	E	**47145**

Max.3500W,16/250~



MULTIPLUG WITH KEY
HKX-6N TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Type	Cable type	Cable specification	Cable length (m)	Packing (pcs)	Product category	Catalogue number
HKX-6N	H05VV-F	3 x 1.0mm²	1.5m	5 / 40	E	**47162**
HKX-6N	H05VV-F	3 x 1.5mm²	3.0m	5 / 30	E	**47163**
HKX-6N	H05VV-F	3 x 1.5mm²	5.0m	5 / 25	E	**47165**

Max.3500W,16/250~

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



THREE WAY CLIP MULTIPLUG

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Cable type	Cable specification	Cable length (m)	Colour	Material	Product category	Catalogue number
H05VV-F	3 x 1.0mm2	1.5m	White & Grey	PP+ABS	C	**47003**



POWER CABLES

Cable type	Cable specification	Cable length (m)	Cable colour	Product category	Catalogue number
H05VV-F	3G1.5mm²	2	white	E	**47001**







ADAPTERS

Type	Colour	Rated current in (A)	Rated power in (W)	Packing (pcs)	Product category	Catalogue number
Adapter double	White	16	3500	50	C	**192213**
Adapter double	Graphite	16	3500	50	C	**192212**
Adapter double with key	White	16	3500	50	C	**192211**
Adapter double with key	Graphite	16	3500	50	C	**192210**
Adapter triple	White	16	3500	40	C	**192209**
Adapter triple	Graphite	16	3500	40	C	**192208**
Adapter triple with key	White	16	3500	40	C	**192207**
Adapter triple with key	Graphite	16	3500	40	C	**192206**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



MULTISOCKET

Type	Colour	Rated current in (A)	Rated power in (W)	Packing (pcs)	Product category	Catalogue number
Multisocket double	black	16	3500	60	C	**192216**
Multisocket double	white	16	3500	60	C	**192217**
Multisocket triple	black	16	3500	60	C	**192218**
Multisocket triple	white	16	3500	60	C	**192219**



RUBBER MULTISOCKET

Type	Colour	Rated current in (A)	Rated power in (W)	Packing (pcs)	Product category	Catalogue number
Multisocket triple	White	16	3500	20	C	**192120/WH**
Multisocket triple	Black	16	3500	20	C	**192120/BL**



RUBBER SCHUKO SOCKETS

Type	Colour	Rated current In (A)	Material	Packing (pcs)	Product category	Catalogue number
Socket	White	16	Rubber	25	C	**192119/WH**
Socket	Black	16	Rubber	25	C	**192119/BL**



RUBBER SCHUKO SOCKETS WITH COVER IP44

Type	Colour	Rated current In (A)	Material	Packing (pcs)	Product category	Catalogue number
Socket	Black	16	Rubber	1/30/150	C	**192122/BL**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days and for 192122/BL will be 90 days.



RUBBER SCHUKO PLUG

Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Plug	16	White	Rubber	25	C	**192118/WH**
Plug	16	Black	Rubber	25	C	**192118/BL**
Plug	16	Red	Rubber	25	C	**192118/R**



ANGLE BAKELITE SCHUKO PLUG

Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Plug	16	White	Bakelite	20/100	C	**192117/WH**
Plug	16	Black	Bakelite	20/100	C	**192117/BL**



PLUG BAKELITE

Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Plug	16	white	bakelite	80	C	**19211102**
Plug	16	black	bakelite	80	C	**19211101**



TWO PIN PLUG

Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Plug	6	White	PP	100	C	**192116/WH**
Plug	6	Black	PP	100	C	**192116/BL**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days

TWO PIN PLUG WITH EXTRACTION RING



Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Plug	10	White	PC	1/500	C	**192115/WH**
Plug	10	Black	PC	1/500	C	**192115/BL**

TWO POLE SOCKET WITH HOOK



Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Socket	10	Black	PC	1/500	C	**192123/BL**
Socket	10	White	PC	1/500	C	**192123/WH**

BRITISH PLUG



Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
British plug	13	white	PMMA	1/20	C	**192114**

FOOT SWITCH



Type	Rated current In (A)	Colour	Material	Packing (pcs)	Product category	Catalogue number
Switch	10	White	PC	1/100	C	**192124/WH**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

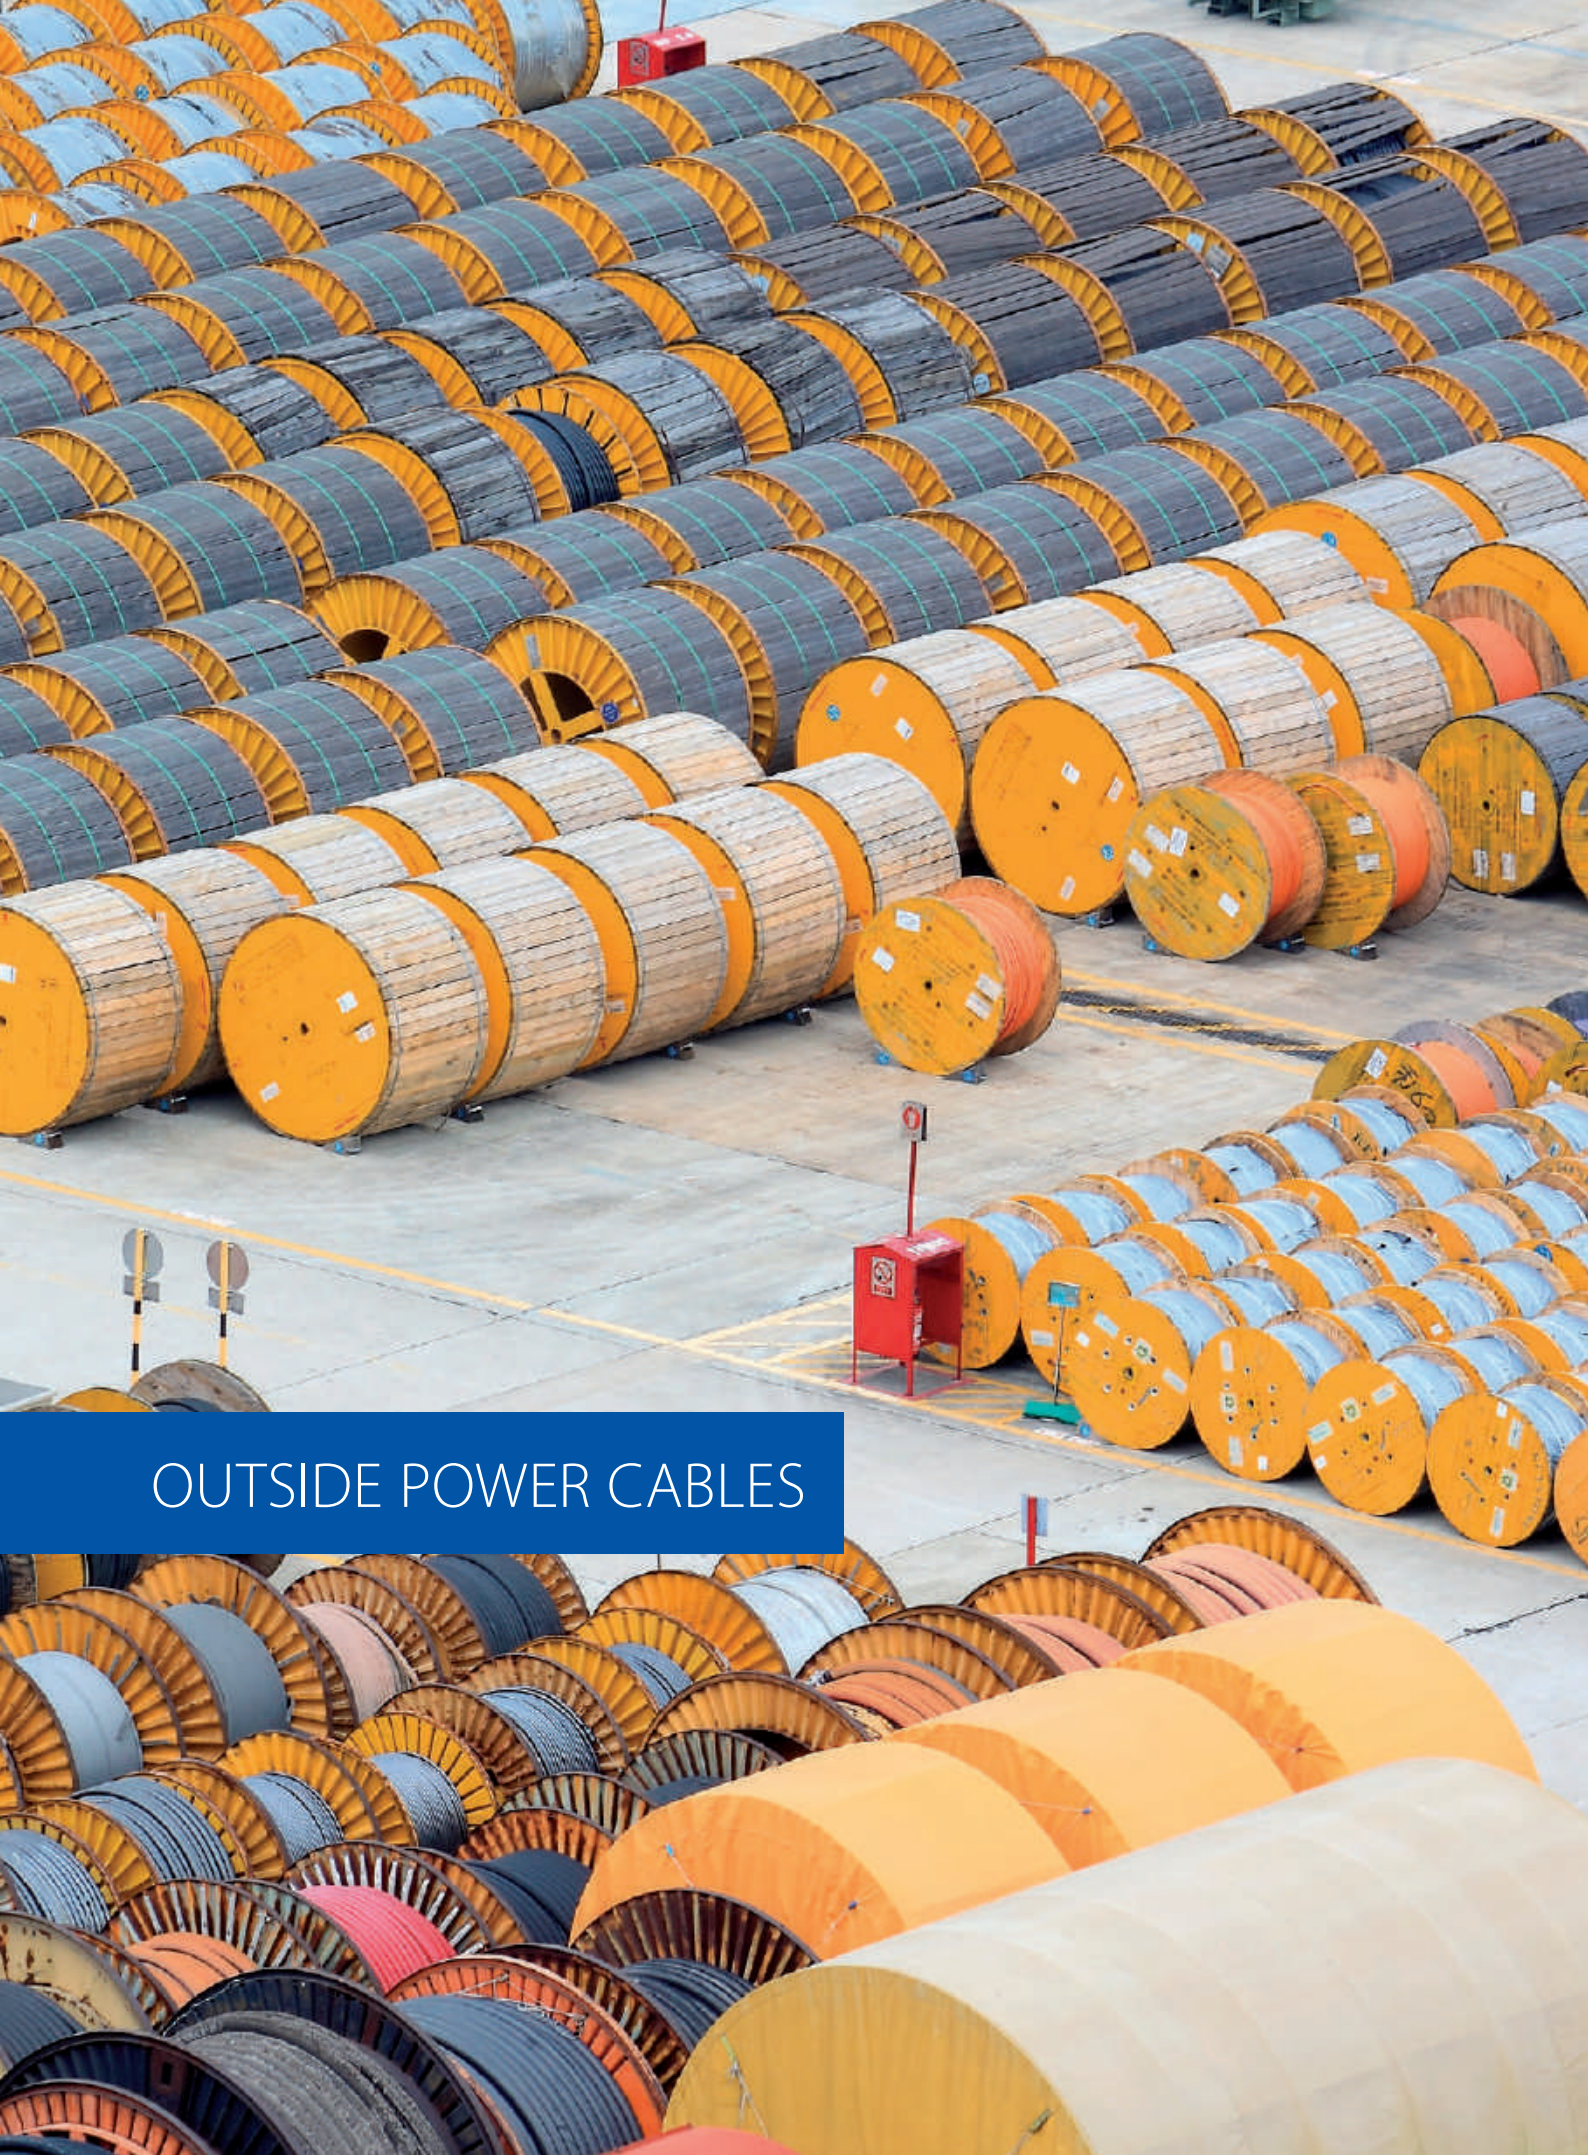

OUTSIDE POWER CABLES

Standards:
DIN VDE 0293-308 - Colour coded acc
DIN VDE 0276 part 603 or HD 186
DIN VDE 0295 - Wire class acc

NYY

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Power cable, Cu-conductor, PVC-insulation, PVC-sheathing

NYY; PP00; PP00; PP00; NYY; NYY; CYY; NYY; NYY

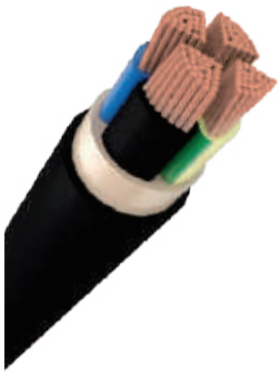

Power cable for construction of underground distribution grids and installations of industrial and public projects, where mechanical damages are not to be expected. Suitable for transmission and distribution of electric power at nominal voltage u0/u 0,6/1 kV.

TECHNICAL DATA:
- Power cable acc. to DIN VDE 0276 part 603
- Ambient temperature
- fixed installation: -30°C to +50°C
- Temperature of laying: min. -5°C
- Max. operating temperature: +70°C
- Short circuit temperature: +160°C
- (short circuit duration up to 5 sec.)
- Nominal voltage Uo/U- 0.6/1 kV
- Test voltage: AC-4 kV/50 Hz

CONSTRUCTION::
- Solid or stranded Cu wires cl. 1 or cl. 2 acc. to DIN VDE 0295
- Insulation: PVC compound
- Inner sheath: filling compound
- Outer sheath: PVC compound
- Outer sheath colour: black
- **re** - round solid
- **rm** - round multi-core
- **sm** - sector multi-core
- **se** - sector solid conductor



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2x1,5	re	black	12,2	28	192	100	E	**833019**
2x2,5	re	black	12,9	46	229	100	E	**833020**
2x4	re	black	14,9	75	315	100	E	**833021**
2x6	re	black	15,9	112	382	100	E	**833022**
2x10	re	black	17,5	188	509	1	E	**833023**
2x16	re	black	19,4	298	676	1	E	**833024**



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3x1,5	re	black	12,1	43	201	100	E	**833030**
3x2,5	re	black	12,9	70	247	100	E	**833031**
3x4	re	black	15	112	350	100	E	**833032**
3x6	re	black	16,1	168	435	100	E	**833034**
3x10	re	black	18	282	606	1	E	**833036**
3x16	re	black	20,1	447	828	1	E	**833038**



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
4x1,5	re	black	12,9	57	232	100	E	**833060**
4x2,5	re	black	13,8	93	289	100	E	**833061**
4x4	re	black	16,2	149	419	100	E	**833062**
4x6	re	black	17,4	223	525	100	E	**833063**
4x10	re	black	19,5	376	741	1	E	**833064**
4x16	re	black	21,8	595	1024	1	E	**833065**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
5x1,5	re	black	13,7	71	272	100	E	**833077**
5x2,5	re	black	14,8	116	341	100	E	**833078**
5x4	re	black	17,4	187	494	100	E	**833079**
5x6	re	black	19	279	635	100	E	**833080**
5x10	re	black	21,6	470	911	1	E	**833081**
5x16	re	black	24,1	744	1262	1	E	**833082**

Standards:
BDS 904-84 - according to construction
IEC60332-1- according to flame retardant

CBT-C

5+2 standard +extended 7 YEAR TOTAL WARRANTY

POWER CABLE WITH SOLID OR STRANDED CU WIRES, PVC INSULATION AND SHEATHING

CBT-c; CBT-c; CBT-c; CBT-c; CBT-c; CBT-c; CBT-c; CBT-c; CBT-c



A cable with solid or stranded CU wires, resistant to the sun radiance and atmospheric influences. It is suitable for spread and transfer of electrical energy if it is installed steady outside or in indoor spaces -cable trunking, electrical cable conduit, cable trays, directly into tunnels, earthworks, pits and etc.

TECHNICAL DATA:
- Nominal voltage Uo- 0.6kV
- Nominal voltage U- 1kV
- Ambient temperature- from -30°C to +50°C
- Max. oprating temperature- +70C°
- Temperature of laying- ≥-5°C
- Conductor material- Copper (Cu)
- Conductors insulation - PVC compaund
- Outer steath material-filling sheath and PVC compaund
- Conductor construction- solid or stranded CU wires, class 1 or class 2
- **re** - round solid
- **rm** - round multi-core
- **sm** - sector multi-core
- **se** - sector solid conductor



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2X1	re	black	9.5	20	100	100	E	**817020**
2X1.5	re	black	10.0	28	120	100	E	**817021**
2X2.5	re	black	10.6	46	150	100	E	**817022**
2X4	re	black	12.5	73	210	100	E	**817023**
2X6	re	black	13.3	110	260	100	E	**817024**
2X10	re	black	15.2	182	370	1	E	**817025**
2X16	rm	black	18	305	560	1	E	**817026**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3X1	re	black	9.7	28	120	100	E	**817036**
3X1.5	re	black	10.2	42	140	100	E	**817037**
3X2.5	re	black	11.0	69	180	100	E	**817039**
3X4	re	black	13.0	110	260	100	E	**817041**
3X6	re	black	14.0	165	340	100	E	**817043**
3X10	re	black	16.0	275	480	1	E	**817045**
3X16	rm	black	19.5	450	695	1	E	**817047**



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3X4+2.5	re/re	black	13,4	132	293	100	E	**817042**
3X6+4	re/re	black	14,4	202	380	100	E	**817044**
3X10+6	re/re	black	16,7	330	545	1	E	**817046**
3X16+10	rm/re	black	20,2	540	870	1	E	**817048**



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
4X1	re	black	10.4	37	140	100	E	**817067**
4X1.5	re	black	11.0	55	165	100	E	**817068**
4X2.5	re	black	11.9	91	215	100	E	**817069**
4X4	re	black	14.1	146	315	100	E	**817070**
4X6	re	black	15.4	220	410	100	E	**817071**
4X10	re	black	17.4	365	595	1	E	**817072**
4X16	rm	black	20.6	585	950	1	E	**817073**



Cross section (n x mm²)	Wires shape	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
5X1	re	black	11.2	45	160	100	E	**817083**
5X1.5	re	black	11.8	69	195	100	E	**817084**
5X2.5	re	black	12.8	114	260	100	E	**817085**
5X4	re	black	15.5	182	380	100	E	**817086**
5X6	re	black	16.8	275	500	100	E	**817087**
5x10	re	black	19,2	455	735	1	E	**817088**
5x16	re	black	23,2	745	1150	1	E	**817089**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

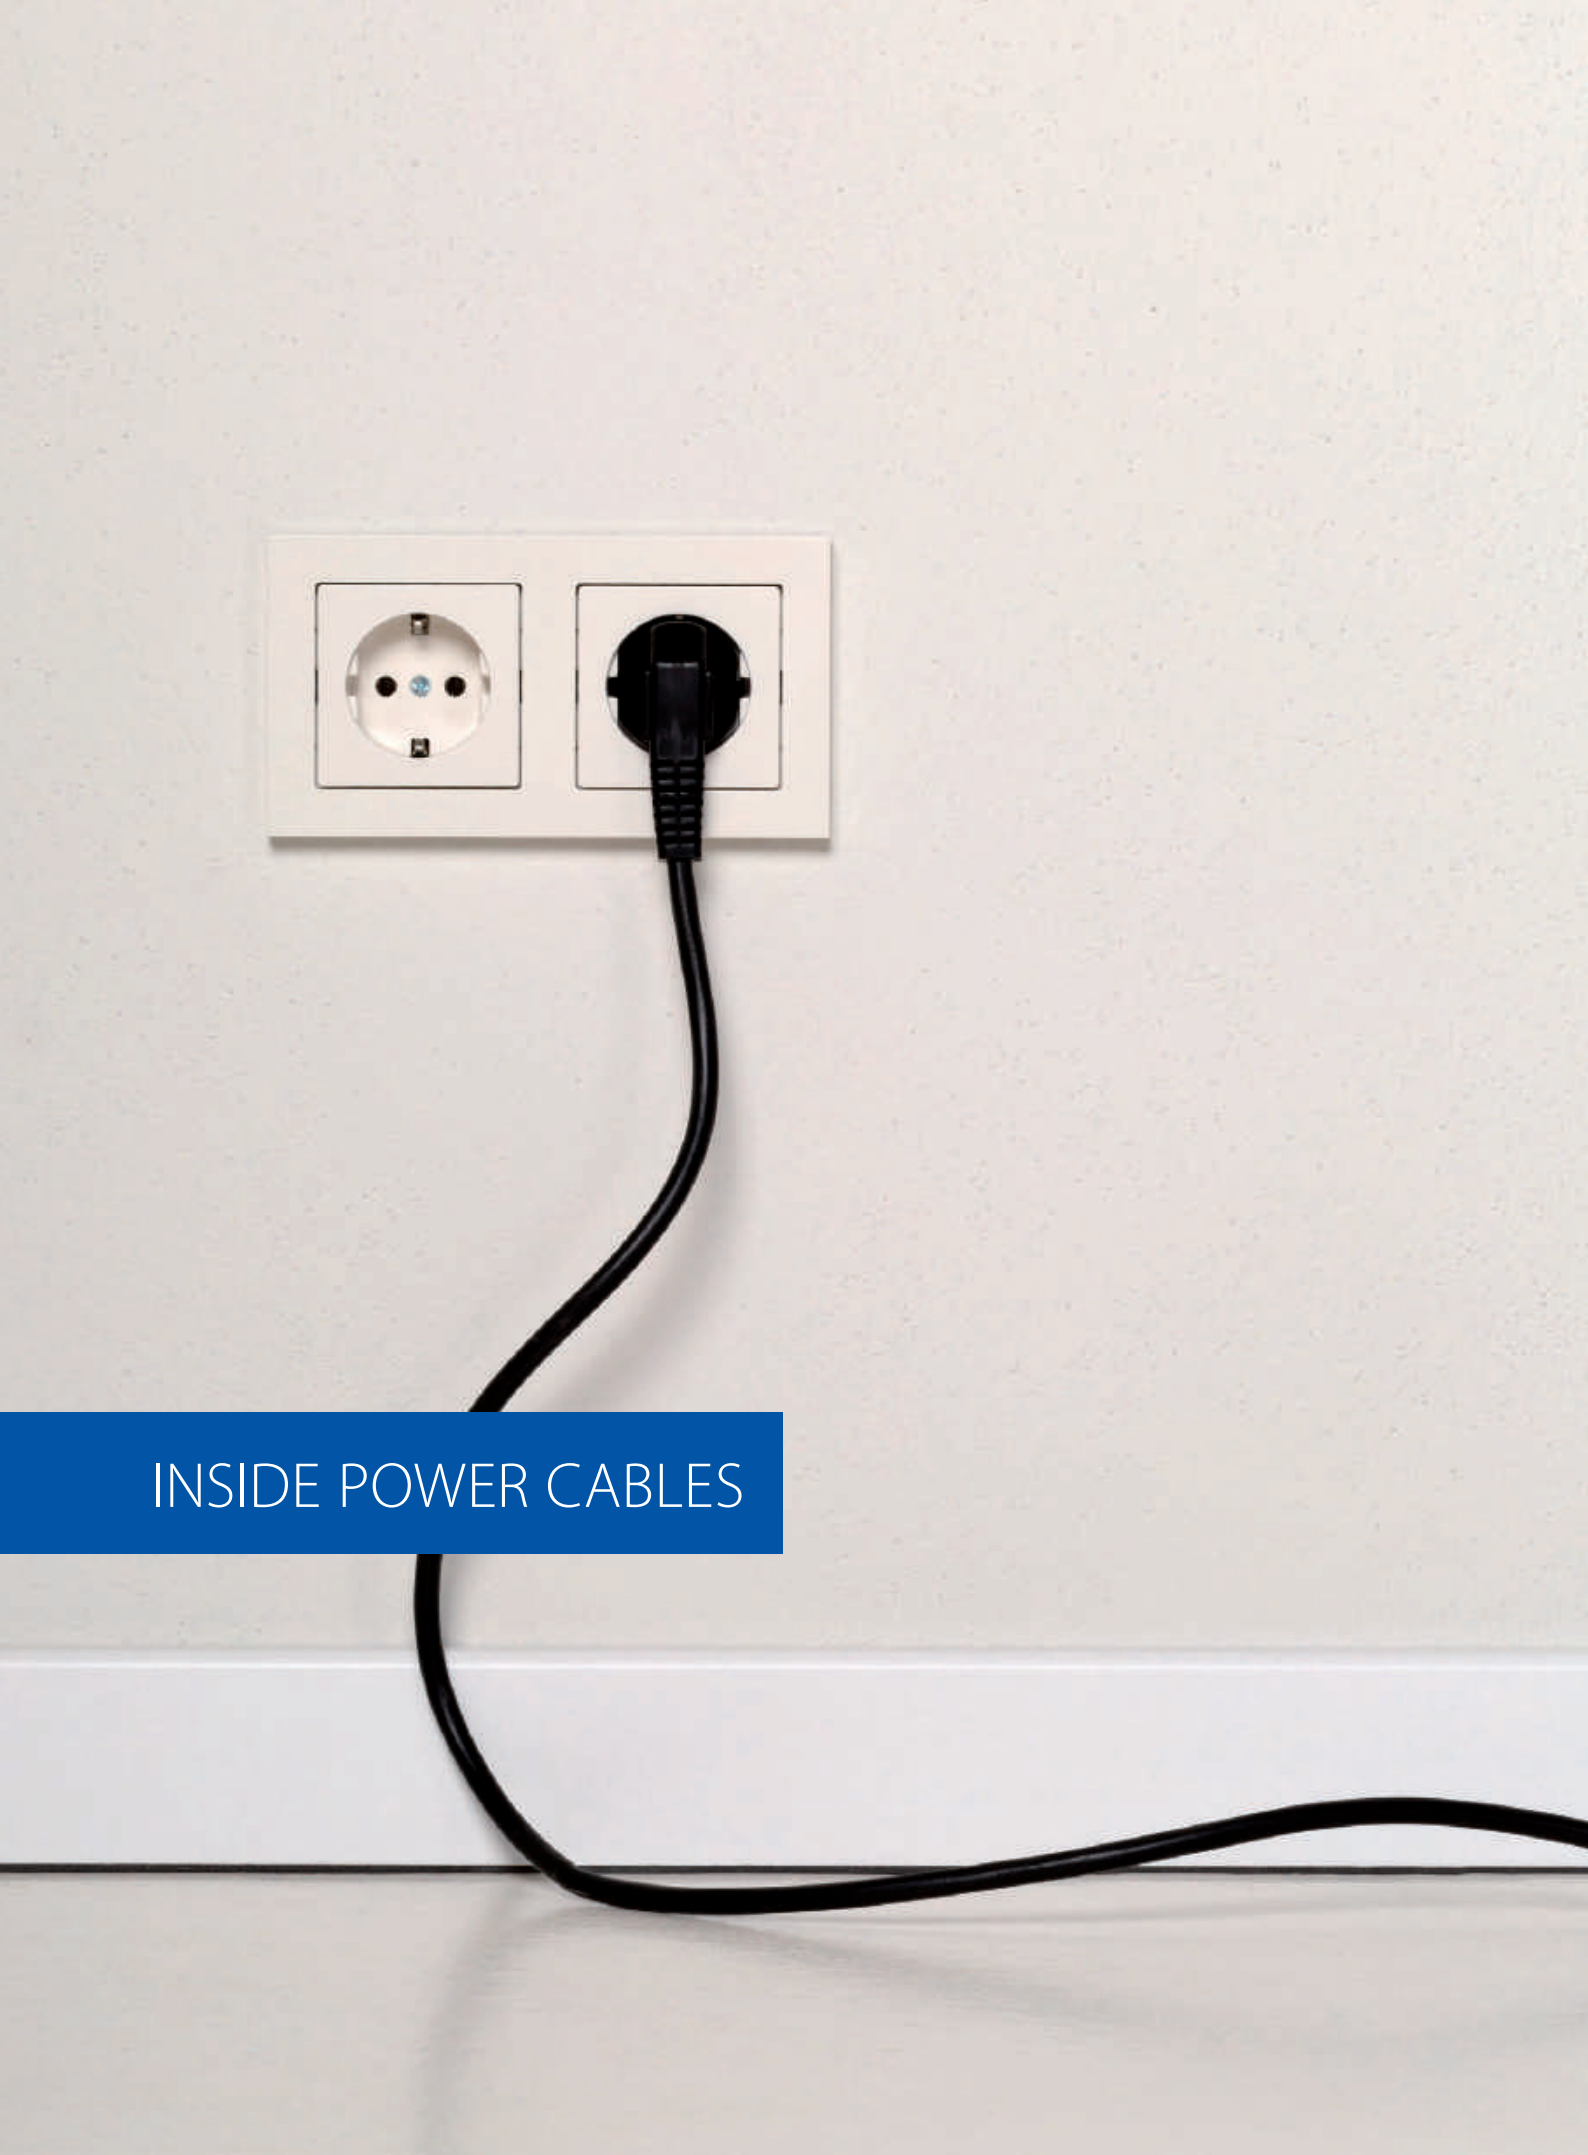

INSIDE POWER CABLES

Standards:
Flat conductor acc. to BDS IEC 60227-5
Flexible Cu-wires, cl. 6 acc. to IEC 60228

H03VH-H

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Flat conductor, flexible Cu-wires, PVC-insullation

ШВПЛ-А; PL; H03VH-H; P/L; H03VH-H; H03VH-H; H03VH-H; RVV; H03VH-H



Designed for connection of electrical appliances to the electrical grid, for connection of mobile users, devices and appliances.

TECHNICAL DATA:
- Ambient temperature: -40°C to+50°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U: 300/300 V
- Test voltage: 2000 V

CONSTRUCTION:
- Flexible Cu-wires, cl. 6 acc. to IEC 60228
- Flat conductor acc. to BDS IEC 60227-5
- Insulation: PVC compound
- Insulation colour: white or black-red

Cross section (n x mm²)	Colour	Thickness (mm)	Width (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2x0,50	white or black-red	6,0	3,0	9	25	100	E	**820001**
2x0,75	white or black-red	6,4	3,2	14	30	100	E	**820002**
2x1	white or black-red	6,8	3,4	19,2	31	100	E	**820017**
2x1,50	white or black-red	7,6	4,0	28,8	38	100	E	**820018**

Standards:
Conductor acc. to HD 21,5 S3
Flexible Cu-wires, cl. 5 acc. to IEC 60228

H03VV-F

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Conductor with flexible Cu-wires, PVC insulation and sheath

ШВПЛ-Б; PP/L; PP/L; PP/L; H03VV-F; H03VV-F; MYYUP; H03VV-F; H03VV-F



Conductor with parallel or stranded in a bundle insulated cores, designed for connection of electrical appliances to the electrical grid, for connection of mobile users, devices and appliances.

TECHNICAL DATA:
- Variant of the conductor: H03VVH2-F - flat type
- Ambient temperature: -30°C to +50°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U: 300/300 V
- Test voltage: 2000 V

CONSTRUCTION:
- Flexible Cu-wires, cl. 5 acc. to IEC 60228
- Insulation: PVC compound
- Sheafing: PVC compound
- Outer sheath colour: white



Type (flat)	Cross section (n x mm²)	Colour	Thickness (mm)	Width (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H03VVH2-F	2x0,5	white	6,0	3,6	10,0	30	100	E	**820004**
H03VVH2-F	2x0,75	white	6,4	3,9	14,5	39	100	E	**820006**



Type (round)	Cross section (n x mm²)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H03VV-F	2X0,5	white	9.5	100	25	100	E	**820003**
H03VV-F	3X0.5	white	10.0	120	30	100	E	**820007**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

Standards:
Flexible cable acc. to HD 21.5 S3, DIN VDE 0281 part 5
Flexible Cu-wires, cl. 5 acc. to DIN VDE 0295, IEC 60228
Colour coding: acc. to DIN VDE 0293-308

H05VV-F

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Conductor with flexible Cu-wires, PVC insulation and sheath

ШВПС; PP/J; PP/J; PP/J; H05VV-F; H05VV-F; MYYM; H05VV-F; H05VV-F

Conductor with parallel or stranded in a bundle insulated cores, designed for connection of electrical appliances to the electric grid, for connection of mobile users, devices and appliances.



TECHNICAL DATA:
- Variant of the conductor: H05VVH2-F - flat type
- Ambient temperature: -30°C to +50°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U: 300/500 V
- Test voltage: 2000 V

CONSTRUCTION:
- Flexible Cu-wires, cl. 5 acc. to DIN VDE 0295, IEC 60228
- Insulation/outer sheath: PVC compound;
- Outer sheath colour: white



Cross section (n x mm²)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2 x 0,75	white	7,6	14,0	62	100	E	**821001**
2 x 1	white	8,0	19,5	71	100	E	**821002**
2 x 1,5	white	9,0	28,0	94	100	E	**821003**
2 x 2,5	white	11,0	47,0	114	100	E	**821004**
2 X 4	white	12,0	75,0	197	100	E	**821005**



Cross section (n x mm²)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3 x 0,75	white	8,0	21,5	74	100	E	**821008**
3 x 1	white	8,4	29,0	85	100	E	**821009**
3 x 1,5	white	9,8	42,0	120	100	E	**821010**
3 x 2,5	white	12,0	70,0	182	100	E	**821011**
3 x 4	white	13,0	114,0	252	100	E	**821012**



Cross section (n x mm²)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
4 x 0,75	white	8,6	29,0	92	100	E	**821016**
4 x 1	white	9,4	38,5	109	100	E	**821017**
4 x 1,5	white	11,0	56,0	151	100	E	**821018**
4 x 2,5	white	13,0	93,5	225	100	E	**821019**
4 x 4	white	14,0	151,0	315	100	E	**821020**



Cross section (n x mm²)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
5 x 0,75	white	9,6	36,0	115	100	E	**821024**
5 x 1	white	10,0	48,0	132	100	E	**821025**
5 x 1,5	white	12,0	70,0	188	100	E	**821026**
5 x 2,5	white	14,0	117,0	280	100	E	**821027**
5 X 4	white	15,5	189,0	395	100	E	**821028**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



INSTALLATION CONDUCTORS

Standards:
Conductor acc. to HD 21.3 S3, DIN VDE 0281 part 3
Solid Cu wires cl. 1 acc. to DIN VDE 0295, IEC 60228



H05V-U, H07V-U

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Conductor, Cu-wires, PVC-insulation

ПВ-А1; P; P; P; H05V-U, H07V-U; H05V-U, H07V-U (CY); H05V-U, H07V-U (FY); H05V-U, H07V-U; H05V-U, H07V-U

For fixed installation in lighting networks, electric power installations, wiring of electrical switchboards, machines and equipment.

TECHNICAL DATA:
- Ambient temperature: -30°C to+50°C
- Temperature of laying: min. -5°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U:
- H05V-U 300/500 V
- H07V-U 450/750 V
- Test voltage:
- H05V-U 2000 V
- H07V-U 2500 V

CONSTRUCTION:
- Solid Cu wires cl. 1 acc. to DIN VDE 0295, IEC 60228
- Insulation: PVC compound
- Insulation colour:
- yellow-green: available cross sections from 0.5 to 10 (mm^2)
- white: available cross sections from 0.5 to 4 (mm^2)
- black: available cross sections from 0.5 to 10 (mm^2)
- blue: available cross sections from 0.5 to 10 (mm^2)
- brown: available cross sections from 0.5 to 10 (mm^2)
- red: available cross sections from 0.5 to 10 (mm^2)

Type	Cross section (n x mm^2)	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H05V-U	0,5	2,4	4,5	9	100	E	**822001**
H05V-U	0,75	2,6	7,0	12	100	E	**822002**
H05V-U	1	2,8	9,0	15	100	E	**822003**

Note: At orders of the desires colour, must be added after the catalogue number:
BL – blue; R – red; B - black; W- white; YG- yellow green; BR- brown

Type	Cross section (n x mm^2)	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H07V-U	1,5	3,3	13,5	21	100	E	**822004**
H07V-U	2,5	3,9	22,0	33	100	E	**822005**
H07V-U	4	4,4	35,0	48	100	E	**822006**
H07V-U	6	4,6	52,5	68	100	E	**822007**
H07V-U	10	6,4	87,5	113	100	E	**822008**

Note: At orders of the desires colour, must be added after the catalogue number:
BL – blue; R – red; B - black; W- white; YG- yellow green; BR- brown

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

Standards:
PVC conductor acc. to HD 21.3 S3, DIN VDE 0281 part 3
Flexible Cu wires cl. 5 acc. to DIN VDE 0295, IEC 60228





H05V-K, H07V-K

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Conductor, Cu-wires, PVC-isulation

ПВ-А2; PF; P/F; P/F; H05V-K, H07V-K; H05V-K, H07V-K (CYA); MYF; H05V-K, H07V-K; H05V-K, H07V-K

For fixed installation wiring of electrical switchboards, machines and equipment, where small bending radius is required.

TECHNICAL DATA:
- Ambient temperature: -30°C to+50°C
- Temperature of laying: min. -5°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U:
- H05V-K 300/500 V
- H07V-K 450/750 V
- Test voltage:
- H05V-K 2000 V
- H07V-K 2500 V

CONSTRUCTION:
- Flexible Cu wires cl. 5 acc. to DIN VDE 0295, IEC 60228
- Insulation: PVC compound
- Insulation colour:
- yellow-green: available cross sections from 0.5 to 25 (mm^2)
- white: available cross sections from 0.5 to 4 (mm^2)
- black: available cross sections from 0.5 to 25 (mm^2)
- blue: available cross sections from 0.5 to 25 (mm^2)
- brown: available cross sections from 0.5 to 10(mm^2)
- red: available cross sections from 0.5 to 25 (mm^2)

Type	Cross section (n x mm^2)	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H05V-K	0,5	2,6	5,0	10	100	E	**823002**
H05V-K	0,75	2,8	7,0	13	100	E	**823003**
H05V-K	1	3,0	9,5	16	100	E	**823004**

Note: At orders of the desires colour, must be added after the catalogue number:
BL – blue; R – red; B - black; W- white; YG- yellow green; BR- brown

Type	Cross section (n x mm^2)	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
H07V-K	1,5	3,5	14,0	23	100	E	**823005**
H07V-K	2,5	4,2	23,0	36	100	E	**823006**
H07V-K	4	4,8	36,5	52	100	E	**823007**
H07V-K	6	6,3	57,0	74	100	E	**823008**
H07V-K	10	7,6	96,0	131	100	E	**823009**
H07V-K	16	8,8	151,0	195	100	E	**823010**
H07V-K	25	11,0	235,0	300	100	E	**823011**

Note: At orders of the desires colour, must be added after the catalogue number:
BL – blue; R – red; B - black; W- white; YG- yellow green; BR- brown

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

Standards:
Flat conductor acc. to BDS 4305-90
Solid Cu wires cl. 1 acc. to BDS 904-84

NYIFY-O/J

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Flat installation conductor, Cu-wires, PVC-insulation, PVC-sheath

ПВВ-МБ1; PG; PP/R; PP/R; NYIFY-O/J; NYIFY-O/J; NYIFY-O/J; NYIFY-O/J; NYFAZ



Installation conductor with parallel Cu-wires for fixed installation in lighting networks and electric power installations.

TECHNICAL DATA:
- Ambient temperature: -30°C to +50°C
- Temperature of laying: min. -5°C
- Max. operating temperature: +70°C
- Nominal voltage Uo/U: 220/380 V
- Test voltage: 2000 V

CONSTRUCTION:
- Solid Cu wires cl. 1 acc. to BDS 904-84
- Insulation: PVC compound
- Sheath: PVC compound
- Outer sheath colour: white



Cross section (n x mm²)	Colour	Conductor Thickness (mm)	Conductor Width (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2 x 1	white	3,70	10,30	17,9	55	100	E	**834001**
2x1,5	white	4,10	11,20	26,6	65	100	E	**834002**
2 x 2,5	white	5,00	12,90	44,3	97	100	E	**834003**
2x4	white	5,60	14,20	70,6	135	100	E	**834004**
2x6	white	6,50	16,00	104,4	190	100	E	**834005**



Cross section (n x mm²)	Colour	Conductor Thickness (mm)	Conductor Width (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3x1	white	3,70	14,00	26,8	73	100	E	**834007**
3x1,5	white	4,10	15,30	39,8	95	100	E	**834008**
3x2,5	white	5,00	16,90	66,4	142	100	E	**834009**
3x4	white	5,60	19,80	104,2	200	100	E	**834010**
3x6	white	6,50	22,50	156,5	280	100	E	**834011**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

Standards:
DIN VDE 0295; IEC 60228- according to construction DIN VDE 0250-204- according to multi-core conductors IEC60332-1- according to flame retardant

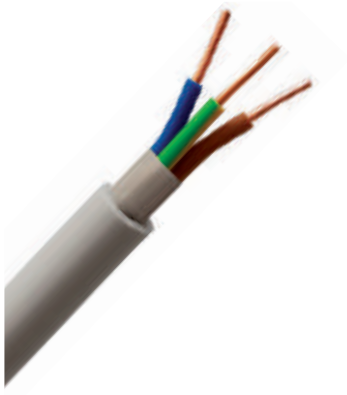



NYM

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Multi-core conductor with Cu wires and PVC insulation

NYM; PGP; PGP; PP-Y; PGP; NYM; NYM; NYM; NYM; NYM

For fixed instalations in , or on under plasterboard, in lighting networks in dry places. Can be used and in damp or wet rooms, in wall and concrete, in switchboards and mashines. Is suitable for outdoor use if cable is protected against direct sunshine.

TECHNICAL DATA:
- Nominal voltage: Uo- 300V; U- 500V
- Ambient temperature- from -20°C to +50°C
- Max. oprating temperature- +70C°
- Instalation temperature- ≥-5°C
- Conductor material- Copper (Cu)
- Conductors insulation - PVC compaund
- Outer steath material-filling sheath and PVC compaund
- Conductor construction- solid CU wires, class 1 and class 2 for cross section above 10mm^2

Cross section (n x mm^2)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2X1.5	grey	9.8	29	120	100	E	**832008**
2X2.5	grey	11.0	48	160	100	E	**832009**
2X4	grey	12.5	76	220	100	E	**832010**

Cross section (n x mm^2)	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3X1.5	grey	10.5	43	136	100	E	**832016**
3X2.5	grey	11.5	72	190	100	E	**832017**
3X4	grey	13.0	115	260	100	E	**832018**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

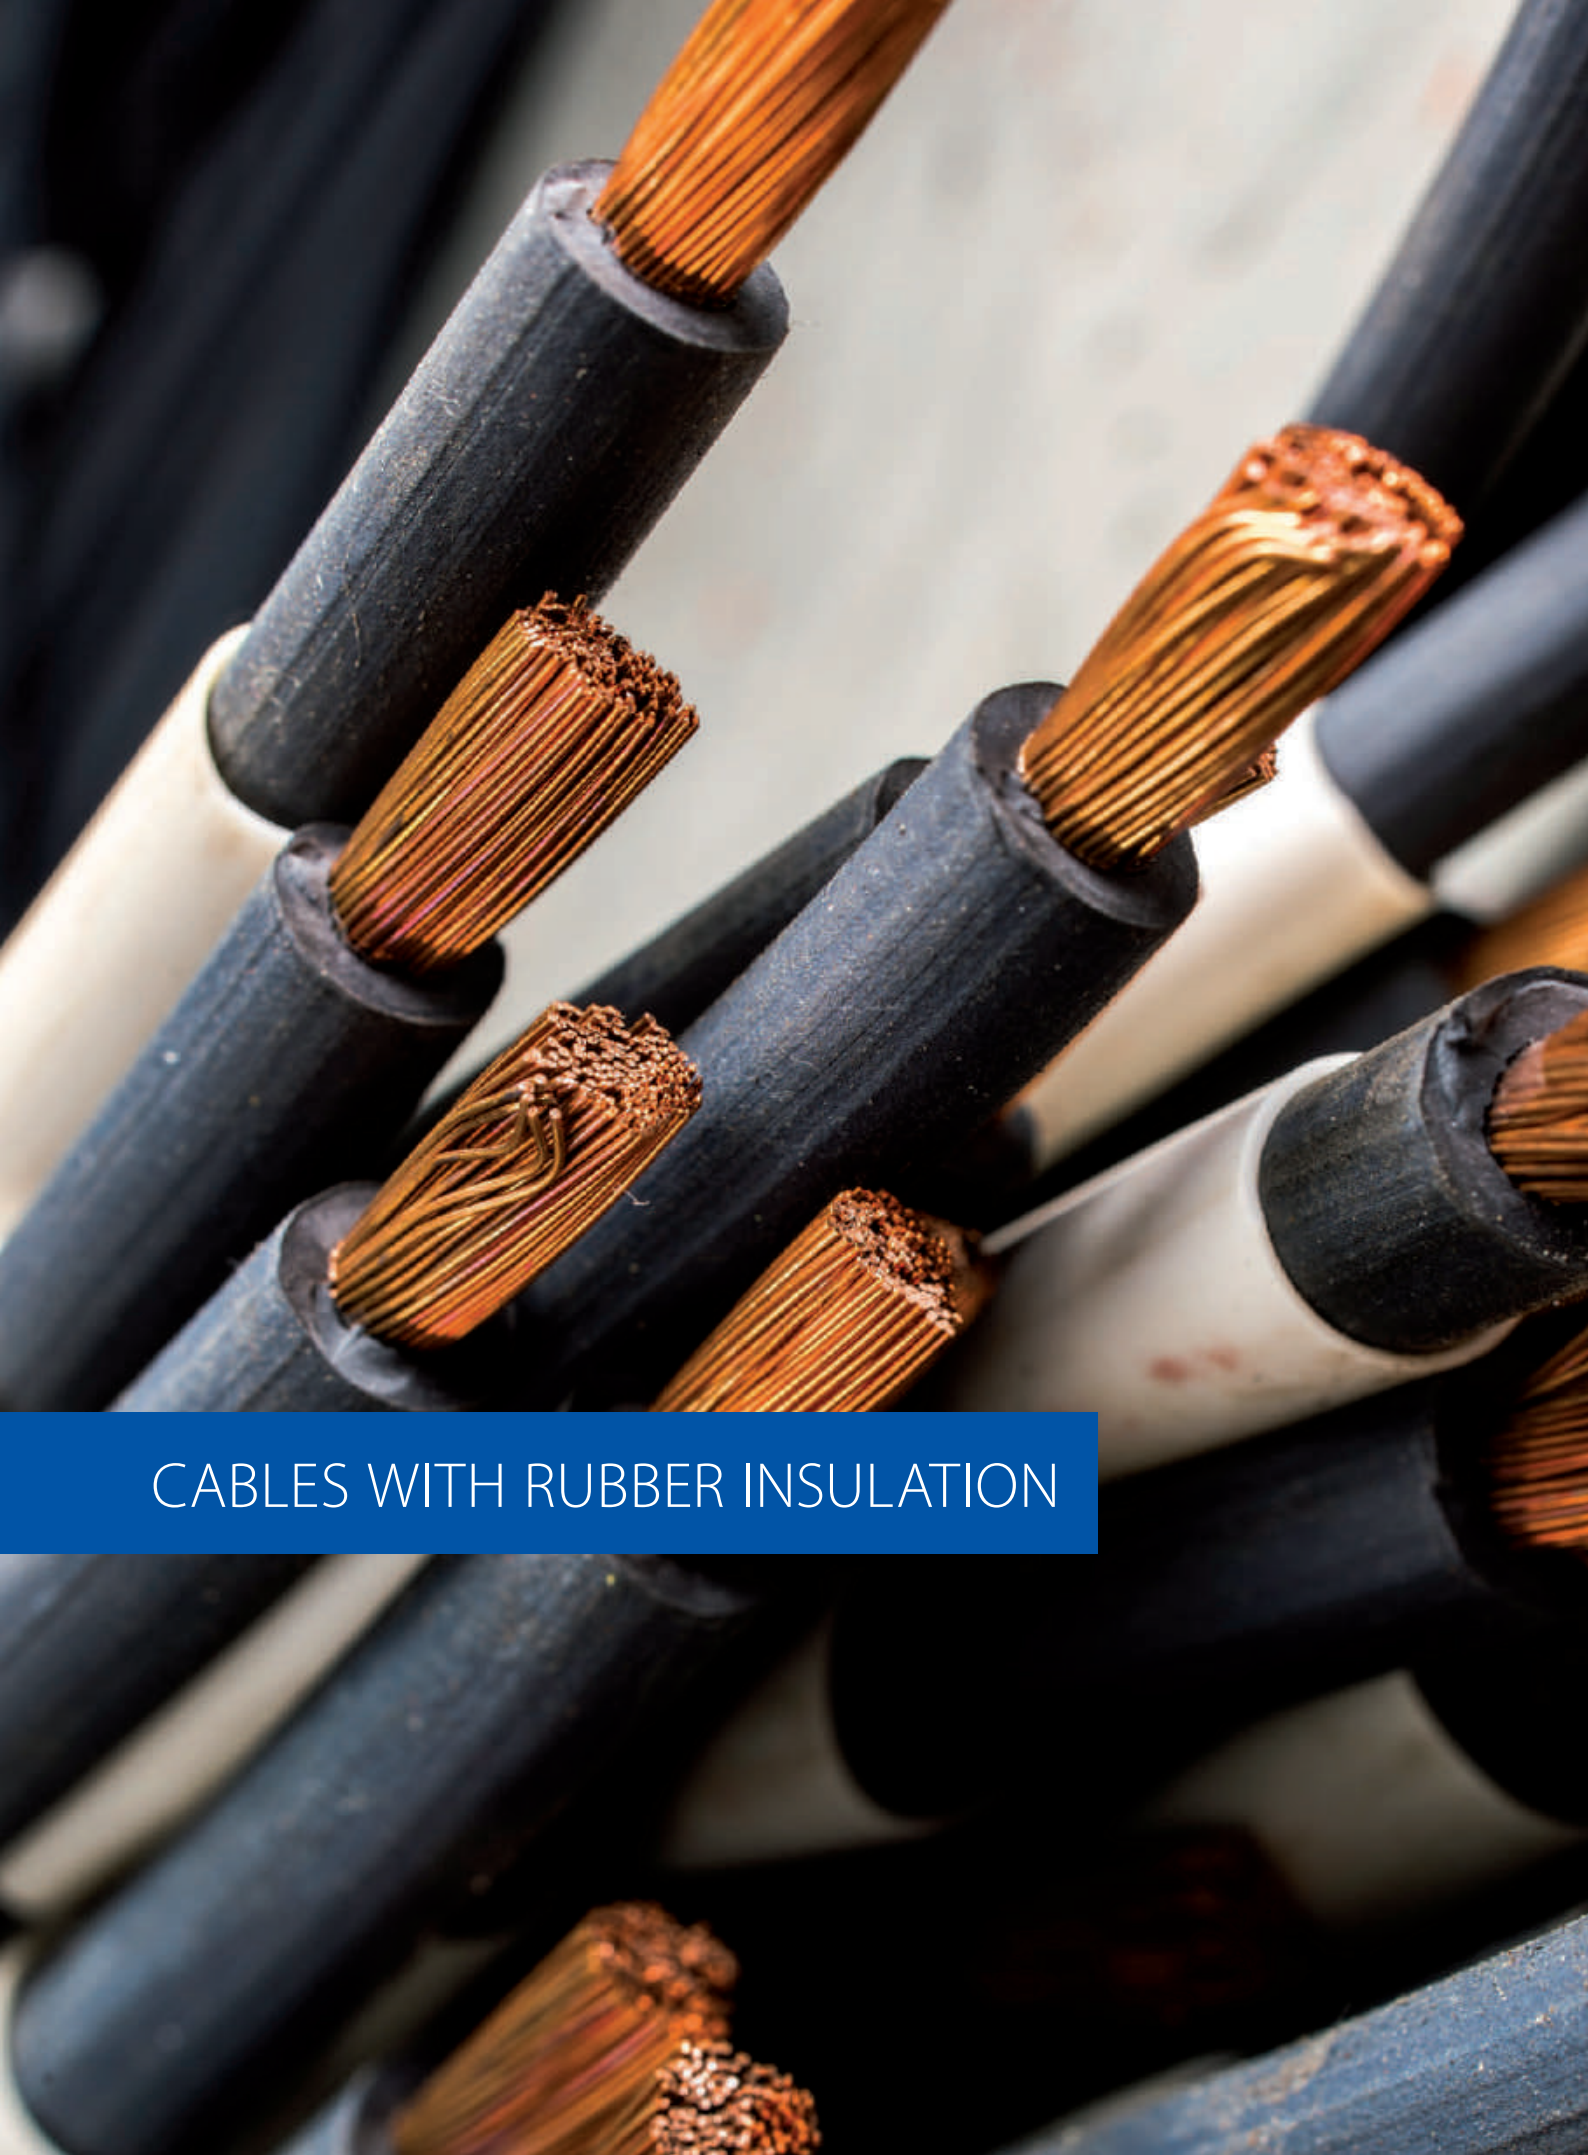

CABLES WITH RUBBER INSULATION

Standards:
DIN VDE 0295; IEC 60228- according to construction
DIN VDE 0293-308 and HD 186- according to colour coating
DIN VDE 0482-332-1-2; IEC60332-1- according to flame retardant

H05RR-F

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Rubber flexible cable

ШКПЛ; GG/J; GG/J; GG/J; H05RR-F; H05RR-F; MCCM; H05RR-F; H05RR-F

For connection of electrical appliances and consumers with low and middle mechanical stress to Alternating Current (AC). It has wide use in household, office, for cable reels, for connecting of mobile consumers and etc.



TECHNICAL DATA:
- Nominal voltage Uo/U: 300V/500V
- Ambient temperature: from -30°C to +60°C
- Conductor material: Copper (Cu) wires, class 5
- Conductors insulation: Rubber EPR
- Outer steath material: Rubber EPR



Cross section (n x mm²)	Type	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
2X1	H05RR-F	black	6.1 - 8.0	19.0	71.0	100	E	**814002**
2X1.5	H05RR-F	black	7.6 - 9.8	29.0	99.0	100	E	**814003**
2X2.5	H05RR-F	black	9.0 - 11.6	48.0	148.0	100	E	**814004**



Cross section (n x mm²)	Type	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
3X1	H05RR-F	black	6.5 - 8.5	29.0	88.0	100	E	**814007**
3X1.5	H05RR-F	black	8.0 - 10.4	43.0	125.0	100	E	**814008**
3X2.5	H05RR-F	black	9.6 - 12.4	72.0	175.0	100	E	**814009**
3X4	H05RR-F	black	11.3 - 14.5	115.0	246.0	100	E	**814010**



Cross section (n x mm²)	Type	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
4X1	H05RR-F	black	9.0 - 11.6	58.0	165.0	100	E	**814012**
4X1.5	H05RR-F	black	9.0 - 11.6	58.0	165.0	100	E	**814013**
4X2.5	H05RR-F	black	10.7 - 13.8	96.0	225.0	100	E	**814014**
4X4	H05RR-F	black	12.7 - 16.2	154.0	315.0	100	E	**814015**
4X6	H05RR-F	black	14.2 - 18.1	231.0	440.0	100	E	**814017**



Cross section (n x mm²)	Type	Colour	Outer diameter (mm)	Cu weight (kg/km)	Total weight (kg/km)	Packing (m)	Product category	Catalogue number
5X1.5	H05RR-F	black	9.8 - 12.7	72.0	185.0	100	E	**814020**
5X2.5	H05RR-F	black	11.9 - 15.3	120.0	275.0	100	E	**814021**
5x4	H05RR-F	black	15,6-19,9	187	475	100	E	**814022**
5x6	H05RR-F	black	17,5-22,2	288	635	100	E	**814023**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



COMMUNICATION CABLES

Construction:
CCA-wires - 4x2x0.24
CU-wires - 4x2x0.24

UTP

5+2 standard +extended 7 YEAR TOTAL WARRANTY

LAN cable, stranded in pairs, cat. 5e

UTP; UTP; UTP; UTP; UTP; UTP; UTP; UTP; UTP CAT5E

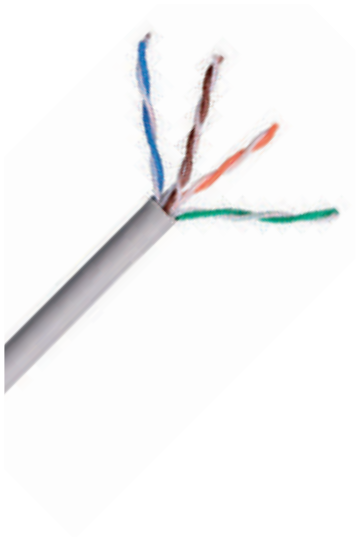

Cable, stranded by pairs, used for transmission of digital signals with high speed of transmission. Suitable for setting computer systems for data transmission, measuring and control systems with proper resistance to electromagnetic influences.

TECHNICAL DATA:
- Ambient temperature: -30°C to +50°C
- Temperature of laying: min. 0°C
- Characteristic Impedance: 100 Ω ± 15 Ω
- Loop resisistance: ≤ 192 0/ km
- Unbalance of loop resistance: ≤ 3%
- Insulation resistance: ≥ 150 MΩ x km
- Operating capacity: ≤ 55,8 nF/km
- Cable diameter: 5 mm
- Cable weight: 27 kg/km

CONSTRUCTION:
- 879002 - CCA-wires - 24 AWG; 0,51 mm, acc. to IEC 60228
- 879017 - CU wires - 24 AWG; 0,51 mm, acc. to IEC 60228
- Insulation: PE compound
- Cable bundle: 4 stranded pairs
- Outer sheath: PVC compound or LSOH compound
- Outer sheath colour: for PVC-grey

Colour	Material	Category	Frequency - MHz	Characteristic of attenuation 4	10	16	62,5	100	125	Packing (m)	Product category	Catalogue number
grey	CCA	Cat. 5e	Attenuation - db/100 m	4,1	6,5	8,2	17	22	24,9	305	E	**879002**
			Attenuation (Next) - db	56,3	50,3	47,3	38,4	35,3	33,9			
grey	CU	Cat. 5e	Attenuation (Next) - db	56,3	50,3	47,3	38,4	35,3	33,9	305	E	**879017**

Insulation colour of stranded pairs - core a / core b:
- white with blue ring / blue
- white with orange ring / orange
- white with green ring /green
- white with brown ring / brown

Construction:
CCA-wires - 4x2x0.24

FTP

5+2 standard +extended 7 YEAR TOTAL WARRANTY

LAN cable, stranded in pairs, with screen, cat. 5e

FTP; FTP; FTP; FTP; FTP; FTP; FTP; FTP; FTP CAT5E



Cable, stranded in pairs, with screen of laminated foil, used for transmission of digital signals with high speed of transmission. FTP cable is suitable for setting computer systems for data transmission, measuring and control systems and for transmission of high-frequency analogue sygnals in automatic and industrial TV networks . High resistance to electromagnetic influences.

TECHNICAL DATA:
- Ambient temperature: -30°C to +50°C
- Temperature of laying: min. 0°C
- Characteristic Impedance: 100 Ω ± 15 Ω
- Loop resisistance: ≤ 192 0/ km
- Unbalance of loop resistance: ≤ 3%
- Insulation resistance: ≥ 150 MΩ x km
- Operating capacity: ≤ 55,8 nF/km
- Cable diameter: 6 mm
- Cable weight: 31 kg/km

CONSTRUCTION:
- 879001- CCA-wires - 24 AWG; 0,51 mm, acc. to IEC 60228
- Insulation: PE compound
- Cable bundle: 4 stranded pairs
- PETP foil
- Drain tinned Cu-wire
- Screen: laminated Al foil
- Outer sheath: PVC compound or LSOH compound
- Outer sheath colour tor PVC-grey

Material	Category	Frequency - MHz	Characteristic of attenuation 4	10	16	62,5	100	125	Packing (m)	Product category	Catalogue number
CCA	Cat. 5e	Attenuation - db/100 m	4,1	6,5	8,2	17	22	24,9	305	E	**879001**

Insulation colour of stranded pairs - core a / core b:
- white with blue ring / blue
- white with orange ring / orange
- white with green ring /green
- white with brown ring / brown

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

Construction:
CCA-wires - 4x2x0.24

STP

5+2 standard +extended 7 YEAR TOTAL WARRANTY

LAN cable, stranded in pairs, with screen on each pair, cat. 6

STP; STP; STP; STP; STP; STP; STP; STP; STP CAT6



Cable, stranded in pairs, with screen of laminated foil on each pair, used for transmission of digital signals with high speed of transmission, with spectrum of the frequency being used up to 300 MHz for cat. 6. The cable is suitable for setting computer systems for data transmission, measuring and control systems and for transmission of high-frequency analogue sygnals in automatic and industrial TV networks and is with high resistance to electromagnetic influences.

TECHNICAL DATA:
- Ambient temperature: -30°C to +50°C
- Temperature of laying: min. 0°C
- Characteristic Impedance:
- 100 Ω ± 15 Ω up to 100 MHz
- 100 Ω ± (15 +0,05(f-100)) above 100 MHz
- Loop resisistance: ≤ 170 Ω / km
- Unbalance of loop resistance: ≤ 3%
- Insulation resistance: ≥ 150 MΩ x km
- Operating capacity: ≤ 50 nF/km
- Cable diameter: 7 mm
- Cable weight 42 kg/km

CONSTRUCTION:
- CCA-wires - 24 AWG; 0,57 mm acc. to IEC 60228
- Insulation: PE compound
- Screen: laminated Al foil on each pair
- Cable bundle: 4 stranded screened pairs
- Outer sheath: PVC compound or LSOH compound
- Outer sheath colour: for PVC-grey, for LSOH - orange

Colour	Category	Frequency - MHz	Characteristic of attenuation 4	10	16	62,5	100	200	300	Packing (m)	Product category	Catalogue number
grey	Cat. 6	Attenuation - db/100 m	3,8	6	7,6	15,5	19,9	29,5	35	305	E	**879012**
		Attenuation (Next) - db	65,3	59,3	56,2	47,4	44,3	39,8	38			

Insulation colour of stranded pairs - core a / core b:
- white with blue ring / blue
- white with orange ring / orange
- white with green ring /green
- white with brown ring / brown

Construction:
CCA-wires - 4x2x0.24

S-FTP

5+2 standard +extended 7 YEAR TOTAL WARRANTY

LAN cable, stranded in pairs, with duble-screen, cat. 5

S-FTP; S-FTP; S-FTP; S-FTP; S-FTP; S-FTP; S/FTP; s-FTP; SFTP CAT5



Cable, stranded in pairs, with screen of laminated foil, with braid of tinned copper wires used for transmisson of digital signals with high speed of transmission, with spectrum of the frequency being used up to 100 MHz for cat. 5. The cable is suitable for setting computer systems for data transmisson, measuring and control systems and for transmisson of high-fiequency analogue sygnals in automatic and industrial TV networks. High resistance to electromagnetic influences.

TECHNICAL DATA:
- Ambient temperature: -30°C to +50°C
- Temperature of laying: min. 0°C
- Characteristic Impedance: 100 Ω ± 15 Ω
- Loop resisistance: ≤ 192 0/ km
- Unbalance of loop resistance: ≤ 3%
- Insulation resistance: ≥ 150 MΩ x km
- Operating capacity: ≤ 55,8 nF/km
- Cable diameter: 6,9 mm

CONSTRUCTION:
- CCA-wires - 24 AWG; 0,51 mm acc. to IEC 60228
- Insulation: PE compound
- Cable bundle: 4 stranded pairs
- PETP foil
- Screen: laminated Al foil
- Braiding of tinned Cu-wires
- Outer sheath: PVC compound or LSOH compound
- Outer sheath colour: for PVC - grey

Colour	Category	Frequency - MHz	Characteristic of attenuation 4	10	16	62,5	100	125	Packing (m)	Product category	Catalogue number
grey	Cat. 5	Attenuation - db/100 m	4,3	6,6	8,2	17,1	22		305	E	**879011**
		Attenuation (Next) - db	53	47	44	35	32				

Insulation colour of stranded pairs - core a / core b:
- white with blue ring / blue
- white with orange ring / orange
- white with green ring /green
- white with brown ring / brown

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

COAXIAL CABLE RG6 / 96

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Coaxial cable, suitable for connection of TV aerials to TV receivers.



RG6/96; RG6/96; RG6; RG6; RG6/96; RG6/96; RG6/96; RG6/96; RG6

Suitable for high frequency equipment, measuring and control equipment and appliances, for setting up local computer networks, and data systems, for connection of TV aerials to TV receivers

TECHNICAL DATA:
- model - RG6 / 96;
- material and structure of the core cable: CCS 1.02 mm;
- type of insulation: PE 4.60 mm;
- external conductor (screen): 96 Al foil;
- diameter and cable material: 6.9 mm PVC;
- wave impedance: 75 ± 5 Ohm;
- operating temperature: from -30 ° C to +70 ° C;
- damping ratio: at 100 MHz 0.0637 dB / m.

Colour	Description	Insulation Ø mm	Outer Ø mm	Wave resistance Ω	Max. capacity pF/m	Attenuation at 200 MHZ max. dB/100m	Packing (m)	Product category	Catalogue number
white	RG6/96	PE 4,70	8,40 PVC	75 ±3	68	12	100	E	**856001**

COAXIAL CABLE RG59 / + 2X0.5MM2

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Coaxial cable, suitable for video surveilance systems.



RG59+2x0.5; RG59+2x0.5; RG59; R59; RG59+2x0.5; RG59(CCTV)+2X0.5; RG59; RG59; RG59+2x0.5

TECHNICAL DATA:
- **Coaxial cable: RG-59**
- Inner conductor: Ø 0.59 mm - CCS wire
- Dielectric: Ø 3.7 mm PE full
- Braid: Stranded wire Cu, Indoor coverage area : 90 %
- Impedance: 75 Ω
- Outer coating: Al foil + Al braiding
- Cable attenuation at 100m section:
- - 10.9 dB @ 100 MHz
- - 15.2 dB @ 200 MHz
- - 23.2 dB @ 450 MHz
- - 32.6 dB @ 800 MHz
- - 36.6 dB @ 1000 MHz

Electrical cable:
- Inner conductor: 2 x 0.5 m CU wires
- Power wires resistance: 4 Ω / 100 m
- Outer coating: Ø 5 mm

Colour	Description	Insulation Ø mm	Outer Ø mm	Wave resistance Ω	Max. capacity pF/m	Attenuation at 200 MHZ max. dB/100m	Packing (m)	Product category	Catalogue number
white	RG59/U+2x0.5	PE 3,66	8/5mm	75 ±3	53.4	12.4	100	E	**856004**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ALARM CABLE

5+2 standard +extended 7 YEAR TOTAL WARRANTY

Unshelles alarm cable



Алармен кабел; Alarmni kabel; Alarmni kabel; Alarmni kabl; Alarmni kabel;
Poplašný kábel; Cablu de alarmă; Riasztó kábel; Καλώδιο συναγερμού

Suitable for the connection of detectors, sensors, infra-red as well as micro wave or mixed technology systems to the switch board.

TECHNICAL DATA:
- Ambient temperature: -20°C to +60°C
- Operating voltage: 300V RMS max
- Capacitance between conductors: 1KHz - 33pF/ft Nom.
- Capacitance between conductors to shield: 1KHz - 60pF/ft Nom.
- Damping ratio: at 100 MHz 0.0637 dB / m.

CONSTRUCTION:
- Conductor: CCA
- Insulation: PVC
- Insulation colors: red, blue, yellow, black, green, white
- Shield: without
- Rip cord: syntetic fibers
- Drain wire: no

Cross section (n x mm²)	Cable type	Colour	Outer diameter (mm)	Packing (m)	Product category	Catalogue number
6x0.22	CCA	white	4.2	100	E	**879016**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PROFESSIONAL DRILL EL-D10

5+0 standard +extended 5 YEAR TOTAL WARRANTY

10mm metal chuck: to tighten and hold bits steady
Forward and reverse: ability for easy adjustment according to tasks

Model	Power (W)	No-load speed (r/min)	Chuck size (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-D10	500	4300	0.6- 6.5	2	1	D	**59510**



IMPACT DRILL EL-D14

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Handle: soft grip handle
Switch: lockable
Speed: variable
Gear housing: aluminium

Model	Power (W)	No-load speed (r/min)	Chuck size (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-D14	600	0-3000	13	2	1	D	**59514**



PROFESSIONAL IMPACT DRILL EL-D11

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Impact and drill: two modes transformed
13mm metal chuck: to tighten and hold bits steady
Auxiliary handle: is convienient for operation at any angle
Variable large trigger: switch and 360° swivel side handle for added comfort speed
Lock-on button: for comfortable operation
Aluminium: diecast gear case

Model	Power (W)	No-load speed (r/min)	Chuck size (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-D11	910	0-2800	13	2	1	D	**59511**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PROFESSIONAL TWO SPEED IMPACT DRILL EL-D12

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Dual-mode selector: easily converts from rotation-only to hammer-drill mode
13mm metal chuck: to tighten and hold bits steady
Auxiliary handle: is convienient for operation at any angle
Variable large trigger: switch and 360° swivel side handle for added comfort speed
Lock-on button: for comfortable operation
Forward and reverse: ability for easy adjustment according to tasks
2- speed: transmission provides maximum torgue in setting one and maximum speed in setting two

Model	Power (W)	No-load speed (r/min)	Chuck size (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-D12	1050	0-1200/ 0-3200	13	2	1	D	**59512**



PROFESSIONAL LIGHT ROTARY HAMMER EL-RH13

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Four functions: easily converts triem
Auxiliary handle: is convienient for operation at any angle
Variable large trigger: switch and 360° swivel side handle for added comfort speed
Lock-on button: for comfortable operation

Model	Power (W)	Single stroke power (J)	No-load speed (r/min)	Impact rate (b/min)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-RH13	800	3.2	0-1400	0-5700	2	1	D	**59513**



PROFESSIONAL ANGLE GRINDER EL-AG01

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Compact grid design: for comfort & control
Cast metal gear case: increased josite durability and tool longevity
Spindle lock: for fast and easy wheel changes whit a single wrench
Epoxy-coated field windings: provides protection against abrasive dust
Soft grid side handle: allows greater and comfortable control in multiple positions. Compact and slim handle for easy operation. Auxiliary handle with rubber coated, can be set in two positions

Model	Power (W)	Diameter of wheel (mm)	No-load speed (r/min)	Theard size	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-AG01	900	125	11 000	M14	2	1	D	**59501**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ANGLE GRINDER EL-AG04

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Compact and slim body: for easy operation
Dust proof: motor and switch

Model	Power (W)	Diameter of wheel (mm)	No-load speed (r/min)	Theard size	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-AG04	750	125	11 000	M14	2	1	D	**59504**

PROFESSIONAL ANGLE GRINDER EL-AG02

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Compact grid design: for comfort & control
Cast metal gear case: increased josite durability and tool longevity
Spindle lock: for fast and easy wheel changes whit a single wrench
Epoxy-coated field windings: provides protection against abrasive dust
Soft grid side handle: allows greater and comfortable control in multiple positions. Compact and slim handle for easy operation. Auxiliary handle with rubber coated, can be set in two positions

Model	Power (W)	Diameter of wheel (mm)	No-load speed (r/min)	Theard size	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-AG02	2000	180	6500	M14	2	1	D	**59502**

PROFESSIONAL ANGLE GRINDER EL-AG03

5+0 standard +extended 5 YEAR TOTAL WARRANTY



Compact grid design: for comfort & control
Cast metal gear case: increased josite durability and tool longevity
Spindle lock: for fast and easy wheel changes whit a single wrench
Epoxy-coated field windings: provides protection against abrasive dust
Soft grid side handle: allows greater and comfortable control in multiple positions. Compact and slim handle for easy operation. Auxiliary handle with rubber coated, can be set in two positions

Model	Power (W)	Diameter of wheel (mm)	No-load speed (r/min)	Theard size	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-AG03	2400	230	6500	M14	2	1	D	**59503**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PROFESSIONAL MULTI TOOL EL-MT40

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Quick blade: changing system can fit widely-used blades
Oscilation angle: 4 degree
Powerful motor: for improved durability and strainghter cuts
Variable speed: for optimal performace and control in a variety of materials

Model	Power (W)	No-load speed (r/min)	Oscilation angle (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-MT40	280	11000-21000	M14	2	1	D	**59540**



PROFESSIONAL JIG SAW EL-JS20

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Model	Power (W)	No-load speed (r/min)	Stroke distance (mm)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-JS20	710	1500-3100	23	2	1	D	**59520**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PROFESSIONAL CORDED HEAT GUN EL-HG30

5+0 standard +extended 5 YEAR TOTAL WARRANTY

Dual fan speed celector delivers high and low fan speed settings
Integrated hands free support stand allow the gun to sit upright for hands free use
1800Watt motor delivers hight heat and multiple fan setting

Model	Power (W)	Temperature (C°)	Air flow (L/M)	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-HG30	1800	50/400/550	250/250/500	2	1	D	**59530**

HEAT GUN NOZZLE FOR EL-HG30



Recommended for	Packing (pcs) / carton	Product ategory	Catalogue number
EL-HG30	1	D	**59532**



CORDED HEAT GUN EL-HG31 WITH HEAT GUN NOZZLE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Protection: against over-heat
Settings: two steps airflow

Model	Power (W)	Temperature (C°)	Switch position	Cable length (m)	Packing (pcs) / carton	Product category	Catalogue number
EL-HG31	2000	350	0-I-II	2	1	D	**59531**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



12V CORDLESS DRIL EL-CD53 WITH BATTERY & CHARGER, SET

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Battery capacity: 12V/2A
Charger: 400mA
Drill gear box: two speed
Compact design: with soft grip handle
LED light: Integrated

Model	Voltage (V)	No-load speed (r/min)	Max. torque (N.m)	Torque settings	Chuck size (mm)	Packing (pcs) / carton	Product category	Catalogue number
EL-CD53	12	0-400/0-1500	30	19+1	10	1	D	**59553**



20V DRILL DRIVER EL-CD50

5+0 standard +extended 5 YEAR TOTAL WARRANTY

High performance 4-pole motor
PCB inside: to protect the motor from over-loading
Belt clip: for easy carring
Soft grip: to reduce fatigue
Battery: Not Included. Suitable with battery with catalogue numbers **59560** and **59561**

Model	Voltage (V)	No-load speed (r/min)	Max. torque (N.m)	Torque settings	Chuck size (mm)	Packing (pcs) / carton	Product category	Catalogue number
EL-CD50	20	0-400/0-1500	30	21+1	10	1	D	**59550**



20V TWO SPEED IMPACT DRILL EL-CD51

5+0 standard +extended 5 YEAR TOTAL WARRANTY

All metal/ 2 speed transmision: for a wide renge of drilling and driving applications
High performance 4-pole motor
PCB inside: to protect the motor from over-loading
Belt clip: for easy carring
Soft grip: to reduce fatigue
Battery: Not Included. Suitable with battery with catalogue numbers **59560** and **59561**

Model	Voltage (V)	No-load speed (r/min)	Max. torque (N.m)	Torque settings	Impact rate (B/min)	Chuck size (mm)	Packing (pcs) / carton	Product category	Catalogue number
EL-CD51	20	0-450/0-1700	50	21+1+1	0-6400/24000	13- all metal	1	D	**59551**



20V ANGLE GRINDER EL-CAD52

5+0 standard +extended 5 YEAR TOTAL WARRANTY

High performance motor
PCB inside: to protect the motor from over-loading
Soft grip: to reduce fatigue
Battery: Not Included. Suitable with battery with catalogue numbers **59560** and **59561**

Model	Voltage (V)	No-load speed (r/min)	Diameter of wheel	Thread size	Packing (pcs) / carton	Product category	Catalogue number
EL-CAD52	20	7000	115	14	1	D	**59552**



20V LITHIUM BATTERIES

2+1 standard +extended 3 YEAR TOTAL WARRANTY

Water protection barrier: routes water away from the electronics and out of the battery pack
Smart electronics: Protect from abuse. Optimum tool performance
Temp control frame: Extend run-time anf life by minimizing heat. Operates below -18°C/ 0°F
Fully explosed cell carrier and rubber overmold: prevents pack failure from vibration or drops

Model	Voltage (V)	Type	Capacity (Ah)	Charge time (h)	Cells (pcs)	Packing (pcs) / carton	Product category	Catalogue number
EL-B60	20VDC	Li-ion	2	1	5	1	D	**59560**
EL-B61	20VDC	Li-ion	4	2	10	1	D	**59561**





FAST BATTERY CHARGER

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Features:
Diagnostics with LED
Short circuit protection
Over heating protection
Over charging protection

Model	Rated Voltage (V)	Input Voltage (V)	Packing (pcs) / carton	Product category	Catalogue number
EL-CH62	20VDC	100-240VAC	1	D	**59562**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL MULTIMETER EM890G

3+0 standard +extended 3 YEAR TOTAL WARRANTY

TECHNICAL FEATURES:
- DC voltage: 200m/ 2 / 20 / 200 / 600 V
- AC voltage : 2 / 20 / 200 / 600 V
- DC current: 2 / 20 / 200 / 10A
- AC current: 200m / 10A
- Resistance: 200 / 2K / 20K / 200K / 2M / 20MΩ
- Capacitors: 2η / 20η / 200η / 2μ / 20μ
- Frequency: 20kHz
- Temperature: -20° up to 1000°C
- Diodes control: yes
- Buzzer: yes
- Transistor test: yes
- Auto power: yes
- Dimensions: 170 x 87 x 33mm
- Weight: 326 g
- Battery: 1x9V

Type	Packing (pcs) / carton	Product category	Catalogue number
EM890G	1/40	C	**519890**



DIGITAL MULTIMETER EM850L

3+0 standard +extended 3 YEAR TOTAL WARRANTY

TECHNICAL FEATURES:
- DC voltage: 200m/ 2 / 20 / 200 / 600 V
- AC voltage : 200 / 600 V
- DC current: 200μ / 2 / 20 / 200 / 10A
- Resistance: 200 / 2K / 20K / 200K / 2MΩ
- Diodes control: yes
- Buzzer: yes
- Transistor test: yes
- Data hold: yes
- Back light function: yes
- Dimensions: 135x 67 x 33mm
- Weight: 147 g
- Battery: 1x9V

Type	Packing (pcs) / carton	Product category	Catalogue number
EM850L	1/40	C	**519850**



DIGITAL MULTIMETER EM83B

3+0 standard +extended 3 YEAR TOTAL WARRANTY

TECHNICAL FEATURES:
- DC voltage: 200m/2000m/ 20 / 200 / 400 V
- AC voltage : 200 / 400 V
- DC current: 2000μ / 20m / 200mA
- Resistance: 200 / 2000 / 20K / 200K / 2000KΩ
- Diodes control: yes
- Buzzer: yes
- Battery test (9V): yes
- Dimensions: 102x 60 x 24mm
- Weight: 60 g
- Battery: 12V

Type	Packing (pcs) / carton	Product category	Catalogue number
EM83B	1/100	C	**519083**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL MULTIMETER EM5510

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of humidity, illumination, temperature and all electric values. It features automatic range adjustment, manual value selection. It has an LCD display showing the measured value in digits with the size of 3 ¾ . It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off.

TECHNICAL FEATURES:

- DC voltage: 0.4 / 4 / 40 / 400 / 600 V
- AC voltage : 4 / 40 / 400 / 600V
- DC current: 400µ / 4000µ / 40m / 400m / 10A
- AC current: 400µ / 4000µ / 40m / 400m / 10A
- Resistance: 400 / 4K / 40K / 400K / 4M / 40MΩ
- Capacitors: 4η / 40η / 400η / 4µ / 40µ / 100µF
- Frequency: 10 / 100 / 1k / 10k / 100k / 200kHz
- Loading cycles: from 0.1% to 99.9%
- Temperature: -20° up to 1000°C
- Humidity: 30% to 95%
- Illumination: 4000 Lux / 40000 Lux
- Noise level: 35 to 100dB
- Circuit control: yes
- Diodes control: yes
- Weight: 310 g (including battery)
- Battery: 1x9V
- Dimensions: 83 x 162 x 47mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM5510	1/10	C	**5195510**



DIGITAL MULTIMETER EM420C

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of humidity, illumination, temperature and all electric values. It features automatic range adjustment, manual value selection. It has an LCD display showing the measured value in 4 digits with the size of 16 mm. It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off.

TECHNICAL FEATURES:

- DC voltage: 200m/ 2 / 20 / 200 / 600 V
- AC voltage : 2 / 20 / 200 / 600V
- DC current: 200µ / 2000µ / 20m / 200m / 2 / 10A
- AC current: 00µ / 2000µ / 20m / 200m / 2 / 10A
- Resistance: 200 / 2K / 20K / 200K / 2M / 20MΩ
- Temperature: -20° up to 1000°C
- Battery test: 1.5 / 3 / 9 / 12 V
- Circuit control: yes
- Diodes control: yes
- Weight: 200 g (including battery)
- battery: 3x1.5 V
- dimensions: 75 x 158 x 35mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM420C	1/10	C	**519420**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL MULTIMETER EM3055

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of all electric values. It features manual range adjustment. It has an LCD display showing the measured value in 4 digits with the size of 3 ½ . It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences.

TECHNICAL FEATURES:

- DC voltage: 200m/ 2 / 20 / 200 / 1000 V
- AC voltage: 2 / 20 / 200 / 750V
- DC current: 2m / 20m / 200m / 10A
- AC current: 200m / 10A
- Resistance: 200 / 2K / 20K / 200K / 2M / 20M / 200MΩ
- Capacity: 2000p / 20η / 200η / 20μF
- Temperature: 0° up to 1000°C
- Battery test: 1.5 / 3 / 9 / 12 V
- Transistor test: Vce≈3V , Ib≈10μF
- Circuit control: yes
- Diodes control: yes
- Weight: 495 g (including battery)
- battery: 1x9V
- dimensions: 97 x 200 x 48mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM3055	1/10	C	**5193055**



DIGITAL MULTIMETER EM3058

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of temperature and all electric values. It features manual range adjustment, manual value selection. It has an LCD display showing the measured value in digits with the size of 3 ¾ . It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off.

TECHNICAL FEATURES:

- DC voltage: 200m/ 2 / 20 / 200 / 1000 V
- AC voltage: 200 m / 2 / 20 / 200 / 750V
- DC current: 20μ / 200 μ / 2m / 200m / 10A
- AC current: 20μ / 200μ / 2m / 200m / 2 / 10A
- Resistance: 200 / 2K / 20K / 200K / 2M / 20M / 200MΩ
- Capacitors: 2η / 20η / 200η / 2μ / 20μF
- Frequency: 20kHz to 2000kHz
- Loading cycles: 0.1% to 99.9%
- Temperature: 0° up to 1000°C
- Logical level: High > 2.0 V; Low < 0.8 V
- Circuit control: yes
- Diodes control: yes
- Weight: 495 g (including battery)
- battery: 1x9V
- dimensions: 97 x 200 x 47 mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM3058	1/10	C	**5193058**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL MULTIMETER EM31

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of electric values. It features automatic range adjustment, manual value selection. It has an LCD display showing the measured value in 4 digits with the size of 16 mm. It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off and low battery indication.

TECHNICAL FEATURES:
- DC voltage: 240m/ 2400m / 24 / 240 / 600 V
- AC voltage: 240m/ 2400m / 24 / 240 / 600 V
- DC current: 240µ / 2400µ / 24m / 240m / 10A
- AC current: 240µ / 2400µ / 24m / 240m / 10A
- Resistance: 400Ω - 40MΩ
- Capacity: 51.2ηF to 51.2µF
- Frequency: 50 / 500 / 5000 / 50k / 50MHz
- Circuit control: yes
- Diodes control: yes
- Weight: 137 g (including battery)
- battery: 9V
- dimensions: 70 x 126 x 28mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM31	1/10	C	**519031**



DIGITAL MULTIMETER / PEN EM3215

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of electric values in the form of a pen. It features automatic range adjustment, manual value selection. It has an LCD display, data retain function, automatic reset, polarity selection, range overload indication. It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off and low battery indication and a torch.

TECHNICAL FEATURES:
- DC voltage: 200m/ 2 / 20 / 200 / 600 V
- AC voltage: 2 / 20 / 200 / 600V
- DC current: 20m to 200mA
- AC current: 20m to 200mA
- Resistance: 200 / 2K / 20K / 200K / 2M / 20MΩ
- Logical level: High > 2.3V; Low < 0.8 V
- Circuit control: yes
- Diodes control: yes
- Weight: 182 g (including battery)
- battery: 1x9V
- dimensions: 57 x 230 x 30mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM3215	1/10	C	**5193215**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL CLAMP METER EM202

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital clamp meter for measuring of electric values. It features manual range adjustment, manual value selection. It has an LCD display showing the measured value in digits with the size of 3½ mm. It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off.

TECHNICAL FEATURES:
- DC voltage: 1000 V
- AC voltage: 750V
- AC current: 20 / 200 / 1000A
- Resistance: 200 kΩ
- Temperature: -40° up to 1400°C
- Circuit control: yes
- Diodes control: yes
- Weight: 400 g (including battery)
- battery: 1x9V
- dimensions: 99 x 250 x 43mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM202	1/10	C	**519202**



DIGITAL CLAMP METER EM204

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital clamp meter for measuring of electric values. It features automatic range adjustment, manual value selection. It has an LCD display, low battery indication, overload protection. It is of high accuracy of analogue-digital conversion, precision in measuring and resistance to electro-magnetic interferences. It has an automatic switch off.

TECHNICAL FEATURES:
- DC voltage: 1000 V
- AC voltage: 750V
- DC current: 200 / 1000A
- AC current: 200 / 1000A
- Resistance: 200 kΩ
- Frequency: 2 kHz
- Circuit control: yes
- Weight: 400 g (including battery)
- battery: 1x9V
- dimensions: 99 x 258 x 43mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM204	1/10	C	**519204**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIGITAL CLAMP METER EM266

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital clamp meter for measuring of electric values. It features manual range adjustment. It has an LCD display and retain function option, low battery indication and overload protection.

TECHNICAL FEATURES:
- DC voltage: 1000 V
- AC voltage: 750V
- AC current: 200 / 1000A
- Resistance: 200 / 20 kΩ
- Circuit control: yes
- Diodes control: yes
- Weight: 310 g (including battery)
- battery: 1x9V
- dimensions: 69 x 229 x 38mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM266	1/10	C	**519266**



INFRARED TEMPERATURE METER EM520A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

This is a digital device for measuring of temperature.The temperature is measured with no contact. It has a laser counter for precision measuring, suitable large LCD display, battery low indication and overload protection.

TECHNICAL FEATURES:
- Temperature: -20° up to 320°C / -4° to 608 °F
- Distance to point size: 6:1
- Precision: ±2° C or 2% in reading
- battery: 1x9V
- dimensions: 90 x 155 x 45mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EM520A	1/5	C	**519520**



INDUSTRIAL REPAIR KIT ETK06A

3+0 standard +extended 3 YEAR TOTAL WARRANTY

A finely packaged repair kit containing four elements in a metal briefcase, sealed with special plastic foam and struts for each instrument.

THE KIT INCLUDES:
- Digital multimeter EM420
- Digital clamp-on ammeter EM465
- Phase meter GK7
- Infrared temperature meter EM520A

Type	Packing (pcs) / carton	Product category	Catalogue number
ETK06A	1/6	F	**51906A**

UNTIL SUPPLY LAST

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VOLTAGE TESTER

2+0 standard +extended 2 YEAR TOTAL WARRANTY

The voltage tester screwdriver is used for detecting the presence of electrical voltage. Existence of voltage is shown via lighting signal indicator located in the handle of the screwdriver. It can detect voltage in the range from 100V to 250V. The screwdriver has a flat tip.

TECHNICAL FEATURES:
- Length-3.5*140mm
- Voltage range 100-250V~
- GS, CE certifycates

Type	Packing (pcs) / carton	Product category	Catalogue number
DN-8203	1/480	C	**519203**



VOLTAGE TESTER

2+0 standard +extended 2 YEAR TOTAL WARRANTY

TECHNICAL FEATURES:
- Length-3.5*190mm
- Voltage range 100-500V~
- ABS+PC

Type	Packing (pcs) / carton	Product category	Catalogue number
EL-1805	1/40/600	C	**519205**



NON-CONTACT VOLTAGE AC DETECTOR

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTION:
- AC voltage detection
- Indicate AC null line and live line
- Auto power off in 5 minutes
- Buzzer: sound beeps when is detected AC voltage
- Green light: by power ON
- RED light: by live parts detection. Higher flashing frequency indicates stronger electric field

TECHNICAL FEATURES:
- Voltage range: from 50 to 1000V/AC
- Handle meterial: ABS
- Metal: carbon steel
- Light: LED
- Blade diameter: 3mm
- Length – 140mm

Type	Packing (pcs) / carton	Product category	Catalogue number
GK8	1/20	C	**519GK8**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

PHASE METER GK7

3+0 standard +extended 3 YEAR TOTAL WARRANTY



A device indicating phase availability in the system. No contact phase indicator featuring sound and light indication of phase availability.

TECHNICAL FEATURES:
- Voltage range: from 50 to 1000V
- Frequency range: from 50 Hz to 500 Hz
- dimensions: length – 62mm

Type	Packing (pcs) / carton	Product category	Catalogue number
GK7	60	C	**519GK7**

MULTIFUNCTIONAL VOLTAGE TESTER

2+0 standard +extended 2 YEAR TOTAL WARRANTY



FUNCTION:
- AC voltage testing
- Line break testing
- Earth checking

TECHNICAL FEATURES:
- Voltage range: from 12 to 220V/AC
- Handle meterial: ABS
- Metal: carbon steel
- Light: LED
- Blade diameter: 4mm
- Length – 190mm

Type	Packing (pcs) / carton	Product category	Catalogue number
EL-8736	1/20	C	**519207**

VOLTAGE TESTER

2+0 standard +extended 2 YEAR TOTAL WARRANTY



TECHNICAL FEATURES:
- Length-2.0*185mm
- Voltage range 6-380V
- ABS

Type	Packing (pcs) / carton	Product category	Catalogue number
EL-EN08	1/10/200	C	**519206**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CUTTER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Cutter	760	1	C	**598245**



MULTI-PURPOSE WIRING TOOL

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Ergonomic molded anti-slip grid handle
Crimp insulated and non insulated cable terminals

Type	Size (mm)	Cable size section	Packing (pcs) / carton	Product category	Catalogue number
Wiring tool	200	0.75-6.0mm	6/36	C	**598030**



AUTOMATIC WIRE STRIPPER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Wire is automatically gripped and stripped with the same motion
Adjustable dial
Comfort grip handle

Type	Size (mm)	Cable size section	Packing (pcs) / carton	Product category	Catalogue number
Wire Stripper	168	1.0-3.2mm	6/36	C	**598032**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

INSTRUMENT FOR MANUAL CRIMPING OF CONDUCTORS HD – 005 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY



FUNCTIONS:
- Crimping of naked cable terminals

TECHNICAL DATA:
- Possibility for crimping of cable conductors up to 10mm^2
- Form of the crimping head: hexahedral^2
- Weight of the instrument: 0.49kg
- Length of the instrument: 220mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
HD – 005	20	C	**59308**

INSTRUMENT FOR MANUAL CRIMPING OF CONDUCTORS G – 301H TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY



FUNCTIONS:
- Crimping of isolated cable terminals

TECHNICAL DATA:
- Possibility for crimping of cable conductors up to 6mm^2
- Form of the crimping head: hexahedral
- Weight of the instrument: 0.49kg
- Length of the instrument: 220mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
G – 301H	20	C	**59307**

CRIMPING PLIERS SN – 003 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY



FUNCTIONS:
- Crimping of naked cable terminals and joining bushes

TECHNICAL DATA:
- Possibility for crimping of cable conductors from 6 to 16mm^2
- Form of the crimping head: hexahedral
- Weight of the instrument: 0.39kg
- Length of the instrument: 190mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
SN – 003	10 / 20	C	**59309**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MECHANICAL CABLE CUTTING PLIERS CC – 325 TYPE

2+0 standard +extended | 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Cutting of aluminum or copper cable conductors
- Cutting of conductors with metal bearing core

TECHNICAL DATA:
- Maximum section of the cable:
  - for aluminum conductors up to 150mm^2
  - for copper conductors up to 150mm^2
- Cutting power: 15T
- Presence of cutting mechanism type ratchet
- Presence of brake of the cutting mechanism
- Weight of the instrument: 0.58kg
- Length of the instrument: 260mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
CC – 325	5 / 10	C	**59305**



MECHANICAL CABLE CUTTING PLIERS CC – 400 TYPE

2+0 standard +extended | 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Cutting of aluminum or copper cable conductors
- Cutting of conductors with metal bearing core

TECHNICAL DATA:
- Maximum section of the cable:
  - - for aluminum conductors up to 400mm^2
  - - for copper conductors up to 350mm^2
- Cutting power: 15T
- Presence of cutting mechanism type ratchet
- Presence of brake of the cutting mechanism
- Weight of the instrument: 1.25kg
- Length of the instrument: 360mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
CC – 400	5	C	**59304**



MECHANICAL CABLE CUTTING PLIERS HS – 250 TYPE

2+0 standard +extended | 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Cutting of aluminum or copper cable conductors
- Cutting of conductors with metal bearing core

TECHNICAL DATA:
- Maximum section of the cable:
  - for aluminum conductors up to 240mm^2
  - for copper conductors up to 185mm^2
- Weight of the instrument: 1.43kg
- Length of the instrument: 540mm
- Packing: blister

Type	Packing (pcs) / carton	Product category	Catalogue number
HS – 250	10	C	**59306**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





HYDRAULIC CRIMPING PLIERS HT - 300 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Crimping of aluminum or copper conductors with cable terminals or bush in the corresponding size

TECHNICAL DATA:
- Crimping head turning at 360° which facilitates the crimping of static conductors
- Device for automatic following of the effort at crimping completion
- Form of the crimping element: hexahedral
- Size of the crimping element: 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300 mm^2
- Section of the crimping conductors:
  - Al conductors - from 16 to 300 mm^2
  - Cu conductors – from 16 to 240 mm^2
- Element pressing power: 60kN
- Width of the element: 17mm
- Weight of the instrument: 3.3 kg
- Length: 460mm
- Used hydraulic oil: #15 (hydraulic oil with viscosity 15)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder

Type	Packing (pcs) / carton	Product category	Catalogue number
HT - 300	2	C	**59300**





HYDRAULIC CRIMPING PLIERS KYQ-300B TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Crimping of aluminum or copper conductors with cable terminals or bush in the corresponding size

TECHNICAL DATA:
- Device for automatic following of the effort at crimping completion
- Form of the crimping element: hexahedral
- Size of the crimping element: 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300 mm^2
- Section of the crimping conductors:
  - Al conductors - from 16 to 300 mm^2
  - Cu conductors – from 16 to 240 mm^2
- Element pressing power: 100kN
- Width of the element: 22mm
- Weight of the instrument: 6.8 kg
- Length: 500mm
- Used hydraulic oil: #23 (hydraulic oil with viscosity 23)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder

Type	Packing (pcs) / carton	Product category	Catalogue number
KYQ-300B	2	C	**59302**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





HYDRAULIC CRIMPING PLIERS YQK-300 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Crimping of aluminum or copper conductors with cable terminals or bush in the corresponding size

TECHNICAL DATA:
- Form of the crimping element: hexahedral
- Size of the crimping element: 10, 16, 25, 35, 50, 70, 95, 120, 150, 185, 240, 300 mm^2
- Section of the crimping conductors:
  - Al conductors - from 10 to 300 mm^2
  - Cu conductors – from 10 to 240 mm^2
- Element pressing power: 100kN
- Width of the element: 22mm
- Weight of the instrument: 6.3 kg
- Length: 500mm
- Used hydraulic oil: #15 (hydraulic oil with viscosity 15)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder

Type	Packing (pcs) / carton	Product category	Catalogue number
YQK-300	4	C	**59301**





HYDRAULIC CRIMPING PLIERS YQK – 50 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
Crimping of aluminum or copper conductors with cable terminals or bush in the corresponding size

TECHNICAL DATA:
- Form of the crimping element: hexahedral
- Size of the crimping element: 4, 6, 10, 16, 25, 35, 50 mm^2
- Section of the crimping conductors:
  - Al conductors - from 4 to 50mm^2
  - Cu conductors – from 4 to 50 mm^2
- Element pressing power: 8T
- Width of the element: 10mm
- Weight of the instrument: 2.8 kg
- Length: 310mm
- Used hydraulic oil: #15 (hydraulic oil with viscosity 15)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder

Type	Packing (pcs) / carton	Product category	Catalogue number
YQK – 50	5	C	**59303**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HYDRAULIC PUNCHING PLIERS WK - 8 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Cutting through openings in sheet metal with gauge up to 3mm without rotary motion

TECHNICAL DATA:
- Piercing head turning at 360°
- Form of the cutting element: round
- Size of the cutting element: Ø 22.5, 28.3, 34.6, 43.2, 49.6, 61.5mm
- Piercing capacity:
  - sheet metal 3mm – openings up to Ø 30mm
  - sheet metal 2mm – openings up to Ø 60mm
- Element pressing power: 80kN
- Thickness of the element: 25mm
- Weight of the instrument: 3.5 kg
- Used hydraulic oil: #15 (hydraulic oil with viscosity 15)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder
- Additional set of cutting elements for cable glands – Ø16, 20, 26.2, 32.5, 39, 51, 63 and a square for display devices 46.5x46.5, 68x68 (ordered additionally); Catalogue number 54002

Type	Packing (pcs) / carton	Product category	Catalogue number
WK - 8	2	C	**54000**
Additional set	2	C	**54002**



HYDRAULIC PUNCHING PRESS SYK – 15 TYPE

2+0 standard +extended 2 YEAR TOTAL WARRANTY

FUNCTIONS:
- Cutting through openings in sheet metal with gauge up to 3mm without rotary motion

TECHNICAL DATA:
- Protracting piercing head supplied with a hose for the hydraulic oil that gives possibility for piercing openings everywhere on the metal surface
- Form of the cutting element:
  - round
  - square
- Size of the cutting element:
  - square: 32x32mm
  - round openings: Ø 22.5, 28.3, 34.6, 43.2, 49.6, 61.5mm
- Piercing capacity:
  - sheet metal 3mm – openings up to Ø 60.8mm
  - sheet metal 2mm – openings up to Ø 115.5mm
  - square opening up to 110x110mm
- Element pressing power: 15T
- Thickness of the element: 25mm
- Weight of the instrument: 11.5 kg
- Used hydraulic oil: #15 (hydraulic oil with viscosity 15)
- Metal box for the instrument
- A set of congestion hoops for the hydraulic cylinder
- Additional set of cutting elements for cable glands – Ø16, 20, 26.2, 32.5, 39, 51, 63 and a square for display devices 46.5x46.5, 68x68 (ordered additionally); Catalogue number 54002

Type	Packing (pcs) / carton	Product category	Catalogue number
SYK – 15	2	C	**54001**
Additional set	2	C	**54002**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CrV

1000V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

VDE INSULATED COMBINED PLIERS

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
COMBINED PLIERS 1000V	200	6 / 36	C	**598001**



CrV

1000V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

VDE INSULATED LONG NOSE PLIERS

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
LONG NOSE PLIERS 1000V	200	6 / 36	C	**598002**



CrV

1000V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

VDE INSULATED DIAGONAL PLIERS

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
CUTTING PLIERS 1000V	160	6 / 36	C	**598003**
CUTTING PLIERS 1000V	180	6 / 36	C	**598013**



CrV

1000V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

VDE INSULATED WIRE STRIPPER

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
WIRE STRIPPER 1000V	160	6 / 36	C	**598004**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CrV

1000V

VDE INSULATED GROOVE JOINT PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
GROOVE JOINT PLIERS 1000V	250	6/36	C	**598005**



CrV

1000V

VDE INSULATED SCREWDRIVER- SLOTTED

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
SCREWDRIVER- SLOTTED	2.5X50	6/36	C	**598006**
SCREWDRIVER- SLOTTED	3.5X75	6/36	C	**598007**
SCREWDRIVER- SLOTTED	4X100	6/36	C	**598008**
SCREWDRIVER- SLOTTED	5.5X150	6/36	C	**598009**



CrV

1000V

VDE INSULATED SCREWDRIVER- PH

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
SCREWDRIVER	PH0X75	6/36	C	**598010**
SCREWDRIVER	PH1X100	6/36	C	**598011**
SCREWDRIVER	PH2X125	6/36	C	**598012**



UNTIL SUPPLY LAST

VDE CABLE CUTTING PLIERS, 1000V

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
VDE Cable Cutting Pliers	180	1 / 6 / 60	F	**599200180**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CrV

MINI COMBINED PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Chrome-vanadium steel for longer life and durability
Bi-material comfort grip handle

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Mini combined pliers	115	6/36	C	**598040**



CrV

MINI DIAGONAL PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Chrome-vanadium steel for longer life and durability
Bi-material comfort grip handle

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Mini diagonal pliers	115	6/36	C	**598042**

BENT NOSE MINI PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Bent Nose Mini Pliers	115	1 / 12 / 120	F	**592400115**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



COMBINED PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Chrome-vanadium steel for longer life and durability
Bi-material comfort grip handle
Heat treated, fully polished

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Combined pliers	160	6/36	C	**598043**
Combined pliers	180	6/36	C	**598044**

CrV



DIAGONAL PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Chrome-vanadium steel for longer life and durability
Bi-material comfort grip handle
Heat treated, fully polished

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Diagonal pliers	160	6/36	C	**598046**

CrV



LONG NOSE PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Chrome-vanadium steel for longer life and durability
Bi-material comfort grip handle
Heat treated, fully polished

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Long nose pliers	160	6/36	C	**598047**

CrV

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAGNETIC SCREWDRIVER- SLOTTED

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	6x38	6/36	C	**598070**
Screwdriver	3x75	6/36	C	**598071**
Screwdriver	3x100	6/36	C	**598072**
Screwdriver	4x100	6/36	C	**598073**

CrV



MAGNETIC SCREWDRIVER- PH

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	PH2x38	6/36	C	**598080**

CrV



MAGNETIC SCREWDRIVER- PZ

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	PZ2x38	6/36	C	**598089**

CrV



MAGNETIC BIT HOLDER

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Packing (pcs) / carton	Product category	Catalogue number
Bit holder	6/36	C	**598096**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

SIDE CUTTING PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Side Cutting Pliers	180	1 / 6 / 36	F	**592200180**

CUTTING PLIERS, HEAVY DUTY

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Cutting Pliers, Heavy Duty	180	1 / 6 / 36	F	**592201180**



UNTIL SUPPLY LAST

SCREWDRIVER SLOTTED

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	4	150	1 / 12 / 120	F	**593140150**
Screwdriver	5	100	1 / 12 / 120	F	**593150100**
Screwdriver	5	150	1 / 12 / 120	F	**593150150**
Screwdriver	6	100	1 / 12 / 120	F	**593160100**
Screwdriver	6	150	1 / 12 / 120	F	**593160150**
Screwdriver	8	150	1 / 6 / 60	F	**593180150**



UNTIL SUPPLY LAST

SCREWDRIVER PH

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	PH0	75	1 / 12 / 120	F	**593200075**
Screwdriver	PH0	100	1 / 12 / 120	F	**593200100**
Screwdriver	PH0	150	1 / 12 / 120	F	**593200150**
Screwdriver	PH1	75	1 / 12 / 120	F	**593201075**
Screwdriver	PH1	100	1 / 12 / 120	F	**593201100**
Screwdriver	PH1	150	1 / 12 / 120	F	**593201150**
Screwdriver	PH2	100	1 / 12 / 120	F	**593202100**
Screwdriver	PH2	150	1 / 12 / 120	F	**593202150**
Screwdriver	PH3	150	1 / 6 / 60	F	**593203150**



UNTIL SUPPLY LAST

SCREWDRIVER PZ

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	PZ0	75	1 / 12 / 120	F	**593300075**
Screwdriver	PZ1	100	1 / 12 / 120	F	**593301100**
Screwdriver	PZ2	150	1 / 12 / 120	F	**593302150**
Screwdriver	PZ3	150	1 / 6 / 60	F	**593303150**



SCREWDRIVER T

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver	T5	75	1 / 12 / 120	F	**593400005**
Screwdriver	T6	75	1 / 12 / 120	F	**593400006**
Screwdriver	T7	75	1 / 12 / 120	F	**593400007**
Screwdriver	T8	75	1 / 12 / 120	F	**593400008**
Screwdriver	T9	75	1 / 12 / 120	F	**593400009**
Screwdriver	T10	100	1 / 12 / 120	F	**593400010**
Screwdriver	T15	100	1 / 12 / 120	F	**593400015**
Screwdriver	T20	100	1 / 12 / 120	F	**593400020**
Screwdriver	T25	100	1 / 12 / 120	F	**593400025**
Screwdriver	T27	100	1 / 12 / 120	F	**593400027**
Screwdriver	T30	100	1 / 12 / 120	F	**593400030**
Screwdriver	T40	150	1 / 6 / 60	F	**593400040**

UNTIL SUPPLY LAST



SLOTTED BIT 1/4

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
Slotted bit	4,0	25	2	125 / 500	F	**594104025**
Slotted bit	4,5	25	2	125 / 500	F	**594104525**
Slotted bit	5,5	25	2	125 / 500	F	**594105525**
Slotted bit	6,0	25	2	125 / 500	F	**594106025**
Slotted bit	6,5	25	2	125 / 500	F	**594106525**
Slotted bit	8,0	25	2	125 / 500	F	**594108025**
Slotted bit	9,0	25	2	125 / 500	F	**594109025**

UNTIL SUPPLY LAST



SLOTTED BIT 1/4

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
Slotted bit	4,0	50	2	125 / 500	F	**594114050**
Slotted bit	4,5	50	2	125 / 500	F	**594114550**
Slotted bit	5,5	50	2	125 / 500	F	**594115550**
Slotted bit	6,0	50	2	125 / 500	F	**594116050**
Slotted bit	6,5	50	2	125 / 500	F	**594116550**
Slotted bit	8,0	50	2	125 / 500	F	**594118050**
Slotted bit	9,0	50	2	125 / 500	F	**594119050**

UNTIL SUPPLY LAST



PH BIT 1/4

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
PH bit	PH0	25	2	125 / 500	F	**594200025**
PH bit	PH1	25	2	125 / 500	F	**594200125**
PH bit	PH3	25	2	125 / 500	F	**594200325**
PH bit	PH3	50	2	125 / 500	F	**594210350**
PH bit	PH4	50	2	125 / 500	F	**594210450**

PZ BIT1/4

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
PZ bit	PZ0	25	2	125 / 500	F	**594300025**
PZ bit	PZ1	25	2	125 / 500	F	**594300125**
PZ bit	PZ3	25	2	125 / 500	F	**594300325**
PZ bit	PZ1	50	2	125 / 500	F	**594310150**
PZ bit	PZ3	50	2	125 / 500	F	**594310350**
PZ bit	PZ4	50	2	125 / 500	F	**594310450**

TORX BIT

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
TORX bit	T4	25	2	125 / 500	F	**594400425**
TORX bit	T5	25	2	125 / 500	F	**594400525**
TORX bit	T6	25	2	125 / 500	F	**594400625**
TORX bit	T7	25	2	125 / 500	F	**594400725**
TORX bit	T8	25	2	125 / 500	F	**594400825**
TORX bit	T9	25	2	125 / 500	F	**594400925**
TORX bit	T10	25	2	125 / 500	F	**594401025**
TORX bit	T15	25	2	125 / 500	F	**594401525**
TORX bit	T20	25	2	125 / 500	F	**594402025**
TORX bit	T25	25	2	125 / 500	F	**594402525**
TORX bit	T27	25	2	125 / 500	F	**594402725**
TORX bit	T30	25	2	125 / 500	F	**594403025**
TORX bit	T40	25	2	125 / 500	F	**594404025**

TORX BIT

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Packing (pcs) / hanging card	Packing (pcs) / carton	Product category	Catalogue number
TORX bit	T10	50	2	125 / 500	F	**594411050**
TORX bit	T15	50	2	125 / 500	F	**594411550**
TORX bit	T25	50	2	125 / 500	F	**594412550**
TORX bit	T27	50	2	125 / 500	F	**594412750**
TORX bit	T40	50	2	125 / 500	F	**594414050**

RACHET HANDLE

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Rachet handle	3/8"	1 / 6 / 36	F	**595100038**

HEXAGON SOCKET 1/4

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
1/4" socket	4mm	1 / 14 / 280	F	**595300040**
1/4" socket	4.5mm	1 / 14 / 280	F	**595300045**
1/4" socket	5mm	1 / 14 / 280	F	**595300050**
1/4" socket	5.5mm	1 / 14 / 280	F	**595300055**
1/4" socket	6mm	1 / 14 / 280	F	**595300060**
1/4" socket	7mm	1 / 14 / 280	F	**595300070**
1/4" socket	8mm	1 / 14 / 280	F	**595300080**
1/4" socket	9mm	1 / 14 / 280	F	**595300090**
1/4" socket	10mm	1 / 14 / 280	F	**595300100**
1/4" socket	11mm	1 / 14 / 280	F	**595300110**
1/4" socket	12mm	1 / 14 / 280	F	**595300120**
1/4" socket	13mm	1 / 14 / 280	F	**595300130**
1/4" socket	14mm	1 / 14 / 280	F	**595300140**

HEXAGON SOCKET 3/8

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
3/8" socket	6mm	1 / 14 / 280	F	**595400006**
3/8" socket	7mm	1 / 14 / 280	F	**595400007**
3/8" socket	8mm	1 / 14 / 280	F	**595400008**
3/8" socket	9mm	1 / 14 / 280	F	**595400009**
3/8" socket	10mm	1 / 14 / 280	F	**595400010**
3/8" socket	11mm	1 / 14 / 280	F	**595400011**
3/8" socket	12mm	1 / 14 / 280	F	**595400012**
3/8" socket	13mm	1 / 12 / 240	F	**595400013**
3/8" socket	14mm	1 / 12 / 240	F	**595400014**
3/8" socket	15mm	1 / 12 / 240	F	**595400015**
3/8" socket	16mm	1 / 12 / 240	F	**595400016**
3/8" socket	17mm	1 / 12 / 240	F	**595400017**
3/8" socket	18mm	1 / 10 / 200	F	**595400018**
3/8" socket	19mm	1 / 10 / 200	F	**595400019**
3/8" socket	20mm	1 / 10 / 200	F	**595400020**
3/8" socket	21mm	1 / 8 / 160	F	**595400021**

UNTIL SUPPLY **LAST**

HEXAGON SOCKET 1/2

3+2 standard +extended 5 YEAR TOTAL WARRANTY



Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
1/2" socket	10mm	1 / 10 / 200	F	**595500010**
1/2" socket	11mm	1 / 10 / 200	F	**595500011**
1/2" socket	12mm	1 / 10 / 200	F	**595500012**
1/2" socket	13mm	1 / 10 / 200	F	**595500013**
1/2" socket	14mm	1 / 10 / 200	F	**595500014**
1/2" socket	15mm	1 / 10 / 200	F	**595500015**
1/2" socket	16mm	1 / 10 / 200	F	**595500016**
1/2" socket	17mm	1 / 8 / 160	F	**595500017**
1/2" socket	18mm	1 / 8 / 160	F	**595500018**
1/2" socket	19mm	1 / 8 / 160	F	**595500019**
1/2" socket	20mm	1 / 8 / 160	F	**595500020**
1/2" socket	21mm	1 / 8 / 160	F	**595500021**
1/2" socket	22mm	1 / 8 / 160	F	**595500022**
1/2" socket	23mm	1 / 6 / 120	F	**595500023**
1/2" socket	24mm	1 / 6 / 120	F	**595500024**
1/2" socket	27mm	1 / 5 / 100	F	**595500027**
1/2" socket	30mm	1 / 4 / 80	F	**595500030**
1/2" socket	32mm	1 / 4 / 80	F	**595500032**

UNTIL SUPPLY **LAST**

COMBINATION SPANNER

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Offset ring end	Packing (pcs) / carton	Product category	Catalogue number
Combination Spanner	9	6,5	15º	1 / 12 / 300	F	**596200009**
Combination Spanner	11	7,5	15º	1 / 12 / 300	F	**596200011**
Combination Spanner	15	9,5	15º	1 / 12 / 180	F	**596200015**
Combination Spanner	16	10,0	15º	1 / 12 / 180	F	**596200016**
Combination Spanner	18	11,0	15º	1 / 12 / 120	F	**596200018**
Combination Spanner	20	12,0	15º	1 / 6 / 120	F	**596200020**
Combination Spanner	21	12,3	15º	1 / 6 / 90	F	**596200021**
Combination Spanner	22	12,5	15º	1 / 6 / 90	F	**596200022**
Combination Spanner	23	12,8	15º	1 / 6 / 90	F	**596200023**
Combination Spanner	24	13,0	15º	1 / 6 / 60	F	**596200024**
Combination Spanner	27	14,5	15º	1 / 6 / 60	F	**596200027**

DOUBLE OPEN SPANNER

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Double Open Spanner	6x7	120	1 / 12 / 300	F	**596300067**
Double Open Spanner	8x9	140	1 / 12 / 300	F	**596300089**
Double Open Spanner	14x15	185	1 / 12 / 240	F	**596301415**
Double Open Spanner	16x17	200	1 / 12 / 180	F	**596301617**
Double Open Spanner	18x19	220	1 / 12 / 180	F	**596301819**
Double Open Spanner	20x22	235	1 / 6 / 120	F	**596302022**
Double Open Spanner	21x23	245	1 / 6 / 60	F	**596302123**
Double Open Spanner	25x28	270	1 / 6 / 48	F	**596302528**
Double Open Spanner	30x32	295	1 / 6 / 48	F	**596303032**

DOUBLE OFFSET RING SPANNER

3+2 standard +extended 5 YEAR TOTAL WARRANTY



UNTIL SUPPLY LAST

Type	Size (mm)	Length (mm)	Offset ring end	Packing (pcs) / carton	Product category	Catalogue number
Double Offset Ring Spanner	6x7	165	75º	1 / 12 / 240	F	**596400067**
Double Offset Ring Spanner	8x9	180	75º	1 / 12 / 240	F	**596400089**
Double Offset Ring Spanner	14x15	235	75º	1 / 6 / 150	F	**596401415**
Double Offset Ring Spanner	16x17	250	75º	1 / 6 / 150	F	**596401617**
Double Offset Ring Spanner	18x19	265	75º	1 / 6 / 120	F	**596401819**
Double Offset Ring Spanner	20x22	285	75º	1 / 6 / 60	F	**596402022**
Double Offset Ring Spanner	21x23	305	75º	1 / 6 / 60	F	**596402123**
Double Offset Ring Spanner	24x27	325	75º	1 / 6 / 60	F	**596402427**
Double Offset Ring Spanner	25x28	340	75º	1 / 6 / 30	F	**596402528**
Double Offset Ring Spanner	30x32	375	75º	1 / 6 / 30	F	**596403032**



PLASTIC LEVEL

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Durable acrylic vials read plumb, level, 45°
Top read window for convenience
Rubber end caps for shock-resistant
Highly visible vials with magnetic base

Type	Length (mm)	Packing (pcs) / carton	Product category	Catalogue number
Level	228.6	6/36	C	**598243**



SAW

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Saw	400	1 / 6 / 60	F	**597200400**



6PC PRECISION SCREWDRIVER SET

Slotted size: 1.4mm, 2.0mm, 2.4mm, 3.0mm
PH size: PH0, PH1
Carbon steel blade with black finish
With chrome plated handle

Type	Packing (pcs) / carton	Product category	Catalogue number
Screwdriver set	6/36	C	**598094**



15-IN-1 MULTI-PURPOSE PLIERS

3+2 standard +extended 5 YEAR TOTAL WARRANTY

Precision punched
Machined surface
Stainless steel components
Compact folding design
deal selection for general purpose use

Type	Packing (pcs) / carton	Product category	Catalogue number
Multi pliers	4/24	C	**598210**



ALLIGATORS CLIPS SETS

Type	Rated current	Colour	Length (mm)	Packing / Box (pcs)	Product category	Catalogue number
F 275	max 5A	red/ black	50	50	G	**M500060**
F 279	max 80A	red/ black	80	50	G	**M500059**
L 150	max 200A	red/ black	150	2	G	**M411012**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CUTTER KNIFE 9MM

Handle material: Plastic PP
Blade material: Steel
Blade size: 83x9x0.4mm;
Color: Yellow
Packaging: Blister card

Type	Packing (pcs) / carton	Product category	Catalogue number
Cutter knife	1/135/1080	C	**597300009**



CUTTER KNIFE 18MM

Handle material: Plastic PP
Blade material: Steel
Blade size: 100x18x0.5mm;
Color: Blue
Packaging: Blister card

Type	Packing (pcs) / carton	Product category	Catalogue number
E-7229 Cutter knife	1/50/400	C	**597300021**



CUTTER KNIFE 18MM

Handle material: Plastic PP+TPR
Blade material: SK5
Blade size: 100x18x0.5mm;
Color: Red
Packaging: Blister card

Type	Packing (pcs) / carton	Product category	Catalogue number
E-82087 Cutter knife	1/36/288	C	**597300019**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOLDABLE KNIFE 18MM

Handle material: Plastic PP+TPR
Blade material: SK5(1+5pcs)
Blade size: 60x19x0.5mm;
Color: Yellow
Packaging: Blister card

Type	Packing (pcs) / carton	Product category	Catalogue number
E7002 Foldable knife	1/12/240	C	**597300022**



ALUMINIUM AUTO-LOCK KNIFE

Handle material: Aluminum Alloy
Blade material: SK5
Blade size: 60x19x0.5mm;
Color: Silver
Packaging: Blister card

Type	Packing (pcs) / carton	Product category	Catalogue number
E-522 Auto- lock knife	1/36/288	C	**597300020**



ALUMINUM FIXED BLADE UTILITY KNIFE

Razor-sharp tempered SK5 blade
Aluminum alloy housing
Fixed blade for more cutting power
3PC blades included

Type	Packing (pcs) / carton	Product category	Catalogue number
Aluminium utility knife	6/36	C	**598201**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KNIFE SPARE BLADES

Type	Size (mm)	Packing (pcs) / carton	Product category	Catalogue number
Knife spare blades	9	10 / 40 / 600	C	**597310009**
Knife spare blades	18	1/20/400	C	**597310018**



HAMMER WITH HARDWOOD HANDLE

Drop forged carbon steel
Fully heat treated & polished head

Type	Packing (pcs) / carton	Product category	Catalogue number
Hammer 300gr	6/36	C	**598230**
Hammer 500gr	6/36	C	**598231**



5PC DIAMOND NEEDLE FILE SET

Fine diamond grit
Perfect for machinists, gunsmiths, jewelers and hobbyists
Size: 3x140mm, 150 grit
Dipped grip handle

Type	Packing (pcs) / carton	Product category	Catalogue number
Needle file	6/24	C	**598232**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



3-IN-1 STAPLE GUN SET

3+2 standard +extended 5 YEAR TOTAL WARRANTY

1PC staple gun
500PC 8x1.2x11.3mm staples
500PC 12mm staples
500PC 14mm nails
1PC handy storage case

Type	Packing (pcs) / carton	Product category	Catalogue number
Staple gun	6	C	**598246**

MAGNETIC TAPE MEASURE E-240 SERIES



Type	Tape sizes (m/mm)	Packing (pcs) / carton	Product category	Catalogue number
E-240/319 Tape measure	3x19	1/10/200	C	**598247**
E-240/519 Tape measure	5x19	1/10/200	C	**598248**
E-240/525 Tape measure	5x25	1/10/100	C	**598249**

CHROME PLATING TAPE MEASURE



Type	Tape Length	Packing (pcs) / carton	Product category	Catalogue number
Tape measure	5m	4/24	C	**598241**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Metal

CUTTING DISC FOR METAL

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)
D2 - Disc width (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	1.0	10/400	C	**M516300**
115	22.2	1.6	10/400	C	**M516301**
125	22.2	1.0	10/400	C	**M516302**
125	22.2	1.6	1/400	C	**M516303**
125	22.2	3.2	5/200	C	**M516211**
180	22.2	3.2	5/100	C	**M516212**
230	22.2	3.2	5/100	C	**M516213**



Metal **Inox**

CUTTING DISC METAL A60T INOX

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)
D2 - Disc width (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	1.0	25/400	C	**M516304**
125	22.2	1.0	25/400	C	**M516305**



Metal

GRINDING DISC

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)
D2 - Disc width (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	6	25/200	C	**M516219**
125	22.2	6	25/100	C	**M516220**
180	22.2	6	25/100	C	**M516307**
230	22.2	6	25/50	C	**M516308**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Metal

TWIST KNOT WIRE WHEEL BRUSH FOR ANGLE GRINDERS

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)

Ø (mm)	D1 (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	22.2	1/100	C	**M516050**
150	22.2	1/40	C	**M516068**



Stone

CUTTING DISC STONE

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)
D2 - Disc width (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	3.2	5/400	C	**M516216**
125	22.2	3.2	25/200	C	**M516306**
180	22.2	3.2	5/100	C	**M516217**
230	22.2	3.2	5/100	C	**M516218**



Concrete **Bricks** **Faience**

DIAMOND CUTTING DISC WET

Ø - Outer disc diameter (mm)
D1 - Inner disc diameter (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	7	10/100	C	**M516309**
125	22.2	7	10/100	C	**M516310**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Concrete **Bricks** **Faience**

DIAMOND CUTTING DISC TURBO

Ø - Outer disc diameter (mm); D1 - Inner disc diameter (mm); D2 - Disc width (mm)

Ø (mm)	D1 (mm)	D2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
115	22.2	7	10/100	C	**M516311**
125	22.2	7	10/100	C	**M516312**



Metal **Wood** **Stone**

FLAP DISC

Ø - Outer disc diameter (mm); D1 - Inner disc diameter (mm)

Ø (mm)	D1 (mm)	Grit	Packing/Box (pcs)	Product category	Catalogue number
125	22.2	A-60	50/100	C	**M516169**
125	22.2	A-80	50/100	C	**M516313**
125	22.2	A-120	50/100	C	**M516171**



Metal

TWIST KNOT WIRE CUP BRUSH FOR ANGLE GRINDERS

Ø - Outer disc diameter (mm)

Ø (mm)	Nut size	Packing/Box (pcs)	Product category	Catalogue number
100	M14x2	1/60	C	**M516256**



Metal

DRILL TWIST KNOT WIRE CUP BRUSH WITH SHANK

Ø - Outer disc diameter (mm); Ø S - Shank size (mm)

Ø (mm)	Ø S (mm)	Packing/Box (pcs)	Product category	Catalogue number
75	6	30/120	C	**M516314**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Wood

HOLE CUTTERS SET

Ø - Outer disc diameter (mm)
7 pcs SET

Ø (mm)	Packing/Box (pcs)	Product category	Catalogue number
26-63	10/60	C	**M516013**



Concrete

CORE CUTTERS FOR DRILL

Ø - Outer disc diameter (mm)

Ø (mm)	Packing/Box (pcs)	Product category	Catalogue number
65	5/20	C	**M516148**
85	4/20	C	**M516315**

ARBOR & PILOT DRILL SDS PLUS FOR CORE CUTTERS



Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
170	4/20	C	**M516147**



Wood

BRAD POINT DRILL FOR WOOD

Ø - Drill bit diameter (mm)
5 pcs SET

Ø (mm)	Packing/Box (pcs)	Product category	Catalogue number
4; 5; 6; 8; 10	5/100	C	**M516370**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



Metal

DRILL BITS FOR METAL

Ø - Drill bit diameter (mm)
L1- Total length (mm)
L1- Working length (mm)
DIN 338
HSS 4241

Ø (mm)	L1 (mm)	L2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
1.0	34	12	2/150/300	C	**M516316**
1.5	40	18	2/150/300	C	**M516317**
2.0	49	24	2/150/300	C	**M516318**
2.5	57	30	2/150/300	C	**M516319**
3.0	61	33	2/150/300	C	**M516320**
3.2	65	36	2/150/300	C	**M516321**
3.5	70	39	2/150/300	C	**M516322**
4.0	75	43	2/150/300	C	**M516323**
4.2	75	43	1/150/300	C	**M516324**
4.5	80	47	1/150/300	C	**M516325**
5.0	86	52	1/150/300	C	**M516326**
6.0	93	57	1/150/300	C	**M516327**
6.5	101	63	1/90/180	C	**M516328**
7.0	109	69	1/90/180	C	**M516329**
8.0	117	75	1/90/180	C	**M516330**
10.0	133	87	1/60/120	C	**M516331**
12.0	151	101	1/10/50	C	**M516332**





Concrete

MASONRY DRILL BITS

Ø - Drill bit diameter (mm)
L1- Total length (mm)
L1- Working length (mm)
DIN 8039
U-type flute

Ø (mm)	L1 (mm)	L2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
3.0	60	30	150/300	C	**M516340**
4.0	75	40	150/300	C	**M516341**
5.0	85	50	150/300	C	**M516342**
6.0	100	60	150/300	C	**M516343**
8.0	120	80	90/180	C	**M516344**
10.0	150	90	60/120	C	**M516345**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.





Concrete

CROSS HEAD DRILLS SDS-PLUS

Ø - Drill bit diameter (mm)
L1- Total length (mm)
L1- Working length (mm)
DIN 8035

Ø (mm)	L1 (mm)	L2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
6.0	110	30	10/200	C	**M516350**
6.0	160	40	10/200	C	**M516351**
6.0	210	50	10/200	C	**M516352**
6.5	260	200	10/200	C	**M516353**
8.0	110	50	10/200	C	**M516354**
8.0	160	100	10/200	C	**M516355**
8.0	210	150	10/200	C	**M516356**
8.0	350	300	10/100	C	**M516357**
10.0	160	100	10/200	C	**M516358**
10.0	260	200	10/200	C	**M516359**
10.0	450	400	10/50	C	**M516360**
12.0	210	150	10/200	C	**M516361**
12.0	450	400	10/50	C	**M516362**



SOLDERING GUN

2+0 standard +extended 2 YEAR TOTAL WARRANTY

With LED light

Power (W)	Temperature range	Packing/Box (pcs)	Product category	Catalogue number
100	600°C	1/24	C	**M516375**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



TIN ABSORBTION PUMP

Packing/Box (pcs)	Product category	Catalogue number
1/150	C	**M516380**



SOLDER WIRE

Solder Alloy	External diameter (mm)	Melting temp.	Weigh	Packing/Box (pcs)	Product category	Catalogue number
Sn-60%; PB-40%	1	180°C	200g	20/120	C	**M516072**

ROSIN



It serves to degrease the soldering parts and the soldering tip of the soldering iron | Facilitates the flow of solder | Increases efficiency of the soldering process

Weight (gr)	Packing/Box (pcs)	Product category	Catalogue number
50	1	G	**M500632**

HOT MELT GLUE GUN

2+0 standard +extended 2 YEAR TOTAL WARRANTY



Power (W)	Temperature range	Silicone pipe diameter	Heating time	Packing/Box (pcs)	Product category	Catalogue number
100	18-200°C	11mm	4-5min	6/24	C	**M516385**

GLUE STICKS SET FOR GLUE GUNS



10 pcs SET

Ø (mm)	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
11	200	10	C	**M516386**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



KNITTED WORK GLOVES PLOVER

Seamless knitted gloves white polyester/cotton elastic cuff, palm and fingers with PVC dots.

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
PLOVER	white/blue	10/100	G	**M081001**



WORK GLOVES SPARROW

Gaude white polyester, nitrile dipped.

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
SPARROW	white/red	10/100	G	**M081014**



WORK GLOVES AUK

Seamless knit, nylon/cotton, white colour

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
AUK	white	10/100	G	**M081015**



COWSPLIT LEATHER GLOVES WITH LINING

Cow split leather gloves with lining, cotton back, reinforced at the palm area

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
GULL EVO	white/yellow	10/100	G	**M081102**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

GLASSES WITH WIDE LENS UNIVET 520 VS160



Glasses with wide lens, compatible to prescription spectacle. With side vents. They can be sterilized. Entirely made of polycarbonate, without metal fragments. Suitable to a wide range of applications.

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
UNIVET 520	white	10/100	G	**M081000**

IMPACT RESISTANT GLASSES



Impact resistant glasses, especially designed for industrial work. PVC frame with polycarbonate lenses against acid splashes and dust, with indirect ventilation Adjustable elastic headband for extra comfort. Suitable for prolong use, without causing distortion or fatigue. Suitable for prolong use, without causing distortion or fatigue.

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
2203-00	white	10/100	G	**M081091**

VENTILATED HELMET, KANTON



Helmet, ventilated with srew. BODY MATERIAL: HDPE, with 6 air vents (High-density polythene) HEADBAND MATERIAL: textile MOUNTING HEADBAND: six points WEIGHT: 360 g

Model	Colour	Packing/Box (pcs)	Product category	Catalogue number
KANTON	blue	1	G	**M081036**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

PLASTIC ORGANIZER WITH DIVIDERS

2+0 standard +extended 2 YEAR TOTAL WARRANTY



Section	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
8	Red	165	140	35	1	G	**M16654432**
8	Black	303	180	50	1	G	**M16654434**
12	Red	265	155	40	1	G	**M16654433**

PLASTIC ORGANIZER WITH DIVIDERS

2+0 standard +extended 2 YEAR TOTAL WARRANTY



Section	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
3x11	315	140	210	1	G	**M16654400**

PLASTIC TOOL BOX WITH ORGANIZER

2+0 standard +extended 2 YEAR TOTAL WARRANTY



Model	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
13"	320	160	130	1	G	**M16654420**
16"	400	200	175	1	G	**M16654421**
19"	480	255	230	1	G	**M16654422**
22"	555	295	265	1	G	**M16654423**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

BATTERIES



Reference IEC	Type	Serie	Voltage (V)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
LR03	AAA	High energy	1.5	10.5	44.5	1/4	G	**M070125**
LR03	AAA	Max tech	1.5	10.5	44.5	1/4	G	**M070261**
LR6	AA	High energy	1.5	14.5	50.5	1/4	G	**M070117**
LR6	AA	Max tech	1.5	14.5	50.5	1/4	G	**M070257**

BATTERIES



M070284



M070110



M070057

Reference IEC	Type	Serie	Voltage (V)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
LR1		Professional electronic	1.5	12	30.2	1/1	G	**M070284**
LR14	C	Long Life	1.5	26.2	50	1/2	G	**M070087**
LR20	D	Long Life	1.5	34.2	61.5	1/2	G	**M070113**
3R12	4.5V	Super Life	4.5		67	1/1	G	**M070057**
LR22	9V	Long Life	9		48.5	1/1	G	**M070110**

BATTERIES



M070236

Reference IEC	Type	Serie	Voltage (V)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
8LR932	A23 GA	Professional electronic	12	10.3	8.5	1/1	G	**M070236**
V27A	A27 GA	Professional electronic	12	7.7	28.2	1/1	G	**M070132**

BATTERIES



Reference IEC	Type	Serie	Voltage (V)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Product category	Catalogue number
DL2016	CR2016	Professional electronic	3	20	1.6	1/1	G	**M070011**
DL2025	CR2025	Professional electronic	3	20	2.5	1/1	G	**M070220**
DL2032	CR2032	Professional electronic	3	20	3.2	1/1	G	**M070221**
LR44	V 13 GA	Professional electronic	1.5	11.6	5.4	1/1	G	**M070259**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



ALUMINIUM LIGHT BAR

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 3Watt COB
- Material: Aluminium
- Size: 159x32x18mm
- Battery Type: 3xAAA
- Light Mode: On/Off
- Other: With Two Magnets & Velcro Strip

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-4116	Light Bar	Silver	1/100	C	**100166**



WORK LIGHT WITH ROTARY BASE

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 3Watt COB
- Lumens: 200lm
- Material: Plastic
- Size: 130x68x39mm
- Battery Type: 3xAAA
- Light Mode: On/Off
- Other: With Two Strong Magnet on Swivel Holder | With 360° Rotary Dividual Pocket Clip and 360° Swivel Holder

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-5542	Work Light	Green	1/100	C	**100169/G**
E-5542	Work Light	Yellow	1/100	C	**100169/Y**



PIVOT WORK LIGHT WITH MAGNETIC BASE

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 3Watt COB
- Lumens: 240lm
- Material: Rubber Coated
- Size: 87x55x95mm
- Battery Type: 3xAA
- Light Mode: On/Off
- Other: With 360° Rotary Pivot Base | With strong magnet on bottom

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-5503	Pivot Work Light	Black	1/50	C	**100167**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALUMINIUM WORK LIGHT

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 3Watt COB
- Lumens: 200lm
- Material: Aluminium
- Size: 162x25x15mm
- Battery Type: 3xAAA
- Light Mode: On/Off
- Other: With Strong Magnet in Swivel Hook

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-5545	Work Light	Black	1/100	C	**100168**



ZOOM FLASHLIGHT

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 1Watt
- Material: Rubber Coated
- Size: 115x34mm
- Battery Type: 3xAAA
- Light Mode: On/Off
- Other: Handstrap; Telescopic (ZOOM)

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-6605	Flashlight	Black	1/100	C	**100172**



ZOOM FLASHLIGHT

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED Type: CREE XPE
- Lumens: 200lm
- Material: Aluminium
- Size: 150x33mm
- Battery Type: 3xAAA
- Light Mode: High/Low/Strobe/Off
- Light Distance: Zoom in-250Meters / Zoom Out-100Meters
- Other: Handstrap

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-1171	Flashlight	Black	1/50	C	**100173**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HANDY SPOT FLASHLIGHT RECHARGEABLE

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- 7LED
- Material: Plastic
- Size: 150x70x70mm
- Battery Type: Rechargeable battery
- Light Mode: On/Off
- Other: Direct Charge

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-6630	Flashlight	Black & Yellow	1/50	C	**100174**



MINI KEY LIGHT

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 1.5W COB
- Material: Plastic
- Size: 71x34x21mm
- Battery Type: 2xCR2032)
- Light Mode: High/Low/Flash/Off
- Other: Strong Back Magnet; Colourful Carabiner

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-5903	Flashlight	Blue	1/100	C	**100176/B**
E-5903	Flashlight	Black	1/100	C	**100176/BL**



BULB SHAPE PULL LIGHT

1+0 standard +extended 1 YEAR TOTAL WARRANTY

TECHNICAL DATA:
- LED 1W
- Material: Plastic
- Size: 55x55x160mm
- Battery Type: 3xAAA
- Light Mode: On/Off

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-6621	Pull Light	Blue	1/100	C	**100175/B**
E-6621	Pull Light	Black	1/100	C	**100175/BL**
E-6621	Pull Light	Pink	1/100	C	**100175/P**
E-6621	Pull Light	Red	1/100	C	**100175/R**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

HEADLAMP

1+0 standard +extended 1 YEAR TOTAL WARRANTY



TECHNICAL DATA:
- LED 3W COB
- Lumens: 200lm
- Size: 60x42x34mm
- Battery Type: 3xAAA
- Light Mode: High/Low/Strobe/Off

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-3645	Headlamp	Black	1/100	C	**100170**

ZOOM HEADLAMP

1+0 standard +extended 1 YEAR TOTAL WARRANTY



TECHNICAL DATA:
- 1xXML T6 + 2xCREE XPE
- Lumens: 1200lm
- Size: 59x43mm
- Battery Type: 4xAA
- Light Mode: 1xT6 On/ 2 Sides XPE On/ All On/ All Strobe/ OFF

Model	Description	Colour	Packing/Box (pcs)	Product category	Catalogue number
E-3396	Zoom Headlamp	Black	1/50	C	**100171**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWINFAST THREAD SCREWS FOR DRYWALLS

- For fixings of drywall panels of standard density
- Needle S point: it drills directly metals up to 0.8 mm thick.
- 60° tapping thread.
- Coverings: Phosphated. This covering enables the adherence of the filler putty to the head of the screw.

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Thread	Packing/ Box (pcs)	Product category	Catalogue number
Plasterboard & metal	3.5	25	PH2	needle	twinfast	1000	G	**M317172**
Plasterboard & metal	3.5	35	PH2	needle	twinfast	1000	G	**M317173**
Plasterboard & metal	3.5	45	PH2	needle	twinfast	1000	G	**M317174**

Application: Fixing of plasterboards or isolation panels to metallic profiles of 0.8 mm maximum thickness.



COARSE THREAD SCREWS FOR DRYWALLS

- S needle point: it allows penetrating in soft materials and in metallic materials up to 0.8 mm thickness.
- Covering: phosphated
- Coarse thread: it allows a faster installation.

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Thread	Packing/ Box (pcs)	Product category	Catalogue number
Plasterboard	3.5	25	PH2	needle	coarse	1000	G	**M317259**
Plasterboard	3.5	35	PH2	needle	coarse	1000	G	**M317169**
Plasterboard	3.5	45	PH2	needle	coarse	1000	G	**M317170**

Applications: with double pitch thread, for the proper fixing of plasterboards together or plasterboards to wood.



SELFDRILLING SCREWS FOR DRYWALLS

- Selfdrilling point and tapping thread: for use in metallic materials without pilot hole, up to 3 mm thick.
- Covering: phosphated

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Thread	Packing/ Box (pcs)	Product category	Catalogue number
Plasterboard & metal	3.5	25	PH2	selfdrilling	tapping	1000	G	**M317300**
Plasterboard & metal	3.5	35	PH2	selfdrilling	tapping	1000	G	**M317301**
Plasterboard & metal	3.5	45	PH2	selfdrilling	tapping	1000	G	**M317302**

"Application: fixing of plaster boards or isolation panels to metallic profiles of 0.8 - 3.0 mm thickness."

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

SELF DRILLING SCREW WITH TRUSS WASHER HEAD



- Selfdrilling point and tapping thread: for use in metallic materials without pilot hole
- Covering: Zn

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Packing/Box (pcs)	Product category	Catalogue number
Metal	4.2	13	PH2	selfdrilling	1000	G	**M317134**
Metal	4.2	16	PH2	selfdrilling	1000	G	**M317135**
Metal	4.2	19	PH2	selfdrilling	1000	G	**M317231**
Metal	4.2	25	PH2	selfdrilling	1000	G	**M317303**

Application: for metal

DRYWALL SCREW WITH WAFER HEAD AND TWINFAST THREAD



- Material: Carbon steel
- Covering: phosphated

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Thread	Packing/Box (pcs)	Product category	Catalogue number
Metal	4.2	13	PH2	needle	twinfast	1000	G	**M317230**
Metal	4.2	16	PH2	needle	twinfast	1000	G	**M317241**
Metal	4.2	19	PH2	needle	twinfast	1000	G	**M317313**
Metal	4.2	25	PH2	needle	twinfast	1000	G	**M317314**

Application: For laminated and metal profiles

CONCRETE SCREW FOR DIRECT MOUNTING



- Material: Carbon steel
- Covering: Zn

Outer thread diameter (mm)	Length (mm)	Recess	Packing/Box (pcs)	Product category	Catalogue number
7.5	72	TX30	100	G	**M317136**
7.5	92	TX30	100	G	**M317137**
7.5	112	TX30	100	G	**M317206**
7.5	132	TX30	100	G	**M317139**

Application: Suitable for installation of PVC and wooden frames, door frames to concrete or solid brick

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



CHIPBOARD (WOOD) SCREW

- Fully threaded
- Covering: Zn

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Recess	Point	Packing/Box (pcs)	Product category	Catalogue number
Wood & Chipboard	3.5	16	PZ2	needle	1000	G	**M317001**
Wood & Chipboard	3.5	20	PZ2	needle	1000	G	**M317003**
Wood & Chipboard	3.5	25	PZ2	needle	1000	G	**M317004**
Wood & Chipboard	3.5	30	PZ2	needle	1000	G	**M317005**
Wood & Chipboard	3.5	35	PZ2	needle	1000	G	**M317006**
Wood & Chipboard	3.5	40	PZ2	needle	1000	G	**M317007**
Wood & Chipboard	4.0	20	PZ2	needle	1000	G	**M317012**
Wood & Chipboard	4.0	25	PZ2	needle	1000	G	**M317013**
Wood & Chipboard	4.0	30	PZ2	needle	1000	G	**M317015**
Wood & Chipboard	4.0	35	PZ2	needle	500	G	**M317014**
Wood & Chipboard	4.0	40	PZ2	needle	500	G	**M317016**
Wood & Chipboard	4.0	50	PZ2	needle	500	G	**M317209**
Wood & Chipboard	4.0	60	PZ2	needle	500	G	**M317210**
Wood & Chipboard	4.5	25	PZ2	needle	1000	G	**M317304**
Wood & Chipboard	4.5	30	PZ2	needle	1000	G	**M317020**
Wood & Chipboard	4.5	35	PZ2	needle	1000	G	**M317021**
Wood & Chipboard	4.5	40	PZ2	needle	500	G	**M317305**
Wood & Chipboard	4.5	50	PZ2	needle	500	G	**M317022**
Wood & Chipboard	4.5	60	PZ2	needle	500	G	**M317023**
Wood & Chipboard	5.0	30	PZ2	needle	1000	G	**M317028**
Wood & Chipboard	5.0	40	PZ2	needle	500	G	**M317030**
Wood & Chipboard	5.0	50	PZ2	needle	500	G	**M317032**
Wood & Chipboard	5.0	60	PZ2	needle	250	G	**M317033**
Wood & Chipboard	5.0	70	PZ2	needle	250	G	**M317048**
Wood & Chipboard	5.0	80	PZ2	needle	250	G	**M317034**
Wood & Chipboard	6.0	50	PZ3	needle	250	G	**M317242**
Wood & Chipboard	6.0	60	PZ3	needle	250	G	**M317040**
Wood & Chipboard	6.0	70	PZ3	needle	250	G	**M317041**
Wood & Chipboard	6.0	80	PZ3	needle	250	G	**M317042**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



SELF DRILLING SCREW WITH HEXAGON HEAD AND EPDM WASHER

- Material: Carbon steel
- Covering: Zn

Material to be fixed	Outer thread diameter (mm)	Length (mm)	Point	Packing/Box (pcs)	Product category	Catalogue number
Metal	4.8	19	selfdrilling	1000	G	**M317306**
Metal	4.8	25	selfdrilling	500	G	**M317243**
Metal	4.8	32	selfdrilling	500	G	**M317126**
Metal	5.5	25	selfdrilling	500	G	**M317127**
Metal	5.5	32	selfdrilling	500	G	**M317307**
Metal	5.5	38	selfdrilling	500	G	**M317308**
Metal	5.5	50	selfdrilling	500	G	**M317309**
Metal	6.3	25	selfdrilling	500	G	**M317130**
Metal	6.3	32	selfdrilling	500	G	**M317310**
Metal	6.3	38	selfdrilling	500	G	**M317131**
Metal	6.3	50	selfdrilling	250	G	**M317311**
Metal	6.3	60	selfdrilling	250	G	**M317312**

Application: Sheet metal to steel construction



HEXAGON HEAD SCREWS FULLY THREADED

- Material: Carbon steel
- Covering: Zn

Thread	Length (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	16	5.6	500	G	**M317064**
M6	20	5.6	500	G	**M317065**
M6	25	5.6	500	G	**M317066**
M6	30	5.6	500	G	**M317067**
M8	20	5.6	200	G	**M317073**
M8	25	5.6	200	G	**M317074**
M8	30	5.6	200	G	**M317075**
M8	40	5.6	200	G	**M317076**
M10	30	5.6	200	G	**M317080**
M10	40	5.6	100	G	**M317081**
M10	50	5.6	100	G	**M317082**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



CARRIAGE BOLT

- Material: Carbon steel
- Covering: Zn

Thread	Length (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	20	5.6	500	G	**M317315**
M6	30	5.6	500	G	**M317316**
M6	40	5.6	200	G	**M317317**
M6	50	5.6	200	G	**M317318**
M6	60	5.6	200	G	**M317319**
M6	70	5.6	200	G	**M317320**
M6	80	5.6	200	G	**M317321**
M8	30	5.6	200	G	**M317322**
M8	40	5.6	200	G	**M317323**
M8	50	5.6	200	G	**M317324**
M8	60	5.6	200	G	**M317325**
M8	70	5.6	200	G	**M317326**
M8	80	5.6	200	G	**M317327**



HEXAGON NUT

- Material: Carbon steel
- Covering: Zn

Thread	Packing/Box (pcs)	Product category	Catalogue number
M6	1000	G	**M317152**
M8	1000	G	**M317153**
M10	1000	G	**M317154**

LOCK NUT

- Material: Carbon steel
- Covering: Zn

Thread	Packing/Box (pcs)	Product category	Catalogue number
M6	1000	G	**M317145**
M8	500	G	**M317146**
M10	500	G	**M317147**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

FLAT WASHER



- Material: Carbon steel
- Covering: Zn

Thread	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
M6	6.4	12	1000	G	**M517076**
M8	8.4	16	1000	G	**M317216**
M10	10.5	20	1000	G	**M317217**

LARGE FLAT WASHER



- Material: Carbon steel
- Covering: Zn

Thread	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
M6	6.4	18	2500	G	**M317236**
M8	8.4	24	500	G	**M517203**
M10	10.5	30	250	G	**M317328**

SPRING-LOCK WASHER



- Material: Carbon steel
- Covering: Zn

Thread	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
M6	6.1	11.8	1000	G	**M317162**
M8	8.1	14.8	1000	G	**M317163**
M10	10.2	18.1	1000	G	**M317164**

EPDM WASHER



- Material: Carbon steel
- Covering: Zn

For screw with diameter (mm)	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)	Product category	Catalogue number
4.8	5.3	16	500	G	**M317329**
4.8	5.3	19	500	G	**M317330**
5.5	5.8	16	500	G	**M317331**
5.5	5.8	19	500	G	**M317332**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



DROP IN ANCHOR

- Material: Galvanized steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
M6	25	8	100	G	**M517233**
M8	30	10	100	G	**M517234**
M10	40	12	50	G	**M517235**

Application: For fixing in concrete and hard materials



SLEEVE ANCHOR

- Material: Galvanized steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	45	8	6.8	100	G	**M517207**
M6	60	8	6.8	100	G	**M517208**
M8	60	10	6.8	100	G	**M517209**
M8	80	10	6.8	100	G	**M517210**
M10	70	12	6.8	50	G	**M517211**
M10	100	12	6.8	25	G	**M517212**

Application: For fixing in concrete and solid materials



HEX NUT ANCHOR

- Material: Galvanized steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	45	8	6.8	100	G	**M517213**
M8	60	10	6.8	100	G	**M517214**
M8	80	10	6.8	50	G	**M517215**
M10	70	12	6.8	50	G	**M517216**
M10	100	12	6.8	25	G	**M517217**

Application: For fixing in concrete and solid materials

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



THROUGH BOLT ANCHOR

- Material: Carbon steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M8	60	10	6.8	100	G	**M517360**
M8	80	10	6.8	70	G	**M517361**
M10	100	12	6.8	50	G	**M517362**
M10	120	12	6.8	45	G	**M517228**
M10	160	12	6.8	25	G	**M517363**
M12	100	14	6.8	35	G	**M517364**
M12	120	14	6.8	30	G	**M517365**
M12	140	14	6.8	50	G	**M517232**

Application: Non-cracked concrete and hard materials. Attaching structural steel, facade, hand rails, racks, elevators, etc.



EYE ANCHOR BOLT

- Material: Galvanized steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	45	8	6.8	100	G	**M517218**
M8	60	10	6.8	50	G	**M517219**
M10	70	12	6.8	25	G	**M517220**

Application: For fixing in concrete and solid materials



HOOK ANCHOR BOLT

- Material: Galvanized steel
- Covering: Zn

Thread	Length (mm)	Drill diameter (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	45	8	6.8	100	G	**M517221**
M8	60	10	6.8	50	G	**M517222**
M10	70	12	6.8	25	G	**M517223**

Application: For fixing in concrete and solid materials

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



FISCHER ULTRACUT FBS II US

APPLICATIONS
- Pipeline routes
- Suspension for individual pipes
- Suspended mounting rails
- Prestressed concrete hollow core ceilings
- Cable trays
- Ventilation ducts
- Perforated tapes

BUILDING MATERIALS
- Concrete C20/25 to C50/60, cracked and non-cracked
- Prestressed hollow concrete ceilings C30/37 to C50/60 for the multiple use of non-load bearing systems
- ETA- approval

Model	Drill hole diameter d0 (mm)	Min. drill hole depth for through fixings h2 (mm)	Screew length ls (mm)	Packing/Box (pcs)	Product category	Catalogue number
FBS II 6 x 40/5 US	6	50	40	100	G	**MF500460**
FBS II 6 x 60/5 US	6	70	60	100	G	**MF500461**
FBS II 8 x 80 30/15 US TX	8	90	10x80	50	G	**MF500462**



FISCHER ULTRACUT WITH INTERNAL THREAD

APPLICATIONS
- Pipeline routes
- Suspension for individual pipes
- Suspended mounting rails
- Prestressed concrete hollow core ceilings
- Ventilation ducts

BUILDING MATERIALS
- Concrete C20/25 to C50/60, cracked and non-cracked
- Prestressed hollow concrete ceilings C30/37 to C50/60 for the multiple use of non-load bearing systems
- ETA- approval

Model	Drill hole diameter d0 (mm)	Min. drill hole depth for through fixings h2 (mm)	Screew length ls (mm)	Packing/Box (pcs)	Product category	Catalogue number
FBS II 6 x 35 M8/M10 I	6	45	35	100	G	**MF500463**
FBS II 6 x 55 M8/M10 I	6	65	55	100	G	**MF500464**



UNIVERSAL NYLON WALL PLUGS

- Material: Nylon PA6
- Halogen free

Diameter (mm)	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
6	30	200	G	**M517065**
6	50	100	G	**M517298**
8	40	200	G	**M517066**
8	60	100	G	**M517067**
10	50	100	G	**M517064**
10	70	50	G	**M517062**

Application: Suitable for general light duty fittings

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

FISCHER EXPANSION PLUG WITH RIM



APPLICATIONS
- Lighting, Motion detectors
- Skirting
- Letter boxes
- Trellis

BUILDING MATERIALS
- Concrete
- Vertically perforated brick
- Hollow blocks made from lightweight concrete
- Cavity floor slabs made from bricks and concrete
- Perforated sand-lime brick
- Solid sand-lime brick
- Natural stone with dense structure
- Aerated concrete
- Solid panel made from gypsum
- Solid brick made from lightweight concrete

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Min. drill hole depth h1 (mm)	Wood and chipboard screws ds (mm)	Packing/Box (pcs)	Product category	Catalogue number
SX 6 x 30	30	6	40	4-5	100	G	**MF500467**
SX 6 x 50	50	6	50	4-5	100	G	**MF500468**
SX 8 x 40	40	8	50	5x60	50	G	**MF500469**
SX 8 x 65	65	8	75	4.5-6	50	G	**MF500470**
SX 10 x 50	50	10	70	6-8	50	G	**MF500471**
SX 10 x 80	80	10	95	6-8	25	G	**MF500472**
SX 12 x 60	60	12	80	8-10	25	G	**MF500473**
SX 14 x 70	70	14	90	10-12	25	G	**MF500474**

FISCHER FRAME FIXING



APPLICATIONS
- Fasade, ceiling and roof substructures made of wood and metal
- TV consoles
- Kitchen hanging cabinets
- Wardrobes
- Squared timbers
- Windows
- Gates and doors
- Beams

BUILDING MATERIALS
- Vertically perforated brick
- Aerated concrete
- Hollow blocks made from lightweight concrete
- Perforated sand-lime brick
- Thermal insulation blocks
- Solid block made from lightweight and normal weight concrete
- Solid brick
- Solid sand-lime brick
- Concrete ≥C12/15
- Natural stone with dense structure
- Solid panel made from gypsum

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Min. drill hole depth for through fixing h2 (mm)	Screws diameter ds (mm)	Min.screw length ls (mm)	Packing/Box (pcs)	Product category	Catalogue number
SXRL 8 x 60	60	8	70	5.5-6	65	100	G	**MF500475**
SXRL 8 x 80	80	8	90	5.5-6	85	100	G	**MF500476**
SXRL 8 x 100	100	8	110	5.5-6	105	100	G	**MF500477**
SXRL 8 x 120	120	8	130	5.5-6	125	100	G	**MF500478**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



fischer

FISCHER DUOPOWER

APPLICATIONS
- Skirting
- Cable ducts
- Pictures and Decorations
- Soap dishes, Toilet paper holder
- Shower curtain rails
- Letter boxes
- Lighting, Motion detectors
- Signs, House numbers

BUILDING MATERIALS
- Concrete
- Solid brick and solid sand-lime brick
- Aerated concrete
- Vertically perforated brick
- Perforated sand-lime brick
- Plasterboard
- Gypsum plasterboard and gypsum fibreboards
- Hollow blocks made from lightweight concrete
- Cavity floor slabs made from bricks and concrete or similar
- Natural stone
- Chipboard
- Solid panel made from gypsum
- Solid brick made from lightweight concrete

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Min. drill hole depth h1 (mm)	Wood and chipboard screws ds (mm)	Packing/Box (pcs)	Product category	Catalogue number
DUOPOWER 5 x 25	25	5	35	3-4	100	G	**MF500479**
DUOPOWER 6 x 30	30	6	40	4-5	100	G	**MF500480**
DUOPOWER 6 x 50	50	6	60	4-5	100	G	**MF500481**
DUOPOWER 8 x 40	40	8	50	4.5-6	100	G	**MF500482**
DUOPOWER 8 x 65	65	8	75	4.5-6	50	G	**MF500483**
DUOPOWER 10 x 50	50	10	60	6-8	50	G	**MF500484**
DUOPOWER 10 x 80	80	10	90	6-8	25	G	**MF500485**
DUOPOWER 12 x 60	60	12	70	8-10	25	G	**MF500486**
DUOPOWER 14 x 70	70	14	80	10-12	20	G	**MF500487**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



FISCHER DUOTEC

APPLICATIONS
- Kitchen hanging cabinets
- Living room cabinets
- Shelves
- Wardrobes
- Handrails
- Pictures
- Mirrors
- Lamps
- Heavy hanging baskets

BUILDING MATERIALS
- Gypsum plasterboard
- Gypsum fibreboard
- Wooden panels, such as OSB boards, chipboard, MDF sheets
- Steel plates
- Plastic boards
- Hollow blocks made from concrete

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Min. drill hole depth h1 (mm)	Wood and chipboard screws ds (mm)	Packing/Box (pcs)	Product category	Catalogue number
DUOTEC 10	50	10	12-55	4.5-5	50	G	**MF500488**



PLASTERBOARD PLUGS

- Material: polyethylene

Drill diameter (mm)	Wall thickness (mm)	Screw size (mm)	Packing/Box (pcs)	Product category	Catalogue number
10	10	4.3x40	25	G	**M517273**
10	17	4.3x50	25	G	**M517274**



WALL PLUG FOR PLASTERBOARD

Type	Color	Bore diameter (mm)	a (mm)	b (mm)	Packing (pcs)	Product category	Catalogue number
wall plug for plasterboard	grey	6-7	30	19	25	G	**500443**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



fischer

FISCHER PLASTERBOARD METAL PLUGS GKM

APPLICATIONS
- Pictures
- Lighting
- Electrical installations
- Fitting accessories

BUILDING MATERIALS
- Gypsum fibreboard
- Gypsum plasterboard

Model	Anchor length l (mm)	Min. thickness to first supporting layer t (mm)	Screw ds x ls (mm)	Packing/Box (pcs)	Product category	Catalogue number
GKM	31	35	4-5	100	G	**MF500443**



fischer

FISCHER INSULATION FIXING

APPLICATIONS
- Fasade construction (ETICS)
- Insulating construction
- Electric construction
- Refrigerated and climate construction

BUILDING MATERIALS
- Non-plastered, pressure-resistant insulating boards
- Plastered, pressure-resistant insulating boards

Model	Anchor length l (mm)	Min. bolt penetration (mm)	Max. bolt penetration screw (mm)	Wood and chipboard screws ds (mm)	Packing/Box (pcs)	Product category	Catalogue number
FID 50	50	50	40	4-5	50	G	**MF500455**
FID 90	90	90	80	6	25	G	**MF500456**



fischer

FISCHER METAL CAVITY FIXING HM WITH METRIC SCREW

APPLICATIONS
- Pictures
- Lighting
- Light shelves
- Towel rails
- Mirror cabinets
- Curtain rails
- Sub-structures

BUILDING MATERIALS
- Gypsum plasterboard and gypsum fibreboards
- Cavity floor slabs
- Light building boards made of wood wool
- Chipboard
- Plywood boards

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Panel thickness dp (mm)	Min. drill hole depth h1 (mm)	Packing/Box (pcs)	Product category	Catalogue number
HM 4x32 S	32	8	3-13	40	50	G	**MF500457**
HM 6x52 S	52	12	7-21	58	50	G	**MF500458**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



FRAME FIXINGS PLUGS WITH SCREWS

- Material: PLUG-Nylon PA6; SCREW- Zink-plated steel
- Halogen free

Plug diameter (mm)	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
8	80	100	G	**M317340**
8	100	100	G	**M317341**
8	120	50	G	**M317342**
10	80	50	G	**M317343**
10	100	50	G	**M317344**
10	120	50	G	**M317345**
10	140	50	G	**M317346**

Application: Suitable for heavy ribbing ensures a tight hold in aerated blocks



NYLON HAMMERFIX

- Material: PLUG-Nylon PA6; SCREW- Zink-plated steel
- Halogen free

Plug diameter (mm)	Length (mm)	Packing/Box (pcs)	Product category	Catalogue number
6	40	200	G	**M517180**
6	50	200	G	**M517281**
6	60	200	G	**M517282**
6	80	200	G	**M517283**
8	60	100	G	**M517074**
8	80	100	G	**M517284**
8	100	100	G	**M517285**
8	120	100	G	**M517286**

Application: Suitable for fixing skirting, stud battens to wall and long runs of shelf support





FISCHER ANGLE SCREW SET

- SET: 2 pcs

Model	Plug size (mm)	Screw size (mm)	Packing/Box (pcs)	Product category	Catalogue number
WDL 14L/95	14	8.8/95	2/50	G	**MF500465**
WDL 14L/120	14	8.8/120	2/50	G	**MF500466**



fischer

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



RIGHT ANGLE SCREW SET

- Material: PLUG-Nylon PA6; SCREW- Zink-plated steel
- SET: 2 pcs

Plug size (mm)	Screw size (mm)	Packing/Box (pcs)	Product category	Catalogue number
12x60	10x75	1	G	**M517156**

Application: Suitable for heavy ribbing ensures a tight hold in aerated blocks



HOOK SCREW WITH PLUG

- Material: PLUG-Nylon PA6; SCREW- Zink-plated steel

Plug size (mm)	Screw size (mm)	Packing/Box (pcs)	Product category	Catalogue number
6x30	4x35	100	G	**M517289**
8x40	5x42	100	G	**M517318**



FISCHER SPRING TOGGLE

APPLICATIONS
- Pictures
- Lighting

BUILDING MATERIALS
- Gypsum plasterboard and gypsum fibreboards
- Cavity floor slabs made from bricks and concrete
- Chipboard
- Plywood

Model	Anchor length l (mm)	Drill hole diameter d0 (mm)	Panel thickness dp (mm)	Thread Ø x length (mm)	Packing/Box (pcs)	Product category	Catalogue number
KDH 4	95	14	35	M4x70	25	G	**MF500459**



THREADED HANGING ROD

- Material: Carbon steel
- Covering: Zn

Thread	Length (mm)	Grade	Packing/Box (pcs)	Product category	Catalogue number
M6	1000	4.8	100	G	**M517079**
M8	1000	4.8	50	G	**M517080**
M10	1000	4.8	40	G	**M517078**

Application: Suitable for fixing skirting, stud battens to wall and long runs of shelf support

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



PERFORATED STEEL STRAP WITH PE PLASTIC JACKETING

APPLICATIONS
For securing, supporting and strapping of cable, trunking and ducting
Use for joist strutting, window frame and sill fixing, fencing repairs and construction, hanging ductwork

Model	Width (mm)	Thickness (mm)	Hole diameter (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
5055 L PE I 14	13	3	5.2	10	1	G	**M318155**



PERFORATED STEEL STRAP IN UNCOLING BOX

APPLICATIONS
For securing, supporting and strapping of cable, trunking and ducting
Use for joist strutting, window frame and sill fixing, fencing repairs and construction, hanging ductwork

Model	Width (mm)	Thickness (mm)	Hole diameter (mm)	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
5055 LI12 FS	12	1	5.2	10	1	G	**M318154**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



FISCHER FIS AB 300 T

APPLICATIONS
- High-performance hybrid mortar for high loads in almost all building materials.
- Fixing pressure-free fastening enables small edge and axis distances
- Injection cartridges can be processed without special extrusion devices
- incl. 2 static mixers.
- Injection cartridges that are not fully squeezed out can be reused by changing the static mixer.
- When fixing in solid building materials, the drill hole must be cleaned thoroughly.
- The use of a hollow drill makes conventional drilling cleaning unnecessary.

Model	Processing time	Curing time	Packing/Box (pcs)	Product category	Catalogue number
FIS AB 300 T	approx. 5 min at 20 °C	approx. 60 min at 20 ° C	1	G	**MF500489**



FISCHER INJECTION ANCHOR SLEEVE PLASTIC

APPLICATIONS
- Anchorings in perforated brick masonry with injection mortars

BUILDING MATERIALS
- Vertically perforated brick
- Hollow blocks made from lightweight concrete
- Hollow blocks made from concrete
- Perforated sand-lime brick
- Solid sand-lime brick
- Solid brick
- Hollow pumice slabs
- Slabs made of hollow brick and other perforated brick
- Solid pumice and other solid building materials
- ETA-approval

Model	Drill hole diameter d0 (mm)	Min. drill hole depth h1 (mm)	Effect. anchorage depth hef (mm)	Fill quantity per sleeve (scale unit)	Packing/Box (pcs)	Product category	Catalogue number
FIS H 12X50 K	12	60	50	5	50	G	**MF500490**
FIS H 12X85 K	12	95	85	10	50	G	**MF500491**
FIS H 16X130 K	16	140	110	15	20	G	**MF500492**
FIS H 20X85 K	20	95	85	15	20	G	**MF500493**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



FISCHER INTUMESCENT ACOUSTIC MASTIC FIAM 310 ML

FISCHER FiAM is a one part water based acrylic emulsion that can provide up to 5 hours fire resistance when used in construction joints and services in both vertical and horizontal applications. When exposed to fire, it reacts to form a highly insulative char that slows down heat transfer, and provides a barrier to fire seal. Formulated to be halogen and solvent free the FiAM exhibits excellent slump characteristics and has been designed to maintain the sound reduction index of a structure.

TOP FEATURES:
- Up to 5 hours fire resistance.
- Movement capability ± 25 %.
- Halogen and solvent free.
- Low VOC.
- Water based.

APPLICATIONS:
- Metallic pipes: 6" (159 mm)
- Cable trays: 18" x 2" (450 x 50 mm)
- Cable bunches: 3" (80 mm)
- Linear joints: flexible and rigid construction elements
- Joints between FCPS coated panel system

BUILDING MATERIALS:
- Flexible wall constructions
- Rigid floor and wall constructions
- Masonry
- Concrete
- Timber
- Steel
- FCPS System

Model	Packing/Box (pcs)	Product category	Catalogue number
FiAM310	1/25	G	**MF500494**



FISCHER INTUMESCENT GRAPHITE MASTIC FIGM 310 ML

FISCHER Intumescent Graphite Mastic FiGM is a one part water based flexible acrylic emulsion containing a high pressure intumescent graphite which is used to seal service penetrations in both vertical and horizontal applications. Tested to both BS 476 & BS EN1366-3 /4 the fischer FiGM is also ETA approved and CE Marked for a wide range of applications such as, non metallic pipes, metallic and insulated pipes, MLC pipes, cables and cable bunches and can also used in combination with the fischer FCPS Coated Panel System.

TOP FEATURES:
- Low VOC.
- Halogen and solvent free.
- Excellent slump characteristics.
- Excellent acoustic properties.

APPLICATIONS:
- Metallic pipes: 6" (159 mm)
- Non-metallic pipes: 5" (125 mm)
- Cable bunches: 1" (21 mm)
- Insulated service: 6" (159 mm)
- Construction joints: 1" (25 mm)
- Mixed services

BUILDING MATERIALS:
- Concrete
- Masonry
- Steel
- Timber

Model	Packing/Box (pcs)	Product category	Catalogue number
FiGM310	1/25	G	**MF500495**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



PENOSIL GENERAL SILICONE, GOLD SERIES

TOP FEATURES:
- Good adhesive properties.
- Excellent processing and smoothing properties.
- Suitable for slightly alkaline, acidic and metal surfaces.
- Does not cause colour changes on marble or other natural stone surfaces.
- Does not cause corrosion on metal.
- After curing very good temperature resistance (between -60 °C and +200 °C).
- Does not lose volume during the curing process.
- Permanent elasticity.
- Mould, UV, moisture and weather resistant
- Cartrige: 310ml

APPLICATIONS:
- Indoor and outdoor applications.
- Sanitary applications.
- Installation and sealing of windows and doors.
- Sealing of ventilation systems.
- Not suitable for aquariums.

Type	Colour	Packing/Box (pcs)	Product category	Catalogue number
General silicone, 310ml	Transparent	1/12	G	**M033128**



PENOSIL UNIVERSAL SILICONE, STANDARD SERIES

TOP FEATURES:
- Insulates and seals.
- Non-sagging, does not spread in the joint.
- Excellent processing and smoothing properties.
- Touch-dries quickly.
- Adheres well to wood, glass, ceramic tiles, many plastics, and most paints.
- Elastic.
- UV and weather proof.
- Cartrige: 280ml

APPLICATIONS:
- Insulation and sealing of connections in indoor and outdoor works.
- General construction and repair works.
- Moist and dry rooms.
- All finishing, insulation, glassing works.
- Insulation of window and door frames and light box displays.

Type	Colour	Packing/Box (pcs)	Product category	Catalogue number
Universal silicone, 280ml	Transparent	1/12	G	**M033129**
Universal silicone, 280ml	White	1/12	G	**M033130**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



PENOSIL SANITARY SILICONE, STANDARD SERIES

TOP FEATURES:
- Excellent processing and smoothing properties.
- Contains fungicides.
- Mould, UV, moisture and weather resistant.
- Touch-dries quickly.
- Non-sagging, does not spread in the joint.
- Adheres well to glass, glazed surfaces, ceramic tiles, many plastics, metals, and most paints.
- Elastic.
- Long storage time.
- Cartrige: 280ml

APPLICATIONS:
- Insulation and sealing of connections during indoor works.
- Insulation and sealing of washbasin, bath, shower, swimming pool connections.
- Insulation of water supply, drainage and PVC-pipes.
- Glazing works.

Type	Colour	Packing/Box (pcs)	Product category	Catalogue number
Sanitary silicone, 280ml	Transparent	1/12	G	**M033131**
Sanitary silicone, 280ml	White	1/12	G	**M033132**



PENOSIL BITUM SEALANT, PREMIUM SERIES

TOP FEATURES:
- Touch-dries quickly.
- Immediately rain and ice resistant.
- Suitable on bituminous materials, alkali and metals.
- Usable on damp surfaces.
- Melting temperature over 100 °C.
- Will not become brittle in cold.
- Can also be used in vertical joints.
- Dissolved acid, alkali, emission and weather resistant.
- High tensile strength
- Cartrige: 310ml

APPLICATIONS:
- Insulation of roof and chimney joints.
- Insulation of joints between bituminous plates or rolls.
- Repairing small leakages and open cracks on flat roofs.
- Patching up joint leakages between metal sheets.

Type	Colour	Packing/Box (pcs)	Product category	Catalogue number
Bitum sealant, 310ml	Black	1/12	G	**M033133**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



PENOSIL ACRYLIC SEALANT, STANDARD SERIES

TOP FEATURES:
- Comfortable use.
- Low odour level.
- Forms a plastic connection.
- Non-sagging, does not spread in the joint.
- Paintable.
- Good adherence on most building materials.
- Moisture resistant 5 hours after application.
- High UV-level.
- Cartrige: 280ml

APPLICATIONS:
- Filling of wall cracks and joints.
- Filling the joints between window frames and walls.
- Filling of joints between plasterboards and filling of screw holes.
- Correction of surface defects before painting.

Type	Colour	Packing/Box (pcs)	Product category	Catalogue number
Acrylic sealant, 280ml	White	1/12	G	**M033134**



PENOSIL FOAM, STANDARD SERIES

TOP FEATURES:
- Good filling properties.
- Good foam for interior and exterior works under normal conditions.
- Good adherence on various building materials.
- Usable with the delivered straw applicator.
- Easy to use.
- The new and narrower straw ensures better foam structure and higher output.
- The new trigger is suitable for temporary air-tight sealing of the straw during work pauses.

APPLICATIONS:
- Filling of holes and gaps, insulation of joints
- Installation and insulation of construction structures
- Insulation and fixation of pipes
- Thermo and sound insulation

Type	Packing/Box (pcs)	Product category	Catalogue number
Foam, 750ml	1/12	G	**M033135**
Foam, 300ml + gloves	1/12	G	**M033136**
Gun foam, 750ml	1/12	G	**M033137**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



PENOSIL FOAM CLEANER, PREMIUM SERIES

TOP FEATURES:
- Efficiently cleans uncured construction foam from foam gun, clothes, adjacent surfaces.
- Suitable for immediate cleaning of a foam gun from inside after use.

APPLICATIONS:
- Cleaning of foam gun after use both inside and outside.
- Cleaning of clothes and tools from uncured construction foam.
- Cleaning of window frames, window sills, doors, jambs, etc. From uncured construction foam during work.

Type	Packing/Box (pcs)	Product category	Catalogue number
Foam cleaner, 500ml	1/12	G	**M033138**



PENOSIL FOAM GUN 306

APPLICATIONS:
- The budget version of the gun known brand PENOSIL for use with professional foam.

Type	Packing/Box (pcs)	Product category	Catalogue number
Foam gun 306 economical	1	G	**M033139**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

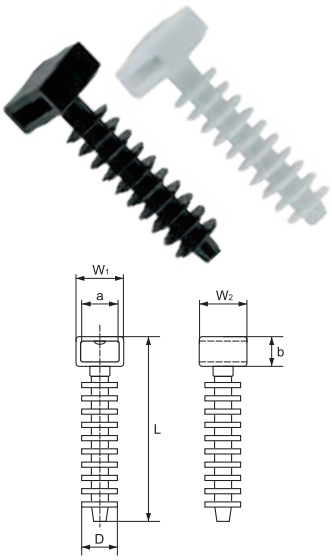

CABLE TIE HOLDER

Type	colour	Bore diameter (mm)	a (mm)	b (mm)	D (mm)	W1 (mm)	W2 (mm)	L (mm)	Packing (pcs)	Product category	Catalogue number
MT-8	black	ϕ8	9,7	6,3	9,9	12,7	12,6	43	100	C	**500046**
MT-8	white	ϕ8	9,7	6,3	9,9	12,7	12,6	43	100	C	**500047**

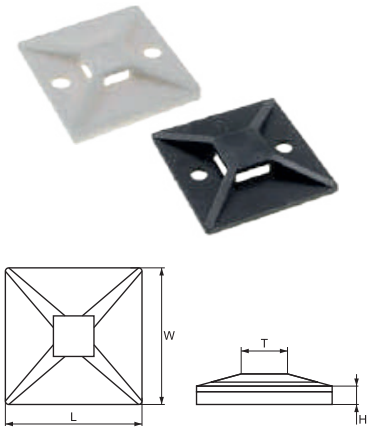

CABLE TIE MOUNTS-ADHESIVE

Type	colour	Dimmensions (mm)				Packing (pcs.)	Product category	Catalogue number
		L	W	H	T			
MT-25	white	25	25	7,5	6,2	100	C	**500041**
MT-25	black	25	25	7,5	6,2	100	C	**500042**
MT-30	white	30	30	8,7	6,4	100	C	**500043**
MT-30	black	30	30	8,7	6,4	100	C	**500039**

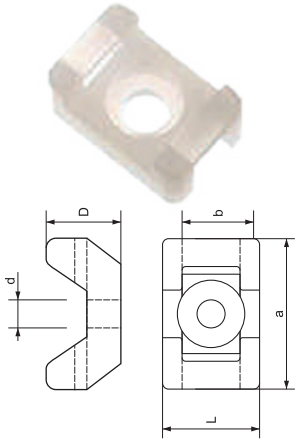

CABLE TIE BASES FIXED WITH SCREWS

2+0 standard +extended 2 YEAR TOTAL WARRANTY

Type	Color	a (mm)	b (mm)	L (mm)	d (mm)	D (mm)	Packing (pcs)	Product category	Catalogue number
CTH-2C	white	22	16,5	9	5,8	9,5	100	C	**500048**
CTH-2C	black	22	16,5	9	5,8	9,5	100	C	**500038**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days, and for CTH-2C will be 90 days.



CABLE TIES - WHITE

Type	Length (mm)	Colour	Width (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
Cable ties	100	white	2.5	100	10 / 800	C	**500100**
Cable ties	150	white	2.5	100	10 / 500	C	**500152**
Cable ties	160	white	2.5	100	10 / 500	C	**500162**
Cable ties	200	white	2.5	100	10 / 400	C	**500202**
Cable ties	250	white	3.5	100	10 / 250	C	**500253**
Cable ties	280	white	3.5	100	10 / 200	C	**500283**
Cable ties	300	white	3.5	100	10 / 200	C	**500303**
Cable ties	300	white	4.8	100	10 / 120	C	**500304**
Cable ties	370	white	3.5	100	10 / 120	C	**500373**
Cable ties	380	white	4.8	100	10 / 100	C	**500384**
Cable ties	450	white	4.8	100	10 / 70	C	**500454**
Cable ties	500	white	7.9	100	5 / 40	C	**500507**



CABLE TIES - BLACK

Type	Length (mm)	Colour	Width (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
Cable ties	150	black	2.5	100	10 / 500	C	**500151**
Cable ties	160	black	2.5	100	10 / 500	C	**500161**
Cable ties	250	black	3.5	100	10 / 250	C	**500251**
Cable ties	280	black	3.5	100	10 / 200	C	**500281**
Cable ties	300	black	3.5	100	10 / 200	C	**500301**
Cable ties	500	black	7.9	100	40	C	**500501**



CABLE HOLDER WITH TIE

Type	Color	a (mm)	b (mm)	c (mm)	d (mm)	Packing (pcs)	Product category	Catalogue number
cable holder with tie	black	27	14	140	0,5	20	C	**500444**



WALL PLUG WITH CABLE TIE

Type	Color	Bore diameter (mm)	Tie Length (mm)	Packing (pcs)	Product category	Catalogue number
wall plug with cable tie	black	Ø6	95	50	C	**500427**
wall plug with cable tie	black	Ø8	95	50	C	**500425**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days, and for Cable Ties will be 90 days.



WIRE GRIP BAND FOR FLAT CABLE

Type	Color	Bore diameter (mm)	width of the head	Packing (pcs)	Product category	Catalogue number
wire grip band for flat cable 1	white	6-7	18	50	C	**500432**
wire grip band for flat cable 2	white	6-7	12	50	C	**500434**
wire grip band for flat cable 3	white	6-7	10	50	C	**500436**

Wire grip band 1 is Suitable for flat cables with section- 2x1.0; 2x1.5mm^2
Wire grip band 2 is Suitable for flat cables with section- 2x2.5; 3x1.0
Wire grip band 3 is Suitable for flat cables with section- 2x4; 2x6; 3x1.5; 3x2.5mm^2



WIRE GRIP BAND FOR ROUND CABLE

Type	Color	Bore diameter (mm)	width of the head	Packing (pcs)	Product category	Catalogue number
wire grip band for round cable 4	white	6-7	6	50	C	**500438**
wire grip band for round cable 5	white	6-7	8	50	C	**500440**
wire grip band for round cable 6	white	6-7	10	50	C	**500439**
wire grip band for round cable 7	white	6-7	14	50	C	**500441**
wire grip band for round cable 8	white	8-9	20	50	C	**500442**

Wire grip band 4 is Suitable for round cables with section- 2x1.0; 2x1.5; 3x1.0; 3x2.5mm^2; RG6
Wire grip band 5 is Suitable for round cables with section- 2x0.5; 2x0.75; UTP; FTP
Wire grip band 6 is Suitable for round cables with section- 2x2.5; 3x1.5; 4x1
Wire grip band 7 is Suitable for round cables with section- 3x6; 4x4; 5x2.5
Wire grip band 8 is Suitable for round cables with diameter D20mm

CABLE FIXING CLIPS



Support insulators are used in control and distribution cabinets mounting when bars isolation is required. Provides reliable insulation of live parts.

TECHNICAL SPECIFICATION:
- Rated voltage: 1000V
- Insulating voltage: 5000 V
- Ambient temperature : -40 to +65°C

Type	Diameter Ø (mm)	Packing (pcs)	Packing / Box (pcs)	Product category	Catalogue number
CHR-4	4	100	500	C	**500004**
CHR-5	5	100	500	C	**500005**
CHR-6	6	100	300	C	**500006**
CHR-7	7	100	300	C	**500007**
CHR-8	8	100	250	C	**500008**
CHR-9	9	100	200	C	**500009**
CHR-10	10	100	200	C	**500010**
CHR-12	12	100	100	C	**500012**
CHR-14	14	100	50	C	**500014**
CHR-16	16	100	50	C	**500016**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days, and for cable fixing clips will be 90 days.



ELMARK AF SERIES EASY MOUNTING

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Axial fans, for exhaust ventilation

AREAS OF APPLICATION
Kitchens, Showers, Bathrooms, Utility spaces

OPTIONS:
- V-Valve: Back flow preventing. Fan is equipped with a valve
- VT- Timer + Valve: Adjustable operating time from 3 to 15 minutes. Fan is equipped with a valve.
- VH- Higro-Timer + Valve: Humidistat detects humidity starting from 40% to 90%, includes adjustable
- timer from 3 minutes to 15 minutes. Fan is equipped with a valve.
- Compatible with 100 and 120 mm PVC or flexible air ducts

MOTOR:
- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- Ambient temperature max 130°C
- IP-X4
- Insulation class B

DESIGN:
- Easy mounting system
- Very slim front panel
- Plastic housing and impeller
- Modern design and aesthetic look

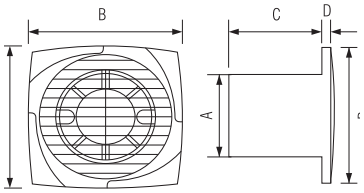







Overal dimensions (mm)

Model	ØA	B	C	D
AF-V100	98	140	98	10
AF-V120	118	170	100	13



Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
AF-V100 with valve	100	220-240	15	2500	98	41	12	D	**500120**
AF-VT100 with valve+timer	100	220-240	15	2500	98	41	12	D	**500122**
AF-VH100 with valve+hygro-timer	100	220-240	15	2500	98	41	12	D	**500124**
AF-V120 with valve	120	220-240	20	2450	190	43	12	D	**500121**
AF-VT120 with valve+timer	120	220-240	20	2450	190	43	12	D	**500123**
AF-VH120 with valve+hygro-timer	120	220-240	20	2450	190	43	12	D	**500125**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



SILENT SERIES

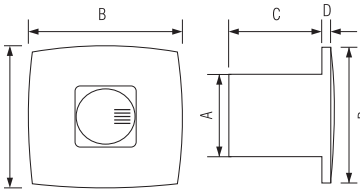

ELMARK ALS SILENT SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Axial fans, for exhaust ventilation

AREAS OF APPLICATION
Kitchens, Showers, Bathrooms, Utility spaces

OPTIONS:
- V-Valve: Back flow preventing. Fan is equipped with a valve
- Compatible with 100 and 120 mm PVC or flexible air ducts

MOTOR:
- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- IP-X4
- Insulation class B

DESIGN:
- Easy mounting system
- Very slim front panel
- Plastic housing and impeller
- Modern design and aesthetic look







Overal dimensions (mm)

Model	ØA	B	C	D
ALS-V100	98	140	98	10
ALS-V120	118	170	100	13



Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
ALS-V100 with valve WHITE	100	220-240	15	2500	98	37	12	D	**500140**
ALS-V100 with valve SILVER	100	220-240	15	2500	98	37	12	D	**500141**
ALS-V120 with valve WHITE	120	220-240	20	2450	190	39	12	D	**500142**
ALS-V120 with valve SILVER	120	220-240	20	2450	190	39	12	D	**500143**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ELMARK AS SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Axial fans, for exhaust ventilation

AREAS OF APPLICATION:
Kitchens, Showers, Bathrooms, Utility spaces

OPTIONS:
- V-Valve: Back flow preventing. Fan is equipped with a valve
- Compatible with 100 mm PVC or flexible air ducts

DESIGN:
- Very slim front panel
- Plastic housing and impeller
- Modern design and aesthetic look

MOTOR:
- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- IP-X4
- Insulation class B

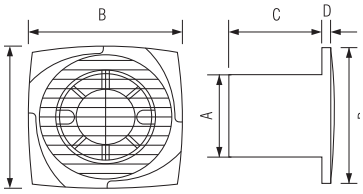





Overal dimensions (mm)

Model	ØA	B	C	D
AS-V100	98	140	75	10

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing	Product category	Catalogue number
AS-V100 with valve	100	220-240	15	2500	98	41	12	D	**500119**



ELMARK APB10

3+0 standard +extended 3 YEAR TOTAL WARRANTY

AREAS OF APPLICATION
Kitchens, Showers, Bathrooms, Utility spaces

OPTIONS:
- Back flow preventing- fan is equipped with a valve
- Equipped with PVC ring for stable fixing of the fan towards the mounted surface - hollow walls, suspended ceilings, furniture flat surfaces, glassings and etc.
- Fan comes with a power cable supply
- Compatible with 110 mm PVC or flexible air ducts

MOTOR:
- Low power consumption
- High materials quality and high efficiency
- IP-X4
- Insulation class B

DESIGN:
- Plastic housing and impeller
- Modern design and aesthetic look

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
APB10- 110V with valve	110	220-240	15	2500	100	41	30	F	**500020**

UNTIL SUPPLY LAST

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ELMARK AN SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Axial fans, for exhaust ventilation.

AREAS OF APPLICATION
Kitchens, Showers, Bathrooms, Utility spaces

OPTIONS:
- Back flow preventing- fan is equipped with a valve
- Compatible with 100 and 120 mm PVC or flexible air ducts

- **MOTOR:**
- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- IP-X4
- Insulation class B

DESIGN:
- Short back tube
- Plastic housing and impeller
- Modern design and aesthetic look

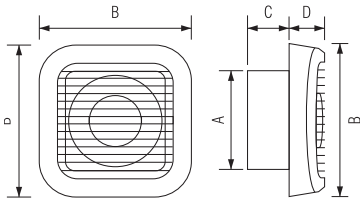







Overal dimensions (mm)

Model	ØA	B	C	D
AN-V100	98	153	45	37
AN-V120	118	180	50	37

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
AN-V100 with valve	100	220-240	15	2500	98	41	9	D	**500115**
AN-V120 with valve	120	220-240	20	2450	190	43	12	D	**500116**



ELMARK AC SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Axial inline fans, for exhaust and supply ventilation.

AREAS OF APPLICATION:
Kitchens, Showers, Bathrooms, Utility spaces, Supply ventilation

OPTIONS:
- Compatible with 100 and 120 mm PVC or flexible air ducts
- Possibility to mounting in in the ventilation systems

MOTOR:
- Equipped with thermal cut out protection
- Low power consumption
- High materials quality and high efficiency
- Do not use in rooms where the temperature is above 40°C
- IP-X4
- Insulation class B

DESIGN:
- Plastic housing and impeller
- Modern design and aesthetic look
- Designed for ventilation where you want to stop spreading humidity and unpleasure smells.

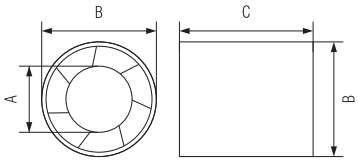





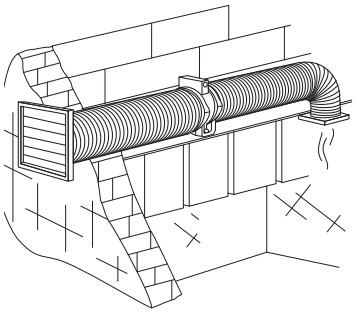

Overal dimensions (mm)

Model	ØA	ØB	C
AC-100	60	97	92
AC-120	65	118	96

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
AC-100	100	220-240	15	2500	98	41	12	D	**500117**
AC-120	120	220-240	20	2450	190	43	12	D	**500118**





RETRO DESK FAN

3+0 standard +extended 3 YEAR TOTAL WARRANTY

AREAS OF APPLICATION:
Domestic - ideal for any rooms or office

TOP FEATURES:
- 2 speed settings- gives gentle and quiet air flow
- Aluminium blades for optimizing airflow volume

Model	Size (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Packing/Box (pcs)	Product category	Catalogue number
RDF2	290x130x330	220-240	28	1250	1200	1/6	D	**500147**



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

INDUSTRIAL FANS

3+0 standard +extended 3 YEAR TOTAL WARRANTY

For a continuous or periodical ventilation of medium large agricultural, industrial buildings, park lots, warehouses and other places where it is needed great volumes of air to be moved as well as other non-explosive gases, not containing glue substances

ELMARK PAS SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Industrial fans, for exhaust ventilation

MOUNTING:
on a window, wall, roof, suspending ceiling, inside walls.

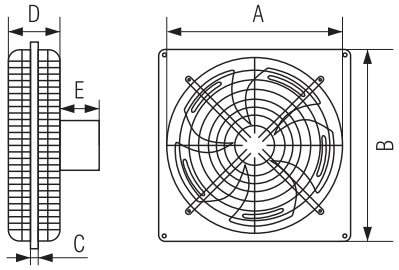

Overal dimensions (mm)

Model	ØA	B	C	D	E
PAS- 200	220	257	3	70	53
PAS- 250	270	313	8	70	60
PAS- 300	320	350	10	86	80

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
PAS- 200	200	220-240	36	1300	410	51	1	D	**500126**
PAS- 250	250	220-240	60	1300	800	53	1	D	**500127**
PAS- 300	300	220-240	110	1300	1400	58	1	D	**500128**

ELMARK IAS SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY



Industrial wall fans, for exhaust ventilation
MOUNTING:
on the, wall.

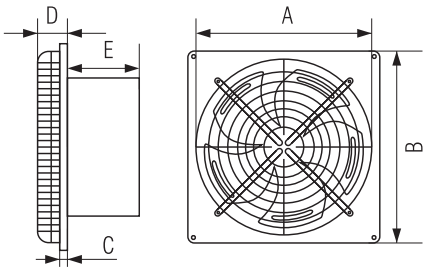

Overal dimensions (mm)

Model	ØA	B	C	D	E
IAS- 200	220	264	11	18	127
IAS- 250	270	314	11	18	147
IAS- 300	320	364	11	18	155

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
IAS- 200	200	220-240	36	1300	410	53	1	D	**500129**
IAS- 250	250	220-240	60	1300	800	56	1	D	**500130**
IAS- 300	300	220-240	110	1300	1400	60	1	D	**500131**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





ELMARK TAS SERIES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

Industrial inline fans, for exhaust ventilation

MOUNTING:
on a walls, ceilings, suspending ceilings.
Possibility to mounting in in the ventilation systems

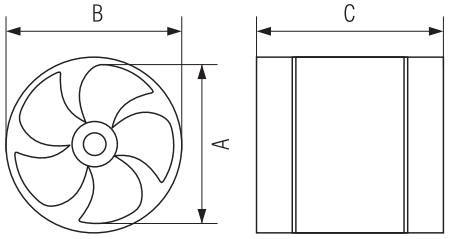

Overal dimensions (mm)

Model	ØA	B	C	D	E
TAS- 200	220	264	11	18	127
TAS- 250	270	314	11	18	147
TAS- 300	320	364	11	18	155

Model	Diameter (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Sound pressure level db(A)	Packing/ Box (pcs)	Product category	Catalogue number
TAS- 200	200	220-240	36	1300	410	55	1	D	**500132**
TAS- 250	250	220-240	60	1300	800	57	1	D	**500133**
TAS- 300	300	220-240	110	1300	1400	62	1	D	**500134**

ALUMINIUM EXHAUST GRILLS

Material	Colour	Dimensions (mm)	Packing/Box (pcs)	Product category	Catalogue number
Aluminium	grey	200/200	8	D	**500136**
Aluminium	grey	250/250	4	D	**500137**
Aluminium	grey	300/300	4	D	**500138**
Aluminium	grey	350/350	5	D	**500139**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ULTRA-QUIET 3 IN 1 INDUSTRIAL FAN

3+0 standard +extended 3 YEAR TOTAL WARRANTY

AREAS OF APPLICATION:
Home or work use as standing fan, floor fan or wall mount fan

TOP FEATURES:
- Low noise
- 3 speed settings
- 90° oscillating for great air flow
- Aluminium blades for optimizing airflow volume

Model	Size (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Packing/Box (pcs)	Product category	Catalogue number
UQIF3	500x500x1350	220-240	65	1250	2800	1	D	**500144**

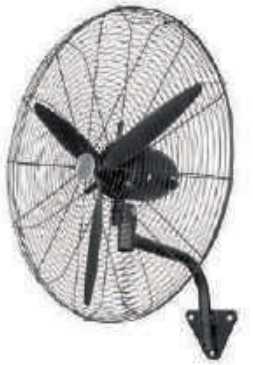

HIGH POWER INDUSTRIAL WALL FAN

3+0 standard +extended 3 YEAR TOTAL WARRANTY

AREAS OF APPLICATION:
Residential, commercial, or industrial - ideal for gyms, workshop, offices, restaurant, warehouses and etc.

TOP FEATURES:
- 3 speed settings
- 90° oscillating for great air flow
- Aluminium blades for optimizing airflow volume

Model	Size (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Packing/Box (pcs)	Product category	Catalogue number
HPIWF3	700x41x750	220-240	180	1000	8800	1	D	**500145**



HIGH POWER INDUSTRIAL STANDING FAN

3+0 standard +extended 3 YEAR TOTAL WARRANTY

AREAS OF APPLICATION:
Residential, commercial, or industrial- ideal for gyms, workshop , offices,restaurant, warehouses and etc.

TOP FEATURES:
- 3 speed settings
- 90° oscillating for great air flow
- Aluminium blades for optimizing airflow volume

Model	Size (mm)	Voltage (V)	Power (W)	r.p.m.	Maximum air capacity (m^3/h)	Packing/Box (pcs)	Product category	Catalogue number
HPISF3	700x490x1650	220-240	180	1000	8800	1	D	**500146**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

AIR CONDUIT ALUMINUM



Material: Aluminium 99,5%. For ventilaton and clima systems

Diameter (mm)	Full length (m)	Thickness (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	1,5m	0,1	66	D	**500201**
100	3m	0,1	42	D	**500101**
120	1,5m	0,1	45	D	**500203**
120	3m	0,1	30	D	**500103**

AIR CONDUIT TEXOFLEX



The tube is completed from multilayer aluminum, laminated with polyester, and forced with reinforcement additionally. The material is light and flexible, which helps for its easy use in round or oval connections in the aspiration and ventilation systems. Toxic gases are not being insulated in case of a fire. The product is certified in B1 category - fireproof material.



Diameter (mm)	Full length (m)	Thickness (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	1,5m	0,1	12	D	**500204**
120	1,5m	0,1	12	D	**500205**
100	3m	0,1	12	D	**500104**
120	3m	0,1	12	D	**500105**

AIR CONDUIT PLASTIC



Connection diameter (mm)	Length (m)	Material	Packing/Box (pcs)	Product category	Catalogue number
100	1	Plastic	1	G	**M522023**

AIR CONDUIT PLASTIC



Width (mm)	Height (mm)	Length (m)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	1	Plastic	1	G	**M522039**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

FLAT DUCT BRACKET



Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522032**

FLAT DUCT CONNECTOR



Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522029**

FLAT DUCT CONNECTOR WITH DAMPER



Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522030**

PVC WALL CONNECTOR

Section of PVC duct	Material	Packing/Box (pcs)	Product category	Catalogue number
110x55	Plastic	1	G	**M522033**

HORIZONTAL 90° BEND FOR FLAT DUCTS



Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522015**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



VERTICAL 90° BEND FOR FLAT DUCTS

Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522016**



T-JOINT FOR FLAT DUCTS

Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	Plastic	1	G	**M522020**



T-JOINT FOR FLAT & ROUND DUCTS

Width (mm)	Height (mm)	Connection diameter of round duct (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	100	Plastic	1	G	**M522017**



END GRILLE FOR FLAT DUCS

Width (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	60	Plastic	1	G	**M522019**



90° CONNECTING BEND FOR FLAT & ROUND DUCTS

Width (mm)	Height (mm)	Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	100	Plastic	1	G	**M522018**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



ROUND TO FLAT CONNECTOR

Width (mm)	Height (mm)	Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
110	55	100	Plastic	1	G	**M522014**



CONNECTOR WITH BACKDRAFT DAMPER AND WALL PLATE FOR ROUND DUCTS

Length (mm)	Width (mm)	Height (mm)	Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
150	62	134	100	Plastic	1	G	**M522115**



90° CONNECTING BEND FOR ROUND DUCTS

Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
100	Plastic	1	G	**M522013**



T-JOINT FOR ROUND DUCTS

Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
100	Plastic	1	G	**M522012**



CONNECTOR WITH BACKDRAFT DAMPER FOR ROUND DUCTS

Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
100	Plastic	1	G	**M522010**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



UNIVERSAL REDUCTOR PVC Ø100- Ø150

Packing/Box (pcs)	Product category	Catalogue number
12	D	**500109**



FRONT MASK WITH SHUTTER ADJUSTABLE

Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
100 / 120	20	D	**500108**



VENTILATION GRILL PVC

For fan with Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	30	D	**500111**
125	30	D	**500112**



RING

For fan with Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	100	D	**500106**
120	100	D	**500107**



VENTILATION ANEMOSTAT PVC

For fan with Diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
100	10	D	**500113**
125	10	D	**500114**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

AIR CONDUIT METAL CLAMPS



Connection diameter (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
90-110	Metal	1	G	**M522036**
110-130	Metal	1	G	**M522089**

METAL FAN GRILLS



Connection diameter (mm)	Width (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
125	125	Metal	1	G	**M522049T**
150	150	Metal	1	G	**M522050T**
200	200	Metal	1	G	**M522139**

FAN GRILLS WITH BACKDRAFT DAMPER



Length (mm)	Width (mm)	Material	Connection diameter (mm)	Packing/Box (pcs)	Product category	Catalogue number
154	154	ABS	100	1	G	**M522034**
186	186	ABS	125	1	G	**M522078**

REVISION OPENING PVC



Length (mm)	Height (mm)	Material	Packing/Box (pcs)	Product category	Catalogue number
150	150	Plastic	1	G	**M522001T**
150	200	Plastic	1	G	**M522002T**
200	200	Plastic	1	G	**M522003T**
200	250	Plastic	1	G	**M522004T**
200	300	Plastic	1	G	**M522005T**
200	400	Plastic	1	G	**M522006T**
250	300	Plastic	1	G	**M522007T**
300	300	Plastic	1	G	**M522008T**
300	400	Plastic	1	G	**M522009T**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



ELECTRIC WATER HEATERS

TANK WATER HEATERS, BILIGHT VERTICAL SERIES



TESY
It's impressive

The appliances is intended to supply hot water to household sites equipped with a piping system working at pressure below 6 bar (0,6 Mpa). Abundant selection of vertical and horizontal models that easily fits in narrow and limited spaces. A distinctive feature of all BiLight electric water heaters is the two-colour indication, which visualises the two operating modes: red light for Heating Mode and blue light for Ready-to-use Mode.

FEATURES:

- Copper heating element
- BiLight indication: red light for heating mode and blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water.The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- On/Off switch
- Anti-freeze function
- Eco position of the thermoregulator for cost efficient and prolonged operation
- No thermal bridge
- Stainless steel pipe
- Plasma welding
- Energy class C

MARKETS:

Water heaters with rated power 3000W and M030426 are available for BG market.
2000W: Available for RO; RS; CR & SI markets.

SUPPORT:

Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 504420 B11 TSR	2000	50	vertical	440	595	467	G	C	**M030426**
GCV 80 44 30 B11 TSR	3000	82	vertical	440	845	467	G	C	**M030114**
GCV 100 44 30 B11 TSR	3000	100	vertical	440	985	467	G	C	**M030402**
GCV 804420 B11 TSR	2000	82	vertical	440	845	467	G	C	**M030415**
GCV 1004420 B11 TSR	2000	100	vertical	440	985	467	G	C	**M030416**
GCV 1204430 B11 TSRC	3000	120	vertical	440	1150	467	G	C	**M030440**
GCV 1504430 B11 TSRC	3000	142	vertical	440	1315	467	G	C	**M030441**
GCV 1204420 B11 TSRC	2000	120	vertical	440	1150	467	G	C	**M030442**
GCV 1504420 B11 TSRC	2000	142	vertical	440	1315	467	G	C	**M030443**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



TESY
It's impressive

TANK WATER HEATERS, BILIGHT SLIM SERIES

The appliances is intended to supply hot water to household sites equipped with a piping system working at pressure below 6 bar (0,6 Mpa). Abundant selection of vertical and horizontal models that easily fits in narrow and limited spaces. A distinctive feature of all BiLight electric water heaters is the two-colour indication, which visualises the two operating modes: red light for Heating Mode and blue light for Ready-to-use Mode.

FEATURES:
- Slim diameter of only 38 cm
- Thick insulation of 34 mm
- Copper heating element
- BiLight indication: red light for heating mode and blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water. The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- On/Off switch
- Anti-freeze function
- Eco position of the thermoregulator for cost efficient and prolonged operation
- No thermal bridge
- Stainless steel pipe
- Plasma welding

MARKETS:
50L: Available for BG; RO; RS; CR & SI markets.
80L: Available for BG market.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 50 38 20 B11 TSR	2000	50	vertical	386	803	412	G	C	**M030167**
GCV 80 38 30 B11 TSR	3000	80	vertical	386	1205	412	G	C	**M030300**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, BILIGHT SERIES WITH HEAT EXCHANGER



TESY
It's impressive

The electric water heaters of the BiLight range with inbuilt heat exchanger /serpentine/ are a product solution for utilization of alternative sources of heat energy such as solar thermal collectors, gas-burning and solid fuel boilers.

FEATURES:
- Inbuilt heat exchanger (serpentine)
- Insutech - an in-house TESY technology for highly efficient insulation and extremely low heat losses
- Copper heating element
- BiLight indication: red light for heating mode and blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water. The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- On/Off switch
- Anti-freeze function
- Eco position of the thermoregulator for cost efficient and prolonged operation
- No thermal bridge
- Stainless steel pipe
- Plasma welding
- Energy class C

MARKETS:
2000W: Available for RO; RS; CR & SI markets.
3000W: Available for BG market.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV6S 804430 B11 TSRP	3000	79	right serpentine	440	845	467	G	C	**M030435**
GCV6L 804430 B11 TSRP	3000	79	left serpentine	440	845	467	G	C	**M030436**
GCVS 804420 B11 TSR	2000	79	right serpentine	440	845	467	G	C	**M030437**
GCVL 804420 B11 TSR	2000	79	left serpentine	440	845	467	G	C	**M030438**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, BILIGHT HORIZONTAL SERIES

The appliances is intended to supply hot water to household sites equipped with a piping system working at pressure below 6 bar (0,6 Mpa). Abundant selection of vertical and horizontal models that easily fits in narrow and limited spaces. A distinctive feature of all BiLight electric water heaters is the two-colour indication, which visualises the two operating modes: red light for Heating Mode and blue light for Ready-to-use Mode.



TESY
It's impressive

FEATURES:

- Copper heating element
- BiLight indication: red light for heating mode and blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water. The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- On/Off switch
- Anti-freeze function
- Eco position of the thermoregulator for cost efficient and prolonged operation
- No thermal bridge
- Stainless steel pipe
- Plasma welding

MARKETS:

3000W/ 80L: Available for BG market.
2000W/50L: Available for BG; RO; RS; CR & SI markets.

SUPPORT:

Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCH 503520 B12 TSR	2000	50	horizontal right	803	353	380	G	C	**M030427**
GCHL 503520 B12 TSR	2000	50	horizontal left	803	353	380	G	C	**M030428**
GCH 80 44 30 B12 TSR	3000	82	horizontal right	855	440	467	G	C	**M030139**
GCHL 80 44 30 B12 TSR	3000	82	horizontal left	855	440	467	G	C	**M030131**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, BILIGHT HORIZONTAL FLOOR SERIES

Specially designed for floor assembly, the electric water heaters of the Bilight Floor series were developed to meet special architectural requirements.



TESY
It's impressive

FEATURES:
- Horizontal assembly on the floor
- Copper heating element
- BiLight indication: red light for heating mode and blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water. The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- On/Off switch
- Anti-freeze function
- Eco position of the thermoregulator for cost efficient and prolonged operation
- No thermal bridge
- Stainless steel pipe
- Plasma welding

MARKETS:
Available for EL markets

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCHF 604440 B12 R	4000	50	horizontal floor	440	675	467	G	C	**M030411**
GCHF 804440 B12 R	4000	82	horizontal floor	440	885	467	G	C	**M030412**
GCHF 1004440 B12 R	4000	100	horizontal floor	440	955	467	G	C	**M030413**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, ANTICALC SERIES



TESY
It's impressive

The water heaters in the Anticalc series have been developed for long-term and reliable operation in households supplied with hard, highly mineralised and/or chemically aggressive water. The enlarged area of the dual heating element, housed in an enamelled steel enclosers with a smooth surface, substantially slows down and limits the process of limescale deposit. The appliances in the family work noiselessly and are easy to service, as they do not require preliminary draining of the water tank.

FEATURES:
- Dual dry heating element
- Protection against limescale
- Noiseless operation
- Easy maintenance
- Two power settings
- External regulator
- Cost efficient operation
- Precise capillary thermostat
- Extented product life
- Energy class C

MARKETS:
Water heaters with catalogue numbers M030406; M030407; M030408 are available only for BG market. Water heaters with catalogue numbers M030417; M030418; M030419 are available for RS, RO, CR & SI markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 803824D B14 TSR	2400	80	vertical	386	1220	412	G	C	**M030406**
GCV 804424D B14 TSR	2400	82	vertical	440	858	468	G	C	**M030407**
GCV 1004424D B14 TSR	2400	100	vertical	440	998	468	G	C	**M030408**
GCV 803824D B14 TBR	2400	80	vertical	386	1220	412	G	C	**M030417**
GCV 804424D B14 TBR	2400	82	vertical	440	858	468	G	C	**M030418**
GCV 1004424D B14 TBR	2400	100	vertical	440	998	468	G	C	**M030419**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, BELLISLIMO SERIES



TESY
It's impressive

BelliSlimo is a fusion of intelligent high-tech advantages and an exclusive Italian design rendering flat and slim silhouette, attainting a space-saving compact size, which ensures easy installation according to various needs. BelliSlimo is reversible and appears both as a horizontal and a vertical piece of art for everyone's taste and space. It raises the bar as it implements next-generation technology and delivers ultimate comfort by combining user-friendly electronic panel and all distinctive TESY advanced innovations. The ECO Smart mode grants an optimum operation with a low energy consumption, achieving the highest possible Energy Class B in its range.

FEATURES:

- Work-on-demand mode: BelliSlimo calculates the time required for your water to heat up just in time.
- Energy class B: The highest energy class in its category.
- Reversible: Can be installed vertically or horizontally.
- Eco smart mode: Self-learning and self management
- Double tank: Two water tanks with separate copper heating elements.
- Quick first shower
- Vacation mode: to reduce water heater's and energy consumption activity.
- Boost function
- Reverse counter: Counts down until the water heater reaches the desired temperature.
- Copper heating element
- Energy class B

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCR 502722 E31 EC	2200	40	vertical/horizontal	490	704	280	G	B	**M030425**
GCR 80 27 22 E31 EC	2200	65	vertical/horizontal	490	1057	280	G	B	**M030409**
GCR 100 27 22 E31 EC	2200	80	vertical/horizontal	490	1287	280	G	B	**M030410**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, BELLISLIMO CLOUD



TESY
It's impressive

BelliSlimo Cloud is the latest addition to the TESY Cloud family of products connectable to the Internet. It features intuitive programming and monitoring by means of the TESY Could app for iOS and Android.

FEATURES:
- Energy class B: The highest energy class in its category.
- Reversible: Can be installed vertically or horizontally.
- Eco smart mode: Self-learning and self management
- Quick first shower
- Vacation mode: to reduce water heater's and energy consumption activity.
- Reverse counter: Counts down until the water heater reaches the desired temperature.
- Copper dry heating element

CONTROL VIA INTERNET:
- Easy installation and connection of the water heater to the TESY Cloud app
- Real-time monitoring and control of the water heater anytime, anywhere
- Energy consumption monitoring through the energy calculator

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCR 502722 E31 ECW	2200	40	vertical/horizontal	490	709	280	G	B	**M030424**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATER, MODECO CERAMIC



TESY
It's impressive

"Next-generation electric water heaters, combining modern design and eco-friendly smart technology. The 32 mm highly efficient PU insulation guarantees low thermal losses, meeting the highest requirements of the European markets. Equipped with a ceramic heating element, providing reliable protection against aggressive water."

FEATURES:

- Ceramic heating element
- Limescale protection
- Noiless operation
- Quick first shower
- Easy maintenance without draining
- Two power settings
- BiLight indication: red light for heating mode anf blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water.The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- No thermal bridge
- Stainless steel pipe
- Plasma welding
- Energy class B: The highest energy class in its category.

MARKETS:
Available for BG; RO; RS & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 50 47 16D C21 TS2R	800/1600	50	vertical	470	590	496	G	B	**M030429**
GCV 80 47 24D C21 TS2R	1200/2400	82	vertical	470	845	496	G	B	**M030302**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

Smartphone Control WiFi

TANK WATER HEATER, MODECO CLOUD





TESY
It's impressive

"Next-generation electric water heaters, combining modern design and eco-friendly smart technology. The 32 mm highly efficient PU insulation guarantees low thermal losses, meeting the highest requirements of the European markets. Providing the comfort to monitor and control your EWH via Internet anytime, anywhere"

FEATURES:

- Control via internet: Easy installation and connection of the water heater to the TESY Cloud app. Real-time monitoring and control of the water heater anytime, anywhere. Energy consumption monitoring through the energy calculator.
- Self-learning ECO SMART MODE for additional comfort and lower thermal losses.
- Touch-control panel and LCD display with crystal clear visualisation.
- Ceramic heating element
- Limescale protection
- Noiless operation
- Quick first shower
- Easy maintenance
- Two power settings
- BiLight indication: red light for heating mode anf blue light for ready to use mode
- Piston effect: ensuring up to 15% more hot water.The nozzle slows down the mixing of the incoming cold water and the water already heated in the appliance through leveling the pressures in the mixing area
- No thermal bridge
- Stainless steel pipe
- Plasma welding
- Vacation mode
- Boost function
- Energy class B: The highest energy class in its category.

MARKETS:
Available for BG; RO; RS; & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 80 47 24D C21 ECW	1200/2400	82	vertical	470	845	496	G	B	**M030307**

TANK WATER HEATER, ELPROM



Water heater that offers you good work and quality an affordable price. The Elprom series has a powerful heater for fast water heating, an external temperature regulator, an external moisture-insulated electric switch and a light indicator indicating the operating mode.

MARKETS:
Available for BG market.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCV 804420 D03 TSR	2000	80	vertical	440	790	468	G	C	**M030434**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, SIMPATECO SERIES



TESY
It's impressive

The appliances is intended to supply hot water to household sites equipped with a piping system working at pressure below 6 bar (0,6 Mpa)

FEATURES:
- Copper heating element
- Light indication: red light for heating mode anf blue light for ready to use mode
- Eco position of the thermoregulator for cost efficient and prolonged operation
- Stainless steel pipe
- Energy class C

MARKETS:
Available only for BG market.

SUPPORT:
Warranty and service support is possible only in BULGARIA

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
CTV 503820 B11 TSR	2000	50	vertical	386	803	386	G	C	**M030403**
CTV 803830 B11 TSR	3000	80	vertical	386	1205	412	G	C	**M030404**
CTV 804430 B11 TSR	3000	82	vertical	440	845	467	G	C	**M030405**

INSTANTANEOUS WATER HEATERS, INSTALINE SERIES



TESY
It's impressive

The appliance is an electric domestic water heater with instantaneous effect (constant flow heater). It is used for supplying hot water in domestic and office environment - kitchens, bathrooms, supporting office premises, etc.

FEATURES:
- Elegant design and compact size
- Ultra fast reaching of the desired temperature
- In-built stabilization of the water temperature
- Overheating protection
- Light indicator
- 360°easy installation
- Energy class A

MARKETS:
Available for: BG; RO; RS; CR, SI & EL markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered.

Model	Rated power (W)	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
IWH 35 X02 KI	3500	130	200	76	G	**M030400**
IWH 50 X02 KI	5000	130	200	76	G	**M030401**
IWH 70 X02 BA H	7000	130	200	76	G	**M030439**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, COMPACT FLAT SERIES



TESY
It's impressive

Low-volume and compact in size. The water heaters of the Compact series are suitable for installation at small and narrow spaces close to the point of use of hot household water. Depending on the room interior and the existing utilities, such appliances can be installed under or above the flow regulating mixing tap. The developed low-volume electric water heaters have storage capacity of 6 litres.

FEATURES:
- Water tank with glass-ceramic coating and anode protector
- Highly efficient heat insulation
- Convenient thermoregulator
- Flat shape
- Saves space
- Above and under the sink installation
- Range 6 l

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCA 0615 M01 RC	1500	5.3	above sinks	265	365	160	G	A	**M030105**
GCU 0615 M01 RC	1500	5.3	under sinks	265	365	160	G	B	**M030088**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

TANK WATER HEATERS, COMPACT SERIES



TESY
It's impressive

The water heaters of the Compact family are suitable for installation in small and narrow spaces close to the point of use of hot water. Depending on the room interior and the existing utilities, such appliances can be installed under or above a sink or mixing tap.
The flat base of the 10 l and 15 l models for under-the-point-of-use installation allows direct on-floor or in-cupboard placement, which avoids wall drilling.

FEATURES:
- Elegant compact design
- Saves space
- Convenient push-push thermoregulator for smooth water temperature setting
- Red light indication for heating mode
- Blue light indication for ready-to-use mode
- Above and under the sink installation
- Energy class B
- Energy class A (Cat. Number M030102)

MARKETS:
2000W: Available for BG market;
1500W: Available for RO; RS, CR, SI & EL market.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Volume (L)	Mounting type	Width (mm)	Height (mm)	Depth (mm)	Product category	Energy class	Catalogue number
GCA 1020 L52 RC	2000	10	above sinks	377	399	247	G	A	**M030102**
GCA 15 20 L52 RC	2000	15	above sinks	377	399	304	G	A	**M030019**
GCU 1020 L52 RC	2000	10	under sinks	377	399	247	G	B	**M030134**
GCU 15 20 L52 RC	2000	15	under sinks	377	399	304	G	B	**M030104**
GCA 1015 L52 RC	1500	10	above sinks	377	399	247	G	A	**M030420**
GCA 1515 L52 RC	1500	15	above sinks	377	399	304	G	A	**M030421**
GCU 1015 L52 RC	1500	10	under sinks	377	399	247	G	B	**M030422**
GCU 1515 L52 RC	1500	15	under sinks	377	399	304	G	B	**M030423**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



HEATING APPLIANCES

OIL-FILLED RADIATORS, CB SERIES





TESY
It's impressive

Oil-filled radiators are considered to be one of the most efficient household electric heating appliances

FEATURES:
- The radiator's heating surface is enlarged up to 40%
- Three power settings
- Convection and radiant heating effect
- Light indicator
- Adjustable thermoregulator
- Anti-frost protection
- Overheating protection
- Tip-over protection
- Fast heating and Silent operation
- Heating element protected from pet's fur, which increases its lifecycle.
- Convenient cable reel
- Built-in 500 W fan heater (for models E01 V)

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Num. of fins	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
CB 2009 E01 R	800/1200/2000	9	16-24m²	290	650	430	G	**M048100**
CB 2512 E01 V	1000/1500/3000	12	24-32m²	290	650	550	G	**M048101**

FLOOR-STANDING ELECTRIC PANEL CONVECTORS WITH MECHANICAL TERMOREGULATOR, HEATECO SERIES



TESY
It's impressive

Electric panel convectors ensure faster room heating and lower electricity costs.

FEATURES:
- Optimal convection
- Adjustable thermoregulator
- Bathroom usage option- IP 24 protection
- Anti-frost protection
- Tip-over protection
- Overheating protection
- Switch with protection cap
- Robust metal construction
- Floor standing
- Casters not included: Four pices set. Cat number: M048109

MARKETS:
Available for BG; RO; RS; CR & SI Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
CN 03 200 MIS F + legs	2000	16-24m²	90	450	830	G	**M048102**
CN 03 300 MIS F + legs	3000	24-32m²	90	450	1180	G	**M048103**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



TESY
It's impressive

WALL MOUNTED ELECTRIC PANEL CONVECTORS WITH ELECTRONIC TERMOREGULATOR, HEATECO SERIES

Electric panel convectors ensure faster room heating and lower electricity costs.

FEATURES:
- Optimal convection - up to 25% faster room heating
- Precise thermoregulator with an accuracy of 0.1° C
- Electronic thermoregulator 10-30° C
- Thermostat calibration to achieve the desired comfort: temperature correction ±4° C
- Weekly programmer 24/7 with 30-minute step
- Adaptive start with On/Off option - provides optimal comfort and saves energy
- Bathroom installation option: IP 24
- Delayed start function- 96 hours
- Anti-frost protection, fixed on 5° C, with On/Off option
- Keyboard lock
- Overheating protection
- LED display indicating desired and actual room temperature
- Robust metal construction

ACCESSORIES:
- Are available separately: allow you to use your product as a floor-standing convector.
- Legs: Two pices set. Cat number: M048108
- Casters: Four pices set. Cat number: M048109

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
CN 03 200 EIS W	2000	16-24m^2	90	450	830	G	**M048104**
CN 03 250 EIS W	2500	20-28m^2	90	450	1000	G	**M048105**
CN 03 300 EIS W	3000	24-32m^2	90	450	1180	G	**M048057**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

FLOOR-STANDING ELECTRIC PANEL CONVECTORS, CN 214 ZF



Floor-standing fan heater with resistive wire

FEATURES:
- Three power settings: 800 W/1200 W/2000 W
- Adjustable thermoregulator
- Light indicator
- Heating element - resistive wire
- Anti-frost protection
- Overheating protection
- Power cord: 1.7 m
- Noise level: 45.4 dB(A)
- Floor standing

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
CN 214 ZF	800/1200/2000	16-24m²	180	430	600	G	**M048065**

FLOOR-STANDING FAN HEATER HL 213 V



Floor-standing fan heater with resistive wire

FEATURES:
- Two power settings: 1000 W/2000 W
- Classic design
- Compact and lightweight
- Adjustable thermoregulator
- Light indicator
- Summer ventilation
- Heating element - resistive wire
- Anti-frost protection
- Overheating protection
- Power cord: 1.5 m
- Noise level: 45.9 dB(A)
- Floor standing

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
HL 213 V	1000/2000	13-16m²	120	227	245	G	**M048069**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

FLOOR-STANDING FAN HEATER HL 830 V PTC



TESY
It's impressive

Floor-standing fan heater with PTC heating element

FEATURES:
- Tree power settings: 1000 W/2000 W/3000 W
- Metal safety grid
- Adjustable thermoregulator
- Summer ventilation
- Heating element - PTC
- Overheating protection
- Noise level: 54.9 dB (A)
- Floor standing

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
HL 830 V PTC	1000/2000/3000	24-32m²	253	238	238	G	**M048110**

BATHROOM HEATER, HL 246 VB W



TESY
It's impressive

Wall-mounted panel heater.

FEATURES:
- Two power settings: 1000 W/2000 W
- LCD display
- Soft-touch key control
- Electronic thermoregulator: 10-35°C
- Weekly programmer 24/7
- Open window/door function
- Wall-mounted, designed for bathroom usage
- Anti-frost protection
- Overheating protection
- Heating element - resistive wire
- IP24
- Noise level: 51.6 dB(A)

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
HL 246 VB W	1000/2000	14-18m²	385	165	380	G	**M048111**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

BATHROOM HEATER, HL 243 VB W



TESY
It's impressive

Wall-mounted panel heater.

FEATURES:
- Two power settings: 1000 W/2000 W
- Rotatable towel rack
- Electronic thermoregulator: 5-35° C
- Weekly programmer 24/7
- Six fixed programs: 5 factory pre-set programs and 1 custom program
- Timer function to switch off
- LCD display and soft-touch key control
- Open window/door function
- Wall-mounted, designed for bathroom usage
- Anti-frost protection
- Overheating protection
- Heating element - resistive wire
- IP24
- Noise level: 50.3 dB(A)

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
HL 243 VB W	1000/2000	14-18m²	340	130	400	G	**M048068**

BATHROOM QUARTZ HEATER, QH 04 120



TESY
It's impressive

Wall-mounted glass panel heater

FEATURES:
- Two power settings: 600 W/1200 W
- Two quartz heating elements
- Pull-cord switch with power setting display
- 45° C tilt option for adjustment of the heat distribution angle
- Wall-mounted, designed for bathroom usage
- IP24

MARKETS:
Available for BG; RO; RS; CR; SI & EL Markets.

SUPPORT:
Warranty and service support is possible only in the countries where the products are offered

Model	Rated power (W)	Heating area	Width (mm)	Height (mm)	Depth (mm)	Product category	Catalogue number
QH 04 120	600/1200	8-10m²	570	105	120	G	**M048095**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



SMART HOME CONTROL

IP20

ONE CHANNEL RECHARGEABLE LED PANEL REMOTE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- To control single color LED lamp
- Removeable and stick easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Standby time: 6 months
- Built-in rechargeable Li-Battery
- Working temperature: -30°C~55°C
- Product size: L86×W86×H13.5mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

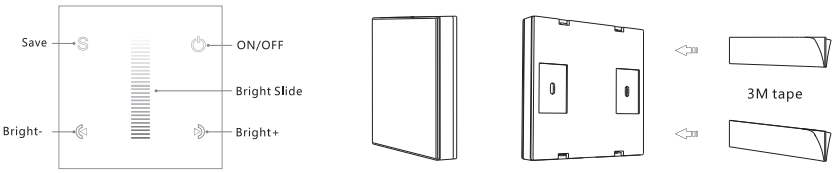

Output signal	Li-battery capacity	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4G)	200mAh	<20mA	< 30μA	1/200	F	**99TOUCHUSB1**

UNTIL SUPPLY LAST

IP20

FOUR CHANNEL RECHARGEABLE LED PANEL REMOTE

3+0 standard +extended 3 YEAR TOTAL WARRANTY

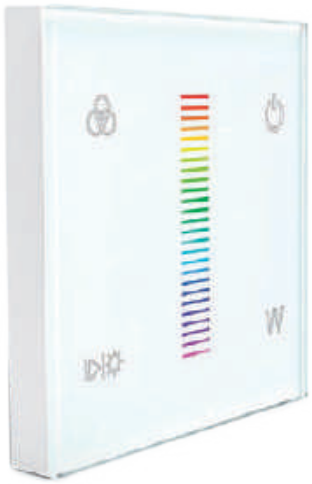

FUNCTION:
- To control LED one-four colors
- Removeable and stick easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Standby time: 6 months
- Built-in rechargeable Li-Battery
- Working temperature: -30°C~55°C
- Product size: L86×W86×H13.5mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

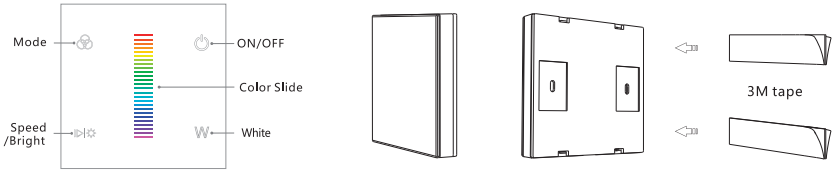

Output signal	Li-battery capacity	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4G)	200mAh	<20mA	< 30μA	1/200	F	**99TOUCHUSB4**

UNTIL SUPPLY LAST

IP20

ONE CHANNEL FOUR ZONES REMOTE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- To control single color LED lamp
- Removeable and stick easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Standby time: 6 months
- Built-in rechargeable Li-Battery
- Working temperature: -30°C~55°C
- Product size: L86×W86×H13.5mm

Full info for the products, instructions, can be found at www.elmarkholding.eu



Turn on/off all zone light.
Brightness slide.
1 2 3 — Short press recall scene. Long press 2s to save the current state into 1/2/3.
1 2 3 4
Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light.
4 zone control seperately or synchronously, each zone could control multiple receivers.

Output signal	Battery capacity	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4G)	2xAAA	<20mA	< 20μA	1/200	D	**99TOUCHB1**

IP20

FOUR CHANNEL FOUR ZONES REMOTE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- To control one-four colours
- Removeable and stick easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control

TECHNICAL DATA:
- ireless control (remote distance): 30m
- tandby time: 6 months
- uilt-in rechargeable Li-Battery
- orking temperature: -30°C~55°C
- roduct size: L86×W86×H13.5mm

Full info for the products, instructions, can be found at www.elmarkholding.eu



Turn on/off all zone light.
Color slide.
M — Short press play 10 built-in mode, long press run mode-cycle.
Adjust dynamic mode speed or static color brightness, 10 levels.
W — Short press turn on/off W channel, long press adjust W channel brightness.
1 2 3 4
Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light.
4 zone control seperately or synchronously, each zone could control multiple receivers.

Output signal	Battery capacity	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4G)	2xAAA	<20mA	< 20μA	1/200	D	**99TOUCHB4**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | IP20

TOUCH AC TRIAC RF DIMMER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Control is done by installed IOS or Android application
- To dim and switch single color dimmable LED lamps,traditional incandescent and halogen lights
- Ultra sensitive high strength glass touch panel with touch brightness slide in the middle and backlighting
- Triac and Mosfet dimmable
- Workt with direct connected dimmable light
- Great compatibility with a variety of dimming remoter
- Leading edge dimming or trailing edge dimming set by dip switch
- Minimum brightness set by dip switch
- Change brightness, support push,long push operation

TECHNICAL DATA:
- Adopt 2.4GHz wireless technology
- Wireless control (remote distance): 30m
- Input voltage: 100-240VAC
- Output voltage: 100-240VAC
- Working temperature: -30°C~55°C
- Product size: L86×W86×H50mm

Download Skydance Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

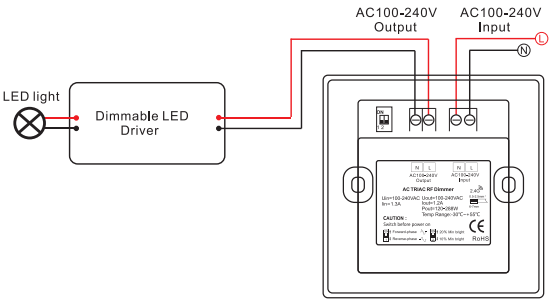

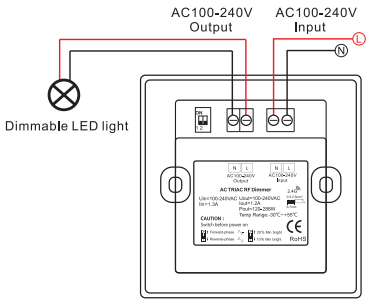

Input voltage	Output voltage	Output current	Output power	Packing/Box (pcs)	Product category	Catalogue number
100- 240VAC	100- 240VAC	1Channel x 1.2A	100- 240VAC-288W	1/200	D	**99TOUCH1**

GET IT ON Google Play | Download on the App Store
Smartphone Control | IP20

RF AC TRIAC ROTARY DIMMER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Control is done by installed IOS or Android application
- To dim and switch single color dimmable LED lamps,traditional incandescent and halogen lights
- Ultra sensitive high strength glass touch panel with touch brightness slide in the middle and backlighting
- Triac and Mosfet dimmable
- Workt with direct connected dimmable light
- Great compatibility with a variety of dimming remoter
- Leading edge dimming or trailing edge dimming set by dip switch
- Minimum brightness set by dip switch
- Rotate knob to change brightness, support push,long push operation

TECHNICAL DATA:
- Adopt 2.4GHz wireless technology
- Wireless control (remote distance): 30m
- Input voltage: 100-240VAC
- Output voltage: 100-240VAC
- Working temperature: -30°C~55°C
- Product size: L86×W86×H50mm

Download Skydance Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Input voltage	Output voltage	Output current	Output power	Packing/Box (pcs)	Product category	Catalogue number
100- 240VAC	100- 240VAC	1Channel x 1.2A	100- 240VAC-288W	1/200	D	**99DIMMERR**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

IP20

SINGLE ZONE RF REMOTE CONTROLLER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Match with single color dimming receiver- 99RECEIVER1
- Operate with LED indicator light
- Can match one or more receiver

TECHNICAL DATA:
- Working volatage: 3VDC
- Wireless control (remote distance): 30m
- Standby time: 6 months
- CR2032 button battery power supply
- Product size: L107×W58.5×H9mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

Output signal	Working voltage	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4GHz)	3VDC(CR2032)	<20mA	<10μA	1/150	D	**99REMOTE1**

IP20

SINGLE ZONE RF RGBW REMOTE CONTROLLER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Match with one channel and four channel dimming receivers- 99RECEIVER1 and 99RECEIVER4
- Suitable to single color, dual color, RGB, RGBW or RGB+CCT LED controller
- Operate with LED indicator light
- Can match one or more receiver

TECHNICAL DATA:
- Working volatage: 3VDC
- Wireless control (remote distance): 30m
- Standby time: 6 months
- Battery: 2 x AAA
- Product size: L107×W58.5×H9mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

Output signal	Working voltage	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4GHz)	3VDC(CR2032)	<20mA	<10μA	1/150	D	**99RGBREMOTE1**

IP20

FOUR ZONE RF RGBW REMOTE CONTROLLER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Match with one channel and four channel dimming receivers- 99RECEIVER1 and 99RECEIVER4
- Four way control
- Suitable to single color, dual color, RGB, RGBW or RGB+CCT LED controller
- Operate with LED indicator light
- Can match one or more receiver

TECHNICAL DATA:
- Working volatage: 3VDC
- Wireless control (remote distance): 30m
- Standby time: 6 months
- Battery: 2 x AAA
- Product size: L122×W53×H17.5mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

Output signal	Working voltage	Working current	Standby current	Packing/Box (pcs)	Product category	Catalogue number
RF(2.4GHz)	3VDC(CR2032)	<20mA	<10μA	1/150	D	**99RGBREMOTE4**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20



FOUR CHANNEL CONSTANT VOLTAGE RECEIVER

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Four channel 2.4GHz RF wireless LED lighting dimming reciever
- Work as ON/OFF switch and RGBW controler with RGBW remoter
- Can also be used for RGB, RGBW, 2 x dual colour, 4 x single color LED strips
- Full compatibility with a variety of single color, dual color and RGB/RGBW remoters
- Through jump, strobe, gradual change style, fine adjust color, realize thousands of powerful editing effect
- 32 change mode optional
- Changing mode or loop mode can be stored to 8 scenes, or timming run
- Control is done by remote control, dimmer switch and/or installed IOS or Android application
- For more power control it can be equiped with amplifier

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Dimming range: 0-100%
- Product size: L97×W33×H18mm

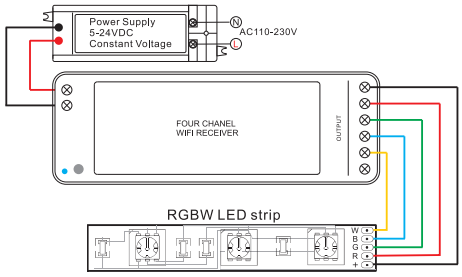

Input voltage	Output current	Output power (12V)	Output power (24V)	Packing/Box (pcs)	Product category	Catalogue number
12-24 VDC	4Channel 4 x 3A	0 - 144W	0 - 288W	1/100	D	**99RGBWF4**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20



WIFI RELAY CONTROLLER

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Convert WiFi to RF signal
- It used to carry 1-16 constant voltage receiver with different channel number
- WiFi-Relay controller control up to 16 zones lamp with any light type
- Can not control lamp directly

Download Skydance Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

TECHNICAL DATA:
- Input voltage: 5-24VDC
- Wireless control (remote distance): 30m
- Product size: D72×H18mm

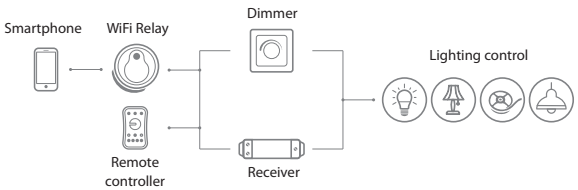



Input voltage	Output current	Output power (12V)	Output power (24V)	Packing/Box (pcs)	Product category	Catalogue number
5-24 VDC	-	-	-	1/100	D	**99RWIFI**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | IP20

ONE CHANNEL LED DIMMING RECEIVER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- One channel 2.4GHz RF wireless LED lighting dimming receiver
- Work as ON/OFF switch and dimming
- Control is done by remote control, dimmer switch and/or installed IOS or Android application
- For more power control it can be equiped with amplifier

TECHNICAL DATA:
- Input voltage: 5-36VDC
- Output power: 5VDC: 0-40W; 12VDC: 0-96W; 24VDC: 0-192W; 36VDC: 0-288W
- Dimming range: 0-100%
- Product size: L97×W33×H18mm

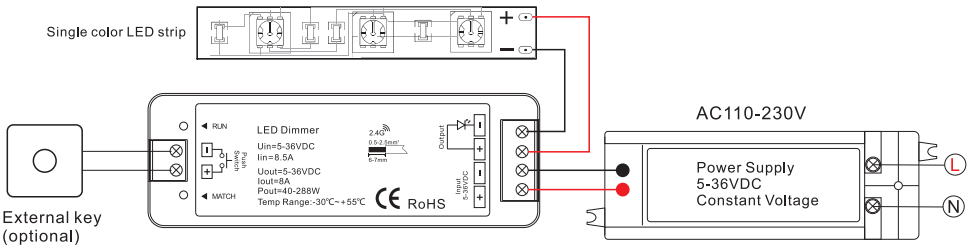

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
5-36 VDC	1Channel x 8A	1/150	D	**99RECEIVER1**

GET IT ON Google Play | Download on the App Store
Smartphone Control | IP20

FOUR CHANNEL LED DIMMING RECEIVER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Four channel 2.4GHz RF wireless LED lighting dimming receiver
- Control is done by remote control, dimmer switch and/or installed IOS or Android application
- Work as ON/OFF switch and RGBW controler with RGBW remoter, create colorful static or dynamic effect
- Can also be used for RGB, RGBW, 2 x dual colour, 4 x single color LED strips
- Full compatibility with a variety of single color, dual color and RGB/RGBW remoters
- When control RGB/RGBW lamp, built in 30 change mode optional
- For more power control it can be equiped with amplifier

TECHNICAL DATA:
- Input voltage: 12-36VDC
- Output power: 12VDC: 0-240W; 24VDC: 0-480W; 36VDC: 0-720W
- Dimming range: 0-100%
- Product size: L97×W33×H18mm

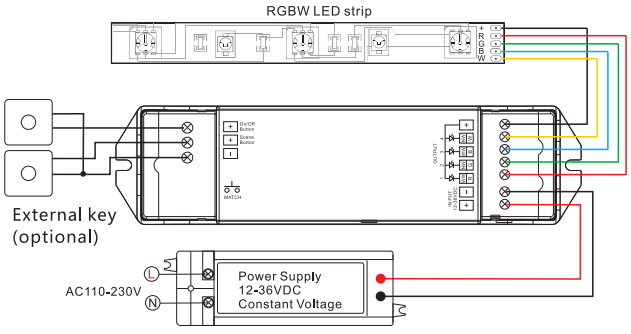

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
12-36VDC	4Channel 4 x 5A	1/150	D	**99RECEIVER4**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

IP20

ONE CHANNEL POWER REPEATER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- It's used along with 99RECEIVER1, in case we want to increase the output power, for the contol of several light sources
- It can be used unlimited number of amplifiers, connected in parallel or
- successively without reflecting the sincronization of the control itself

TECHNICAL DATA:
- Input voltage: 5-36VDC
- Output power: 5VDC: 40W; 12V: 96W; 24V: 192W; 36V: 288W
- Output current: 1x8A
- Product size: L97×W33×H18mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

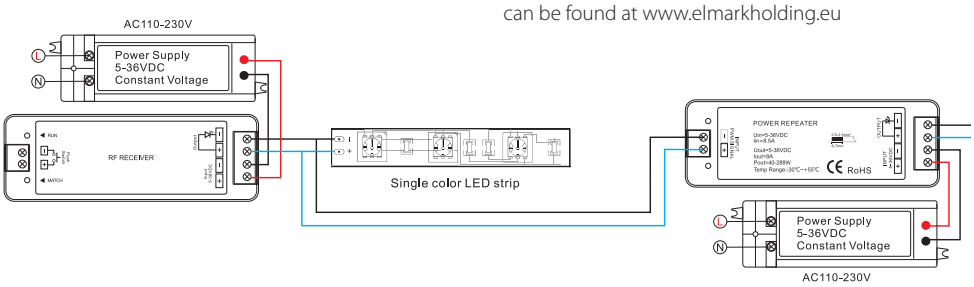

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
5-36 VDC	1Channel x 8A	1/200	D	**99REPEATER1**

IP20

FOUR CHANNEL POWER REPEATER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- It's used along with 99RECEIVER4, in case we want to increase the output power, for the contol of several light sources
- It can be used unlimited number of amplifiers, connected in parallel or
- successively without reflecting the sincronization of the control itself

TECHNICAL DATA:
- Input voltage: 12-36VDC
- Output power: 12V: 240W; 24V: 480W; 36V: 720W
- Output current: 1x8A
- Product size: L175×W45×H27mm

Full info for the products, instructions, can be found at www.elmarkholding.eu

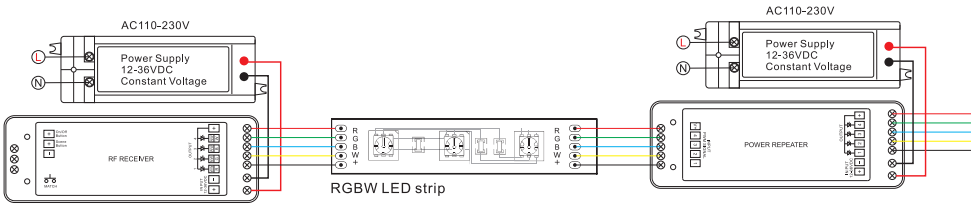

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
12-36VDC	4Channel 4 x 5A	1/200	D	**99REPEATER4**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | IP20

AC TRIAC RF DIMMER

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- AC phase cut RF dimmer
- Control is done by installed IOS or Android application
- Control is done by remote control
- To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights
- Triac and Mosfet dimmable
- Leading edge dimming or trailing edge dimming set by dip switch
- Minimum brightness set by dip switch

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Output voltage: 100-240VAC
- Output power: 240VAC: 288W
- Product size: L103×W67×H30mm

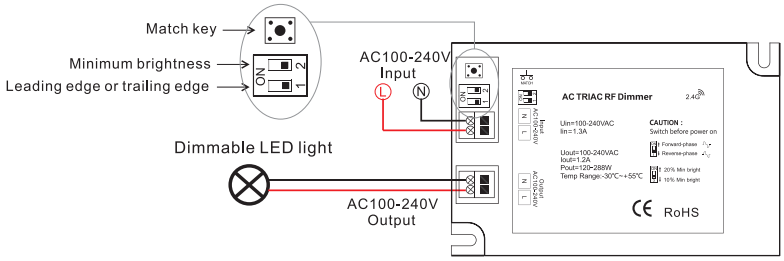

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
100- 240VAC	1Channel x 1.2A	1/300	D	**99DIMMERT1**

GET IT ON Google Play | Download on the App Store | Smartphone Control | IP20

AC TRIAC RF DIMMER SWITCH

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- AC phase cut RF dimmer switch
- Control is done by installed IOS or Android application
- Control is done by remote control. Can accept up to 10 remote control
- Suitable to use with dimmer switch. Great compatibility with a variety of dimming remote
- Suitable to mounting in standard panel bottom box
- To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights
- Triac and Mosfet dimmable
- Leading edge dimming or trailing edge dimming set by dip switch
- Minimum brightness set by dip switch

TECHNICAL DATA:
- Wireless control (remote distance): 30m
- Input voltage: 100-240VAC
- Output voltage: 100-240VAC
- Output power: 240VAC: 240W
- Product size: L52×W25×H26mm

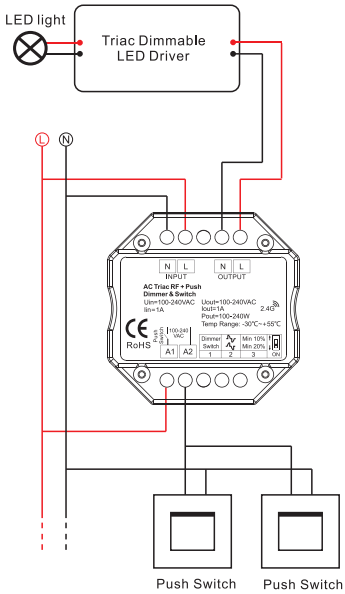

Input voltage	Output current	Packing/Box (pcs)	Product category	Catalogue number
100- 240VAC	1Channel x 1A	1/200	D	**99DIMMERMT**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

ONE CHANNEL SMART WIFI GLASS TOUCH PANEL

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Touch ON/OF
- Real-time turn ON/OF lighting from anywhere
- Control is done from anywhere with IOS or Android mobile application
- Time setting function- turn ON/OF at specified time after setting
- Through jump, strobe, gradual change style, fine adjust color, realize thousands of powerful editing effect
- Turn ON/OF a gang of devices with one tap
- Control can by shared to another mobile phones
- Control electrical devices over Wi-Fi
- Supports max 8 enabled timing tasks
- EU standard
- Possibility to voice control with AMAZON ALEXA, Google Home(Stay tuned)
- Works with GOOGLE NEST

TECHNICAL DATA:
- Input voltage: 90-250VAC
- Output power: 400W
- Output current: 2A
- Frequency: 2.4Ghz
- Working temperature: 0°C-40°C (32°F-104°F).
- Humidity: 5%-90%RH, Non-condensing

Download EWeLink Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Input voltage	Output current	Output power	Colour	Packing/Box (pcs)	Product category	Catalogue number
90-250V AC	2A	400 W	white	1/1000	D	**195020**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

WIFI SMART PLUG-IN SOCKET GERMAN/UK TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



195021



195022

FUNCTION:
- Tourn ON/OF electrical devices from enywhere
- Real time control status
- Control is done from anywhere with IOS or Android mobile application
- Time setting function- turn ON/OF at specified time after setting
- Turn ON/OF a gang of devices with one tap
- Control can by shared to another mobile phones
- Control electrical devices over Wi-Fi
- Supports max 8 enabled timing tasks
- German / UK standard
- Possibility to voice control with AMAZON ALEXA, Google Home(Stay tuned)
- Works with GOOGLE NEST
- Security mechanism: WEP/WPA-PSK/WPA2-PSK/WPA/WPA2/WAPI/WPS2

TECHNICAL DATA:
- Input voltage: 90-250VAC
- Output power: 2000W
- Output current: 10A
- Frequency: 2.4Ghz
- Working temperature: 0°C-40°C (32°F-104°F).
- Humidity: 5%-90%RH, Non-condensing

Download EWeLink Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Socket Type	Input voltage	Output current	Output power	Packing/Box (pcs)	Product category	Catalogue number
German	90-250V AC	10A	2000 W	1/900	D	**195021**
UK	90-250V AC	10A	2000 W	1/200	D	**195022**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

WIFI SMART PLUG-IN SOCKET GERMAN TYPE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



FUNCTION:
- Tourn ON/OF electrical devices from enywhere
- Real time control status
- Control is done from anywhere with IOS or Android
- mobile application
- Time setting function- turn ON/OF at specified time
- after setting
- Turn ON/OF a gang of devices with one tap
- Control electrical devices over Wi-Fi
- Possibility to voice control with AMAZON ALEXA,
- Google assistant

TECHNICAL DATA:
Input voltage: 100-240VAC
Output power: 3500W
Output current: 10A
Frequency: 2.4Ghz
Working temperature: -10°C-50°C
Size (LxWxH)mm: 108x56x72

Download "Tuya smart" Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Socket Type	Input voltage	Output current	Output power	Packing/Box (pcs)	Product category	Catalogue number
German	100-240V AC	16A	3500 W	1/100	D	**195023**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

ONE AND TWO CHANNEL SMART SWITCH

3+0 standard +extended 3 YEAR TOTAL WARRANTY



195001

FUNCTION:
- One and Two channel wireless ON/OF switch
- Real-time ON/OF devices status provided to application from anywhere
- Control is done from anywhere with IOS or Android mobile application
- Time setting function- turn ON/OF at specified time after setting
- Control can by shared to another mobile phones
- Control electrical devices over Wi-Fi
- Supports max 8 enabled timing tasks
- Possibility to voice control with AMAZON ALEXA, Google Home (Stay tuned)
- Works with GOOGLE NEST

TECHNICAL DATA:
- Input voltage: 90-250VAC
- Output power: 2000W per channel
- Output current: 10A per channel
- Frequency: 2.4Ghz
- Working temperature: 0°C-40°C (32°F-104°F).
- Humidity: 5%-90%RH, Non-condensing
- Product size: L88×W38×H23mm

Download EWeLink Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu



195004

Input voltage	Output current	Output power	Colour	Packing/Box (pcs)	Product category	Catalogue number
90-250V AC	10A	2200 W	white	1/800	D	**195001**
90-250V AC	2x10A	2x2200 W	white	1/ 800	D	**195004**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20



WIRELESS SMART SWITCH WITH POWER CONSUMPTION MEASUREMENT

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Real-time ON/OF control and monitoring status from energy usage in a period via App (KWH calculator)
- Check energy usage daily and monthly via App
- Control is done from anywhere with IOS or Android mobile application
- This device works perfectly with electric fan, air conditioner, humidifier, smart fish tank, watering system, etc.
- Time setting function- turn ON/OF at specified time after setting
- Control can by shared to another mobile phones
- Control electrical devices over Wi-Fi
- Supports max 8 enabled timing tasks
- Possibility to voice control with AMAZON ALEXA, Google Home (Stay tuned)
- Works with GOOGLE NEST

TECHNICAL DATA:
Input voltage: 90-250VAC
Output power: 3500W
Output current: 16A
Frequency: 2.4Ghz
Working temperature: 0°C-40°C (32°F-104°F).
Humidity: 5%-90%RH, Non-condensing
Product size: L114×W52×H32mm

Download EWeLink Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Input voltage	Output current	Output power	Colour	Packing/Box (pcs)	Product category	Catalogue number
90-250V AC	16A	3500 W	white	1/800	D	**195003**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20



195002



195030



195031

TEMPERATURE AND HUMIDITY MONITORING WIFI WIRELESS SWITCH

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Real-time ON/OF control and monitoring status from temperature and humidity with sensor
- Can turn switch ON/OF electrical devices without monted
- sensor
- This device works perfectly with electric fan, air conditioner, humidifier,
- smart fish tank, watering system, etc
- Control is done from anywhere with IOS or Android mobile application
- Time setting function- turn ON/OF at specified time after setting
- Control can by shared- temperature and humidity to another mobile phones
- Supports max 8 enabled timing tasks
- Possibility to voice control with AMAZON ALEXA, Google Home(Stay tuned)
- Works with GOOGLE NEST

TECHNICAL DATA:
- Input voltage: 90-250VAC
- Output power: 3500W
- Output current: 16A
- Frequency: 2.4Ghz
- Working temperature: 0°C-40°C (32°F-104°F).
- Humidity: 5%-90%RH, Non-condensing
- Product size: L114×W52×H32mm

SENSORS:
- 195030 - High-precision temperature & humidity sensor, -40°C/+80°C, 0~99.9% RH
- 195031 - Waterproof temperature sensor, IP68, -55°C/+125°C

Input voltage	Output current	Output power	Colour	Packing/Box (pcs)	Product category	Catalogue number
90-250V AC	16A	3500 W	white	1/800	D	**195002**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20



195006

SMART WIFI FOUR CHANNEL SWITCH

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Real-time ON/OF switching electrical devices from anywhere
- This device is good for industrial control
- Three modes to work- Switch among interlock/self-locking/inching modes
- Posibility to turn on devices for 0,25-4 s
- Control each channel separately
- Control is done from anywhere with IOS or Android mobile application
- Time setting function- turn ON/OF at specified time after setting
- Control can by shared to another mobile phones
- Control electrical devices over Wi-Fi
- Supports max 8 enabled timing tasks
- Possibility to voice control with AMAZON ALEXA, Google Home(Stay tuned)
- Works with GOOGLE NEST

TECHNICAL DATA:
- Input voltage: 90-250VAC & 5-24VDC
- Output power: 4x2200W
- Output current: 4x10A
- Frequency: 2.4Ghz
- Working temperature: 0°C-40°C (32°F-104°F).
- Humidity: 5%-90%RH, Non-condensing
- Product size: L145×W90
- Mounting: DIN rail

Download EWeLink Application from Android market or Apple store.

Full info for the products, instructions, can be found at www.elmarkholding.eu

Input voltage	Output current	Output power	Packing/Box (pcs)	Product category	Catalogue number
90-250V AC / 5-24V DC	4x10A	4x2200 W	1/ 350	D	**195006**

IP20

REMOTE CONTROL SWITCHES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

DESCRIPTION:
The remote devices for lighting control work through sending a frequent signal from the key to the receiver, which commands the connected to it lighting bodies. The installation of the key can be done in a standard round bracket as the advantage of this product is that there is no additional requirement for wiring from it towards the receiver. Thanks to this the product is widely used in premises with build in installations where there is no ability for adding the additional cable layouts and expenses for their building are reserved. The connection between the key and the receiver is through a frequent signal in the range -315Mhz – 433.92 Mhz.

TECHNICAL DATA:
- Battery: 12V 23A
- Input voltage: 220- 230 VAC
- Cordless control of lighting fixtures
- Frequency: 315Mhz–433.92 Mhz



Description	Operating distance in open air (m)	Output power (per way) ESL/ LED lamp	Incandescent lamp	Packing/Box (pcs)	Product category	Catalogue number
One way output power	50	200W	600W	1/60	D	**99101**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Description	Operating distance in open air (m)	Output power (per way) ESL/ LED lamp	Incandescent lamp	Packing/Box (pcs)	Product category	Catalogue number
Two ways output power	50	200W	600W	1/60	D	**99102**



Description	Operating distance in open air (m)	Output power (per way) ESL/ LED lamp	Incandescent lamp	Packing/Box (pcs)	Product category	Catalogue number
Three way output power	50	200W	600W	1/60	D	**99103**





Description	Operating distance in open air (m)	Output power (per way) ESL/ LED lamp	Incandescent lamp	Packing/Box (pcs)	Product category	Catalogue number
Two ways output power- 2xE27	50	150W	400W	1/60	D	**99104**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

IP20

4 CHANNEL DIGITAL VIDEO RECORDERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



TECHNICAL DATA:

- Commpresion format: H.265
- Video system: NTSC/PAL
- Operation system: Linux- embedded
- Analog video-input /output: 4CH inputs / VGA and HDMI output
- IP Video Input: 2ch (only IP up to 6ch)
- Composite video input: up to 6ch (Analog video + IP video)
- Audio input /output: 1CH input /1CH output(RCA)
- Display resolution: Analog :1080N/720P/960H, IP:1080P/720P
- Display feature: single/Quad/S.E.Q.
- Record resolution: Analog :1080N/720P/960H, IP:1080P/720P
- Maximum input bandwidth: 8Mbps~16Mbps (default is 8Mbps, decrease one Analog channel can increase 4Mbps)
- Maximum output bandwidth: 16Mbps
- Maximum decode performance: 1080N:140fps
- Recording mode: Continuous/Manual/Motion detect
- Network type: Lan, DHCP, and DDNS
- HDD interface: 1SATA HDD, up to 6TB
- Multiplex operation: live display, record, playback, backup and network
- USB: 2xUSB(for mouse and backup/upgrade)
- PTZ control: yes (RS485)
- Mobile surveillance: Support Mobile Phones based on iPhone and Android operation system
- VGA/HDMI: 1024*768,1280*1024,1440*900,1920*1080
- Power supply: DC 12V/2A
- Dimension(WxDxH): 300x227x53mm
- Working temperature: -10°C~+55°C
- Working humidity: 10%~90%

Model	Channel	Input voltage	Packing/Box (pcs)	Product category	Catalogue number
EL-4004	4	12V DC	1	D	**195060**

IP20

8 CHANNEL DIGITAL VIDEO RECORDERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



TECHNICAL DATA:

- Commpresion format: H.265
- Video system: NTSC/PAL
- Operation system: Linux- embedded
- Analog video-input /output: 8CH inputs / VGA and HDMI output
- IP Video Input: 4ch (only IP up to 12ch)
- Composite video input: up to 12ch (Analog video + IP video)
- Audio input /output: 1CH input /1CH output(RCA)
- Display resolution: Analog :1080N/720P/960H, IP:1080P/720P
- Display feature: 1/4/6/8/9/10/13/14S.E.Q.
- Record resolution: Analog :1080N/720P/960H, IP:1080P/720P
- Maximum input bandwidth: 16Mbps~32Mbps (default is 8Mbps, decrease one Analog channel can increase 4Mbps)
- Maximum output bandwidth: 32Mbps
- Maximum decode performance: 1080N:120fps
- Recording mode: Continuous/Manual/Motion detect
- Network type: Lan, DHCP, and DDNS
- HDD interface: 1SATA HDD, up to 6TB
- Multiplex operation: live display, record, playback, backup and network
- USB: 2xUSB(for mouse and backup/upgrade)
- PTZ control: yes (RS485)
- Mobile surveillance: Support Mobile Phones based on iPhone and Android operation system
- VGA/HDMI: 1024*768,1280*1024,1440*900,1920*1080
- Power supply: DC 12V/2A
- Dimension(WxDxH): 300x227x53mm
- Working temperature: -10°C~+55°C
- Working humidity: 10%~90%

Model	Channel	Input voltage	Packing/Box (pcs)	Product category	Catalogue number
EL-4008	8	12V DC	1	D	**195061**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

IP66



HD 2MP BULLET CAMERA IP66

3+0 standard +extended 3 YEAR TOTAL WARRANTY

CAMERA TECHNICAL DATA:
- IR Distance: up to 20m
- Image Sensor: 1/2.9" progressive CMOS
- Signal system: PAL/NTSC
- Frame Rate: AHD/TVI/CVI: P/25fps N/30fps/ CVBS: 960H
- Resolution: 2MP 1920(H)×1080(V)
- Lens: 3.6mm
- Day & Night: IR cut filter: 850nm
- Synchronization: internal
- Dwdr: support
- Communication: Up the coax, protocol

MENU:
- AGC: yes
- Day/Night Mode: EXT/auto/color/black and white)
- White balance: auto/manual
- BLC: yes
- S/N ratio: 40dB
- OSD: support

INTERFACE:
- Video Output: 1-channel BNC video output
- Swaitch Button: AHD/TVI/CVI/CVBS

Model	Input voltage	Packing/Box (pcs)	Product category	Catalogue number
EL-2232	12V DC	1	D	**195054**

IP66



HD 2MP DOME CAMERA IP66

3+0 standard +extended 3 YEAR TOTAL WARRANTY

CAMERA TECHNICAL DATA:
IR Distance: up to 15m
Image Sensor: 1/2.9" progressive CMOS
Signal system: PAL/NTSC
Frame Rate: AHD/TVI/CVI: P/25fps N/30fps/ CVBS: 960H
Resolution: 2MP 1920(H)×1080(V)
Lens: 3.6mm
Day & Night: IR cut filter: 850nm
Synchronization: internal
Dwdr: support
Communication: Up the coax, protocol

MENU:
- AGC: yes
- Day/Night Mode: EXT/auto/color/black and white)
- White balance: auto/manual
- BLC: yes
- S/N ratio: 40dB
- OSD: support

INTERFACE:
- Video Output: 1-channel BNC video output
- Swaitch Button: AHD/TVI/CVI/CVBS

Model	Input voltage	Packing/Box (pcs)	Product category	Catalogue number
EL-328	12V DC	1	D	**195055**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

DVR AND CAMERA ACCESSORIES - CABLE SPLITTERS



1 to 4 or 1 to 8 power splitter power cable (power splitter connection)
Plug and play ready only for camera with DC power
For adapting power supply 12V2A

Description	Power source type	Packing/Box (pcs)	Product category	Catalogue number
1-4 cable splitter	DC	1	D	**195062**
1-8 cable splitter	DC	1	D	**195063**

DVR AND CAMERA ACCESSORIES- POWER ADAPTOR



High quality supply for DVR cameras with over current protection, over voltage protection, overload protection and short-circuit protection

Description	Input Voltage	Output Voltage	Current	Packing/Box (pcs)	Product category	Catalogue number
Power adaptor	100-240V AC	12V DC	2A	1	D	**195065**

DVR AND CAMERA ACCESSORIES- BNC CABLE



BNC video and power security camera cable. Suitable just for camera with DC power and supply DC power for security cameras
Plug and play connectors on both ends
It is used for CCTV cameras, DVRs, audio video systems.Compatible with all CCTV surveillance DVR camera system

Description	Length (m)	Packing/Box (pcs)	Product category	Catalogue number
BNC cable	18.29	1	D	**195064**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP66



4 CHANNEL WI-FI NETWORK VIDEO RECORDERS + 4 CAMERA, SET

3+0 standard +extended 3 YEAR TOTAL WARRANTY

NVR TECHNICAL DATA::
- Commpresion format: H.265+
- Operation system: Linux- embedded
- Video-input: 4*1080P
- Audio compression: G.711A
- Display resolution: Max 1080P
- Record resolution: Analog : 1080P
- Access bandwidth: 24Mbps
- Forwarding bandwidth: 24Mbps
- Maximum decode performance: 4x1080P
- Recording mode: Manual>Alarm>Dynamic Detection>Timing
- Network interface: 1*RJ45 10M/100M Adaptive Ethernet port+4ch WIFI
- HDD interface: 1SATA, up to 8TB for each disk- not included
- Record storage: live display, record, playback, backup and network
- USB: 2xUSB
- Mobile surveillance: Support Mobile Phones based on iPhone and Android operation system

CAMERA TECHNICAL DATA:
- IR Distance: 20-30m
- Sensor: progressive scan
- Low illumination: Color: 0.1 Lux; B/W: 0.01 Lux
- Effective pixel: HD 1080P
- Video compression: H.265+
- Lens: HD 3.6mm
- Day & Night: IR cut filter with auto switch
- Power supply: DC12V 1A
- Consumption: max 6W
- IP66

Model	Channel	Camera Included	Packing/Box (pcs)	Product category	Catalogue number
EL-4004N	4	4	1	D	**195069**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20



WI-FI CEILING SMART CAMERA

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Control is done from anywhere with IOS or Android mobil application
- Diferent view settings
- Support TF recording & Cloud storage
- Two-way voice communication
- Motion detection voice alarm & save alarm video
- Detailed alarm sector setting
- Sending images
- Night vision

TECHNICAL DATA:
- Input voltage: 100-240VAC
- Output voltage: 5V
- Cover range: 50m
- Wiev angle: 360°
- Effective pixel: HD 1080P

Download V380 pro Application from Android market or Apple store.

- Full info for the products, instructions, can be found at www.elmarkholding.eu

Type	Pixels	Cover range	Packing/Box (pcs)	Product category	Catalogue number
ceiling camera 200	1080	50m²	1	D	**195052**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20



WI-FI SMART CAMERA

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Control is done from anywhere with IOS or Android mobil application
- Support TF recording & Cloud storage
- Two-way voice communication
- Motion detection alarm
- Detailed alarm sector setting
- Sending images. Night vision

TECHNICAL DATA:
- Input voltage: 100-240VAC
- Output voltage: 5V, 1A
- Speaker: 8Ω 1W
- Field of view: H.86° (355°)/V.64°(90°)
- Resolution: 1280×720(1.0MP)
- Wireless Frequency: 2.4GHz~2.4835 GHz

Type	Resolution	Packing/Box (pcs)	Product category	Catalogue number
EL-2019Y	1280×720(1.0MP)	1	D	**195067**

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20



WI-FI SMART CAMERA

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Control is done from anywhere with IOS or Android mobil application
- Support TF recording & Cloud storage
- Two-way voice communication
- Motion detection alarm
- High quality videos and Night vision
- Sending images

TECHNICAL DATA:
- Input voltage: 100-240VAC
- Output voltage: 5V, 2A
- Speaker: 8Ω 1W
- Field of view: H.86° (355°)/V.64°(90°)
- Resolution: 1920×1080(2.0MP)
- Wireless Frequency: 2.4GHz~2.4835 GHz

Type	Resolution	Packing/Box (pcs)	Product category	Catalogue number
EL-2017G	1920×1080(2.0MP)	1	D	**195068**

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP66



WI-FI OUTDOOR SMART CAMERA IP66

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Control is done from anywhere with IOS or Android mobile application
- Support TF recording & Cloud storage
- Two-way voice communication
- Motion detection alarm
- High quality videos and Night vision
- Sending images

TECHNICAL DATA:
- Input voltage: 100-240VAC
- Output voltage: 5V, 1A
- Speaker: Built-in 18 euro 1W speaker
- Field of view: H.86° (355°)/V.64°(90°)
- Resolution: 1920x1080 (2MP)
- Wireless Frequency: 2.4GHz~2.4835 GHz

Model	Resolution	Packing/Box (pcs)	Product category	Catalogue number
EL-2019Q	1920x1080 (2MP)	1	D	**195070**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20

WIFI IP CAMERA WITH ALARM SYSTEM - KIT

3+0 standard +extended 3 YEAR TOTAL WARRANTY






FUNCTION:

- Magnetic Sensor: Under arm mode, when the door or window installed with magnetic sensor is opened, tne magnetic sensor will send alarm signal to the main unit, the main unit will take video and send message to the smartphone.
- IR Sensor: When someone is detected by the infrared sensor, it will send alarm signal to the main unit. Under arm mode, the main unit will take video and send message to the smartphone.
- SOS Panic Button: When someone press the SOS panic button, it will send SOS signal to the main unit. Under arm mode, the main unit will send alarm signal and video to the users smartphone. Suitable for the care of children, the elderly and disabled people.
- Main Unit: IP camera with built-in Wi-Fi module. Receive wireless alarm signal from other security sensors. Under arm mode, after received signal, the main unit will take video and send message to the smartphone.
- Arm and disarm on smartphone
- View IP camera protected area from anywhere anytime.
- In arm mode IP camera will take video and send message when intruder enters the front door and trigger the IR sensor, or break open the door/window contact, or panic button was pressed
- Night Vision: Supported by IP Camera
- Intercom: Two-way voice communication

TECHNICAL DATA:

- Working Distance: 100m (open area)
- IP Sensor Angle: Adjustable from 90° to 110°
- IP Canmera Lens: HD 1080P

Model	Description	Product category	Catalogue number
EL-WFAK1	WIFI IP camera with sensors and panic button- KIT	D	**195091**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

WIFI INFRARED ALARM SENSOR

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
IR Sensor: When someone is detected by the infrared sensor, it will send alarm signal to the smartphone via APP.

TECHNICAL DATA:
- Working Distance: 30m (open area)
- IP Sensor Angle: 110°max 7m



Model	Description	Product category	Catalogue number
EL-AK3	WIFI IP Infrared alarm sensor	D	**195090**

GET IT ON Google Play | Download on the App Store
Smartphone Control | WiFi
IP20

RECHARGEABLE WIFI SMART VIDEO DOOR BELL WITH DOOR CHIME

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Intercom: Two-way voice communication and local intercom with 3 mobile users
- Monitoring: See and speak to visitors via the APP from anywhere
- Recording: TF card for storing the video recorder. Photo taking

OUTDOOR UNITS TECHNICAL DATA:
- Camera angle: 136°
- Battery: Li- 4000mA
- Night Vision: Supported
- Distance: 1-3m for night vision



Model	Description	Product category	Catalogue number
EL-RWF1DP1DC	Rechargeable WIFI video doorbell switch with door chime	D	**195074**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20

7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Monitoring: See and speak to visitors via the APP from anywhere
- Unlock door: when someone pressess the button on the outdoor unit, the smartphone and the indoor unit will ring together. The local remote video intercom will be pushed to your smartphone APP, you can also unlock the door strike remotely by APP, or unlock by the door monitor unit. The door strike needs extra power supply.
- Recording: User can take photos or record video via APP
- Intercom: Two-way voice communication

OUTDOOR UNITS TECHNICAL DATA:
- Working Voltage: 12VDC
- Working Current: ≤ 500mA
- IP Rating: IP44
- Body material: Metal: anti-oxidation and anti-vandal outdoor unit
- Night Vision: Supported

INDOOR MONITORS TECHNICAL DATA:
- Connecting wire: 4- core
- Ring tone: 16 melody
- Working Voltage: 12VDC
- Resolution: 800x400
- Working Current: ≤ 1100mA
- Talking time: 120s±10%
- Monitoring time: 40s±10%



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, SINGLE WAY- ONE BUTTON ONE MONITOR

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF1DP	Single way smart intercom system	1	12VDC	7 inch	D	**195071**



7 INCH ADDITIONAL MONITOR FOR SINGLE WAY DOORBELL SYSTEM

Additional monitor is suitable only for single way intercom system. When a guest or visitor presses the doorbell button on the camera unit, the homeowner can use a few monitors to see who is requesting entry, speak with the caller, take a photo and unlock the door.

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-1BM	Additional monitor for EL-WF1DP		12VDC	7 inch	D	**195077**



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, DOUBLE WAY- ONE UNIT WITH TWO BUTTON AND TWO MONITORS

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF2DP	Double way smart intercom system	2	12VDC	7 inch	D	**195072**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, SINGLE WAY- ONE BUTTON AND TWO MONITORS

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF1DP+1	Single way intercom with 2 monitors	2	12VDC	7 inch	D	**195080**



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, SINGLE WAY- ONE BUTTON AND THREE MONITORS

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF1DP+2	Single way intercom with 3 monitors	3	12VDC	7 inch	D	**195076**



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, SINGLE WAY- ONE BUTTON AND FOUR MONITORS

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF1DP+3	Single way intercom with 4 monitors	4	12VDC	7 inch	D	**195078**



7 INCH WIFI SMART VIDEO INTERCOM DOORBELL SYSTEMS, SINGLE WAY- ONE BUTTON AND FIVE MONITORS

Model	Description	Monitors QTY	Voltage	Screen	Product category	Catalogue number
EL-WF1DP+4	Single way intercom with 5 monitors	5	12VDC	7 inch	D	**195079**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

GET IT ON Google Play | Download on the App Store | Smartphone Control | WiFi

IP20



WIFI SMART VIDEO DOOR BELL WITH TWO DOOR CHIMES

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Intercom: Two-way voice communication
- Monitoring: See and speak to visitors via the APP from anywhere
- Security: Built-in motion sensor. Once detected the human body, it can send an photo to the owner's e mail box, and send an alarm signal to the smartephone!

OUTDOOR UNITS TECHNICAL DATA:
- Camera: Reinforced CMOS
- Working Voltage: 12VDC
- Working Current: ≤ 500mA
- IP Rating: IP55
- Body material: Metal: anti-oxidation and anti-vandal outdoor unit
- Night Vision: Supported

Model	Description	Voltage	Product category	Catalogue number
EL-WF2DP2DC	WIFI video doorbell switch with 2 extra door chimes	12VDC	D	**195073**



DOORPHONE KIT

3+0 standard +extended 3 YEAR TOTAL WARRANTY

FUNCTION:
- Intercom: Two-way voice communication
- Unlock door strike

OUTDOOR UNITS TECHNICAL DATA:
- Working Voltage: 12VDC
- Working Current: ≤ 500mA
- IP Rating: IP44
- Body Material: Metal: anti-oxidation and anti-vandal outdoor unit
- Night Vision: Supported
- Two-wire connection

Model	Description	Product category	Catalogue number
EL-1DP1IU	Doorphone kit	D	**195075**

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5020



5016



5019

WIRELESS DOORBELLS WITH LED FLASH LIGHT

Catalogue number	Product category	QTY Transmiter/Reciever	Voltage (V)	Sound level db(A)	Volume levels	Music	Distance (m)	Packing/Box (pcs)
5020	D	One/One	220	65-85	Low/Middle/High	36 melodies	80	1/60
5016	D	One/One	220	65-85	Low/Middle/High	36 melodies	80	1/60
5019	D	One/One	220	65-85	Low/Middle/High	36 melodies	80	1/60

Transmitter battery: 12V A23

The item is without a coded frequency! Within a montage at a distance less than 80 meters and of two or more analogue doorbells, their work can be influenced by or disturbances to happen.

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5015



5018

WIRELESS DOORBELLS WITH LED FLASH LIGHT

Catalogue number	Product category	QTY Transmiter/Reciever	Voltage (V)	Sound level db(A)	Volume levels	Music	Distance (m)	Packing/Box (pcs)
5015	D	One/Two	220	65-85	Low/Middle/High	36 melodies	80	1/60
5018	D	One/Two	220	65-85	Low/Middle/High	36 melodies	80	1/60

Transmitter battery: 12V A23

The item is without a coded frequency! Within a montage at a distance less than 80 meters and of two or more analogue doorbells, their work can be influenced by or disturbances to happen.

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5023/1
5024



5023/2

WIRELESS DOORBELLS WITH LED FLASH LIGHT

Catalogue number	Product category	QTY Transmiter/ Reciever	Transmiter Voltage (V)	Receiver Voltage (V)	Sound level db(A)	Volume levels	Music	Distance (m)	Packing/Box (pcs)
5023/1	D	One/One	12V 23A Battery	DC 3x1.5V AAA Battery	70-85	Low/Middle/High	36 melodies	80	1/60
5023/2	D	One/Two	12V 23A Battery	DC 3x1.5V AAA Battery	70-85	Low/Middle/High	36 melodies	80	1/60
5024	D	One/One	12V 23A Battery	220V AC	70-85	Low/Middle/High	36 melodies	80	1/60

The item is without a coded frequency! Within a montage at a distance less than 80 meters and of two or more analogue doorbells, their work can be influenced by or disturbances to happen.

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5025BL



5025WH

DIGITAL WIRELESS DOORBELLS WITH LED FLASH LIGHT

Catalogue number	Product category	QTY Transmiter/ Reciever	Transmiter Voltage (V)	Receiver Voltage (V)	Sound level db(A)	Volume levels	Music	Distance (m)	Packing/Box (pcs)
5025BL	D	One/One	12V 23A Battery	DC 2x1.5V AA Battery	70-85	Low/Middle/High	32 melodies	120	1/60
5025WH	D	One/One	12V 23A Battery	DC 2x1.5V AA Battery	70-85	Low/Middle/High	32 melodies	120	1/60

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5021



5022

INFRARED INDUCTION DOORBELLS

Catalogue number	Product category	Description	Voltage (V)	Sound level db(A)	Detection angle	Sensor detection distance (m)	Music	Packing/Box (pcs)
5021	D	Doorbell with sensor	4,5V DC	85	100°	up to 7	36 melodies	1/60
5022	D	Doorbell & sensor	4,5V DC	85	100°	up to 7	36 melodies	1/60

5021 - This is an electric appliance with inserted motion sensor.It is used for advisement for guests,visitors or customers.When there is a motion ,it starts / there is a sound which advises that there is a visitor/customer/ in the premisses.Working area - up to 7 meters

5022 - This is a complex product that combines two appliances.It is used for advisor for guests,visitors or customers.The sensor is installed to the place that we would like to know there is a motion/ visitor,this usually is the shop entrance,offices,warehouses and etc.The bell can be installed at a distance up to 130 m from the sensor which we will receive the signal for motion /visitor.

Working frequency: 315MHz/433.92 MHz

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5012
5220



5001

BELL / BELL TRANSFORMER

Catalogue number	Product category	Type	In (V)	Un (V)	Conssumption (VA)	Sound level db(A)	Packing/Box (pcs)
5012	D	Bell	230	8-12	3.6	70	1 /12 / 240
5220	D	Bell	230	230	5	70	1 /12 / 240
5001	D	Bell transformer	230	8/12/24	8	-	1 / 80

Mounting: on DIN-rail |

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SWITCHES AND SOCKETS


White/White


Champagne metallic/White


Orenge/White


Yellow/White


Red/White


Green/White


Blue/White


Orange metallic/White


Bordo metallic/
White


Grey/White


2 gangs Champagne metallic/White


3 gangs Red/White


4 gangs Bordo metallic/White


5 gangs Grey/White

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


190011
190021
190031


190011L
190021L


190041
190051


190191


190181


190183


190211s


190371s


190211D


190211F


190043


190062


190060


190066
190045


190064



IP20

FUNCTIONAL PART PLUS PANEL "CITY" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/ Box (pcs)
190011	C	1 button 1 way switch	White	10	10/100
190011L	C	1 button 1 way switch with light	White	10	10/100
190021	C	1 button 2 way switch	White	10	10/100
190021L	C	1 button 2 way switch with light	White	10	10/100
190031	C	1 button cross switch	White	10	10/100
190041	C	2 buttons 1 way switch	White	10	10/100
190051	C	2 buttons 2 way switch	White	10	10/100
190064	C	3 buttons 1 way switch	White	10	10/100
190191	C	Dimmer switch LED 3-300W	White	-	10/60
190181	C	Door bell switch	White	-	10/100
190183	C	Push light button	White	-	10/100
190211S	C	German screw type socket	White	16	10/100
190211F	C	French screw type socket	White	16	10/100
190211D	C	German screw type socket IP44	White	16	10/100
190371S	C	German screw type socket (double)	White	16	10/60
190060	C	1 Gang cable outlet without cable terminal	White		10/100
190062	C	German screw type socket 2xUSB port	White	16	10/60
190043	C	Key card power switch *	White	10	10/60
190045	C	1-2 mode curtain control switch	White	10	10/60
190066	C	Interlock shutter switch	White	10	10/100

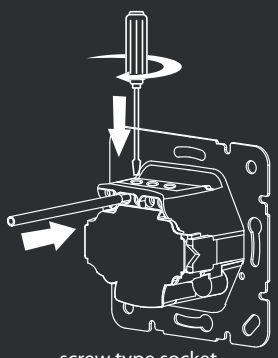
screw type socket


screwless type socket

**is not compatible with another decorative frame or frame designed for more than one functional part*

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


190261


190281
190034


190711
190731


190251


190033


190791


190721


190751


190747


190771


190090


190171


190741


190091
190092

IP20

FUNCTIONAL PART PLUS PANEL "CITY" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/ Box (pcs)
190261	C	Phone socket RJ11	White	-	10/100
190281	C	Computer socket RJ45 CAT5E	White	-	10/100
190034	C	Computer socket RJ45 CAT6	White	-	10/100
190731	C	Phone socket RJ11 + computer socket RJ45	White	-	10/100
190711	C	Computer socket RJ45 - double	White	-	10/100
190251	C	TV socket	White	-	10/100
190033	C	TV+FM+SAT	White	-	10/100
190791	C	1 button double pole switch	White	20	10/100
190721	C	Audio socket- double	White	10	10/100
190751	C	USB socket- double	White	2	10/100
190747	C	HDMI socket	White		10/100
190771	C	Motion sensor 200W	White		10/100
190171	C	Doorbell switch with light name card	White	10	10/100
190741	C	1 Gang blank Plate	White		10/100
190090	C	Silicone cover IP44	White	-	100
190091	C	1 Gang Surface mounting box	White	-	126
190092	C	2 Gang Surface mounting box	White	-	66

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


190012
190022
190032


190012L


190042
190052


190192


190182


190184


190212s


190372s


190212D


190212F


190044


190065


190069


190067

IP20

FUNCTIONAL PART PLUS PANEL "CITY" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
190012	C	1 button 1 way switch	Champagne metallic	10	10/100
190012L	C	1 button 1 way switch with light	Champagne metallic	10	10/100
190022	C	1 button 2 way switch	Champagne metallic	10	10/100
190022L	C	1 button 2 way switch with light	Champagne metallic	10	10/100
190032	C	1 button cross switch	Champagne metallic	10	10/100
190069	C	1 button double pole switch	Champagne metallic	20	10/100
190042	C	2 buttons 1 way switch	Champagne metallic	10	10/100
190052	C	2 buttons 2 way switch	Champagne metallic	10	10/100
190065	C	3 buttons 1 way switch	Champagne metallic	10	10/100
190192	C	Dimmer switch LED 3-300W	Champagne metallic	-	10/60
190182	C	Door bell switch	Champagne metallic	-	10/100
190184	C	Push light button	Champagne metallic	-	10/100
190212S	C	German screw type socket	Champagne metallic	16	10/100
190212F	C	French screw type socket	Champagne metallic	16	10/100
190372S	C	German screw type socket (double)	Champagne metallic	16	10/60
190212D	C	German screw type socket IP44	Champagne metallic	16	10/100
190044	C	Key card power switch *	Champagne metallic	10	10/60
190046	C	Curtain control switch	Champagne metallic	10	10/60
190067	C	Interlock shutter switch	Champagne metallic	10	10/100

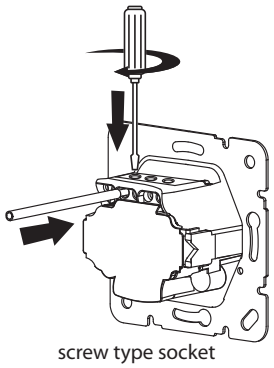
screw type socket


screwless type socket

**** is not compatible with another decorative frame or frame designed for more than one functional part***

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


190262


190282
190035


190732
190712


190252


190034F


190722


190742


190752


190772


190782


190792


190748


190172

IP20

FUNCTIONAL PART PLUS PANEL "CITY" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
190262	C	Phone socket RJ11	Champagne metallic	-	10/100
190282	C	Computer socket RJ45 CAT5E	Champagne metallic	-	10/100
190035	C	Computer socket RJ45 CAT6	Champagne metallic	-	10/100
190732	C	Phone socket RJ11 + computer socket RJ45	Champagne metallic	-	10/100
190712	C	Computer socket RJ45 - double	Champagne metallic	-	10/100
190252	C	TV socket	Champagne metallic	-	10/100
190034F	C	TV+FM+SAT	Champagne metallic	-	10/100
190722	C	1 button 1 way switch	Champagne metallic	20	10/100
190742	C	Audio socket- double	Champagne metallic	10	10/100
190752	C	USB socket- double	Champagne metallic	2	10/100
190772	C	HDMI socket	Champagne metallic		10/100
190782	C	Motion sensor 200W	Champagne metallic		10/100
190792	F	Thermostat*	Champagne metallic	16	10/100
190748	C	Doorbell switch with light name card	Champagne metallic	10	10/100
190172	C	1 Gang blank Plate	Champagne metallic		10/100

*Until Supply Last

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

1 gang

2 gangs

3 gangs

1 GANG PANEL "CITY" SERIES

Catalogue number	Product category	Type	Colour
190441	C	1 gang	White
190442	C	1 gang	Champagne metallic
190443	C	1 gang	Orange
190444	C	1 gang	Yellow
190445	C	1 gang	Green
190446	C	1 gang	Red
190447	C	1 gang	Blue
190448	C	1 gang	Orange metallic
190449	C	1 gang	Bordo metallic
190450	C	1 gang	Grey

2 gangs PANELS "CITY" SERIES

Catalogue number	Product category	Type	Colour
190551	C	2 gangs	White
190552	C	2 gangs	Champagne metallic
190553	C	2 gangs	Orange
190554	C	2 gangs	Yellow
190555	C	2 gangs	Green
190556	C	2 gangs	Red
190557	C	2 gangs	Blue
190558	C	2 gangs	Orange metallic
190559	C	2 gangs	Bordo metallic
190560	C	2 gangs	Grey

3 gangs PANELS "CITY" SERIES

Catalogue number	Product category	Type	Colour
190661	C	3 gangs	White
190662	C	3 gangs	Champagne metallic
190663	C	3 gangs	Orange
190664	C	3 gangs	Yellow
190665	C	3 gangs	Green
190666	C	3 gangs	Red
190667	C	3 gangs	Blue
190668	C	3 gangs	Orange metallic
190669	C	3 gangs	Bordo metallic
190670	C	3 gangs	Grey

Packing/Box (pcs): 1 gang 1/200 | 2 gangs 1/100 | 3 gangs 1/150

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

4 gangs

5 gangs

4 gangs PANELS “CITY” SERIES

Catalogue number	Product category	Type	Colour
190361	C	4 gangs	White
190362	C	4 gangs	Champagne metallic
190363	C	4 gangs	Orange
190364	C	4 gangs	Yellow
190365	C	4 gangs	Green
190366	C	4 gangs	Red
190367	C	4 gangs	Blue
190368	C	4 gangs	Orange metallic
190369	C	4 gangs	Bordo metallic
190370	C	4 gangs	Grey

5 gangs PANELS “CITY” SERIES

Catalogue number	Product category	Type	Colour
190601	C	5 gangs	White
190602	C	5 gangs	Champagne metallic
190603	C	5 gangs	Orange
190604	C	5 gangs	Yellow
190605	C	5 gangs	Green
190606	C	5 gangs	Red
190607	C	5 gangs	Blue
190608	C	5 gangs	Orange metallic
190609	C	5 gangs	Bordo metallic
190610	C	5 gangs	Grey

Packing/Box (pcs): 4 gangs 1/100 | 5 gangs 1/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LECCE



White/White



Blue/White



Silver grey/White



Golden/White



Graphite mat/White



Graphite/White



Champagne/White



Green/White



Onix/White



Cherry-tree/White

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



sound dimmer



boiler switch with neon*



LED dimmer 200VA, 3 mod



1 button 1 way switch with light



1 button 1 way / 2 way / cross switch / push light



1 button 2 pole switch 16A



curtain Switch



dimmer 250W



door bell switch

IP20

FUNCTIONAL PART "LECCE" SERIES

Catalogue number	Product category	Type	Colour	Size	Rated current In (A)	Packing/Box (pcs)
26016	C	sound dimmer	White	2 mod		1/120
26053	C	LED dimmer 200VA	White	3 mod	-	
26024	C	boiler switch with neon*	White	3 mod	45	1/60
26001	C	1 button 1 way switch	White	1 mod	16	1/300
26003	C	1 button 2 way switch	White	1 mod	16	1/300
26026	C	1 button 2 pole switch	White	1 mod	16	
26004	C	1 button cross switch	White	1 mod	10	1/240
26002	C	1 button 1 way switch with light	White	1 mod	16	1/300
26006	C	curtain Switch	White	1 mod	6	1/240
26055	C	dimmer 250W	White	1 mod	-	1/120
26005	C	door bell switch	White	1 mod	10	1/300
26027	C	push light button	White	1 mod	10	

* the product comes without decorative tripple panel

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



blank cover



computer socket



phone socket



TV socket



Satellite socket



button without functional part



key power switch

IP20

FUNCTIONAL PART "LECCE" SERIES

Catalogue number	Product category	Type	Colour	Size	Rated current In (A)	Packing/Box (pcs)
26017	C	blank cover	White	1 mod		1/600
26013	C	computer socket RJ45 CAT5E	White	1 mod		1/300
26013C	C	computer socket RJ45 CAT6	White	1 mod		1/300
26012	C	phone socket	White	1 mod		1/300
26010	C	TV socket	White	1 mod	-	1/300
26011	C	Satellite socket	White	1 mod	-	1/300
26023	C	button without functional part	White	3 mod		1/360
26025	C	key power switch	white	3 mod	30A	

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



german type socket



double pin socket



italian standard multi socket



door bell



2 port USB socket



universal socket



audio socket



italian type socket



HDMI socket

IP20

FUNCTIONAL PART "LECCE" SERIES

Catalogue number	Product category	Type	Colour	Size	Rated current In (A)	Packing/Box (pcs)
26008	C	german type socket	White	2 mod	16	1/140
26007SA	C	double pin socket	White	1 mod	16	1/300
26007	C	italian standard multi socket	White	1 mod	16	1/300
26015	C	door bell	White	2 mod		1/100
26014	C	2 port USB socket, Input: 90-240V Output: 5V 2A	White	1 mod		1/120
26009	C	universal socket	White	2 mod	13	1/120
26021	C	audio socket	White	1 mod		1/100
26020	C	italian type socket	White	2 mod	16	1/300
26022	C	HDMI socket	White	1 mod		1/300

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



box for suspended mounting
IP65 3 & 4 mod



mounting frames
6 mod



mounting frames
3x2 mod



mounting frames
1 mod / 3 mod



mounting frames
2 mod



mounting frames
4 mod



Console box for plasterboard
26636



Console box for brick and concrete
24203
71304
68206



Console box for plasterboard
24205
24206

INSTALLATION FRAMES "LECCE"

Catalogue number	Product category	Type	Size	Packing/Box (pcs)
26019	C	mounting frames	1 mod	1/110
26019	C	mounting frames	3 mod	1/110
26018	C	mounting frames	2 mod	1/110
26054	C	mounting frames	4 mod	1/150
26156	C	mounting frames	6 mod	1/240
26056	C	mounting frames	2x3 mod	1/240
2603	C	box for suspended mounting IP65	3 mod	
2604	C	box for suspended mounting IP65	4 mod	
24203	C	Console box for brick and concrete	triple	1/300
71304	C	Console box for brick and concrete	quadruple	1/200
68206	C	Console box for brick and concrete	sixfold	1/200
24205	C	Console box for plasterboard	triple	1/300
24206	C	Console box for plasterboard	quadruple	1/200
26636	C	Console for plasterboard	sixfold	1/160

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



1 gang

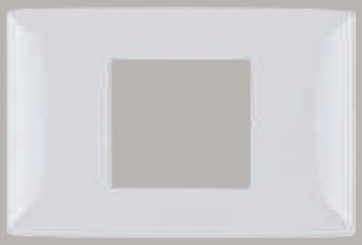

2 gangs



3 gangs

1 GANG PANEL "LECCE" SERIES

Catalogue number	Product category	Type	Colour
26100	C	1 gang	White
26101	C	1 gang	Blue
26102	C	1 gang	Silver grey
26103	C	1 gang	Golden
26104	C	1 gang	Graphite mat
26105	C	1 gang	Graphite
26106	C	1 gang	Champagne
26107	C	1 gang	Green
26108	C	1 gang	Onix
26109	C	1 gang	Cherry-tree

2 gangs PANELS "LECCE" SERIES

Catalogue number	Product category	Type	Colour
26200	C	2 gangs	White
26201	C	2 gangs	Blue
26202	C	2 gangs	Silver grey
26203	C	2 gangs	Golden
26204	C	2 gangs	Graphite mat
26205	C	2 gangs	Graphite
26206	C	2 gangs	Champagne
26207	C	2 gangs	Green
26208	C	2 gangs	Onix
26209	C	2 gangs	Cherry-tree

3 gangs PANELS "LECCE" SERIES

Catalogue number	Product category	Type	Colour
26300	C	3 gangs	White
26301	C	3 gangs	Blue
26302	C	3 gangs	Silver grey
26303	C	3 gangs	Golden
26304	C	3 gangs	Graphite mat
26305	C	3 gangs	Graphite
26306	C	3 gangs	Champagne
26307	C	3 gangs	Green
26308	C	3 gangs	Onix
26309	C	3 gangs	Cherry-tree

Packing/Box (pcs): 1 gang 1/180 | 2 gangs 1/180 | 3 gangs 1/180

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

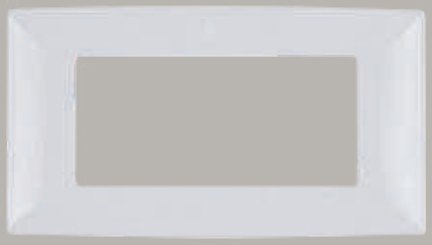

4 gangs



3x2 gangs



6 gangs

4 gangs PANELS "LECCE" SERIES

Catalogue number	Product category	Type	Colour
26400	C	4 gangs	White
26401	C	4 gangs	Blue
26402	C	4 gangs	Silver grey
26403	C	4 gangs	Golden
26404	C	4 gangs	Graphite mat
26405	C	4 gangs	Graphite
26406	C	4 gangs	Champagne
26407	C	4 gangs	Green
26408	C	4 gangs	Onix
26409	C	4 gangs	Cherry-tree

6 gangs PANELS "LECCE" SERIES

Catalogue number	Product category	Type	Colour
266001	C	6 gangs	White
26601	C	6 gangs	Blue
266021	C	6 gangs	Silver grey
26603	C	6 gangs	Golden
26604	C	6 gangs	Graphite mat
266051	C	6 gangs	Graphite
266061	C	6 gangs	Champagne
26607	C	6 gangs	Green
26608	C	6 gangs	Onix
26609	C	6 gangs	Cherry-tree

3x2 gangs PANELS "LECCE" SERIES

Catalogue number	Product category	Type	Colour
26600	C	6 gangs	White
26606	C	6 gangs	Champagne
26602	C	6 gangs	Silver grey
26605	C	6 gangs	Graphite

Packing/Box (pcs): 4 gangs 1/200 | 6 gangs 1/160 | 3x2 gangs 1/80

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RHYME



White metallic



Champagne metallic



Grey metallic



Graphite metallic



Coffee metallic

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11011
11021
11341



11041
11051



11721



11171A



11411



11191



11181



11181B



11181C

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11011	C	1 button 1 way switch	White metallic	10	10/100
11021	C	1 button 2 way switch	White metallic	10	10/100
11341	C	1 button cross switch	White metallic	10	10/100
11041	C	2 buttons 1 way switch	White metallic	10	10/100
11051	C	2 buttons 2 way switch	White metallic	10	10/100
11721	C	3 buttons 1 way switch	White metallic	10	10/100
11171A	C	curtain control switch	White metallic	-	10/100
11411	C	sensor switch	White metallic	-	10/100
11191	C	dimmer switch	White metallic	-	10/80
11181	C	door bell switch	White metallic	-	10/100
11181B	C	door bell switch with name card	White metallic	-	10/100
11181C	C	Push light switch	White metallic	10	10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11211



11371



11211C



11261



11741
11731



11281
112816E



11711



11251



11681



11331

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11211	C	German type socket	White metallic	16	10/100
11211C	C	German type socket with cover	White metallic	16	10/100
11371	C	German type socket (double)	White metallic	16	10/50
11261	C	Phone socket RJ11	White metallic		10/100
11741	C	Phone socket RJ11 - double	White metallic		10/100
11731	C	Phone socket RJ11 + computer socket RJ45	White metallic		10/100
11281	C	Computer socket (cat5e) RJ45	White metallic		10/100
112816E	C	Computer socket RJ45 (CAT6e)	White metallic		10/100
11711	C	Computer socket RJ45 - double	White metallic		10/100
11251	C	TV socket	White metallic		10/100
11681	C	TV socket+FM socket + SAT socket *	White metallic		10/100
11331	C	Key card power switch *	White metallic		10/100

is not compatible with another decorative frame or frame designed for more than one functional part

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11012
11022
11342



11042
11052



11722



11172A



11412



11192



11182



11182B



11182C

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11012	C	1 button 1 way switch	Champagne metallic	10	10/100
11022	C	1 button 2 way switch	Champagne metallic	10	10/100
11342	C	1 button cross switch	Champagne metallic	10	10/100
11042	C	2 buttons 1 way switch	Champagne metallic	10	10/100
11052	C	2 buttons 2 way switch	Champagne metallic	10	10/100
11722	C	3 buttons 1 way switch	Champagne metallic	10	10/100
11172A	C	curtain control switch	Champagne metallic	-	10/100
11412	C	sensor switch	Champagne metallic	-	10/100
11192	C	dimmer switch	Champagne metallic	-	10/100
11182	C	door bell switch	Champagne metallic	-	10/100
11182B	C	door bell switch with name card	Champagne metallic	-	10/100
11182C	C	Push light switch	Champagne metallic	10	10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11212



11372



11212C



11262



11742
11732



11282
112826E



11712



11252



11682



11332

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11212	C	German type socket	Champagne metallic	16	10/100
11212C	C	German type socket with cover	Champagne metallic	16	10/100
11372	C	German type socket (double)	Champagne metallic	16	10/50
11262	C	Phone socket RJ11	Champagne metallic		10/100
11742	C	Phone socket RJ11 - double	Champagne metallic		10/100
11732	C	Phone socket RJ11 + computer socket RJ45	Champagne metallic		10/100
11282	C	Computer socket (cat5e) RJ45	Champagne metallic		10/100
112826E	C	Computer socket RJ45 (CAT6e)	Champagne metallic		10/100
11712	C	Computer socket RJ45 - double	Champagne metallic		10/100
11252	C	TV socket	Champagne metallic		10/100
11682	C	TV socket+FM socket + SAT socket *	Champagne metallic		10/100
11332	C	Key card power switch *	Champagne metallic		10/100

**** is not compatible with another decorative frame or frame designed for more than one functional part***

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11014
11024
11344



11044
11054



11724



11174A



11414



11194



11184



11184B



11184C

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11014	C	1 button 1 way switch	Grey metallic	10	10/100
11024	C	1 button 2 way switch	Grey metallic	10	10/100
11344	C	1 button cross switch	Grey metallic	10	10/100
11044	C	2 buttons 1 way switch	Grey metallic	10	10/100
11054	C	2 buttons 2 way switch	Grey metallic	10	10/100
11724	C	3 buttons 1 way switch	Grey metallic	10	10/100
11174A	C	curtain control switch	Grey metallic	-	10/100
11414	C	sensor switch	Grey metallic	-	10/100
11194	C	dimmer switch	Grey metallic	-	10/100
11184	C	door bell switch	Grey metallic	-	10/100
11184B	C	door bell switch with name card	Grey metallic	-	10/100
11184C	C	Push light switch	Grey metallic	10	10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11214



11374



11214C



11264



11744
11734



11284
112846E



11714



11254



11684



11334

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11214	C	German type socket	Grey metallic	16	10/100
11214C	C	German type socket with cover	Grey metallic	16	10/100
11374	C	German type socket (double)	Grey metallic	16	10/50
11264	C	Phone socket RJ11	Grey metallic		10/100
11744	C	Phone socket RJ11 - double	Grey metallic		10/100
11734	C	Phone socket RJ11 + computer socket RJ45	Grey metallic		10/100
11284	C	Computer socket (cat5e) RJ45	Grey metallic		10/100
112846E	C	Computer socket RJ45 (CAT6e)	Grey metallic		10/100
11714	C	Computer socket RJ45 - double	Grey metallic		10/100
11254	C	TV socket	Grey metallic		10/100
11684	C	TV socket+FM socket + SAT socket *	Grey metallic		10/100
11334	C	Key card power switch *	Grey metallic		10/100

**** is not compatible with another decorative frame or frame designed for more than one functional part***

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11015
11025
11345



11045
11055



11725



11175A



11415



11195



11185



11185B



11185C

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11015	C	1 button 1 way switch	Graphite metallic	10	10/100
11025	C	1 button 2 way switch	Graphite metallic	10	10/100
11345	C	1 button cross switch	Graphite metallic	10	10/100
11045	C	2 buttons 1 way switch	Graphite metallic	10	10/100
11055	C	2 buttons 2 way switch	Graphite metallic	10	10/100
11725	C	3 buttons 1 way switch	Graphite metallic	10	10/100
11175A	C	curtain control switch	Graphite metallic	-	10/100
11415	C	sensor switch	Graphite metallic	-	10/100
11195	C	dimmer switch	Graphite metallic	-	10/100
11185	C	door bell switch	Graphite metallic	-	10/100
11185B	C	door bell switch with name card	Graphite metallic	-	10/100
11185C	C	Push light switch	Graphite metallic	10	10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11215



11375



11215C



11265



11745
11735



11285
112856E



11715



11255



11685



11335

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11215	C	German type socket	Graphite metallic	16	10/100
11215C	C	German type socket with cover	Graphite metallic	16	10/100
11375	C	German type socket (double)	Graphite metallic	16	10/50
11265	C	Phone socket RJ11	Graphite metallic		10/100
11745	C	Phone socket RJ11 - double	Graphite metallic		10/100
11735	C	Phone socket RJ11 + computer socket RJ45	Graphite metallic		10/100
11285	C	Computer socket (cat5e) RJ45	Graphite metallic		10/100
112856E	C	Computer socket RJ45 (CAT6e)	Graphite metallic		10/100
11715	C	Computer socket RJ45 - double	Graphite metallic		10/100
11255	C	TV socket	Graphite metallic		10/100
11685	C	TV socket+FM socket + SAT socket *	Graphite metallic		10/100
11335	C	Key card power switch *	Graphite metallic		10/100

** is not compatible with another decorative frame or frame designed for more than one functional part*
In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11016
11026
11346



11046
11056



11726



11176A



11416



11196



11186



11186B



11186C

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11016	C	1 button 1 way switch	Coffee metallic	10	10/100
11026	C	1 button 2 way switch	Coffee metallic	10	10/100
11346	C	1 button cross switch	Coffee metallic	10	10/100
11046	C	2 buttons 1 way switch	Coffee metallic	10	10/100
11056	C	2 buttons 2 way switch	Coffee metallic	10	10/100
11726	C	3 buttons 1 way switch	Coffee metallic	10	10/100
11176A	C	curtain control switch	Coffee metallic	-	10/100
11416	C	sensor switch	Coffee metallic	-	10/100
11196	C	dimmer switch	Coffee metallic	-	10/100
11186	C	door bell switch	Coffee metallic	-	10/100
11186B	C	door bell switch with name card	Coffee metallic	-	10/100
11186C	C	Push light switch	Coffee metallic	10	10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



11216



11376



11216C



11266



11746
11736



11286
112866E



11716



11256



11686



11336

IP20

FUNCTIONAL PART "RHYME" SERIES

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
11216	C	German type socket	Coffee metallic	16	10/100
11216C	C	German type socket with cover	Coffee metallic	16	10/100
11376	C	German type socket (double)	Coffee metallic	16	10/50
11266	C	Phone socket RJ11	Coffee metallic		10/100
11746	C	Phone socket RJ11 - double	Coffee metallic		10/100
11736	C	Phone socket RJ11 + computer socket RJ45	Coffee metallic		10/100
11286	C	Computer socket (cat5e) RJ45	Coffee metallic		10/100
112866E	C	Computer socket RJ45 (CAT6e)	Coffee metallic		10/100
11716	C	Computer socket RJ45 - double	Coffee metallic		10/100
11256	C	TV socket	Coffee metallic		10/100
11686	C	TV socket+FM socket + SAT socket*	Coffee metallic		10/100
11336	C	Key card power switch *	Coffee metallic		10/100

** is not compatible with another decorative frame or frame designed for more than one functional part*

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



2 gangs



3 gangs

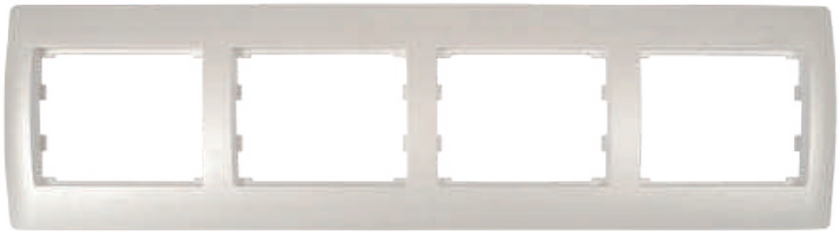

4 gangs

2 GANGS PANEL "RHYME" SERIES

Catalogue number	Product category	Type	Colour
11551	C	2 gangs	White metallic
11552	C	2 gangs	Champagne metallic
11554	C	2 gangs	Grey metallic
11555	C	2 gangs	Graphite metallic
11556	C	2 gangs	Coffee metallic

3 GANGS PANELS "RHYME" SERIES

Catalogue number	Product category	Type	Colour
11661	C	3 gangs	White metallic
11662	C	3 gangs	Champagne metallic
11664	C	3 gangs	Grey metallic
11665	C	3 gangs	Graphite metallic
11666	C	3 gangs	Coffee metallic

4 GANGS PANELS "RHYME" SERIES

Catalogue number	Product category	Type	Colour
11361	C	4 gangs	White metallic
11362	C	4 gangs	Champagne metallic
11364	C	4 gangs	Grey metallic
11365	C	4 gangs	Graphite metallic
11366	C	4 gangs	Coffee metallic

Packing/Box (pcs): 2 gangs 20/200 | 3 gangs 20/200 | 4 gangs 10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



5 gangs



6 gangs



Outlet safety cap



Wall protector

5 GANGS PANEL "RHYME" SERIES

Catalogue number	Product category	Type	Colour
11601	C	5 gangs	White metallic
11602	C	5 gangs	Champagne metallic
11604	C	5 gangs	Grey metallic
11605	C	5 gangs	Graphite metallic
11606	C	5 gangs	Coffee metallic

6 GANGS PANELS "RHYME" SERIES

Catalogue number	Product category	Type	Colour
11621	C	6 gangs	White metallic
11622	C	6 gangs	Champagne metallic
11624	C	6 gangs	Grey metallic
11625	C	6 gangs	Graphite metallic
11626	C	6 gangs	Coffee metallic

OUTLET SAFETY CAP

Catalogue number	Type	Colour
192215	Outlet safety cap	White
192214	Outlet safety cap	Brown
192121/WH	Wall protector	White
192121/TR	Wall protector	Transperent

Packing/Box (pcs): 2 gangs 20/200 | 3 gangs 20/200 | 4 gangs 10/100

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



M030137



M030164

IP20

WATER HEATER SWITCH WITH LIGHT LABEO SERIES

Catalogue number	Product category	Type	Voltage (V)	Current (A)	Mounting type	Length (mm)	Height (mm)	Width (mm)	Packing/ Box (pcs)
M030137	G	LABEO FM	220 AC	25	flush	100	100	50	1
M030164	G	LABEO SM	220 AC	25	surface	100	100	50	1

2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



26024



24203



24205

IP20

WATER HEATER SWITCH AND MOUNTING CONSOLE BOXES "LECCE" SERIES

Catalogue number	Product category	Type	Colour	Size	Rated current In (A)	Packing/Box (pcs)
26024	C	boiler switch with neon*	White	3 mod	45	1/60
24203	C	Console box for brick and concrete	Black	triple		1/300
24205	C	Console box for plasterboard	Blue	triple	-	1/300

* the product comes without decorative tripple panel

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



191011
191021
191031



191041



191012



191071

IP44

SWITCHES AND SOCKETS

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
191011	C	1 Gang 1 Way Switch	white	10AX	10/100
191021	C	1 Gang 2 Way Switch	white	10AX	10/100
191031	C	1 Gang Intermediate Switch	white	10AX	10/100
191041	C	2 gangs 1 Way Switch	white	10AX	10/100
191012	C	German type socket	white	16A	10/100
191071	C	German type socket- double	white	16A	10/100

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



191111
191121
191181



191141



191112



191171

IP65

SWITCHES AND SOCKETS

Catalogue number	Product category	Type	Colour	Rated current In (A)	Packing/Box (pcs)
191111	C	1 Gang 1 Way Switch	grey	10AX	10/100
191121	C	1 Gang 2 Way Switch	grey	10AX	10/100
191141	C	2 gangs 1 Way Switch	grey	10AX	10/100
191181	C	1 Gang Push Button Switch	grey	10AX	10/100
191112	C	German type socket	grey	16A	10/100
191171	C	German type socket- double	grey	16A	10/100

5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELMARK®

The Brand of Electricity

Mobile app for users on the GO!

1. Download the App
2. Scan the QR code in the catalogue for product information
3. Order quick & easy

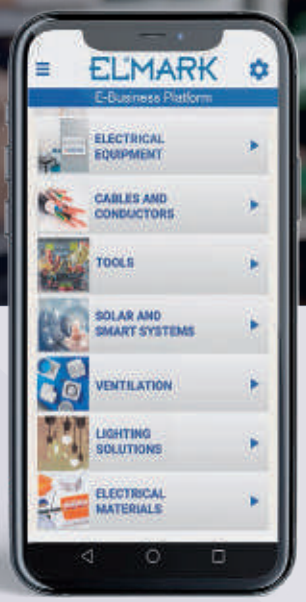

ELMARK Store

/For all customers/

- Shopping without registration
- Discounts with registration
- All benefits of the site
- Scan a QR code & buy a product

*Visit **elmarkstore.eu** or download ELMARK Store from:*

GET IT ON Google Play | Download on the App Store

BUSINESS partners

- Designers & Projectors
- Construction companies
- Installation companies
- Electrical & lighting traders

*Visit **elmarkholding.eu** or download ELMARK BUSINESS from:*

GET IT ON Google Play | Download on the App Store



LIGHTING



MODERN



MARCELLA
955MARCELLA1T



MARCELLA
955MARCELLA1W

MARCELLA
955MARCELLA3R

LED WARM WHITE 2700K **IP40**

MARCELLA

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955MARCELLA1W	A	Wall lamp	11	756	2800-3200	Silver	400	110	140	1/1	A++→A
955MARCELLA1T	A	Table lamp	11	770	2800-3200	Silver	220	160	363	1/1	A++→A
955MARCELLA3R	A	Chandelier	33	2310	2800-3200	Silver	540	520	1500	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MARCELLA

955MARCELLA4A

LED WARM WHITE 2700K **IP40**

MARCELLA

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955MARCELLA4A	A	Chandelier	42	2940	2800-3200	Silver	740	520	1500	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



OWEN

955OWEN1P

LED WARM WHITE 2700K IP40

OWEN

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955OWEN1P	A	Pendant	19	1330	2800-3200	Chrome	520	520	1500	1/5	A++→A

Material: Aluminium + Iron + Acrylic, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SENSO
955SENSO1T



SENSO
955SENSO3F

LED WARM WHITE 2700K **IP40**

SENSO

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SENSO1T	A	Table lamp	8.5	588	2800-3200	Matte black	458	180	459	1/1	A++→A
955SENSO3F	A	Floor lamp	25	1764	2800-3200	Matte black	443		1475	1/1	A++→A

Material: Aluminium + Iron + Acrylic, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SENSO
955SENSO1W

SENSO
955SENSO2W

SENSO
955SENSO6

LED WARM WHITE 2700K **IP40**

SENSO

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SENSO1W	A	Wall lamp	8.5	588	2800-3200	Matte black	100	100	300	1/1	A++→A
955SENSO2W	A	Wall lamp	17	1176	2800-3200	Matte black	180	100	460	1/1	A++→A
955SENSO6	A	Pendant	50	3528	2800-3200	Matte black	696		1200	1/1	A++→A

Material: Aluminium + Iron + Acrylic, **LED:** Included, **Light source:** Epistar 2835

~230V 50/60 Hz > 15000 SMD 2835 Ra≥80 IP 40 RoHS COMPLIANT EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DUNCAN
955DUNCAN1W



DUNCAN
955DUNCAN1T

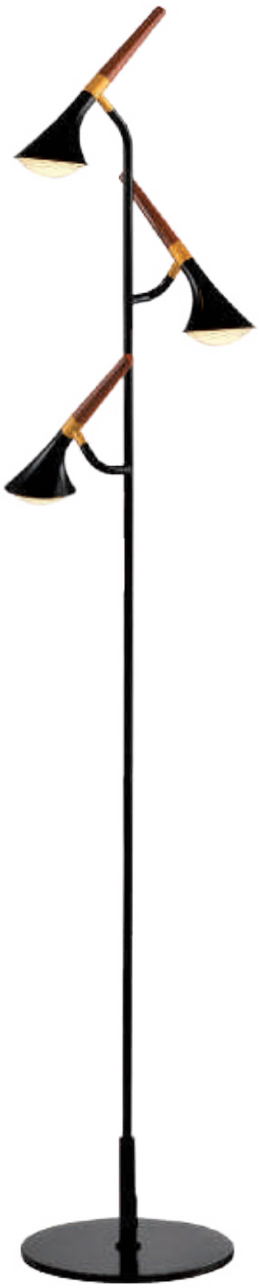

DUNCAN
955DUNCAN3F

LED WARM WHITE 2700K **IP40**

DUNCAN

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955DUNCAN1W	A	Wall lamp	5	350	2800-3200	Matte black & wood	288	100	190	1/10	A++→A
955DUNCAN1T	A	Table lamp	5	350	2800-3200	Matte black & wood	272	180	272	1/2	A++→A
955DUNCAN3F	A	Floor lamp	15	1050	2800-3200	Matte black & wood	230	250	1440	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DUNCAN
955DUNCAN9



DUNCAN
955DUNCAN6

LED WARM WHITE 2700K **IP40**

DUNCAN

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955DUNCAN6	A	Chandelier	30	2100	2800-3200	Matte black & wood	730	730	260	1/1	A++→A
955DUNCAN9	A	Chandelier	45	3150	2800-3200	Matte black & wood	820	820	390	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LINUS
955LINUS1W

LINUS
955LINUS1P

LED | WARM WHITE 2700K | IP40

LINUS

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955LINUS1W	A	Wall lamp	8.5	595	2800-3200	Silver	408	100	135	1/1	A++→A
955LINUS1P	A	Pendant	23	1610	2800-3200	Silver	918	60	1200	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HENDRIX
955HENDRIX1P



HENDRIX
955HENDRIX1T

LED WARM WHITE 2700K **IP40**

HENDRIX

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955HENDRIX1T	A	Table lamp	11	770	2800-3200	White & black	250	480	1/1	A++→A
955HENDRIX1P	A	Pendant	21	1470	2800-3200	White & black	350	1500	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

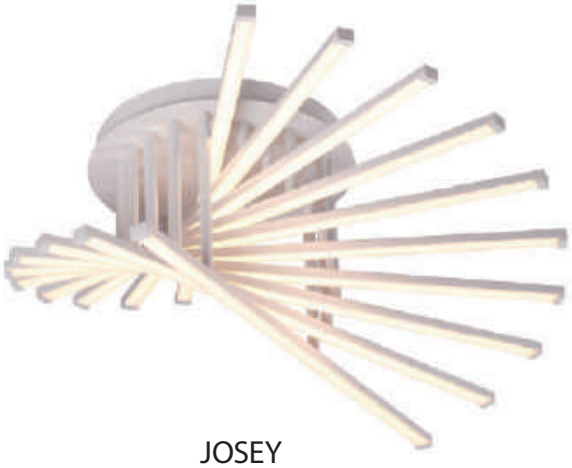

JOSEY
955JOSEY120



JOSEY
955JOSEY156P
955JOSEY156PW

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

JOSEY

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JOSEY120	F	Chandelier	120	9000	3000	mat white	610	610	260	1/1	A++→A
955JOSEY156P	F	Pendant	156	11700	3000	mat white	700		1200	1/1	A++→A
955JOSEY156PW	F	Pendant	156	11700	5000	mat white	700		1200	1/1	A++→A

Material: Aluminium + silicon, **LED:** Included, **Light source:** Epistar 2835, **White:** RAL9016

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



JOSEY

955JOSEY192
955JOSEY192W

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

JOSEY

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JOSEY192	F	Chandelier	192	13824	3000	mat white	600	600	220	1/1	A++→A
955JOSEY192W	F	Chandelier	192	13824	5000	mat white	600	600	220	1/1	A++→A

Material: Aluminium + silicon, **LED:** Included, **Light source:** Epistar 2835, **White:** RAL9016

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



SHELL
955SHELL1P



SHELL
955SHELL1W/G



SHELL
955SHELL1W/SL



SHELL
955SHELL1W/WH

LED NEUTRAL WHITE 4000K **IP40**

UNTIL SUPPLY LAST

SHELL

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SHELL1P	F	Chandelier	40	3600	4000	white	500		70	1/1	A++→A
955SHELL1W/WH	F	Wall lamp	5	500	4000	white	170	110	70	1/20	A++→A
955SHELL1W/G	F	Wall lamp	5	500	4000	gold	170	110	70	1/20	A++→A
955SHELL1W/SL	F	Wall lamp	5	500	4000	silver	170	110	70	1/20	A++→A

Material: Plastic, **LED:** Included, **Light source:** Epistar

~230V 50/60 Hz > 15000 Ra≥80 IP 40 RoHS COMPLIANT EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CAMEO
955CAMEO20



CAMEO
955CAMEO30



CAMEO
955CAMEO15

LED WARM WHITE 2700K **IP40**

UNTIL SUPPLY LAST

CAMEO

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955CAMEO15	F	Spot	15	1200	3200	chrome	250		125	1/6	A++→A
955CAMEO20	F	Spot	20	1600	3200	chrome		600	125	1/6	A++→A
955CAMEO30	F	Spot	30	2400	3200	chrome		1500	145	1/4	A++→A

Material: Metal, **LED:** Included, **Light source:** Epistar

~230V 50/60 Hz > 15000 Ra≥80 Hg IP 40 RoHS EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



AZZAR
955AZZAR7

AZZAR
955AZZAR108

LED | WARM WHITE 2700K | **IP40**

UNTIL SUPPLY LAST

AZZAR

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955AZZAR7	F	Ceiling lamp	7	490	3000	mat white	100	100	75	1/20	A++→A
955AZZAR108	F	Chandelier	108	8100	3000	mat white	1000	420	1200	1/1	A++→A

Material: Aluminium + acrylic + silicon, **LED:** Included, **Light source:** Epistar 2835, **White:** RAL9016

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



AZZAR
955AZZAR66



AZZAR
955AZZAR72

LED | WARM WHITE 2700K | IP40

UNTIL SUPPLY LAST

AZZAR

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955AZZAR66	F	Chandelier	66	4950	3000	mat white	580	580	140	1/1	A++→A
955AZZAR72	F	Chandelier	72	5400	3000	mat white	800	420	1200	1/1	A++→A

Material: Aluminium + acrylic + silicon, **LED:** Included, **Light source:** Epistar 2835, **White:** RAL9016

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



OLIVIA
955OLIVIA7W



OLIVIA
955OLIVIA42

LED WARM WHITE 2700K **IP40**

UNTIL SUPPLY LAST

OLIVIA

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955OLIVIA7W	F	Wall fixture	7	490	3000	black	130	90	250	1/10	A++→A
955OLIVIA42	F	Chandelier	42	3150	3000	black	430		300	1/1	A++→A

Material: Aluminium + acrylic, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

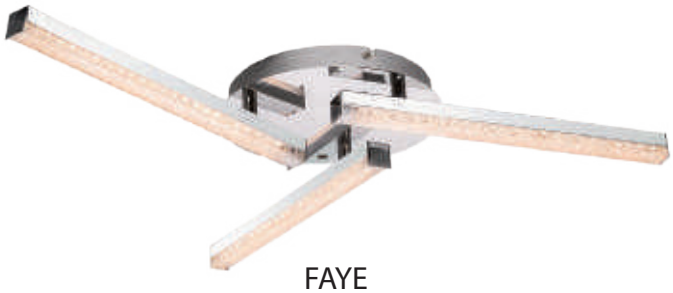

FAYE
955FAYE12

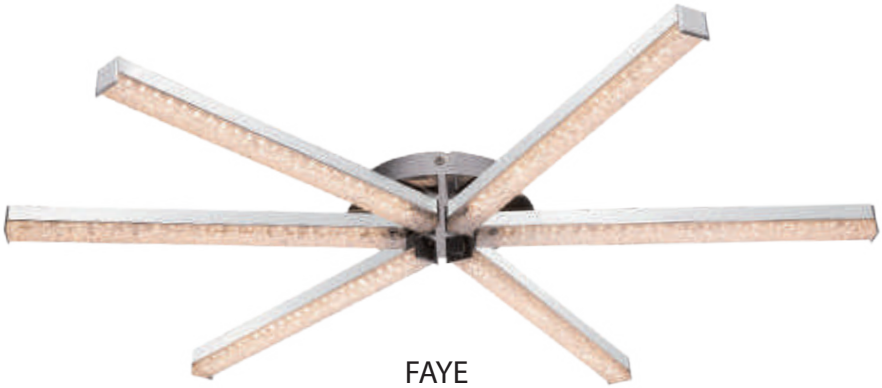

FAYE
955FAYE24

LED WARM WHITE 2700K **IP40**

UNTIL SUPPLY LAST

FAYE

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955FAYE12	F	Ceiling lamp	12	960	3200	chrome	580		50	1/6	A++→A
955FAYE24	F	Ceiling lamp	24	1920	3200	chrome	680		50	1/4	A++→A

Material: Metal, **LED:** Included, **Light source:** Epistar

~230V 50/60 Hz > 15000 Ra≥80 IP 40 RoHS COMPLIANT EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY


LUX



ELIZABETH
955ELIZABETH1WL/NI



ELIZABETH
955ELIZABETH1WL/G



ELIZABETH
955ELIZABETH1/G



ELIZABETH
955ELIZABETH1/NI

IP20

ELIZABETH

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ELIZABETH1/NI	A	Chandelier	Nickel	500	1500	1xE27	1/1	A++→E
955ELIZABETH1/G	A	Chandelier	Gold	500	1500	1xE27	1/1	A++→E
955ELIZABETH1WL/NI	A	Wall lamp	Nickel	220	200	1xE27	1/1	A++→E
955ELIZABETH1WL/G	A	Wall lamp	Gold	220	200	1xE27	1/1	A++→E

Material: Metal & fabric | **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CLARA
955CLARA1T/NI



CAROL
955CAROL1F/BL

IP20

CAROL / CLARA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CAROL1F/BL	A	Floor lamp	Black & brass	600	1850	1xE27	1/1	A++→E
955CLARA1T/NI	A	Table lamp	Nickel	460	670	1xE27	1/1	A++→E

Material: CAROL: Wood, fabric & metal, CLARA: Metal & fabric | **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TOMY
955TOMY1T



TOMY
955TOMY1F



TOMY
955TOMY1WLED

IP20

TOMY

Catalogue number	Product category	Description	Colour	Length/ Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TOMY1T	A	Table lamp	dark gray	240	490	E27	1/1	A++→E
955TOMY1F	A	Floor lamp	dark gray	400	1550	E27	1/1	A++→E
955TOMY1WLED	A	Wall lamp with two keys	dark gray	120	250	E27 + LED	1/1	A++→A A++→E

Material: Metal+ Fabric, **Lamps Not Included,** max 40W on lampholder, 955TOMY1WLED colour temperature: 4000K, with two keys on the base

RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MELODY
955MELODY5



MELODY
955MELODY1

IP20

MELODY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MELODY1	A	Wall lamp	Chrome & white	200	250	1xE27	1/1	A++→E
955MELODY3	A	Chandelier	Chrome & white	200	250	3xE27	1/1	A++→E
955MELODY5	A	Chandelier	Chrome & white	200	250	5xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CARMEN
955CARMEN1T



CARMEN
955CARMEN6



CARMEN
955CARMEN1F

IP20

CARMEN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CARMEN1F	A	Floor lamp	White & chrome	300	230	1xE27	1/1	A++→E
955CARMEN1T	A	Table lamp	White & chrome	300	230	1xE27	1/1	A++→E
955CARMEN6	A	Chandelier	White & chrome	300	230	6xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAYA
955MAYA1T



MAYA
955MAYA1WLED



MAYA
955MAYA1W



MAYA
955MAYA1P



MAYA
955MAYA1F



MAYA
955MAYA5



MAYA
955MAYA3

IP20

MAYA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MAYA3	A	Chandelier	Chrome	550	420	3 x E27	1/1	A++→E
955MAYA5	A	Chandelier	Chrome	600	420	5 x E27	1/1	A++→E
955MAYA1P	A	Pendant	Chrome	350	420	1 x E27	1/1	A++→E
955MAYA1T	A	Table lamp	Chrome	300	650	1 x E27	1/1	A++→E
955MAYA1F	A	Floor lamp	Chrome	400	1630	1 x E27	1/1	A++→E
955MAYA1W	A	Wall lamp	Chrome	150	310	1 x E27	1/10	A++→E
955MAYA1WLED	A	Wall lamp	Chrome	220	220	1 x E27 + 1W LED	1/10	A++→E

Material: Metal with glass and fabric shade, **955MAYA1WLED** - Wattage- 1W; Colour temperature- 4000K, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LILLY
955LILLY1T



LILLY
955LILLY5



LILLY
955LILLY1W



LILLY
955LILLY1F



LILLY
955LILLY3

IP20

LILLY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LILLY3	A	Chandelier	Chrome	550	-	540	3 x E27	1/1	A++→E
955LILLY5	A	Chandelier	Chrome	650	-	590	5 x E27	1/1	A++→E
955LILLY1W	A	Wall lamp	Chrome	-	220	330	1 x E27	1/10	A++→E
955LILLY1T	A	Table lamp	Chrome	150	-	410	1 x E27	1/4	A++→E
955LILLY1F	A	Floor lamp	Chrome	400	-	1585	1 x E27	1/1	A++→E

Material: Metal with crystal and fabirc shade, **Lamps Not Included**

RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MERY
955MERY1T/AB



MERY
955MERY5/AB



MERY
955MERY1P/AB



MERY
955MERY1F/AB



MERY
955MERY1W/AB



MERY
955MERY3/AB

IP20

MERY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MERY3/AB	A	Chandelier	Antique brass	600	480	3 x E27	1/1	A++→E
955MERY5/AB	A	Chandelier	Antique brass	700	520	5 x E27	1/1	A++→E
955MERY1P/AB	A	Pendant	Antique brass	350	520	1 x E27	1/1	A++→E
955MERY1T/AB	A	Table lamp	Antique brass	320	570	1 x E27	1/1	A++→E
955MERY1F/AB	A	Floor lamp	Antique brass	400	1565	1 x E27	1/1	A++→E
955MERY1W/AB	A	Wall lamp	Antique brass	160	350	1 x E27	1/10	A++→E

Material: Metal with crystal and fabric shade, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MERY
955MERY1T/CH



MERY
955MERY5/CH



MERY
955MERY1P/CH



MERY
955MERY1F/CH



MERY
955MERY1WLED/CH



MERY
955MERY1W/CH



MERY
955MERY3/CH

IP20

MERY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MERY3/CH	A	Chandelier	Chrome	600	480	3 x E27	1/1	A++→E
955MERY5/CH	A	Chandelier	Chrome	700	520	5 x E27	1/1	A++→E
955MERY1P/CH	A	Pendant	Chrome	350	520	1 x E27	1/1	A++→E
955MERY1T/CH	A	Table lamp	Chrome	320	570	1 x E27	1/1	A++→E
955MERY1F/CH	A	Floor lamp	Chrome	400	1565	1 x E27	1/1	A++→E
955MERY1W/CH	A	Wall lamp	Chrome	160	350	1 x E27	1/10	A++→E
955MERY1WLED/CH	A	Wall lamp	Chrome	220	400	1 x E27 + 1W LED	1/10	A++→A A++→E

Material: Metal with crystal and fabric shade, **955MERY1WLED/CH** - Wattage: 1W; Colour temperature: 4000K, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DELIA
955DELIA1W/BL



DELIA
955DELIA2/BL



DELIA
955DELIA3/BL

IP20

DELIA

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Depth (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955DELIA1W/BL	A	Spot	black + red amber	80	150	200	1xE27	1/12	A++→E
955DELIA2/BL	A	Spot	black + red amber	340	80	200	2xE27	1/8	A++→E
955DELIA3/BL	A	Spot	black + red amber	620	80	200	3xE27	1/6	A++→E

Material: Iron+PVC+cotton cloth, **Lamps Not Included , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DELIA
955DELIA4/BL



DELIA
955DELIA6/BL

IP20

DELIA

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Depth (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955DELIA4/BL	A	Spot	black + red amber	630	90	200	4xE27	1/4	A++→E
955DELIA6/BL	A	Ceiling lamp	black + red amber	800	500	200	6xE27	1/4	A++→E

Material: Iron+PVC+cotton cloth, **Lamps Not Included , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



YOLI
955YOLI1W/SN



YOLI
955YOLI2/SN



YOLI
955YOLI3/SN

IP20

YOLI

Catalogue number	Product category	Description	Colour	Length/Diameter (mm)	Depth (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955YOLI1W/SN	A	Spot	satin nickel +white	100	200	1xE27	1/12	A++→E
955YOLI2/SN	A	Spot	satin nickel +white	360	200	2xE27	1/8	A++→E
955YOLI3/SN	A	Spot	satin nickel +white	360	200	3xE27	1/4	A++→E

Material: Iron, **Lamps Not Included , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



YOLI
955YOLI4/SN



YOLI
955YOLI6/SN

IP20

YOLI

Catalogue number	Product category	Description	Colour	Length/Diameter (mm)	Depth (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955YOLI4/SN	A	Spot	satin nickel +white	800	200	4xE27	1/6	A++→E
955YOLI6/SN	A	Ceiling lamp	satin nickel +white	620	200	6xE27	1/4	A++→E

Material: Iron, **Lamps Not Included , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AMBIX
955AMBIX1W



AMBIX
955AMBIX3



AMBIX
955AMBIX3R



AMBIX
955AMBIX2

IP20

AMBIX

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955AMBIX1W	A	Spot	black+copper	80		162	1xE14	1/24	A++→E
955AMBIX2	A	Spot	black+copper		250	175	2xE14	1/12	A++→E
955AMBIX3	A	Spot	black+copper	250		175	3xE14	1/6	A++→E
955AMBIX3R	A	Ceiling lamp	black+copper	390		240	3xE14	1/6	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AMBIX
955AMBIX4



AMBIX
955AMBIX6



AMBIX
955AMBIX5

IP20

AMBIX

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955AMBIX4	A	Spot	black+copper		600	175	4xE14	1/6	A++→E
955AMBIX5	A	Ceiling lamp	black+copper	630	370	210	5xE14	1/4	A++→E
955AMBIX6	A	Spot	black+copper		1500	195	6xE14	1/4	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JULIE
955JULIE1W



JULIE
955JULIE2



JULIE
955JULIE3



JULIE
955JULIE3R

IP20

JULIE

Catalogue number	Product category	Description	Colour	Lampholder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JULIE1W	A	Spot	satin nickel+aluminium	1xE14	80		162	1/24	A++→E
955JULIE2	A	Spot	satin nickel+aluminium	2xE14		250	175	1/12	A++→E
955JULIE3	A	Spot	satin nickel+aluminium	3xE14		410	175	1/8	A++→E
955JULIE3R	A	Ceiling lamp	satin nickel+aluminium	3xE14	390		240	1/6	A++→E

Material: Metal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JULIE
955JULIE4



JULIE
955JULIE6



JULIE
955JULIE5

IP20

JULIE

Catalogue number	Product category	Description	Colour	Lampholder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JULIE4	A	Spot	satin nickel+aluminium	4xE14		600	175	1/6	A++→E
955JULIE5	A	Ceiling lamp	satin nickel+aluminium	5xE14	630	370	210	1/4	A++→E
955JULIE6	A	Spot	satin nickel+aluminium	6xE14		1500	195	1/4	A++→E

Material: Metal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHEEN
955SHEEN1W/SN



SHEEN
955SHEEN2/SN



SHEEN
955SHEEN31/SN

IP20

SHEEN

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SHEEN1W/SN	A	Spot	satin nickel and chrome frame with clear glass	1xE14	92	74	150	1/8	A+→E
955SHEEN2/SN	A	Spot	satin nickel and chrome frame with clear glass	2xE14		280	165	1/6	A+→E
955SHEEN31/SN	A	Ceiling lamp	satin nickel and chrome frame with clear glass	3xE14	380	240		1/4	A+→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHEEN
955SHEEN3/SN



SHEEN
955SHEEN4/SN



SHEEN
955SHEEN5/SN

IP20

SHEEN

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SHEEN3/SN	A	Spot	satin nickel and chrome frame with clear glass	3xE14	450		165	1/6	A+→E
955SHEEN4/SN	A	Spot	satin nickel and chrome frame with clear glass	4xE14		700	165	1/4	A+→E
955SHEEN5/SN	A	Ceiling lamp	satin nickel and chrome frame with clear glass	5xE14	610	360	210	1/4	A+→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ABBY
955ABBY6



ABBY
955ABBY3

IP20

UNTIL SUPPLY LAST

ABBY

Catalogue number	Product category	Description	Colour	Lamp holder	Length / Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ABBY3	F	Spot	chrome+white glass	3xE14	250	175	1/6	A++→E
955ABBY6	F	Spot	chrome+white glass	6xE14	1500	185	1/4	A++→E

Material: Metal+glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



DJENY
955DJENY5



DJENY
955DJENY3



JAKLIN
955JAKLIN1W

IP20

UNTIL SUPPLY LAST

DJENY / JAKLIN

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DJENY5	F	Chandelier	Silver	530	-	200	5 x E14	1/1	A++→E
955DJENY3	F	Ceiling lamp	Silver	450	-	240	3 x E14	1/1	A++→E
955JAKLIN1W	F	Wall lamp	Silver	200	241	95	1 x E27	1/1	A++→E

Material: Metal with crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



IZZY
955IZZY1/BL



IZZY
955IZZY1/WH



IZZY
955IZZY2/BL



IZZY
955IZZY2/WH



IZZY
955IZZY1W/BL



IZZY
955IZZY1W/WH

IP20

IZZY

Catalogue number	Product category	Description	Colour	Lamp holder	Base Diameter (mm)	Length (mm)	Width (mm)	Packing/Box (mm)	Energy class
955IZZY1W/WH	A	Spot with metal swtich	white	1xGU10	80		180	1/20	A++→E
955IZZY1W/BL	A	Spot with metal swtich	black	1xGU10	80		180	1/20	A++→E
955IZZY1/WH	A	Spot	white	1xGU10	80		180	1/20	A++→E
955IZZY1/BL	A	Spot	black	1xGU10	80		180	1/20	A++→E
955IZZY2/WH	A	Spot	white	2xGU10	80	250	180	1/12	A++→E
955IZZY2/BL	A	Spot	black	2xGU10	80	250	180	1/12	A++→E

Material: Metal, **Lamps Not Included** | max 50W on lampholder

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



IZZY
955IZZY4/WH



IZZY
955IZZY3/BL



IZZY
955IZZY3/WH



IZZY
955IZZY4/BL

IP20

IZZY

Catalogue number	Product category	Description	Colour	Lamp holder	Diameter (mm)	Length (mm)	Width (mm)	Packing/Box (mm)	Energy class
955IZZY3/WH	A	Spot	white	3xGU10	80/250		180	1/6	A++→E
955IZZY3/BL	A	Spot	black	3xGU10	80/250		180	1/6	A++→E
955IZZY4/WH	A	Spot	white	4xGU10	80	600	180	1/6	A++→E
955IZZY4/BL	A	Spot	black	4xGU10	80	600	180	1/6	A++→E

Material: Metal, **Lamps Not Included** | max 50W on lampholder

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY WHITE
955ADDY3/WH



ADDY WHITE
955ADDY4/WH



ADDY WHITE
955ADDY1W/WH

IP20

ADDY WHITE

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY1W/WH	A	Spot	white and wood painting	1xE14	80		150	1/24	A++→E
955ADDY3/WH	A	Spot	white and wood painting	3xE14	250		165	1/6	A++→E
955ADDY4/WH	A	Spot	white and wood painting	4xE14		700	165	1/6	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY BLACK
955ADDY3/BL



ADDY BLACK
955ADDY4/BL



ADDY BLACK
955ADDY1W/BL

IP20

ADDY BLACK

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY1W/BL	A	Spot	black and wood painting	1xE14	80		150	1/24	A++→E
955ADDY3/BL	A	Spot	black and wood painting	3xE14	250		165	1/6	A++→E
955ADDY4/BL	A	Spot	black and wood painting	4xE14		700	165	1/6	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY GOLD
955ADDY1W/G



ADDY GOLD
955ADDY2/G



ADDY GOLD
955ADDY31/G

IP20

ADDY GOLD

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY1W/G	A	Spot	antique gold and amber glass	1xE14	80	150	150	1/8	A++→E
955ADDY2/G	A	Spot	antique gold and amber glass	2xE14		280	165	1/6	A++→E
955ADDY31/G	A	Ceiling lamp	antique gold and amber glass	3xE14	390		240	1/6	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY GOLD
955ADDY4/G



ADDY GOLD
955ADDY5/G

IP20

ADDY GOLD

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY4/G	A	Spot	antique gold and amber glass	4xE14		700	165	1/4	A++→E
955ADDY5/G	A	Ceiling lamp	antique gold and amber glass	5xE14	300	600	180	1/4	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY CHROME
955ADDY1W/CH



ADDY CHROME
955ADDY2/CH



ADDY CHROME
955ADDY31/CH

IP20

ADDY CHROME

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY1W/CH	A	Spot	chrome and smoking glass	1xE14	80		150	1/8	A++→E
955ADDY2/CH	A	Spot	chrome and smoking glass	2xE14		280	165	1/6	A++→E
955ADDY31/CH	A	Ceiling lamp	chrome and smoking glass	3xE14	390		240	1/6	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY CHROME
955ADDY4/CH



ADDY CHROME
955ADDY5/CH

IP20

ADDY CHROME

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY4/CH	A	Spot	chrome and smoking glass	4xE14		700	165	1/4	A++→E
955ADDY5/CH	A	Ceiling lamp	chrome and smoking glass	5xE14	300	600	180	1/4	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADDY WOOD
955ADDY1W/WD



ADDY WOOD
955ADDY2/WD



ADDY WOOD
955ADDY3/WD



ADDY WOOD
955ADDY4/WD

IP20

ADDY WOOD

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ADDY1W/WD	A	Spot	satin nickel+wood painting+amber glass	1xE14	80	150	150	1/8	A++→E
955ADDY2/WD	A	Spot	satin nickel+wood painting+amber glass	2xE14		280	165	1/6	A++→E
955ADDY3/WD	A	Spot	satin nickel+wood painting+amber glass	3xE14	250		165	1/6	A++→E
955ADDY4/WD	A	Spot	satin nickel+wood painting+amber glass	4xE14		700	165	1/4	A++→E

Material: Metal and glass | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



EDDY BLACK
955EDDY1W/BL



EDDY BLACK
955EDDY2/BL



EDDY BLACK
955EDDY3/BL



EDDY BLACK
955EDDY4/BL

IP20

EDDY BLACK

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955EDDY1W/BL	A	Spot	black and white	80		150	1xE14	1/24	A++→E
955EDDY2/BL	A	Spot	black and white		280	165	2xE14	1/12	A++→E
955EDDY3/BL	A	Spot	black and white	250	250		3xE14	1/6	A++→E
955EDDY4/BL	A	Spot	black and white		700	165	4xE14	1/6	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RIKO
955RIKO1W



RIKO
955RIKO2



RIKO
955RIKO3



RIKO
955RIKO4

IP20

RIKO

Catalogue number	Product category	Description	Colour	Length (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955RIKO1W	A	Spot	wood and black	150	100	1xGU10	1/1	A++→E
955RIKO2	A	Spot	wood and black	320	100	2xGU10	1/1	A++→E
955RIKO3	A	Spot	wood and black	505	100	3xGU10	1/1	A++→E
955RIKO4	A	Spot	wood and black	300	100	4xGU10	1/1	A++→E

Material: Metal **and wood | Lamps Not Included |** max 35W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWIST
955TWIST3/BL



TWIST
955TWIST5/BL

IP20

TWIST

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955TWIST3/BL	A	Ceiling lamp	black	570	220	3xE27	1/1	A++→E
955TWIST5/BL	A	Ceiling lamp	black	670	220	5xE27	1/1	A++→E

Material: Metal | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CRYSTAL

High Quality



DALISS
955DALISS5



DALISS
955DALISS13

IP20

DALISS

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DALISS5	A	Chandelier	Gold	K9	390	420	5xE14	1/1	A++→E
955DALISS13	A	Chandelier	Gold	K9	580	570	13xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AURIA
955AURIA5



AURIA
955AURIA10

IP20

UNTIL SUPPLY LAST

AURIA

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955AURIA5	F	Chandelier	Chrome	K9	390	360	5xE14	1/1	A++→E
955AURIA10	F	Chandelier	Chrome	K9	550	450	10xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

High Quality



BLESSY
955BLESSY10



BLESSY
955BLESSY18

IP20

BLESSY

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BLESSY10	A	Chandelier	Chrome	K9	460	580	10xE14	1/1	A++→E
955BLESSY18	A	Chandelier	Chrome	K9	610	770	18xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

High Quality



BLESSY
955BLESSY44



BLESSY
955BLESSY77



BLESSY
955BLESSY19

IP20

BLESSY

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BLESSY77	A	Chandelier 14 sections	Chrome	K9	750	3000	77xE14	1/1	A++→E
955BLESSY44	A	Chandelier 8 sections	Chrome	K9	750	1500	44xE14	1/1	A++→E
955BLESSY19	A	Chandelier 5 sections	Chrome	K9	500	950	19xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

High Quality



VERA
955VERA9

IP20

VERA

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955VERA9	A	Chandelier	Gold	K9	500	200	9xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELMARK
www.elmarkholding.eu

High Quality



CATHERINE
955CATHERINE17/S



CATHERINE
955CATHERINE17/R

IP20

CATHERINE

Catalogue number	Product category	Description	Colour	Crystal index	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CATHERINE17/R	A	Chandelier	Gold & black	K9	600		460	17xE14	1/1	A++→E
955CATHERINE17/S	A	Chandelier	Gold & black	K9	400	1000	330	17xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

High Quality



ALBERT
955ALBERT6



ALBERT
955ALBERT13

IP20

ALBERT

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ALBERT6	A	Chandelier 5 sections	Chrome	K9	500	950	6xE14	1/1	A++→E
955ALBERT13	A	Chandelier 8 sections	Chrome	K9	750	1500	13xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELMARK
www.elmarkholding.eu

High Quality



VICTORIA
955VICTORIA6



VICTORIA
955VICTORIA14



VICTORIA
955VICTORIA22

IP20

VICTORIA

Catalogue number	Product category	Description	Colour	Crystal index	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955VICTORIA6	A	Ceiling lamp	Gold & black	K9	400	270	6xE14	1/1	A++→E
955VICTORIA14	A	Ceiling lamp	Gold & black	K9	600	310	14xE14	1/1	A++→E
955VICTORIA22	A	Ceiling lamp	Gold & black	K9	800	350	22xE14	1/1	A++→E

Material Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AMELIA
955AMELIA18



MISHELLE
955MISHELLE8

IP20

AMELIA / MISHELLE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955AMELIA18	A	Ceiling lamp	Gold	800	300	18 x E27	1/1	A++→E
955MISHELLE8	A	Ceiling lamp	Chrome	600	340	8 x E14	1/1	A++→E

Material: Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INNA
955INNA2W/CH



INNA
955INNA2W/GD

IP20

INNA

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Lampholder	Packing/Box (pcs)	Energy class
955INNA2W/CH	A	Wall lamp	Chrome	210	330	2 x E14	1/1	A++→E
955INNA2W/GD	A	Wall lamp	Gold	210	330	2 x E14	1/1	A++→E

Material: Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ANNA
955ANNA4



ANNA
955ANNA3



ANNA
955ANNA2



ANNA
955ANNA1W

IP20

UNTIL SUPPLY LAST

ANNA

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ANNA4	F	Chandelier	Chrome	180	820	330	4xE14	1/1	A++→E
955ANNA2	F	Chandelier	Chrome	140	430	330	2xE14	1/1	A++→E
955ANNA3	F	Chandelier	Chrome	140	580	330	3xE14	1/1	A++→E
955ANNA1W	F	Wall lamp	Chrome	250	150	140	1xE14	1/10	A++→E

Material: Metal and crystal, Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIZA
955LIZA5/CH



LIZA
955LIZA1W/CH



LIZA
955LIZA1T/CH



LIZA
955LIZA3/CH

IP20

LIZA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LIZA3/CH	A	Chandelier	Chrome	445	225	3xE14	1/1	A++→E
955LIZA5/CH	A	Chandelier	Chrome	500	230	5xE14	1/1	A++→E
955LIZA1W/CH	A	Wall lamp	Chrome	145	125	1xE14	1/4	A++→E
955LIZA1T/CH	A	Table lamp	Chrome	210	330	1xE14	1/4	A++→E

Material: Metal and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIZA
955LIZA5/AB



LIZA
955LIZA1W/AB



LIZA
955LIZA1T/AB



LIZA
955LIZA3/AB

IP20

LIZA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LIZA3/AB	A	Chandelier	Antique brass	445	225	3xE14	1/1	A++→E
955LIZA5/AB	A	Chandelier	Antique brass	500	230	5xE14	1/1	A++→E
955LIZA1W/AB	A	Wall lamp	Antique brass	145	125	1xE14	1/4	A++→E
955LIZA1T/AB	A	Table lamp	Antique brass	210	330	1xE14	1/4	A++→E

Material: Metal and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MADLEN
955MADLEN5



MADLEN
955MADLEN3



MADLEN
955MADLEN1W

IP20

MADLEN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MADLEN5	A	Chandelier	Transparent	610	590	5xE14	1/1	A++→E
955MADLEN3	A	Chandelier	Clear	610	555	3 x E14	1/1	A++→E
955MADLEN1W	A	Wall lamp	Clear	115	260	1 x E14	1/10	A++→E

Material: Metal and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KARY
955KARY1P

IP20

KARY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KARY1P	A	Chandelier	Smoky	400	5xG9	1/1	A++→E

Material: Glass and crystal, **Lamps Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIA
955LIA3



KATELYN
955KATELYN1



NIA
955NIA4

IP20

UNTIL SUPPLY LAST

NIA / KATELYN / LIA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955NIA4	F	Chandelier	Chrome	400	270	4xE14	1/1	A++→E
955KATELYN1	F	Pendant	Chrome	280	-	1xE27	1/1	A++→E
955LIA3	F	Chandelier	Chrome	400	300	3xE14	1/1	A++→E

Material: Metal and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY


DESIGN



SPIDER
955SPIDER3/BK



SPIDER
955SPIDER6/WH



SPIDER
955SPIDER8/WH



SPIDER
955SPIDER1T/WH



SPIDER
955SPIDER1W/WH

IP20

UNTIL SUPPLY LAST

SPIDER

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SPIDER3/WH	F	Chandelier	Copper and white	1200	-	600	3 x E27	1/5	A++→E
955SPIDER3/BK	F	Chandelier	Golden and black	1200	-	600	3 x E27	1/5	A++→E
955SPIDER6/WH	F	Chandelier	Copper and white	1200	-	600	6 x E27	1/1	A++→E
955SPIDER8/WH	F	Chandelier	Copper and white	1200	-	600	8 x E27	1/1	A++→E
955SPIDER1W/WH	F	Wall lamp	Copper and white	130	600	-	1 x E27	1/8	A++→E
955SPIDER1T/WH	F	Table lamp	Copper and white	130	-	600	1 x E27	1/8	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CINEMA
955CINEMA1

CINEMA
955CINEMA6

IP20

CINEMA

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CINEMA6	A	Chandelier	Black	630	-	150	6 x E27	1/1	A++→E
955CINEMA1	A	Ceiling lamp	Black	170	310	850	1 x E27	1/8	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BETTY
955BETTY1W/BL



BETTY
955BETTY1W/WH



BRENDA
955BRENDA1T/BL



BRENDA
955BRENDA1/WH

IP20

BETTY / BRENDA

Catalogue number	Product category	Description	Colour	Length/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BETTY1W/BL	A	Wall lamp	Black	180	280	1xG9	1/1	A++→E
955BETTY1W/WH	A	Wall lamp	White	180	280	1xG9	1/1	A++→E
955BRENDA1/WH	A	Wall lamp	White & grey	160	180	1xG9	1/1	A++→E
955BRENDA1T/BL	A	Table lamp	Black	160	180	1xG9	1/1	A++→E

Material: Metal + Glass, **Lamps Not Included**, BETTY with USB port, **955BRENDA1/WH Lampshade Colour:** Outside Grey, Inside White

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LINA
955LINA1W/WHBL



RITA
955RITA1W/WHBL

IP20

LINA / RITA

Catalogue number	Product category	Description	Colour	Length/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LINA1W/WHBL	A	Wall lamp	Black with white glass	130	270	1xE27	1/1	A++→E
955RITA1W/WHBL	A	Wall lamp	Black with white glass	130	180	1xE27	1/1	A++→E

Material: Metal + Glass, **Lamps Not Included**, max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



OLENA GOLD
955OLENA5H/GD



OLENA BLACK
955OLENA5H/BL

IP20

OLENA

Catalogue number	Product category	Description	Colour	Length / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955OLENA5H/BL	A	Chandelier	Black	600	450-900 adjustable	5xG9	1/4	A++→E
955OLENA5H/GD	A	Chandelier	Gold	600	450-900 adjustable	5xG9	1/4	A++→E

Material: Iron + Glass, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



OLENA BLACK
955OLENA1W/BL



OLENA GOLD
955OLENA1W/GD



OLENA BLACK
955OLENA5V/BL



OLENA GOLD
955OLENA5V/GD

IP20

OLENA

Catalogue number	Product category	Description	Colour	Length / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955OLENA1W/BL	A	Wall lamp	Black	150	150	1xG9	1/10	A++→E
955OLENA5V/BL	A	Chandelier	Black	270	725-1025 adjustable	5xG9	1/4	A++→E
955OLENA1W/GD	A	Wall lamp	Gold	150	150	1xG9	1/10	A++→E
955OLENA5V/GD	A	Chandelier	Gold	270	725-1025 adjustable	5xG9	1/4	A++→E

Material: Iron + Glass, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELLARIA
955ELLARIA3



ELLARIA
955ELLARIA5

IP20

ELLARIA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ELLARIA3	A	Chandelier	Wood & grey	620	250	3xE27	1/1	A++→E
955ELLARIA5	A	Chandelier	Wood & grey	620	250	5xE27	1/1	A++→E

Material: Iron + Glass, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BUBBLES
955BUBBLES16



BUBBLES
955BUBBLES8

IP20

BUBBLES

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BUBBLES16	A	Chandelier	Black and bronze with amber glass	1350	600	16 x E14	1/1	A++→E
955BUBBLES8	A	Chandelier	Black and bronze with amber glass	850	600	8 x E14	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ERMINA
955ERMINA8



ERMINA
955ERMINA6

IP20

ERMINA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ERMINA6	A	Ceiling lamp	Chrome & smocked glass	730	640	200	6xE14	1/1	A++→E
955ERMINA8	A	Ceiling lamp	Chrome & smocked glass	860	860	200	8xE14	1/1	A++→E
955ERMINA1W	A	Wall lamp	Chrome & smocked glass	130	-	270	1xE27	1/1	A++→E

Material: Shades: Glass; **Body:** Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ARTE
955ARTE4/BL

IP20

ARTE

Catalogue number	Product category	Description	Colour	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ARTE4/BL	A	Ceiling lamp	black	580/400	390	4xE27	1/1	A++→E

Material: Metal, Lamps Not Included, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SALLY
955SALLY6/BL

IP20

SALLY

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SALLY6/BL	A	Ceiling lamp	Black	650	650	220	6xE27	1/12	A++→E

Material: Metal, **Lamps Not Included, Max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

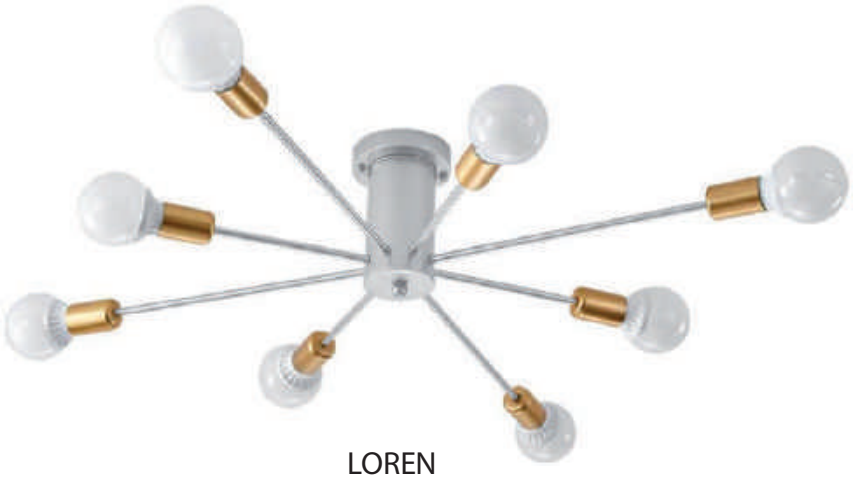

LOREN
955LOREN8/BL

IP20

LOREN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LOREN8/WH	A	Ceiling lamp	White & gold	1000	200	8xE27	1/1	A++→E
955LOREN8/BL	A	Ceiling lamp	Black	1000	200	8xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

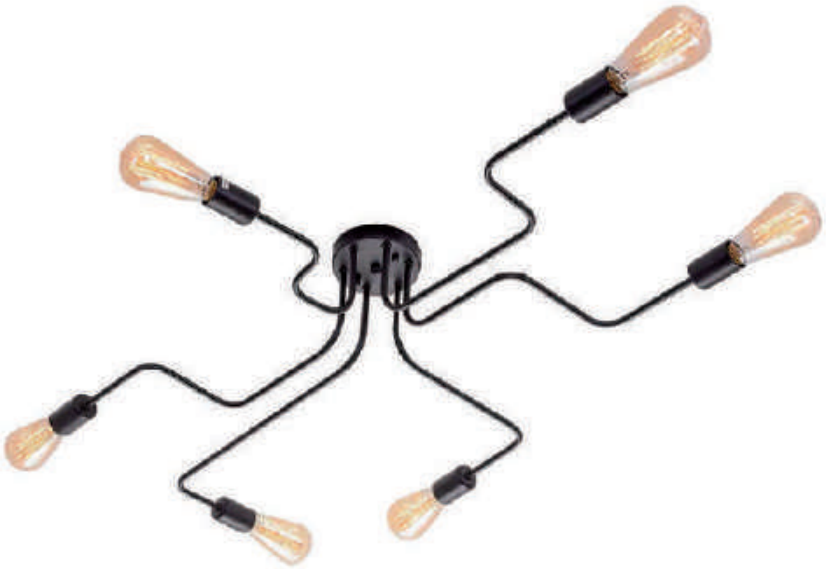

MARISA
955MARISA6/BL

IP20

MARISA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MARISA6/BL	A	Ceiling lamp	Black	1000	200	6xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

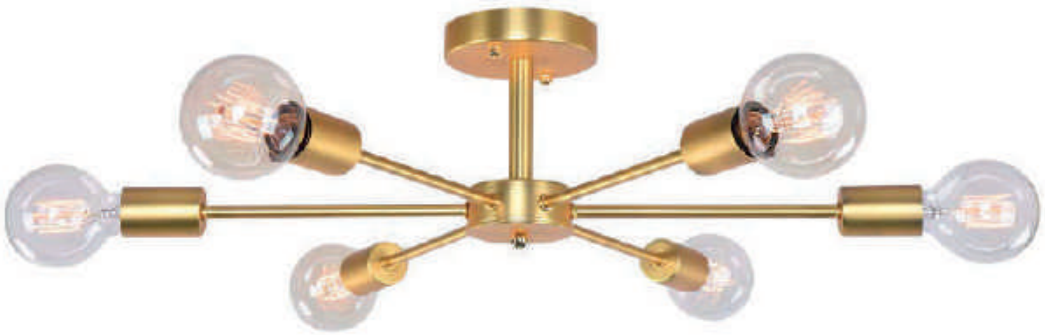

ROXIE
955ROXIE6/GD

IP20

ROXIE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ROXIE3/GD	A	Ceiling lamp	Gold	640	190	3xE27	1/1	A++→E
955ROXIE6/GD	A	Ceiling lamp	Gold	830	190	6xE27	1/1	A++→E
955ROXIE12/GD	A	Ceiling lamp	Gold	1330	190	12xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELMARK

www.elmarkholding.eu





DINNER

955DINNER3M



DINNER
955DINNER6



DINNER
955DINNER3S

IP20

DINNER

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DINNER3M	F	Chandelier	Black and chrome	330	-	800	3 x E14	1/5	A++→E
955DINNER6	F	Chandelier	Black and chrome	310	900	700	6 x E14	1/1	A++→E
955DINNER3S	F	Chandelier	Black and chrome	260	-	540	3 x E14	1/6	A++→E

UNTIL SUPPLY LAST

Material: Metal with stainless steel and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CUPS
955CUPS4

IP20

UNTIL SUPPLY LAST

CUPS

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CUPS4	F	Chandelier	Black with white cover	520	-	750	4 x E14	1/1	A++→E

Material: Metal with stainless steel and crystal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TEATIME
955TEATIME1/BK



TEATIME
955TEATIME1/WH

IP20

TEATIME

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TEATIME1/BK	A	Pendant	Black	150	200	160	1 x E27	1/1	A++→E
955TEATIME1/WH	A	Pendant	White	120	220	160	1 x E27	1/1	A++→E

Material: Metal with polyresin, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BOTTLES
955BOTTLES5



BOTTLES
955BOTTLES2

IP20

UNTIL SUPPLY LAST

BOTTLES

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BOTTLES5	F	Chandelier	Black with colored glass	600	-	400	5 x E27	1/1	A++→E
955BOTTLES2	F	Chandelier	Black with colored glass	300	780	400	2 x E27	1/1	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



BLOOM
955BLOOM8

IP20

BLOOM

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BLOOM8	A	Chandelier	black	900	1500	8xE27	1/1	A++→E

Material: Metal, **Lamps Not Incl uded**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

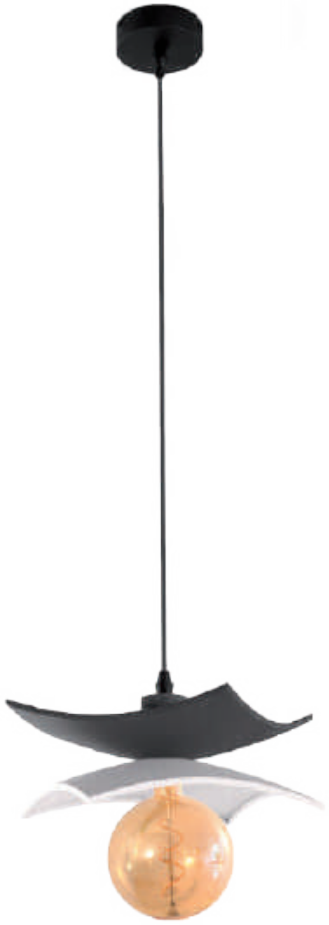

ROBBY
955ROBBY1/BL

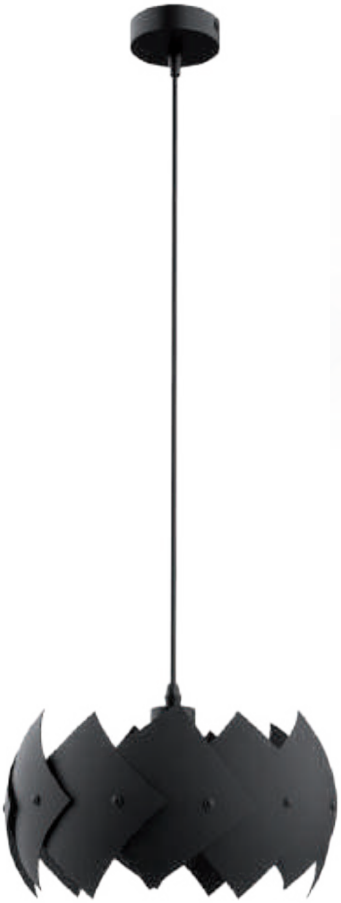

ROCCO
955ROCCO1/BL



ROCCO
955ROCCO1/WH

IP20

ROBBY/ ROCCO

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ROBBY1/BL	A	Pendant	Black & white	290	290	1042	1xE27	1/20	A++→E
955ROCCO1/BL	A	Pendant	Black	280	280	1230	1xE27	1/10	A++→E
955ROCCO1/WH	A	Pendant	White	280	280	1230	1xE27	1/10	A++→E

Material: Metal and PP, **Lamps Not Included, Max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PENDANT SPRING

955SPRING1P

IP20

UNTIL SUPPLY LAST

PENDANTS

Catalogue number	Product category	Description	Colour	Material	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SPRING1P	F	Pendant	black	metal	330	400	1xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



KEN
955KEN1



KEN
955KEN3

IP20

KEN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KEN3	A	Chandelier	Matt black	280	1385	3 x E27	1/1	A++→E
955KEN1	A	Pendant	Matt black	120	1385	1 x E27	1/6	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHUTTLE
955SHUTTLE3



SHUTTLE
955SHUTTLE1/WH

IP20

SHUTTLE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955SHUTTLE1/WH	A	Pendant	White	200	200	1300	1xE27	1/1	A++→E
955SHUTTLE3	A	Pendant	White/Grey/Green	420	420	1300	3xE27	1/1	A++→E

Material: Metal | **Lamps Not Included, max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PARIS
955PARIS1P/BL



PARIS
955PARIS31P/BL



PARIS
955PARIS3P/BL

IP20

PARIS

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955PARIS1P/BL	A	Pendant	Black	140	240	1xE14	1/1	A+→E
955PARIS3P/BL	A	Pendant	Black	140	240	3xE14	1/1	A+→E
955PARIS31P/BL	A	Pendant	Black	140	240	3xE14	1/1	A+→E

Material: Metal & PVC | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PARIS
955PARIS1T/BL



PARIS
955PARIS1F/BL

IP20

PARIS

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955PARIS1T/BL	A	Table lamp	Black	140	480	1xE14	1/1	A++→E
955PARIS1F/BL	A	Floor lamp	Black	140	1500	1xE14	1/1	A++→E

Material: Metal & PVC | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



POLLY
955POLLY4/BL

IP20

POLLY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955POLLY4/BL	A	Ceiling lamp	black	650	350	4xE27	1/1	A++→E

Material: Metal | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HOLLY
955HOLLYP/BL



HOLLY
955HOLLYWL/BL

IP20

HOLLY

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955HOLLYWL/BL	A	Wall lamp	Black	270	180	280	1xE27	1/12	A++→E
955HOLLYP/BL	F	Pendant*	Black	180	180	650	1xE27	1/12	A++→E

Material: Metal, **Lamps Not Included, Max 25W**
*Until Supply Last

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADRIA
955ADRIA1/BL



ADRIA
955ADRIA3/BL

IP20

ADRIA

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ADRIA1/BL	A	Pendant	black	160		1500	1xE27	1/1	A++→E
955ADRIA3/BL	A	Chandelier	black	160	650	1500	3xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HEIDI
955HEIDI3/BL



HEIDI
955HEIDI1/BL

IP20

HEIDI

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955HEIDI1/BL	A	Pendant	black	200		1500	1xE27	1/1	A++→E
955HEIDI3/BL	A	Chandelier	black	150	550	1500	3xE27	1/1	A++→E

Material: Metal+Plastic, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MYSTIC
955MYSTIC1P



MYSTIC
955MYSTIC3P

IP20

UNTIL SUPPLY LAST

MYSTIC

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MYSTIC1P	F	Pendant	black/copper	150		200	1xE27	1/1	A++→E
955MYSTIC3P	F	Pendant	black/copper	300		200	3xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CLIVE
955CLIVE1/BL



SALVA
955SALVA1/BL

IP20

SALVA/ CLIVE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SALVA1/BL	A	Pendant	black	400	1500	1xE27	1/1	A++→E
955CLIVE1/BL	A	Pendant	black	150	1500	1xE27	1/10	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JILL
955JILL1/BL

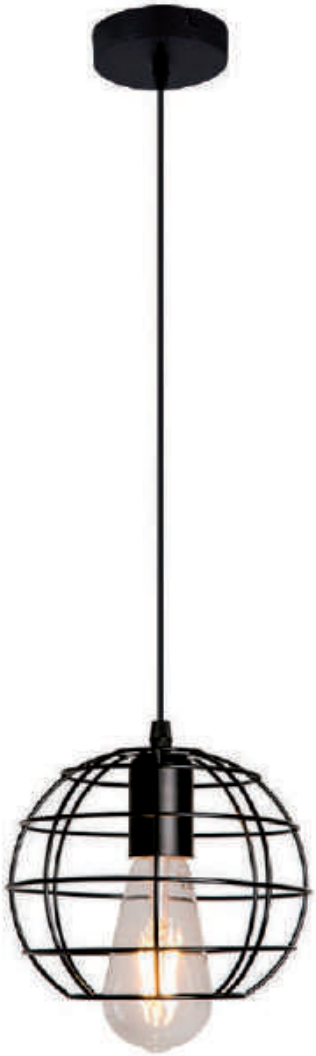

TARA
955TARA1/BL

IP20

JILL / TARA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JILL1/BL	A	Pendant	black	175	1140	1xE27	1/50	A++→E
955TARA1/BL	A	Pendant	black	200	1140	1xE27	1/50	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

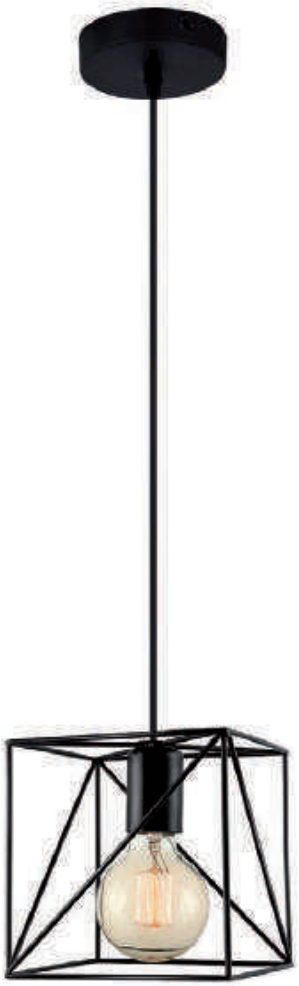

TERI
955TERI1/BL



IDA
955IDA1/BL

IP20

IDA / TERI

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955IDA1/BL	A	Pendant	black	175	175	1140	1xE27	1/50	A++→E
955TERI1/BL	A	Pendant	black	160	160	1140	1xE27	1/50	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



QUINN
955QUINN5/BL



STAR
955STAR1/BL



CAGE
955CAGE1/BL

IP20

QUINN/STAR/CAGE

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955QUINN5/BL	A	Chandelier	black	250		1500	5xE27	1/1	A++→E
955STAR1/BL	F	Pendant*	black+gold		300	1500	1xE27	1/1	A++→E
955CAGE1/BL	A	Pendant	black	200		1500	1xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

*Until Supply Last

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MALI
955MALI3/WH



MALI
955MALI3/BL

IP20

MALI

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MALI3/WH	A	Chandelier	white	200	900	1500	3xE27	1/1	A++→E
955MALI3/BL	A	Chandelier	black	200	900	1500	3xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KERRY
955KERRY3WL/AL



KERRY
955KERRY3P/AL

IP20

KERRY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KERRY3WL/AL	A	Ceiling lamp	aluminium	400	280	3xE27	1/1	A++→E
955KERRY3P/AL	A	Pendant	aluminium	400	1500	3xE27	1/1	A++→E

Material: Aluminium, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIV
955LIV1/BL



LIV
955LIV1/AL



LIV
955LIV1/C

IP20

LIV

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LIV1/BL	A	Pendant	chrome/black	400	1500	1xE27	1/1	A++→E
955LIV1/AL	A	Pendant	chrome/aluminium	400	1500	1xE27	1/1	A++→E
955LIV1/C	A	Pendant	chrome/coffe	400	1500	1xE27	1/1	A++→E

Material: Aluminium, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LUCCA
955LUCCA1/WH

IP20

LUCCA

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LUCCA1/WH	A	Pendant	white	400	1500	1xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAJESTIC
955MAJESTIC1P



MAJESTIC
955MAJESTIC1P/BG



MAJESTIC
955MAJESTIC1P/CF



MAJESTIC
955MAJESTIC4



MAJESTIC
955MAJESTIC3

IP20

MAJESTIC

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MAJESTIC1P	A	Pendant	concrete/wood	125		165	1xE27	1/1	A++→E
955MAJESTIC1P/BG	A	Pendant	beige/wood	125		165	1xE27	1/1	A++→E
955MAJESTIC1P/CF	A	Pendant	caffe/wood	125		165	1xE27	1/1	A++→E
955MAJESTIC3	A	Chandelier	concrete/beige/caffe/wood	300	1100		3xE27	1/1	A++→E
955MAJESTIC4	A	Chandelier	concrete/beige/caffe/green/wood	400	1100		4xE27	1/1	A++→E

Material: Metal+wood+concrete, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALMA
955ALMA1/BL



ALMA
955ALMA1/GR



ALMA
955ALMA1/G

IP20

ALMA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ALMA1/BL	A	Pendant	Wood & blue	200	1320	1xE27	1/1	A++→E
955ALMA1/GR	A	Pendant	Gold & grey	200	1320	1xE27	1/1	A++→E
955ALMA1/G	A	Pendant	Gold & green	200	1320	1xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALMA
955ALMA3/MC

IP20

ALMA

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ALMA3/MC	A	Pendant	Multicolour	1000	200	1320	1320	3xE27	1/1

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BRADLEY
955BRADLEY3



BRADLEY
955BRADLEY1

IP20

BRADLEY

Catalogue number	Product category	Description	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BRADLEY1	A	Pendant	Wood & grey	165		1000	1xE27	1/4	A++→E
955BRADLEY3	A	Pendant	Wood & grey	890	165	1000	3xE27	1/4	A++→E

Material: Iron + Glass, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

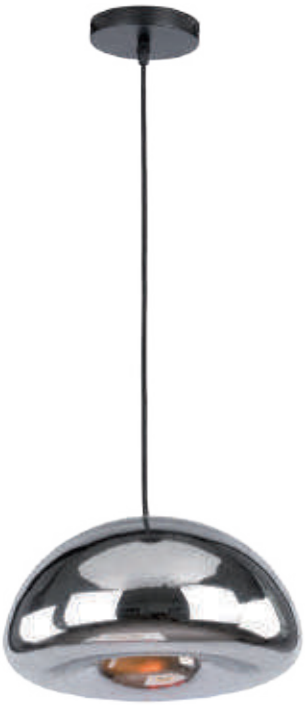

ART
955ART1C



DUKE
955DUKE1/BK



DUKE
955DUKE1/AB



DUKE
955DUKE1/CH

IP20

DUKE / ART

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DUKE1/BK	A	Pendant	Black	90	400	1 x GU10	1/10	A++→E
955DUKE1/AB	F	Pendant*	Antique brass	70	430	1 x GU10	1/10	A++→E
955DUKE1/CH	F	Pendant*	Chrome	55	430	1 x GU10	1/10	A++→E
955ART1C	F	Pendant*	Chrome	300	140	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



SHADE
91SHADE3DR4



SHADE
91SHADE3DC1

IP20

UNTIL SUPPLY LAST

SHADE

Catalogue number	Product category	Description	Colour	Material	Width / Diameter (mm)	Length (mm)	Lampholder	Packing/Box (pcs)	Energy class
91SHADE3DR4	F	Chandelier	Colourful	Glass	150	1150	E27	1/12	A++→E
91SHADE3DC1	F	Chandelier	Colourful	Glass	120	1120	E27	1/20	A++→E

Lamps Not Included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



ANDREA
955ANDREA1/BL

IP20

ANDREA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ANDREA1/BL	A	Pendant	Black & gold	400	1500	1xE27	1/1	A++→C

Material: Metal + Fabric, **Lamps Not Included , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MORGAN
955MORGAN1W/BL



MORGAN
955MORGAN2/BL

IP20

MORGAN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MORGAN1W/BL	A	Wall lamp	Black	370	370	180	1xE14	1/1	A++→C
955MORGAN2/BL	A	Chandelier	Black	500	500	420	2xE14	1/1	A++→C

Material: Metal, **Lamps Not Included, Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MORGAN
955MORGAN3/BL



MORGAN
955MORGAN6/BL

IP20

MORGAN

Catalogue number	Product category	Description	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MORGAN3/BL	A	Chandelier	Black	500	500	500	3xE14	1/1	A++→C
955MORGAN6/BL	A	Chandelier	Black	600	600	500	6xE14	1/1	A++→C

Material: Metal, **Lamps Not Included, Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TIM
955TIM1A



TIM
955TIM1C



TIM
955TIM1B

IP20

TIM

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TIM1A	A	Pendant	Black & Gold	190	400	1 x E27	1/1	A++→C
955TIM1B	A	Pendant	Black & Gold	350	150	1 x E27	1/1	A++→C
955TIM1C	A	Pendant	Black & Gold	250	300	1 x E27	1/1	A++→C

Material: Aluminum, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JEMMA
955JEMMA3

IP20

JEMMA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JEMMA3	A	Chandelier	Black & gold	255	195	3xE27	1/1	A++ → E

Material: Iron, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



FOREST
955FOREST1B



MARBLE
955MARBLE1A/WH



MARBLE
955MARBLE1A/BR

IP20

UNTIL SUPPLY LAST

MARBLE / FOREST

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MARBLE1A/WH	F	Pendant	Marble	200	1 x E27	1/1	A++→E
955MARBLE1A/BR	F	Pendant	Marble	200	1 x E27	1/1	A++→E
955FOREST1B	F	Pendant	Cherry-tree	300	1 x E27	1/1	A++→E

Material: Metal and glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



FRANK
955FRANK3/GR

IP20

FRANK

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955FRANK3/GR	A	Chandelier	grey	400	900	600	3xE27	1/1	A++→E

Material: Metal, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



YVONNE
955YVONNE1S/BL
955YVONNE1L/BL



YVONNE
955YVONNE1S/BR
955YVONNE1L/BR

IP20

YVONNE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955YVONNE1S/BL	A	Pendant	Black	350	1500	3xE27	1/2	A++→E
955YVONNE1S/BR	A	Pendant	Brown	350	1500	3xE27	1/1	A++→E
955YVONNE1L/BL	A	Pendant	Black	500	1500	5xE27	1/2	A++→E
955YVONNE1L/BR	A	Pendant	Brown	500	1500	5xE27	1/1	A++→E

Material: Iron + Acrylic + Fabric, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWEED
955TWEED1



LUNA
955LUNA1

IP20

TWEED/LUNA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TWEED1	A	Pendant	White	300	230	1320	1xE27	1/1	A++→E
955LUNA1	A	Pendant	White	300	300	1400	1xE27	1/1	A++→E

Material: Plastic, , **Lamps Not Included, max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PHIL
955PHIL1WL/BL



PHIL
955PHIL5/BL



PHIL
955PHIL3/BL

IP20

PHIL

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955PHIL1WL/BL	A	Wall lamp	Black and wood	200	160	130	1xE27	1/40	A++→E
955PHIL3/BL	A	Ceiling lamp	Black and wood	536	536	415	3xE27	1/10	A++→E
955PHIL5/BL	A	Ceiling lamp	Black and wood	731	731	515	5xE27	1/6	A++→E

Material: Metal and Wood, **Lamps Not Included, max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

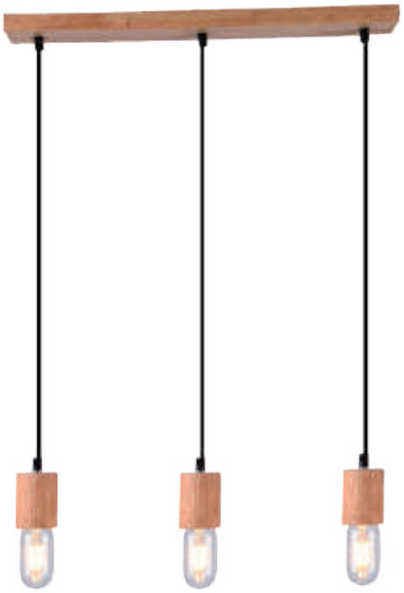

FIONA
955FIONA3



RONNY
955RONNY1



RONNY
955RONNY3

IP20

RONNY / FIONA

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955RONNY1	A	Pendant	Black and wood	150	90	1120	1xE27	1/40	A++→E
955RONNY3	A	Pendant	Black and wood	480	145	940	3xE27	1/10	A++→E
955FIONA3	A	Pendant	Wood		300	230	3xE27	1/1	A++→E

Material: Metal and Wood, **Lamps Not Included, max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WOODY
955WOODY/D



WOODY
955WOODY/R

IP20

WOODY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955WOODY/D	A	Pendant	black painting+rattan	340	1200	E27	1	A++→E
955WOODY/R	A	Pendant	wood painting+wood ring	380	1200	E27	1	A++→E

Material 955WOODY/D: Metal+ Rattan | **Material 955WOODY/R:** Metal+ Wood | **Lamps Not Included** | max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WOODY
955WOODY/1



WOODY
955WOODY/2



WOODY
955WOODY/H

IP20

WOODY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955WOODY/1	A	Pendant	wood painting+rattan	540	1200	E27	1/1	A++→E
955WOODY/2	A	Pendant	wood painting+rattan	350	1200	E27	1/1	A++→E
955WOODY/H	A	Pendant	black painting+rattan	300/300	1200	E27	1/1	A++→E

Material: Metal+ Rattan | **Lamps Not Included** | max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WOODY
955WOODY/3



WOODY
955WOODY/4

IP20

WOODY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955WOODY/3	A	Pendant	chrome/wood	400	1500	1xE27	1/1	A++→E
955WOODY/4	A	Ceiling lamp	black/wood	300		1xE27	1/1	A++→E

Material: Metal+ Wood | **Lamps Not Included** | Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BAMBOO
955BAMBOO1



SIMONA
955SIMONA1

IP20

BAMBOO/SIMONA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BAMBOO1	A	Pendant	Wood	330	200	1xE27	1/1	A++→E
955SIMONA1	A	Pendant	Wood	450	300	1xE27	1/1	A++→E

Material: Wood, **Lamps Not Included, Max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEGRA
955ALEGRA1W



ALEGRA
955ALEGRA1T

IP20

ALEGRA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ALEGRA1W	A	Wall lamp	wood and black	245	290	1xE14	1/1	A++→E
955ALEGRA1T	A	Table lamp	wood and black	280	475	1xE14	1/1	A++→E

Material: Metal and wood, **Lamps Not Included, Max 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CIMENT
955CIMENT1A



CIMENT
955CIMENT1C



CIMENT
955CIMENT1D



STONE
955STONE1C

IP20

UNTIL SUPPLY LAST

CIMENT / STONE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CIMENT1A	F	Pendant	Concrete	180	250	1 x E27	1/1	A++→E
955CIMENT1C	F	Pendant	Concrete	250	250	1 x E27	1/1	A++→E
955CIMENT1D	F	Pendant	Concrete	150	220	1 x E27	1/1	A++→E
955STONE1C	F	Pendant	Stone	300		1 x E27	1/1	A++→E

Material: Cement and metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



HELIX
955HELIX3/BK



HELIX
955HELIX3/WH



UNION
955UNION1

IP20

HELIX / UNION

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955HELIX3/BK	A	Chandelier	Matt black	425	1240	3 x E27	1/1	A++→E
955HELIX3/WH	A	Chandelier	White	400	1240	3 x E27	1/1	A++→E
955UNION1	A	Pendant	Matt black	300	1240	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GALAXY
955GALAXY1/BL



CHESTER
955CHESTER1/WH



CHESTER
955CHESTER1/BL

IP20

GALAXY / CHESTER

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955GALAXY1/BL	A	Pendant	Black & gold	400	1500	1xE27	1/1	A++→E
955CHESTER1/WH	A	Pendant	White	350	1500	1xE27	1/1	A++→E
955CHESTER1/BL	A	Pendant	Black	350	1500	1xE27	1/1	A++→E

Material: Iron, **Lamps Not Included, Max 40W, 955CHESTER1/BL Lampshade Colour:** Outside Black, Inside White

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JASON
955JASON1/GR



JASON
955JASON1/WH



JASON
955JASON1/BK

IP20

JASON

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JASON1/BK	A	Pendant	Sand black with copper	300	1410	1 x E27	1/1	A++→E
955JASON1/GR	A	Pendant	Sand grey with copper	300	1410	1 x E27	1/1	A++→E
955JASON1/WH	A	Pendant	Sand white with satin nickel	300	1410	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TEDD
955TEDD1P/WH



TEDD
955TEDD1P/BK

IP20

UNTIL SUPPLY LAST

TEDD

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TEDD1P/BK	F	Pendant	Sand black with copper	260	1400	1 x E27	1/1	A++→E
955TEDD1P/WH	F	Pendant	Sand white with satin nickel	260	1400	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



MATT
955MATT1/WH



MATT
955MATT1/BK

IP20

MATT

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MATT1/BK	A	Pendant	Matt black and gold	360	1290	1 x E27	1/1	A++→E
955MATT1/WH	A	Pendant	Matt white and gold	360	1290	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


VINTAGE



JACKSON
955JACKSON18

IP20

JACKSON

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JACKSON18	A	Chandelier	black	730	18 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DAMON
955DAMON1W



DAMON
955DAMON1P



DAMON
955DAMON3P

IP20

DAMON

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DAMON1P	F	Pendant*	black	230	1 x E27	1/10	A++→E
955DAMON3P	A	Pendant	black	360	3 x E27	1/1	A++→E
955DAMON1W	A	Wall lamp	black	230	1 x E27	1/6	A++→E

Material: Metal, **Lamps Not Included**

Pendant*

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DAMON
955DAMON1P/BL



DAMON
955DAMON1P/AB

IP20

DAMON

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DAMON1P/BL	A	Pendant	Black	220	1 x E27	1/50	A++→E
955DAMON1P/AB	A	Pendant	Antique brass	220	1 x E27	1/50	A++→E

Material: Metal, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





JACOB

955JACOB1P

IP20

UNTIL SUPPLY **LAST**

JACOB

Catalogue number	Product category	Description	Diameter (mm)	Height (mm)	Lampholder	Packing/ Box (pcs)	Energy class
955JACOB1P	F	Pendant	320	550	1 x E27	1/1	A++→E

Material: Metal with transparent glass, Lamps Not Included

BEST EFFECT WITH **VINTAGE LAMPS** · RoHS COMPLIANT · CE · 3+2 standard +extended **5 YEAR TOTAL WARRANTY**



LUTON
955LUTON1



LUTON
955LUTON6

IP20

LUTON

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LUTON1	A	Pendant	Black	205	205	1500	1xE14	1/1	A++→E
955LUTON6	A	Pendant	Black	990	205	1500	6xE14	1/1	A++→E

Material: Metal + Acrylic, **Lamps Not Included, , Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PAIL
955PAIL1



APIS
955APIS1

IP20

PAIL / APIS

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
955APIS1	A	Pendant	Black with sliver	300	240	1 x E27	Metal	1/1	A++→E
955PAIL1	A	Pendant	Black with wood	215	130	1 x E27	Metal with wood	1/1	A++→E

Lamps Not Included

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ROPE
955ROPE1W



ROPE
955ROPE2W

IP20

ROPE

Catalogue number	Product category	Description	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ROPE1W	A	Wall lamp	200	190	1 x E27	1/1	A++→E
955ROPE2W	A	Wall lamp	400	400	2 x E27	1/1	A++→E

Material: Metal, Black and rust, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ROPE
955ROPE1P



SAILOR
955SAILOR17



GRID
955GRID1P

IP20

ROPE / GRID / SAILOR

Catalogue number	Product category	Description	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ROPE1P	A	Pendant	160	180	1 x E27	1/10	A++→E
955GRID1P	A	Pendant	160	180	1 x E27	1/1	A++→E
955SAILOR17	A	Pendant	40	1000	1xE27	1/100	A++→E

Material: Metal, Black and rust, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CARTER
955CARTER6L



CARTER
955CARTER4R

IP20

UNTIL SUPPLY LAST

CARTER

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CARTER6L	F	Chandelier	black	300	480	250	6 x E27	1/1	A++→E
955CARTER4R	F	Chandelier	black	370		250	4 x E27	1/1	A++→E

Material: Metal, Lamps Not Included

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CLARK
955CLARK1B



CLARK
955CLARK1A



TYLER
955TYLER1A/CU

IP20

UNTIL SUPPLY LAST

CLARK / TYLER

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CLARK1A	F	Pendant	Copper	260	1 x E27	1/1	A++→E
955CLARK1B	F	Pendant	Copper	220	1 x E27	1/1	A++→E
955TYLER1A/CU	F	Pendant	Copper	155	1 x E27	1/1	A++→E

Material: Glass with metal, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+0 standard +extended · 3 YEAR TOTAL WARRANTY

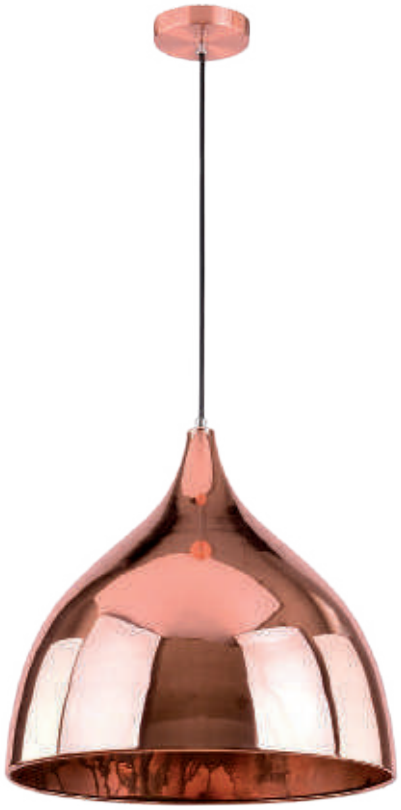

DECO
955DECO1A



DECO
955DECO1B

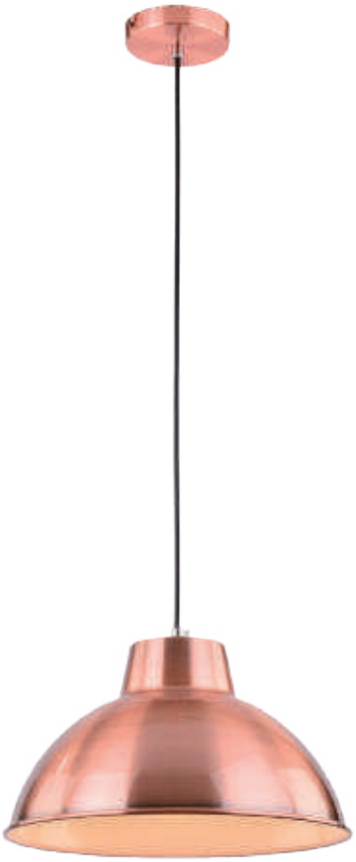

DECO
955DECO1C

IP20

DECO

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955DECO1A	A	Pendant	Copper	350	350	1 x E27	1/1	A++→E
955DECO1B	A	Pendant	Copper	300	270	1 x E27	1/1	A++→E
955DECO1C	F	Pendant*	Copper	300	180	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

*Until Supply Last

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HAMMER
955HAMMER1C/CU



HAMMER
955HAMMER1A/G



HAMMER
955HAMMER1D/CH

IP20

UNTIL SUPPLY LAST

HAMMER

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955HAMMER1C/CU	F	Pendant	Copper	300		1 x E27	1/1	A++→E
955HAMMER1A/G	F	Pendant	Gold	290	220	1 x E27	1/1	A++→E
955HAMMER1D/CH	F	Pendant	Chrome	190	250	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+0 standard +extended · 3 YEAR TOTAL WARRANTY



ELMARK

www.elmarkholding.eu



BRYAN

955BRYAN1W

IP20

BRYAN

Catalogue number	Product category	Description	Diameter (mm)	Height (mm)	Lampholder	Packing/ Box (pcs)	Energy class
955BRYAN1W	A	Wall lamp	260	260	1 x E27	1/6	A++→E

Material: Metal antique brass and glass, **Lamps Not Included**

BEST EFFECT WITH VINTAGE LAMPS

RoHS COMPLIANT

CE

3+2 standard +extended

5 YEAR TOTAL WARRANTY



BERLIN
955BERLIN1A/CH

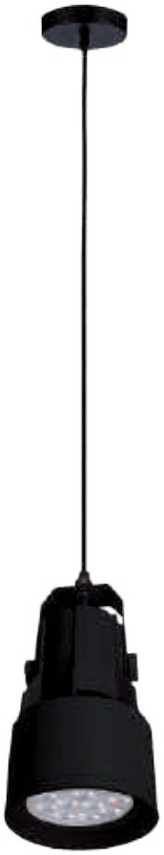

SKY
93SKY2211PWW/BL
93SKY2211PW/BL
93SKY2211PCW/BL

IP20

BERLIN / SKY

Catalogue number	Product category	Description	Colour temp. (K)	Lamp	Watt	Whole fixture lumens (lm)	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
955BERLIN1A/CH	F	Pendant*	-	Not Included	-	-	Chrome	360	1 x E27	1/1	A++→E
93SKY2211PWW/BL	A	Pendant	2700	Included PAR30	15	1275	Black	100	1 x E27	1/1	A+ A++→E
93SKY2211PW/BL	A	Pendant	4000	Included PAR30	15	1275	Black	100	1 x E27	1/1	A+ A++→E
93SKY2211PCW/BL	A	Pendant	6400	Included PAR30	15	1275	Black	100	1 x E27	1/1	A+ A++→E

Material: Metal

* Until Supply Last



SKY Lamp included



BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SAILOR
955SAILOR1RAB



SAILOR
955SAILOR1P



SAILOR
9527100



SAILOR
955SAILOR1W

IP20

SAILOR

Catalogue number	Product category	Description	Colour	Diameter (mm)	Length (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
955SAILOR1RAB	F	Pendant*	red antique brass	100	2050	E27	iron	1/20	A++→E
955SAILOR1P	F	Pendant*	pink	90	1500	E27	silicone	1/80	A++→E
9527100	A	Pendant	chrome	100	1085	E27	silicone	1/50	A++→E
955SAILOR1W	A	Wall fixture	antique brass	100	200	E27	iron	1/20	A++→E

Lamps Not Included

* Until Supply Last

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SAILOR
955SAILOR1AB



SAILOR
955SAILOR1CU



SAILOR
955SAILOR1C



SAILOR
955SAILOR1BR

IP20

SAILOR

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
955SAILOR1AB	A	Pendant	Antique brass and black	50	1070	1 x E27	Metal	1/10	A++→E
955SAILOR1CU	A	Pendant	Copper and black	50	1080	1 x E27	Metal	1/10	A++→E
955SAILOR1C	F	Pendant*	Cement and black	60	1090	1 x E27	Cement and metal	1/10	A++→E
955SAILOR1BR	F	Pendant*	Brown	50	1080	1 x E27	Silicone	1/50	A++→E

Lamps Not Included
* Until Supply Last

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SAILOR
955SAILOR11/G



SAILOR
955SAILOR12/G



SAILOR
955SAILOR13/S



SAILOR
955SAILOR14/AB



SAILOR
955SAILOR15/RAB

IP20

SAILOR

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
955SAILOR11/G	A	Pendant	Gold	50	1000	1 x E27	Metal	1/100	A++→E
955SAILOR12/G	A	Pendant	Gold	45	1000	1 x E27	Metal	1/100	A++→E
955SAILOR13/S	A	Pendant	Silver	45	1000	1 x E27	Metal	1/100	A++→E
955SAILOR14/AB	A	Pendant	Antique brass	55	1000	1 x E27	Metal	1/100	A++→E
955SAILOR15/RAB	A	Pendant with switch	Red antique brass	35	1000	1 x E27	Metal	1/100	A++→E

Lamps Not Included

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



955SAILOR16/R



955SAILOR16/BL



955SAILOR16/BR



955SAILOR16/WH



955SAILOR16/Y

IP20

SAILOR

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
955SAILOR16/BL	A	Pendant	Black	40	1000	1 x E27	Silicon	1/100	A++→E
955SAILOR16/WH	A	Pendant	White	40	1000	1 x E27	Silicon	1/100	A++→E
955SAILOR16/R	A	Pendant	Red	40	1000	1 x E27	Silicon	1/100	A++→E
955SAILOR16/BR	A	Pendant	Brown	40	1000	1 x E27	Silicon	1/100	A++→E
955SAILOR16/Y	A	Pendant	Yellow	40	1000	1 x E27	Silicon	1/100	A++→E

Lamps Not Included

BEST EFFECT WITH VINTAGE LAMPS · RoHS COMPLIANT · CE · 3+2 standard +extended · 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CLASSIC



MARIEL
955MARIEL5/WH-G



MARIEL
955MARIEL5/GR-G

IP20

UNTIL SUPPLY LAST

MARIEL

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MARIEL5/WH-G	F	Chandelier	white and gold	600	460	5xE14	1/1	A++→E
955MARIEL5/GR-G	F	Chandelier	gray and gold	600	460	5xE14	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



AMANDA
955AMANDA5/BK



AMANDA
955AMANDA5/WH

IP20

UNTIL SUPPLY LAST

AMANDA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955AMANDA5/WH	F	Chandelier	White	580	550	5 x E14	1/1	A++→E
955AMANDA5/BK	F	Chandelier	Black	580	550	5 x E14	1/10	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



ANGELA
955ANGELA1W



ANGELA
955ANGELA5



ANGELA
955ANGELA8



ANGELA
955ANGELA3

IP20

ANGELA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ANGELA1W	A	Wall lamp	Black	270	370	1 x E14	1/10	A++→E
955ANGELA3	A	Chandelier	Black	510	530	3 x E14	1/1	A++→E
955ANGELA5	A	Chandelier	Black	510	570	5 x E14	1/1	A++→E
955ANGELA8	A	Chandelier	Black	680	690	8 x E14	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MADISON
955MADISON5



ASHLEY
955ASHLEY1W



ASHLEY
955ASHLEY5

IP20

UNTIL SUPPLY LAST

ASHLEY / MADISON

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ASHLEY1W	F	Wall lamp	White	250	360	1 x E14	1/10	A++→E
955ASHLEY5	F	Chandelier	White	550	680	5 x E14	1/1	A++→E
955MADISON5	F	Chandelier	Black	500	520	5 x E14	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



LAURA
955LAURA1W



LAURA
955LAURA5



RUBY
955RUBY6



RUBY
955RUBY1W

IP20

RUBY / LAURA

Catalogue number	Product category	Description	Colour	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955RUBY6	A	Chandelier	Beige swept gold	570	490	6 x E14	1/1	A++→E
955LAURA5	A	Chandelier	White swept gold	650	680	5 x E14	1/1	A++→E
955RUBY1W	A	Wall lamp	Beige swept gold	270	205	1 x E14	1/10	A++→E
955LAURA1W	A	Wall lamp	White swept gold	100	425	1 x E14	1/10	A++→E

Material: Metal with crystal, **Lamps Not Included**

RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KAYLA
955KAYLA6



KAYLA
955KAYLA5

IP20

UNTIL SUPPLY LAST

KAYLA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KAYLA5	F	Chandelier	black	640	200	5 x E14	1/1	A++→E
955KAYLA6	F	Chandelier	black	930	200	6 x E14	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



SIA
955SIA5



CALLA
955CALLA3



CALLA
955CALLA5

IP20

UNTIL SUPPLY LAST

CALLA / SIA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CALLA3	F	Chandelier	Chrome	500	200	3xE14	1/1	A++→E
955CALLA5	F	Chandelier	Chrome	500	200	5xE14	1/1	A++→E
955SIA5	F	Chandelier	Gold	500	300	5xE14	1/1	A++→E

Material: Metal + glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



RENY
955RENY3



RENY
955RENY4

IP20

UNTIL SUPPLY LAST

RENY

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955RENY3	F	Chandelier	Wenge/chrome	460		220	3xE27	1/1	A++→E
955RENY4	F	Chandelier	Wenge/chrome	520		220	4xE27	1/1	A++→E

Material: Metal + glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



ZORY
955ZORY3



ZORY
955ZORY6

IP20

UNTIL SUPPLY LAST

ZORY

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ZORY3	F	Chandelier	Wenge/chrome	540		230	3xE27	1/1	A++→E
955ZORY6	F	Chandelier	Wenge/chrome	690		230	6xE27	1/1	A++→E

Material: Metal + glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



TAURY
955TAURY5



CIARA
955CIARA5

IP20

UNTIL SUPPLY LAST

CIARA / TAURY

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CIARA5	F	Chandelier	Wenge/chrome	530		220	5xE27	1/1	A+→E
955TAURY5	F	Chandelier	antique brass	500		300	5xE14	1/1	A+→E

Material: Metal + glass, **Lamps Not Included**

RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



STACY
955STACY4



STACY
955STACY3



STACY
955STACY2



STACY
955STACY1W

IP20

UNTIL SUPPLY LAST

STACY

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955STACY4	F	Chandelier	Satin nickel	180	750	350	4 x E27	1/1	A++→E
955STACY1W	F	Wall lamp	Satin nickel	220	250	130	1 x E27	1/10	A++→E
955STACY3	F	Chandelier	Satin nickel	160	600	350	3 x E27	1/1	A++→E
955STACY2	F	Chandelier	Satin nickel	180	390	350	2 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SARA
955SARA6



SARA
955SARA4



SARA
955SARA3

IP20

UNTIL SUPPLY LAST

SARA

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SARA6	F	Chandelier	Satin nickel	330	660	330	6 x E27	1/1	A++→E
955SARA4	F	Chandelier	Satin nickel	240	680	330	4 x E27	1/1	A++→E
955SARA3	F	Chandelier	Satin nickel	180	560	330	3 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



LEXI
955LEXI6/SN



LEXI
955LEXI4/SN

IP20

UNTIL SUPPLY LAST

LEXI

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LEXI6/SN	F	Chandelier	Satin nickel	650	350	6 x E27	1/1	A++→E
955LEXI4/SN	F	Chandelier	Satin nickel	520	350	4 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



LEXI
955LEXI6/AB



LEXI
955LEXI4/AB

IP20

UNTIL SUPPLY LAST

LEXI

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LEXI6/AB	F	Chandelier	Antique brass	650	350	6 x E27	1/1	A++→E
955LEXI4/AB	F	Chandelier	Antique brass	520	350	4 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



ADEL
955ADEL6/SN



ADEL
955ADEL4/SN



ADEL
955ADEL3/SN



ADEL
955ADEL1W/SN

IP20

UNTIL SUPPLY LAST

ADEL

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ADEL1W/SN	F	Wall lamp	Satin nickel	160	260	140	1 x E27	1/10	A++→E
955ADEL3/SN	F	Chandelier	Satin nickel	480	-	370	3 x E27	1/1	A++→E
955ADEL4/SN	F	Chandelier	Satin nickel	330	520	370	4 x E27	1/1	A++→E
955ADEL6/SN	F	Chandelier	Satin nickel	600	-	370	6 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ADEL
955ADEL6/AB



ADEL
955ADEL3/AB



ADEL
955ADEL4/AB

IP20

UNTIL SUPPLY LAST

ADEL

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ADEL3/AB	F	Chandelier	Antique brass	480	-	370	3 x E27	1/1	A++→E
955ADEL4/AB	F	Chandelier	Antique brass	330	520	370	4 x E27	1/1	A++→E
955ADEL6/AB	F	Chandelier	Antique brass	600	-	370	6 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALICE
955ALICE5



ALICE
955ALICE4

IP20

UNTIL SUPPLY LAST

ALICE

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ALICE4	F	Chandelier	Satin nickel	500	-	350	4 x E27	1/1	A++→E
955ALICE5	F	Chandelier	Satin nickel	600	-	350	5 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



JUDY
955JUDY3/WH



JUDY
955JUDY5/WH

IP20

JUDY

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JUDY3/WH	A	Ceiling lamp	White	460	460	340	3xE27	1/12	A++→E
955JUDY5/WH	A	Ceiling lamp	White	540	540	340	5xE27	1/12	A++→E

Material: Metal and PP, **Lamps Not Included, Max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JUDY
955JUDY3/BL



JUDY
955JUDY5/BL

IP20

JUDY

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JUDY3/BL	A	Ceiling lamp	Black	460	460	340	3xE27	1/12	A++→E
955JUDY5/BL	A	Ceiling lamp	Black	540	540	340	5xE27	1/12	A++→E

Material: Metal and PP, **Lamps Not Included, Max 25W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KRISTA
955KRISTA5



KRISTA
955KRISTA1W



KRISTA
955KRISTA1T



KRISTA
955KRISTA3

IP20

KRISTA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KRISTA1T	A	Table lamp	Golden copper brass with beige	180	-	330	1 x E27	1/6	A++→E
955KRISTA1W	A	Wall lamp	Golden copper brass with beige	180	275	235	1 x E27	1/12	A++→E
955KRISTA3	A	Chandelier	Golden copper brass with beige	525	-	450	3 x E27	1/1	A++→E
955KRISTA5	A	Chandelier	Golden copper brass with beige	525	-	450	5 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KAREN
955KAREN1P



KAREN
955KAREN3R



KAREN
955KAREN3L

IP20

UNTIL SUPPLY LAST

KAREN

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KAREN3R	F	Chandelier	Satin nickel	130	500	800	3 x E27	1/1	A++→E
955KAREN1P	F	Pendant	Satin nickel	120	-	800	1 x E27	1/1	A++→E
955KAREN3L	F	Chandelier	Satin nickel	130	500	800	3 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOLLY
955MOLLY1P/SN



MOLLY
955MOLLY2/SN

IP20

UNTIL SUPPLY LAST

MOLLY

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MOLLY1P/SN	F	Pendant	Satin nickel and white	295	-	1245	1 x E27	1/1	A++→E
955MOLLY2/SN	F	Chandelier	Satin nickel and white	295	1100	800	2 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



MOLLY
955MOLLY1P/AB



MOLLY
955MOLLY1T/AB



MOLLY
955MOLLY2/AB

IP20

UNTIL SUPPLY LAST

MOLLY

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MOLLY1P/AB	F	Pendant	Antique brass and white	295	-	1245	1 x E27	1/1	A++→E
955MOLLY2/AB	F	Chandelier	Antique brass and white	295	1100	800	2 x E27	1/1	A++→E
955MOLLY1T/AB	F	Table lamp	Antique brass and white	230	300	480	1 x E27	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



CECIL
955CECIL4



CECIL
955CECIL6

IP20

UNTIL SUPPLY LAST

CECIL

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CECIL6	F	Chandelier	Wenge and chrome	550	-	350	6 x E27	1/1	A++→E
955CECIL4	F	Chandelier	Wenge and chrome	400	-	350	4 x E27	1/1	A++→E

Material: Metal with white glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



ERIN
955ERIN1P



ERIN
955ERIN3R



ERIN
955ERIN3L



VELEKA
9520067

IP20

UNTIL SUPPLY LAST

ERIN / VELEKA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ERIN3R	F	Chandelier	Satin nickel	300	-	800	3 x E27	1/1	A++→E
955ERIN1P	F	Pendant	Satin nickel	120	-	800	1 x E27	1/10	A++→E
955ERIN3L	F	Chandelier	Satin nickel	90	500	800	3 x E27	1/1	A++→E
9520067	F	Table lamp	chrome/frosted glass				1 x E14	1/1	A++→E

Material: Metal with glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JANIS
955JANIS1A



JANIS
955JANIS1B



JANIS
955JANIS1C

IP20

JANIS

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JANIS1A	A	Pendant	Black	130	-	250	1 x E27	1/1	A++→E
955JANIS1B	A	Pendant	White	130	130	190	1 x E27	1/1	A++→E
955JANIS1C	A	Pendant	Black	130	-	250	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HANNA
955HANNA3



DONNA
955DONNA3

IP20

HANNA / DONNA

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955HANNA3	F	Ceiling lamp*	Lite wood	450	160	3 x E27	1/1	A++→E
955DONNA3	A	Ceiling lamp	Black wood	400	100	3 x E27	1/1	A++→E

Material: Metal with glass and wood, **Lamps Not Included**

* Until Supply last

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



EROS
958930BL



EROS
958940BL



EROS
958970



EROS
958960BL



EROS
958970BL

IP20

UNTIL SUPPLY LAST

EROS

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Lampholder	Packing/Box (pcs)	Energy class
958930BL	F	Ceiling lamp	Black	300	-	1 x E27	1/1	A++→E
958940BL	F	Ceiling lamp	Black	400	-	2 x E27	1/1	A++→E
958960BL	F	Wall lamp	Black	300	300	2 x E27	1/1	A++→E
958970BL	F	Wall lamp	Black	230	350	2 x E27	1/1	A++→E
958970	F	Wall lamp	White	230	350	2 x E27	1/1	A++→E

Material: Metal with glass, Lamps Not Included

RoHS COMPLIANT CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY



VIVIAN
9500650025



STYLE
9500250008



BRANDY
9501450065



CORAL
9500840034
9500850035

IP20

UNTIL SUPPLY LAST

VIVIAN / BRANDY / CORAL / STYLE

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
9500650025	F	Ceiling lamp	Blue	500	3 x E27	1/5	A++→E
9501450065	F	Ceiling lamp	Brown	500	3 x E27	1/5	A++→E
9500840034	F	Ceiling lamp	Brown	400	2 x E27	1/5	A++→E
9500850035	F	Ceiling lamp	Brown	500	3 x E27	1/5	A++→E
9500250008	F	Ceiling lamp	Brown	500	3xE27	1/5	A++→E

Material: Metal with glass, Lamps Not Included

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



CANDY
950273631113



LIDIA
9501850081



LIDIA
9501740076
9501750077

IP20

UNTIL SUPPLY LAST

LIDIA / CANDY

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
9501740076	F	Ceiling lamp	Pink	400	2 x E27	1/5	A++→E
9501750077	F	Ceiling lamp	Pink	500	3 x E27	1/5	A++→E
9501850081	F	Ceiling lamp	Purple	500	3 x E27	1/5	A++→E
950273631113	F	Wall lamp	Dots	360/310	2 x E27	1/10	A++→E

Material: Metal with glass, Lamps Not Included

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



SENSOR
958120WH



SENSOR
958120MCH



SENSOR
958300WH



SENSOR
958300MCH

IP20

UNTIL SUPPLY LAST

SENSOR

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Lampholder	Packing/Box (pcs)	Energy class
958120WH	F	Ceiling lamp	White	300	300	2 x E27	1/8	A++→E
958120MCH	F	Ceiling lamp	Satin nickel	300	300	2 x E27	1/8	A++→E
958300WH	F	Ceiling lamp	White	300	-	2 x E27	1/8	A++→E
958300MCH	F	Ceiling lamp	Satin nickel	300	-	2 x E27	1/8	A++→E

Material: Metal with glass, Lamps Not Included

Ceiling fixture with movement sensor | Detection range: 360 degrees | Detection distance: max.6m | Time-Delay: 10sec ± 3sec to 7 min ± 2 min (adjustable) | Ambient light: <3 - 2000lux (adjustable) | Detection motion speed: 0.6 - 1.5 m/s | Installation height: 2.2 - 4m

RoHS COMPLIANT CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



SENSOR
958300WH/2

IP20

SENSOR

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Lampholder	Packing/Box (pcs)	Energy class
958300WH/2	A	Ceiling lamp	White	300	-	2xE27	1/10	A++→E

Material: Metal with glass, Lamps Not Included

958300WH/2: Lamps Not Included- max 2x25W | Detection range: 360 degrees | Detection distance: max.5m | Time-Delay: 7sec to 8 min (adjustable) | Installation height: 2.2 - 4m

RoHS COMPLIANT CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



TUBES
9510010



RULET
95109R

IP20

UNTIL SUPPLY LAST

RULET / TUBES

Catalogue number	Product category	Description	Colour	Diameter (mm)	Lampholder	Packing/Box (pcs)	Energy class
95109R	F	Pendant	red	190	1 x E27	1/1	A++→E
9510010	F	Chandelier	chrome	-	5 x E27	1/1	A++→E

Material: Metal with glass, Lamps Not Included

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



TABLE & FLOOR LAMPS



MAX
955MAX1T



MAX
955MAX1F

IP20

MAX

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MAX1T	A	Table lamp	Sand black	200	310	520	1 x E27	1/12	A++→E
955MAX1F	A	Floor lamp	Sand black	545	640	1450	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CLARA
955CLARA1T/NI



CAROL
955CAROL1F/BL

IP20

CAROL / CLARA

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CAROL1F/BL	A	Floor lamp	Black & brass	600	1850	1xE27	1/1	A++→E
955CLARA1T/NI	A	Table lamp	Nickel	460	670	1xE27	1/1	A++→E

Material: CAROL: Wood, fabric & metal, CLARA: Metal & fabric | **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PARIS
955PARIS1T/BL



PARIS
955PARIS1F/BL

IP20

PARIS

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955PARIS1T/BL	A	Table lamp	Black	140	480	1xE14	1/1	A++→E
955PARIS1F/BL	A	Floor lamp	Black	140	1500	1xE14	1/1	A++→E

Material: Metal & PVC | **Lamps Not Included** | max 40W on lampholder

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JOHN
955JOHN1F/BK



JOHN
955JOHN1T/BK



JOHN
955JOHN1T/WH

IP20

JOHN

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955JOHN1T/WH	A	Table lamp	Sand white with satin nickel	190	495	600	1 x E27	1/1	A++→E
955JOHN1T/BK	A	Table lamp	Sand black with copper	190	495	600	1 x E27	1/1	A++→E
955JOHN1F/BK	A	Floor lamp	Sand black with copper	280	830	1500	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



KILIE
955KILIE1

IP20

KILIE

Catalogue number	Product category	Description	Colour	Widthr (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955KILIE1	A	Floor lamp	White	1390	1750	E27	1/1	A++→E

Material: KILIE: Marble + Fabric; LEDA: Metal, **Lamps Not Included, Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DANN
955DANN3F

IP20

ROY / DANN

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ROY1F	A	Floor lamp	Satin nickel	445	2110	2120	1 x E27	1/1	A++→E
955DANN3F	F	Floor lamp*	Satin nickel	830	820	2000	3 x E14	1/1	A++→E

Material: Metal, Lamps Not Included
* Until supply Last - 3 year standard+0 year extended warranty

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





ROY
955ROY1F



TOMY
955TOMY1F



TOMY
955TOMY1T

IP20

TOMY

Catalogue number	Product category	Description	Colour	Widthr (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955TOMY1T	A	Table lamp	dark gray	240	490	E27	1/1	A++→E
955TOMY1F	A	Floor lamp	dark gray	400	1550	E27	1/1	A++→E

Material: Metal+ Fabric, **Lamps Not Included, Max. 40W**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CARMEN
955CARMEN1T



CARMEN
955CARMEN1F

IP20

CARMEN

Catalogue number	Product category	Description	Colour	Diameter/Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955CARMEN1F	A	Floor lamp	White & chrome	300	230	1xE27	1/1	A++→E
955CARMEN1T	A	Table lamp	White & chrome	300	230	1xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**, Max 40W

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MERY
955MERY1F/AB



MERY
955MERY1T/AB



MERY
955MERY1F/CH



MERY
955MERY1T/CH

IP20

MERY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MERY1F/AB	A	Floor lamp	Antique brass	400	1565	1 x E27	1/1	A++→E
955MERY1T/AB	A	Table lamp	Antique brass	320	570	1 x E27	1/1	A++→E
955MERY1F/CH	A	Floor lamp	Chrome	400	1565	1 x E27	1/1	A++→E
955MERY1T/CH	A	Table lamp	Chrome	320	570	1 x E27	1/1	A++→E

Material: Metal with crystal and fabirc shade, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAYA
955MAYA1F



MAYA
955MAYA1T



LILLY
955LILLY1F



LILLY
955LILLY1T

IP20

MAYA / LILLY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955MAYA1F	A	Floor lamp	Chrome	400	1630	1 x E27	1/1	A++→E
955MAYA1T	A	Table lamp	Chrome	300	650	1 x E27	1/1	A++→E
955LILLY1F	A	Floor lamp	Chrome	400	1585	1 x E27	1/1	A++→E
955LILLY1T	A	Table lamp	Chrome	150	410	1 x E27	1/4	A++→E

Material: Metal with crystal and fabirc shade, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SENSO
955SENSO1T



SENSO
955SENSO3F

LED WARM WHITE 2700K **IP40**

SENSO

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955SENSO1T	A	Table lamp	8.5	588	2800-3200	Matte black	458	180	459	1/1	A++→A
955SENSO3F	A	Floor lamp	25	1764	2800-3200	Matte black	443		1475	1/1	A++→A

Material: Aluminium + Iron + Acrylic, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DUNCAN
955DUNCAN1T

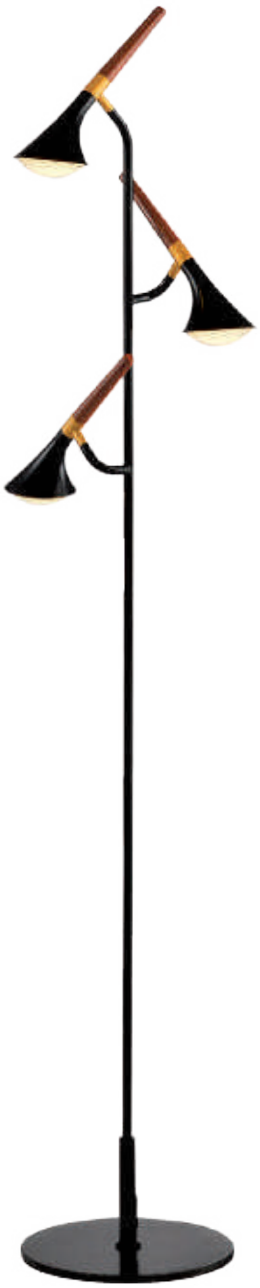

DUNCAN
955DUNCAN3F

LED WARM WHITE 2700K **IP40**

DUNCAN

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955DUNCAN1T	A	Table lamp	5	350	2800-3200	Matte black & wood	272	180	272	1/2	A++→A
955DUNCAN3F	A	Floor lamp	15	1050	2800-3200	Matte black & wood	230	250	1440	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HENDRIX
955HENDRIX1T

LED WARM WHITE 2700K **IP40**

HENDRIX

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955HENDRIX1T	A	Table lamp	11	770	2800-3200	White & black	250	480	1/1	A++→A

Material: Aluminium + Iron + PC, **LED:** Included, **Light source:** Epistar 2835

~230V | 50/60 Hz | > 15000 | SMD 2835 | Ra≥80 | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIMMABLE LED TABLE LAMPS
955LED101T/WH



DIMMABLE LED TABLE LAMPS
955LED101T/BL

LED NEUTRAL WHITE 4000K IP40 DIMMABLE

DIMMABLE LED TABLE LAMPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955LED101T/WH	A	9	500	4000K	white	150	600	1/30	A++→A
955LED101T/BL	A	9	500	4000K	black	150	600	1/30	A++→A

Material: ABS+PP | Third gear dimmable | **Lamps Not Included** | **Light source:** 30pcs 5730SMD | **Voltage:** 100-240V AC | **Adapter:** 4.6V/1.5A

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELINOR
955ELINOR1T/DGR



ELINOR
955ELINOR1T/TR

IP20

ELINOR

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955ELINOR1T/DGR	A	Table lamp	Dark grey	245	512	1xE27	1/1	A++→E
955ELINOR1T/TR	A	Table lamp	Transparent	245	512	1xE27	1/1	A++→E

Material: Acrylic , **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEGRA
955ALEGRA1T



LUKE
955LUKE1T/BK



LUKE
955LUKE1T/WH

IP20

LUKE

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LUKE1T/BK	A	Table lamp	Sand black with copper	165	530	700	1 x E27	1/12	A++→E
955LUKE1T/WH	A	Table lamp	Sand white with satin nickel	165	530	700	1 x E27	1/12	A++→E
955ALEGRA1T	A	Table lamp	wood and black	280		475	1xE14	1/1	

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIZA
955LIZA1T/AB



LIZA
955LIZA1T/CH



KRISTA
955KRISTA1T

IP20

LIZA / KRISTA

Catalogue number	Product category	Description	Material	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955LIZA1T/AB	A	Table lamp	Metal and crystal	Antique brass	210	330	1 x E14	1/4	A++→E
955LIZA1T/CH	A	Table lamp	Metal and crystal	Chrome	210	330	1 x E14	1/4	A++→E
955KRISTA1T	A	Table lamp	Metal with glass	Golden copper brass with beige	180	330	1 x E27	1/6	A++→E

Material: Metal with crystal / glass, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



SPIDER
955SPIDER1T/WH



MOLLY
955MOLLY1T/AB

IP20

UNTIL SUPPLY LAST

SPIDER / MOLLY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
955SPIDER1T/WH	F	Table lamp	Copper and white	130	600	1 x E27	1/8	A++→E
955MOLLY1T/AB	F	Table lamp	Antique brass and white	300	480	1 x E27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



SPOTLIGHTS



MICKEY BLUE
955MICKEY1W/B



MICKEY BLUE
955MICKEY3/B



MICKEY BLUE
955MICKEY1T/B

IP20

MICKEY BLUE

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955MICKEY1T/B	A	Table lamp	blue	1xE27	120		300	1/1	A++→E
955MICKEY1W/B	A	Wall lamp	blue	1xE27	120	250	140	1/1	A++→E
955MICKEY3/B	A	Chandelier	blue	3xE27	300		1100	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MICKEY PINK
955MICKEY1W/P



MICKEY PINK
955MICKEY3/P



MICKEY PINK
955MICKEY1T/P

IP20

MICKEY PINK

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955MICKEY1T/P	A	Table lamp	pink	1xE27	120		300	1/1	A++→E
955MICKEY1W/P	A	Wall lamp	pink	1xE27	120	250	140	1/1	A++→E
955MICKEY3/P	A	Chandelier	pink	3xE27	300		1100	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MICKEY WHITE
955MICKEY1W/WH



MICKEY WHITE
955MICKEY3/WH



MICKEY WHITE
955MICKEY1T/WH

IP20

MICKEY WHITE

Catalogue number	Product category	Description	Colour	Lamp holder	Width / Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955MICKEY1T/WH	A	Table lamp	white	1xE27	120		300	1/1	A++→E
955MICKEY1W/WH	A	Wall lamp	white	1xE27	120	250	140	1/1	A++→E
955MICKEY3/WH	A	Chandelier	white	3xE27	300		1100	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TINY
955TINY1/P



TINY
955TINY1/B

IP20

TINY

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955TINY1/P	A	Wall lamp	pink	120		1xGU10	1/1	A++→E
955TINY1/B	A	Wall lamp	blue	120		1xGU10	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

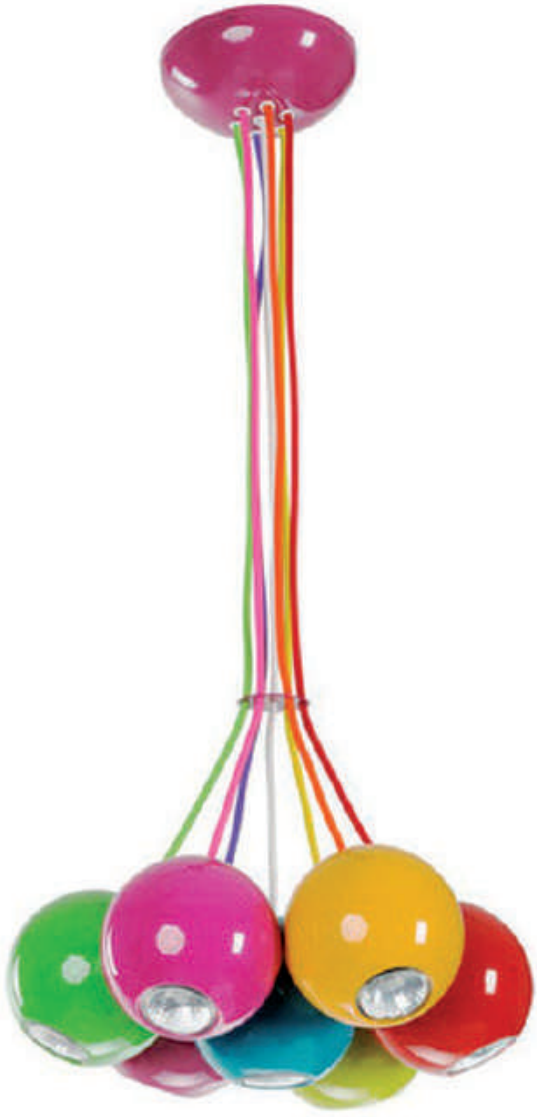

TINY
955TINY7/MC



PEARL
955PEARL3/BL

IP20

TINY / PEARL

Catalogue number	Product category	Description	Colour	Width / Diameter (mm)	Height (mm)	Lamp holder	Packing/Box (pcs)	Energy class
955TINY7/MC	A	Chandelier	multicolour	350	1500	7xGU10	1/1	A++→E
955PEARL3/BL	A	Chandelier	black and gold	150	1500	3xE27	1/1	A++→E

Material: Metal, **Lamps Not Included**

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



IZZY
955IZZY1/BL



IZZY
955IZZY1/WH



IZZY
955IZZY2/BL



IZZY
955IZZY2/WH



IZZY
955IZZY1W/BL



IZZY
955IZZY1W/WH

IP20

IZZY

Catalogue number	Product category	Description	Colour	Lamp holder	Base Diameter (mm)	Length (mm)	Width (mm)	Packing/Box (mm)	Energy class
955IZZY1W/WH	A	Spot with metal swtich	white	1xGU10	80		180	1/20	A++→E
955IZZY1W/BL	A	Spot with metal swtich	black	1xGU10	80		180	1/20	A++→E
955IZZY1/WH	A	Spot	white	1xGU10	80		180	1/20	A++→E
955IZZY1/BL	A	Spot	black	1xGU10	80		180	1/20	A++→E
955IZZY2/WH	A	Spot	white	2xGU10	80	250	180	1/12	A++→E
955IZZY2/BL	A	Spot	black	2xGU10	80	250	180	1/12	A++→E

Material: Metal, **Lamps Not Included** | max 50W on lampholder

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



IZZY
955IZZY4/WH



IZZY
955IZZY3/BL



IZZY
955IZZY3/WH



IZZY
955IZZY4/BL

IP20

IZZY

Catalogue number	Product category	Description	Colour	Lamp holder	Diameter (mm)	Length (mm)	Width (mm)	Packing/Box (mm)	Energy class
955IZZY3/WH	A	Spot	white	3xGU10	80/250		180	1/6	A++→E
955IZZY3/BL	A	Spot	black	3xGU10	80/250		180	1/6	A++→E
955IZZY4/WH	A	Spot	white	4xGU10	80	600	180	1/6	A++→E
955IZZY4/BL	A	Spot	black	4xGU10	80	600	180	1/6	A++→E

Material: Metal, **Lamps Not Included** | max 50W on lampholder

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DOTS
955DOTS1S



DOTS
955DOTS2S



DOTS
955DOTS3S

IP20

UNTIL SUPPLY LAST

DOTS

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955DOTS1S	F	Spot	White with colored dots	1 x E27	110	205	180	1/20	A++→E
955DOTS2S	F	Spot	White with colored dots	2 x E27	185	400	180	1/6	A++→E
955DOTS3S	F	Spot	White with colored dots	3 x E27	185	580	180	1/6	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



DOTS
955DOTS1P



DOTS
955DOTS3P

IP20

UNTIL SUPPLY LAST

DOTS

Catalogue number	Product category	Description	Colour	Lampholder	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955DOTS1P	F	Pendant	White with colored dots	1 x E27	130	1225	1/12	A++→E
955DOTS3P	F	Chandelier	White with colored dots	3 x E27	260	1225	1/6	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



STRIPS
955STRIPS1S



STRIPS
955STRIPS3S



STRIPS
955STRIPS2S

IP20

UNTIL SUPPLY LAST

STRIPS

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955STRIPS1S	F	Spot	White with creme and coffee	1 x E27	110	205	180	1/20	A++→E
955STRIPS2S	F	Spot	White with creme and coffee	2 x E27	185	400	180	1/6	A++→E
955STRIPS3S	F	Spot	White with creme and coffee	3 x E27	185	580	180	1/6	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



STRIPS
955STRIPS1P



STRIPS
955STRIPS3P

IP20

UNTIL SUPPLY LAST

STRIPS

Catalogue number	Product category	Description	Colour	Lampholder	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955STRIPS1P	F	Pendant	White with creme and coffee	1 x E27	130	1225	1/12	A++→E
955STRIPS3P	F	Chandelier	White with creme and coffee	3 x E27	260	1225	1/6	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



BRAD
955BRAD3/WH



BRAD
955BRAD3/BK

IP20

UNTIL SUPPLY LAST

BRAD

Catalogue number	Product category	Description	Colour	Lampholder	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955BRAD3/WH	F	Chandelier	White	3 x E14	170	495	1/1	A++→E
955BRAD3/BK	F	Chandelier	Black	3 x E14	170	495	1/1	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



NOAH
955NOAH2L



NOAH
955NOAH3L



NOAH
955NOAH1



NOAH
955NOAH3R



NOAH
955NOAH2R

IP20

UNTIL SUPPLY LAST

NOAH

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955NOAH1	F	Spot	Satin nickel	1 x E27	120	225	170	1/20	A++→E
955NOAH2L	F	Spot	Satin nickel	2 x E27	195	415	170	1/6	A++→E
955NOAH3L	F	Spot	Satin nickel	3 x E27	195	550	170	1/1	A++→E
955NOAH2R	F	Spot	Satin nickel	2 x E27	220	310	220	1/6	A++→E
955NOAH3R	F	Spot	Satin nickel	3 x E27	400	410	220	1/6	A++→E

Material: Metal

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



JIM
955JIM1/AB



JIM
955JIM2/AB



JIM
955JIM3/AB



JIM
955JIM3/SN

IP20

UNTIL SUPPLY LAST

JIM

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JIM3/SN	F	Spot	Satin nickel	3 x E27	120	560	155	1/12	A++→E
955JIM1/AB	F	Spot	Antique brass	1 x E27	95	145	140	1/30	A++→E
955JIM2/AB	F	Spot	Antique brass	2 x E27	145	360	155	1/12	A++→E
955JIM3/AB	F	Spot	Antique brass	3 x E27	120	560	155	1/12	A++→E

Material: Metal

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



JACK
955JACK3/SN



JACK
955JACK3R/SN

IP20

UNTIL SUPPLY LAST

JACK

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JACK3/SN	F	Spot	Satin nickel	3 x E14	105	560	145	1/12	A++→E
955JACK3R/SN	F	Spot	Satin nickel	3 x E14	180	-	145	1/12	A++→E

Material: Metal

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



JACK
955JACK1/AB



JACK
955JACK3R/AB



JACK
955JACK2/AB



JACK
955JACK3/AB

IP20

UNTIL SUPPLY LAST

JACK

Catalogue number	Product category	Description	Colour	Lampholder	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955JACK1/AB	F	Spot	Antique brass	1 x E14	75	105	140	1/30	A++→E
955JACK2/AB	F	Spot	Antique brass	2 x E14	105	360	145	1/12	A++→E
955JACK3/AB	F	Spot	Antique brass	3 x E14	105	560	145	1/12	A++→E
955JACK3R/AB	F	Spot	Antique brass	3 x E14	180	-	145	1/12	A++→E

Material: Metal

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



ARDA
9520001



ARDA
9520002



ARDA
9520003

IP20

UNTIL SUPPLY LAST

ARDA

Catalogue number	Product category	Description	Model	Colour	Lampholder	Packing/Box (pcs)	Energy class
9520001	F	Spot	3901	Satin nickel	1 x GU10	1/1	A++→C
9520002	F	Spot	3902	Satin nickel	2 x GU10	1/1	A++→C
9520003	F	Spot	3903	Satin nickel	3 x GU10	1/1	A++→C

Material: Metal

~230V RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



VRANA
9520022



VRANA
9520023

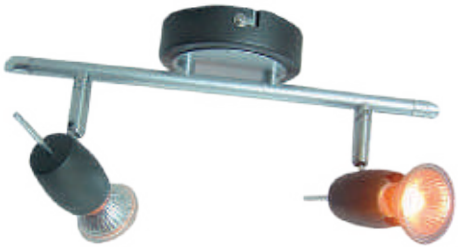

VRANA
9520021

IP20

UNTIL SUPPLY LAST

VRANA

Catalogue number	Product category	Description	Model	Colour	Lampholder	Packing/Box (pcs)	Energy class
9520021	F	Spot	3602	Silver + black	2 x GU10	1/1	A++→C
9520022	F	Spot	3603	Silver + black	3 x GU10	1/1	A++→C
9520023	F	Spot	3604	Silver + black	4 x GU10	1/1	A++→C

Material: Metal

~230V RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



ARCHAR
9520027



AHELOY
9520033

IP20

UNTIL SUPPLY LAST

AHELOY / ARCHAR

Catalogue number	Product category	Description	Model	Colour	Lampholder	Packing/Box (pcs)	Energy class
9520033	F	Spot	3804	Chrome	4 x GU10	1/1	A++→C
9520027	F	Spot	3703	Satin nickel and Chrome	3 x GU10	1/1	A++→C

Material: Metal

~230V RoHS CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

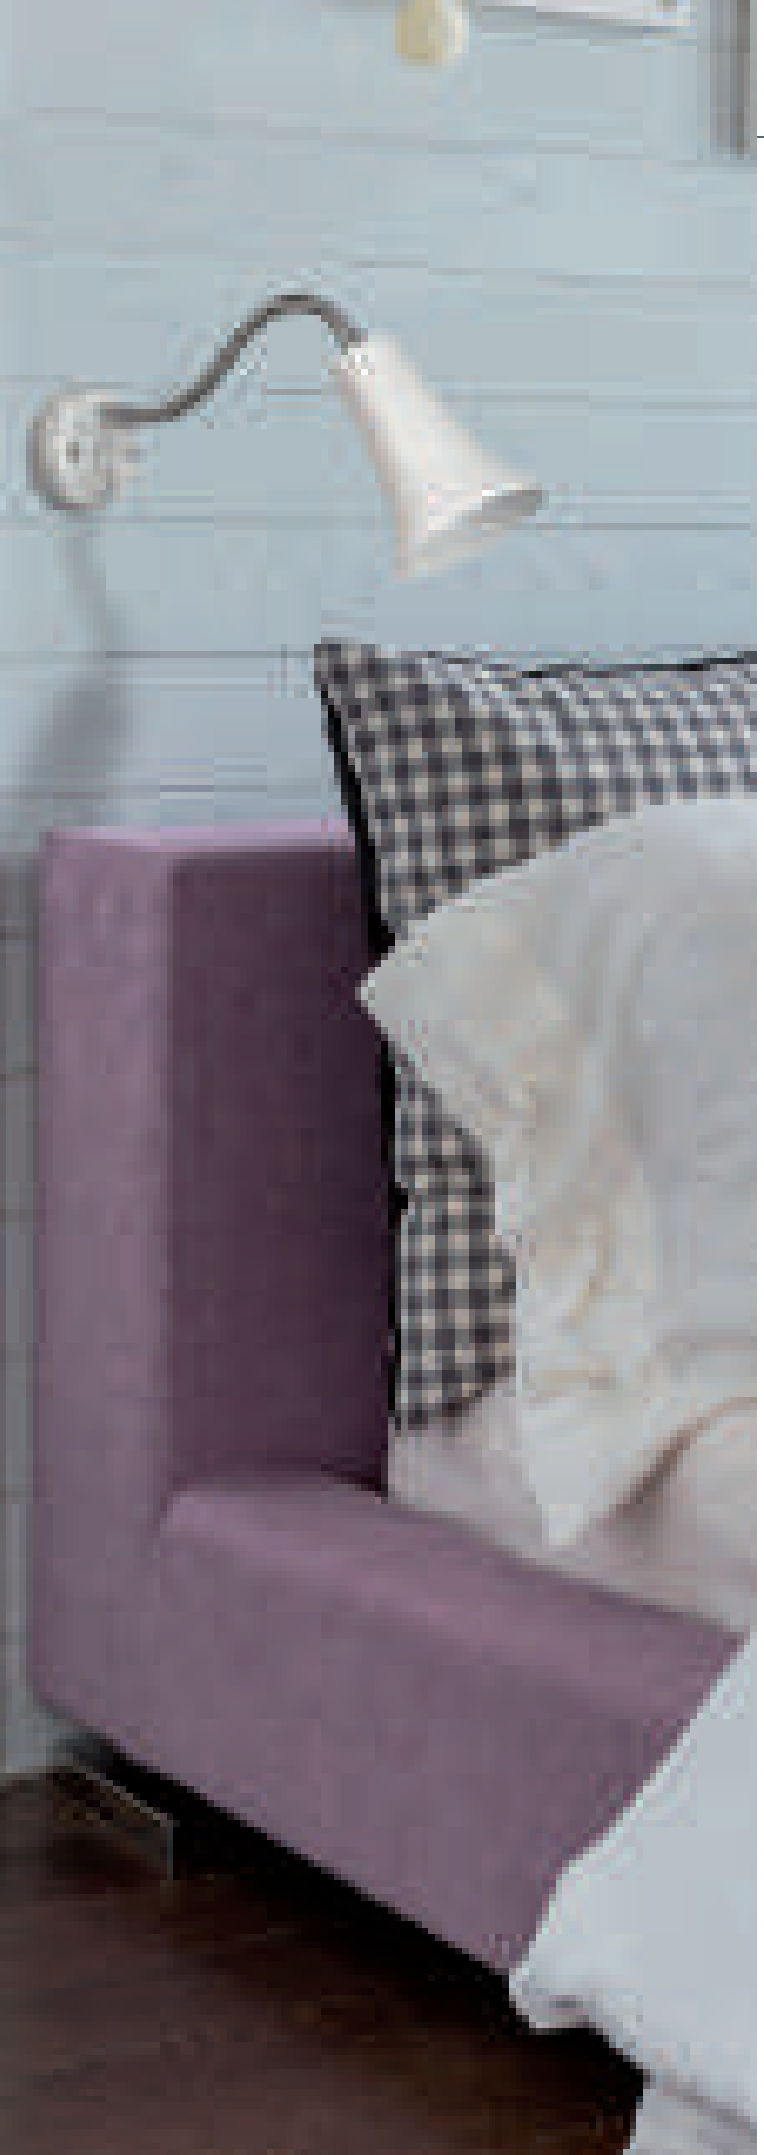

ELMARK

www.elmarkholding.eu



SAM

955SAM1W/WH



SAM

955SAM1W/SN

IP20

SAM

Catalogue number	Product category	Description	Lampholder	Width (mm)	Length (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
955SAM1W/SN	A	Spot	1 x E27	105	340	175	1/20	A++→E
955SAM1W/WH	A	Spot	1 x E27	105	340	175	1/20	A++→E

Material: Metal , Satin nickel, White, With key

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



PICASSO
955PICASSO12/AB



PICASSO
955PICASSO8/AB



PICASSO
955PICASSO12/SN



PICASSO
955PICASSO8/SN

LED NEUTRAL WHITE 4000K **IP44**

PICASSO

Catalogue number	Product category	Description	Colour	Watt (W)	Colour temp. (K)	Whole fixture lumens (lm)	Width (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955PICASSO12/AB	A	LED Picture Light	Antique brass	12	4000	960	70	675	190	1/20	A++→A
955PICASSO12/SN	A	LED Picture Light	Satin nickel	12	4000	960	70	675	190	1/20	A++→A
955PICASSO8/AB	A	LED Picture Light	Antique brass	8	4000	640	70	495	180	1/20	A++→A
955PICASSO8/SN	A	LED Picture Light	Satin nickel	8	4000	640	70	495	180	1/20	A++→A

Material: Metal | **Beam angle:** 30° | **Operating temperature:** 50-60° | **LED chip type:** SMD2835

~230V 50/60 Hz Ra>80 30000h >50000 INSTANT 100% IP 44 RoHS COMPLIANT 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INDOOR

LED PANEL STELLAR IP40
99XPANEL020W
99XPANEL020CW

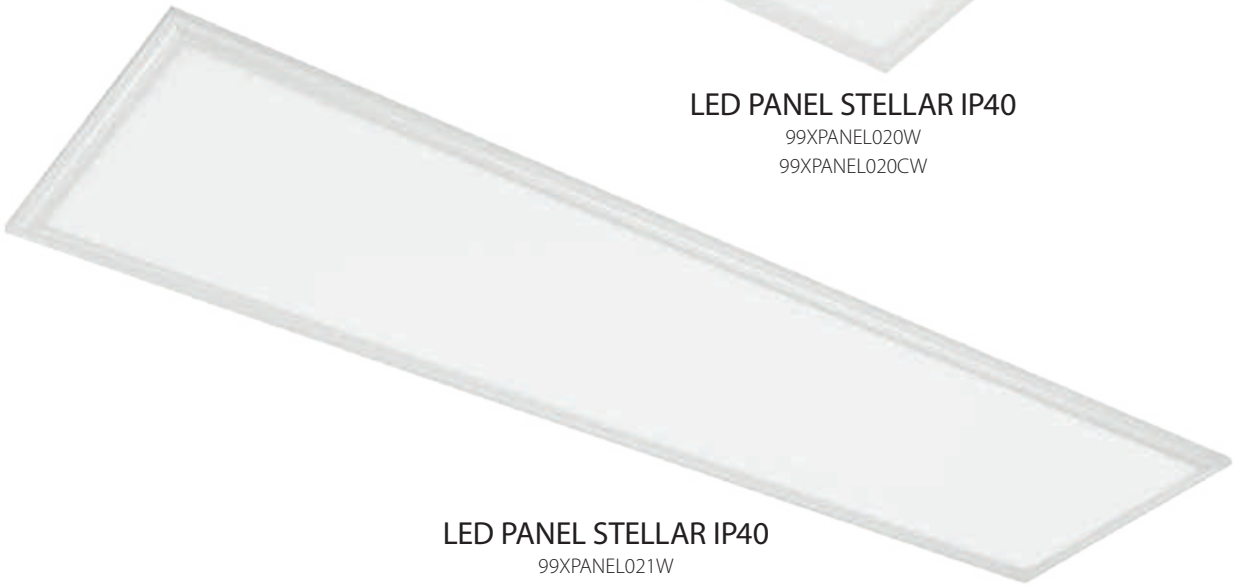

LED PANEL STELLAR IP40
99XPANEL021W

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANELS STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99XPANEL020W	**99XPANEL020WE**	C	48	4320	4000	white	595	595	30	1/6	A++→A
99XPANEL020CW	**99XPANEL020CWE**	C	48	4320	6400	white	595	595	30	1/6	A++→A
99XPANEL021W	**99XPANEL021WE**	C	48	4320	4000	white	295	1195	30	1/6	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.



Frame for LED panel with dimensions 595/595/30mm for surface mounting.
Catalogue number:
92FRAME020W



Frame for LED panel with dimensions 295/1195/30mm for surface mounting.
Catalogue number:
92FRAME021W

*Suitable for surface and ceiling mounting. | **Body:** Iron+PS | 1YEAR WARRANTY
Suitable for mountig in suspended celling Armstrong type (in grid cellings)
Body: aluminium | **Light source:** SMD 4014 | **Starting time:** < 0.5s | **Power factor:** 0.9 | Recessed mounted luminaire | **Until Supply Last

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | IP 40 | RoHS | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HIGH POWER LED PANEL 60W IP44
WHITE FRAME COLOUR



LED PANEL IP44
WHITE FRAME COLOUR

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP44 | DIMMABLE

LED PANEL IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Dimmable	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
92PANEL012WIP44	**92PANEL012WIP44E**	C	-	24	2400	4000	white	295	295	11	1/12	A++→A
92PANEL013WIP44	**92PANEL013WIP44E**	C	-	36	3600	4000	white	595	295	11	1/6	A++→A
92PANEL020WIP44	**92PANEL020WIP44E**	C	-	48	4800	4000	white	595	595	30	1/6	A++→A
92PANEL020CWIP44	**92PANEL020CWIP44E**	C	-	48	4800	6400	white	595	595	30	1/6	A++→A
92PANEL018WIP44	**92PANEL018WIP44E**	C	Yes	45	4500	4000	white	595	595	9	1/5	A++→A
92PANEL021WIP44	**92PANEL021WIP44E**	C	-	48	4800	4000	white	1195	295	30	1/6	A++→A
92PANEL031WIP44	-	C	-	60	6000	4000	white	595	595	30	1/5	A++→A
92PANEL031CWIP44	-	C	-	60	6000	6400	white	595	595	30	1/5	A++→A





INSTALLATION ACCESSORIES FOR LED PANELS
Suspension wire for suspended mounting
Catalogue number: **99ACC18**
Clips for mounting on plasterboard
Catalogue number: **99ACC21**
Fasteners for surface mounting
Catalogue number: **99ACC22**



Emergency kit with a possibility for work in an emergency regime more than two hours.

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings). 99ACC21 and 99ACC22 are suitable only for LED panels with height 9-11mm
Body: aluminium | **Light source:** Epistar SMD4014 | **Starting time:** <0.5s | **Power factor:** λ>0.9
LED panels can be dimmed using a suitable dimmable driver and remote control.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >15000 | INSTANT 100% | 30000h | Hg | IP 44 | RoHS COMPLIANT | EMC | F | CE | 4+1 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED THIN PANEL WITH CLIPS FOR MOUNTING IN DRYWALL



LED PANEL
WHITE FRAME COLOUR

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40 | DIMMABLE

LED PANEL

Catalogue number	Catalogue number with Emergency kit	Product category	Additional function	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
92PANEL012W	**92PANEL012WE**	C	-	24	2400	4000	white	295	295	11	1/12	A++→A
92PANEL013W	**92PANEL013WE**	C	-	36	3600	4000	white	595	295	11	1/6	A++→A
92PANEL018W	**92PANEL018WE**	C	Dimmable	45	4500	4000	white	595	595	9	1/5	A++→A
92PANEL018	-	F	Dimmable	45*	4500	4000	aluminium	595	595	9	1/5	A++→A
92PANEL020W	**92PANEL020WE**	C	-	48	4800	4000	white	595	595	30	1/6	A++→A
92PANEL020CW	**92PANEL020CWE**	C	-	48	4800	6400	white	595	595	30	1/6	A++→A
92PANEL021W	**92PANEL021WE**	C	-	48	4800	4000	white	1195	295	30	1/6	A++→A
92PANEL030W	**92PANEL030WE**	C	With clips	48	4800	4000	white	595	595	9	1/6	A++→A
92PANEL030CW	**92PANEL030CWE**	C	With clips	48	4800	6400	white	595	595	9	1/6	A++→A
92PANEL031W	-	C	High power	60	6000	4000	white	595	595	30	1/5	A++→A
92PANEL031CW	-	C	High power	60	6000	6400	white	595	595	30	1/5	A++→A





INSTALLATION ACCESSORIES FOR LED PANELS
Suspension wire for suspended mounting
Catalogue number: **99ACC18**
Clips for mounting on plasterboard
Catalogue number: **99ACC21**
Fasteners for surface mounting
Catalogue number: **99ACC22**



Panel frame for 595/595 mm ceiling mounting white
Catalogue number: **92FRAME020W**

Panel frame for 295/1195 mm ceiling mounting white
Catalogue number: **92FRAME021W**

Frame for LED panel with dimensions 595/595/9mm and 595/595/11mm for surface mounting.
Catalogue number: **92FRAME014W**

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings). 99ACC21 and 99ACC22 are suitable only for LED panels with height 9-11mm
Body: aluminium | **Light source:** Epistar SMD4014 | **Starting time:** <0.5s | **Power factor:** λ>0.9 | *Until Supply Last | LED panels can be dimmed using a suitable dimmable driver and remote control.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >15000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND
99XLED621
99XLED620
99XLED620CW



LED PANEL ROUND
99XLED615
99XLED614
99XLED614CW



LED PANEL ROUND
99XLED612
99XLED611
99XLED611CW



LED PANEL ROUND
99XLED610
99XLED609
99XLED609CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

LED PANELS ROUND STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
99XLED610	**99XLED610E**	C	6	330	2700	white	118	18	100	1/30	A++→A
99XLED609	**99XLED609E**	C	6	330	4000	white	118	18	100	1/30	A++→A
99XLED609CW	**99XLED609CWE**	C	6	330	6500	white	118	18	100	1/30	A++→A
99XLED612	**99XLED612E**	C	12	840	2700	white	167	18	150	1/24	A++→A
99XLED611	**99XLED611E**	C	12	840	4000	white	167	18	150	1/24	A++→A
99XLED611CW	**99XLED611CWE**	C	12	840	6500	white	167	18	150	1/24	A++→A
99XLED615	**99XLED615E**	C	18	1350	2700	white	225	18	205	1/20	A++→A
99XLED614	**99XLED614E**	C	18	1350	4000	white	225	18	205	1/20	A++→A
99XLED614CW	**99XLED614CWE**	C	18	1350	6500	white	225	18	205	1/20	A++→A
99XLED621	**99XLED621E**	C	24	1800	2700	white	295	18	268	1/24	A++→A
99XLED620	**99XLED620E**	C	24	1800	4000	white	295	18	268	1/24	A++→A
99XLED620CW	**99XLED620CWE**	C	24	1800	6500	white	295	18	268	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | **Body:** aluminium | **Light source:** SMD 2835 | **Starting time:** < 0.5s | **Power factor:** 0.55 | Recessed mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND



LED PANEL ROUND
DIMMABLE

UNTIL SUPPLY LAST

LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Dimmable	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
99LED971	**99LED971E**	F		6	350	4000	white	118	17	103	1/50	A++→A
99LED971WW	**99LED971WWE**	F		6	350	2700	white	118	17	103	1/50	A++→A
99LED971CW	**99LED971CWE**	F		6	350	6400	white	118	17	103	1/50	A++→A
99LED972	**99LED972E**	F		12	890	4000	white	166	18	151	1/30	A++→A
99LED972WW	**99LED972WWE**	F		12	890	2700	white	166	18	151	1/30	A++→A
99LED972CW	**99LED972CWE**	F		12	890	6400	white	166	18	151	1/30	A++→A
99LED973	**99LED973E**	F		18	1420	4000	white	225	18	205	1/20	A++→A
99LED973WW	**99LED973WWE**	F		18	1420	2700	white	225	18	205	1/20	A++→A
99LED973CW	**99LED973CWE**	F		18	1420	6400	white	225	18	205	1/20	A++→A
99LED617D	**99LED617DE**	F	Yes	21	1680	4000	white	225	21	205	1/20	A++→A
99LED974	**99LED974E**	F		24	1900	4000	white	296	13	275	1/20	A++→A
99LED974WW	**99LED974WWE**	F		24	1900	2700	white	296	13	275	1/20	A++→A
99LED974CW	**99LED974CWE**	F		24	1900	6400	white	296	13	275	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | **Body:** aluminium | **Reflector:** policarbonate (pc) | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND

99LED621T
99LED620TCW
99LED618T



LED PANEL ROUND

99LED612T

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

LED PANEL ROUND

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED612T	F	9	720	2700-3000	white	142	24	132	1/50	A++⇨A
99LED618T	F	18	1440	2700-3000	white	225	24	207	1/20	A++⇨A
99LED621T	F	24	1920	2700-3000	white	297	24	277	1/20	A++⇨A
99LED620TCW	F	24	1920	6000-6400	white	297	24	277	1/20	A++⇨A

Body: aluminium | **Reflector:** policarbonate (pc) | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8
Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



LED PANEL ECO

99LED962CW
99LED962
99LED962WW
99LED963CW
99LED963
99LED963WW
99LED964CW
99LED964
99LED964WW



LED PANEL ECO

99LED960CW
99LED960
99LED960WW
99LED961CW
99LED961
99LED961WW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANEL ROUND ECO SERIES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED960CW	C	6	510	6000-6400	white	100	25	77	1/100	A++→A
99LED960	C	6	510	4000-4300	white	100	25	77	1/100	A++→A
99LED960WW	C	6	510	2700-3000	white	100	25	77	1/100	A++→A
99LED961CW	C	12	1020	6000-6400	white	141	25	117	1/60	A++→A
99LED961	C	12	1020	4000-4300	white	141	25	117	1/60	A++→A
99LED961WW	C	12	1020	2700-3000	white	141	25	117	1/60	A++→A
99LED962CW	C	18	1530	6000-6400	white	168	25	143	1/60	A++→A
99LED962	C	18	1530	4000-4300	white	168	25	143	1/60	A++→A
99LED962WW	C	18	1530	2700-3000	white	168	25	143	1/60	A++→A
99LED963CW	C	24	2040	6000-6400	white	200	25	168	1/30	A++→A
99LED963	C	24	2040	4000-4300	white	200	25	168	1/30	A++→A
99LED963WW	C	24	2040	2700-3000	white	200	25	168	1/30	A++→A
99LED964CW	F	28*	2500	6000-6400	white	220	25	190	1/20	A++→A
99LED964	F	28*	2500	4000-4300	white	220	25	190	1/20	A++→A
99LED964WW	F	28*	2500	2700-3000	white	220	25	190	1/20	A++→A

Body: PC | **Reflector:** policarbonate (pc) | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8
Easy installation due to handy clips | Recessed mounted luminaire.

*Until Supply Last

~230V | 50/60 Hz | SMD | 160° | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS | EMC | F | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND IP44
99LED609IP44
99LED609IP44CW



LED PANEL ROUND IP44
99LED611IP44
99LED611IP44CW



LED PANEL ROUND IP44
99LED617IP44
99LED617IP44CW

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP44**

LED PANEL ROUND IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP44	**99LED609IP44E**	C	5	400	4000	white	90	21	40	A++→A
99LED609IP44CW	**99LED609IP44CWE**	C	5	400	6500	white	90	21	40	A++→A
99LED611IP44	**99LED611IP44E**	C	12	960	4000	white	175	21	20	A++→A
99LED611IP44CW	**99LED611IP44CWE**	C	12	960	6500	white	175	21	20	A++→A
99LED617IP44	**99LED617IP44E**	C	18	1440	4000	white	225	21	20	A++→A
99LED617IP44CW	**99LED617IP44CWE**	C	18	1440	6500	white	225	21	20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | **Light source:** SMD 2835 | **Recessed mounted luminaire** | **Beam angle:** 120°| **Driver:** Isolated
Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED607IP65
99LED607IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED610IP65
99LED610IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED616IP65
99LED616IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED623IP65
99LED623IP65CW

LED NEUTRAL WHITE 4000K COOL WHITE 6400K **IP65**

LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter1 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED607IP65	**99LED607IP65E**	C	7	660	4000	white	115	100-110	27	1/20	A++→A
99LED607IP65CW	**99LED607IP65CWE**	C	7	660	6500	white	115	100-110	27	1/20	A++→A
99LED610IP65	**99LED610IP65E**	C	10	770	4000	white	170	150-160	27	1/20	A++→A
99LED610IP65CW	**99LED610IP65CWE**	C	10	770	6500	white	170	150-160	27	1/20	A++→A
99LED616IP65	**99LED616IP65E**	C	16	1300	4000	white	220	200-210	27	1/20	A++→A
99LED616IP65CW	**99LED616IP65CWE**	C	16	1300	6500	white	220	200-210	27	1/20	A++→A
99LED623IP65	**99LED623IP65E**	C	23	1750	4000	white	240	220-230	39	1/20	A++→A
99LED623IP65CW	**99LED623IP65CWE**	C	23	1750	6500	white	240	220-230	39	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.



Body: policarbonate (pc) | **Reflector:** policarbonate (pc) | Light source: SMD2835 | **Starting time:** <0.5s | Power factor: >0.9
Waterproof, dustproof and oily smoke|Milky white mask, soft light, not dazzling| Ultra-thin lamp body

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WATERPROOF LED PANEL ROUND
99LED609IP65



WATERPROOF LED PANEL ROUND
99LED611IP65CW



WATERPROOF LED PANEL ROUND
99LED617IP65CW

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

UNTIL SUPPLY **LAST**

WATERPROOF LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP65	**99LED609IP65E**	F	5	400	4000	white	88	30	1/40	A++→A
99LED611IP65CW	**99LED611IP65CWE**	F	10	800	6500	white	150	27	1/40	A++→A
99LED617IP65CW	**99LED617IP65CWE**	F	18	1440	6500	white	225	27	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: policarbonate (pc) | **Reflector:** policarbonate (pc) | **Light source:** Epistar | **Starting time:** <0.5s | **Power factor:** λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SUPER SLIM LED PANELS
WITH SLIDABLE FIXING CLIPS



SUPER SLIM LED PANELS
WITH SLIDABLE FIXING CLIPS

LED NEUTRAL WHITE 4000K **IP40**

SUPER SLIM LED PANELS WITH SLIDABLE FIXING CLIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter/ Length (mm)	Width (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED934/W	C	15	1000	4000	white	173		11	50-160	1/40	A++→A
99LED935/W	C	15	1000	4000	white	175	175	20	50-160	1/40	A++→A

Body: aluminium | **Light source:** San'an 2835SMD | 175-264V AC | Can by mounted in cut sizes from 50 to 160mm



~230V | 50/60 Hz | SMD 4014 | G13 | Ra≥80 | >20000 | INSTANT 100% | 30000h | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND OM
99xLED628
99xLED627
99xLED627CW



LED PANEL ROUND OM
99XLED623
99XLED622
99XLED622CW



LED PANEL ROUND OM
99XLED626
99XLED625
99XLED625CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANELS ROUND OM STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99XLED626	-	C	12	840	2700	white	165	32	1/30	A++→A
99XLED625	-	C	12	840	4000	white	165	32	1/30	A++→A
99XLED625CW	-	C	12	840	6500	white	165	32	1/30	A++→A
99XLED623	**99XLED623E**	C	18	1350	2700	white	219	32	1/20	A++→A
99XLED622	**99XLED622E**	C	18	1350	4000	white	219	32	1/20	A++→A
99XLED622CW	**99XLED622CWE**	C	18	1350	6500	white	219	32	1/20	A++→A
99XLED628	**99XLED628E**	C	24	1800	2700	white	295	32	1/20	A++→A
99XLED627	**99XLED627E**	C	24	1800	4000	white	295	32	1/20	A++→A
99XLED627CW	**99XLED627CWE**	C	24	1800	6500	white	295	32	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | **Body:** aluminium | **Starting time:** <0.5s | **Power factor:** λ>0.8

OM - surface mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | IP 40 | RoHS COMPLIANT | EMC | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND OM
99LED625



LED PANEL ROUND OM
99LED623T

LED PANEL ROUND OM
99LED625T

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

LED PANEL ROUND OM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED625T	F	12	960	2700-3000	white	170	38	1/24	A++→A
99LED623T	F	18	1440	2700-3000	white	225	38	1/24	A++→A
99LED625	F	13	1040	2700-3000	satin nickel	170	38	1/40	A++→A

Body: aluminium | **Light source:** Epistar SMD 2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8 | **OM** - surface mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



LED PANEL ROUND OM

99LED966CW
99LED966
99LED966WW

LED PANEL ROUND OM

99LED965CW
99LED965
99LED965WW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANEL ROUND OM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED965CW	C	18	1530	6300-6500	white	175	33	1/60	A++→A
99LED965	C	18	1530	4000-4300	white	175	33	1/60	A++→A
99LED965WW	C	18	1530	2700-3000	white	175	33	1/60	A++→A
99LED966CW	C	28	2500	6300-6500	white	225	33	1/20	A++→A
99LED966	C	28	2500	4000-4300	white	225	33	1/20	A++→A
99LED966WW	C	28	2500	2700-3000	white	225	33	1/20	A++→A

Voltage: 185-240V | **Body:** Policarbonate (PC) | **Starting time:** <0.5s | **Power factor:** λ>0.8

OM - surface mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FIXTURES WITH ADJUSTABLE COLOUR TEMPERATURE

99DS406

LED | 3000 K | 4000 K | 6000 K | IP40

UNTIL SUPPLY LAST

LED FIXTURES WITH ADJUSTABLE COLOUR TEMPERATURE

Catalogue number	Product category	Sensor	Watt (W)	Whole fixture lumens (lm)	Colour body	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99DS406	F	No	18	1440	white	3000 / 4000 / 6000	220	18.8	1/40	A++→A

Input Voltage: 110-240 VAC | **Body:** Alluminium | **Light source:** Sanan SMD2835 | **Starting Time:** <0.5s | **Power factor:** λ>0.9





3 options of colour temperature:
1. Cool White 6000K
2. Neutral White 4000K
3. Warm White 3000K

50/60 Hz | SMD 2835 | 110° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



92DL1240/WH

LED NEUTRAL WHITE 4000K **IP40**

UNTIL SUPPLY LAST

INDIRECT LED DOWNLIGHTS

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
92DL1240/WH	**92DL1240/WHE**	F	12	480	4000K	white	149	45	130	1/1	A++→A

Body: aluminium



FRONT



BACK



Emergency kit with a possibility for work in an emergency regime more than two hours.

~230V | 50/60 Hz | SMD | 60° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL STELLAR SQUARE

99XLED637
99XLED636
99XLED636CW



LED PANEL STELLAR SQUARE

99XLED635
99XLED634
99XLED634CW



LED PANEL STELLAR SQUARE

99XLED633
99XLED632
99XLED632CW



LED PANEL STELLAR SQUARE OM

99XLED969
99XLED970

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANELS STELLAR SQUARE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99XLED633	**99XLED633E**	C	12	840	2700	white	167	167	18	150	150	1/24	A++→A
99XLED632	**99XLED632E**	C	12	840	4000	white	167	167	18	150	150	1/24	A++→A
99XLED632CW	**99XLED632CWE**	C	12	840	6500	white	167	167	18	150	150	1/24	A++→A
99XLED635	**99XLED635E**	C	18	1350	2700	white	221	221	18	200	200	1/20	A++→A
99XLED634	**99XLED634E**	C	18	1350	4000	white	221	221	18	200	200	1/20	A++→A
99XLED634CW	**99XLED634CWE**	C	18	1350	6500	white	221	221	18	200	200	1/20	A++→A
99XLED637	**99XLED637E**	C	24	1800	2700	white	296	296	18	275	275	1/20	A++→A
99XLED636	**99XLED636E**	C	24	1800	4000	white	296	296	18	275	275	1/20	A++→A
99XLED636CW	**99XLED636CWE**	C	24	1800	6500	white	296	296	18	275	275	1/20	A++→A
99XLED969	**99XLED969E**	C	18	1350	4000	white	220	220	32	-	-	1/20	A++→A
99XLED970	**99XLED970E**	C	24	1800	4000	white	300	300	32	-	-	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | **Light source:** SMD 2835 | **Starting time:** <0.5s | **Power factor:** 0.55 | Recessed mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL SQUARE
99LED968CW
99LED968
99LED968WW



LED PANEL SQUARE
99LED967CW
99LED967
99LED967WW



LED PANEL SQUARE OM
99LED969CW
99LED969
99LED969WW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

LED PANEL SQUARE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99LED967CW	**99LED967CWE**	C	12	890	6400	white	175	175	13	155	155	1/20	A++→A
99LED967	**99LED967E**	C	12	890	4000	white	175	175	13	155	155	1/20	A++→A
99LED967WW	**99LED967WWE**	C	12	890	2700	white	175	175	13	155	155	1/20	A++→A
99LED968CW	**99LED968CWE**	C	18	1420	6400	white	225	225	13	205	205	1/20	A++→A
99LED968	**99LED968E**	C	18	1420	4000	white	225	225	13	205	205	1/20	A++→A
99LED968WW	**99LED968WWE**	C	18	1420	2700	white	225	225	13	205	205	1/20	A++→A
99LED969CW	**99LED969CWE**	C	18	1420	6400	white	220	220	32			1/20	A++→A
99LED969	**99LED969E**	C	18	1420	4000	white	220	220	32			1/20	A++→A
99LED969WW	**99LED969WWE**	C	18	1420	2700	white	220	220	32			1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | **Light source:** Epistar SMD | **Starting time:** <0.5s | **Power factor:** λ>0.8

OM - surface mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL SQUARE
99LED635T



LED PANEL SQUARE
99LED633T
99LED633

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP40

UNTIL SUPPLY LAST

LED PANEL SQUARE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99LED633T	F	9	720	2700-3000	white	148	148	21	130	130	1/40	A++→A
99LED633	F	12	960	2700-3000	white	145	145	21	130	130	1/40	A++→A
99LED635T	F	18	1440	2700-3000	white	218	218	21	200	200	1/20	A++→A

Body: aluminium | **Light source:** Epistar SMD | **Starting time:** <0.5s | **Power factor:** λ>0.8

OM - surface mounted luminaire

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



LED GLASS PANEL SQUARE
99LED642
99LED643



LED GLASS PANEL ROUND
99LED638
99LED639



LED GLASS PANEL SQUARE
99LED644
99LED645



LED GLASS PANEL ROUND
99LED640
99LED641

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP40**

LED GLASS PANELS SQUARE / ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter/ Length (mm)	Height (mm)	Diameter1/ Length1 (mm)	Packing/Box (pcs)	Energy class
99LED642	**99LED642E**	C	6	480	4000	white	97	40	77	1/100	A++→A
99LED643	**99LED643E**	C	6	480	2700	white	97	40	77	1/100	A++→A
99LED644	**99LED644E**	C	18	1440	4000	white	200	40	180	1/20	A++→A
99LED645	**99LED645E**	C	18	1440	2700	white	200	40	180	1/20	A++→A
99LED638	**99LED638E**	C	6	480	4000	white	100	35	60	1/100	A++→A
99LED639	**99LED639E**	C	6	480	2700	white	100	35	60	1/100	A++→A
99LED640	**99LED640E**	C	18	1440	4000	white	200	35	148	1/20	A++→A
99LED641	**99LED641E**	C	18	1440	2700	white	200	35	148	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECESSED LED
CEILING LAMP ELLIS
95ELLISLEDR9/W
95ELLISLEDR18/W
95ELLISLEDR24/W

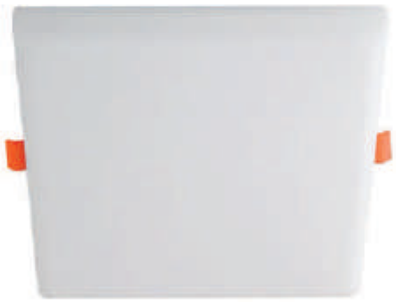

RECESSED LED
CEILING LAMP ELLIS
95ELLISLEDS9/W
95ELLISLEDS18/W

LED NEUTRAL WHITE 4000K **IP20**

RECESSED LED CEILING LAMP ELLIS

Catalogue number	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter 1 (mm)	Packing/Box (pcs)	Energy class
95ELLISLEDR9/W	C	ROUND	9	760	4000	White	100	21	55-70	1/100	A++→A
95ELLISLEDS9/W	C	SQUARE	9	760	4000	White	101/101	21	55-70	1/100	A++→A
95ELLISLEDR18/W	C	ROUND	18	1520	4000	White	119	21	55-90	1/60	A++→A
95ELLISLEDS18/W	C	SQUARE	18	1520	4000	White	120/120	21	55-90	1/60	A++→A
95ELLISLEDR24/W	C	ROUND	24	2280	4000	White	168	21	55-135	1/40	A++→A

Body: Alluminium| **Reflector:** PP | **Light source:** Sanan SMD2835-MLS | **Driver isolated:** 180-265V

Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



RECESSED LED FIXTURE GLOSS
95GLOSS24



RECESSED LED FIXTURE BRILLIANCE
95BRILLIANCE24

LED | COOL WHITE 6400K | **IP20**

UNTIL SUPPLY **LAST**

RECESSED LED FIXTURE GLOSS / BRILLIANCE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter 1 (mm)	Packing/Box (pcs)	Energy class
95GLOSS24	F	24	1800	6500	White	220	20	205	1/20	A++→A
95BRILLIANCE24	F	24	1800	6500	White	220	20	205	1/20	A++→A


Gloss


Brilliance


Clips

Body: Alluminium| **Reflector:** policarbonate (pc) | **Light source:** Sanan SMD2835 | **Starting time:** <0.5s

Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD 2835 | 110° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



IVOR
95IVOR22LED



ASIA
95ASIA24LED

NEUTRAL WHITE 4000K **IP40**

CEILING LAMPS IVOR/ ASIA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95IVOR22LED	C	21	1750	4000	Black+gold	400	100	1/1	A++→A
95ASIA24LED	C	21	1750	4000	Chrome	350	55	1/1	A++→A

Body: Metal | **Surface mounted luminaire**

~230V · 50/60 Hz · SMD · 160° · Ra>80 · 30000h · Hg · RoHS COMPLIANT · EMC · F · CE · 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NEOS
95NEOS18LED



REGO
95REGO18LED

IP40 DIMMABLE

CEILING LAMPS REGO / NEOS WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95REGO18LED	C	18	1260	CCT - adjustable	White	410	90	1/5	A++→A
95NEOS18LED	C	18	2160	CCT - adjustable	White &Chrome	380	50	1/5	A++→A

Body: Metal and plastic | **Surface mounted luminaire** | **Beam angle:** Rego- 130°; Neos- 120° | **LED chip:** Rego- SANAN 5730; Neos- SANAN 2835 with LENS



~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LUCE
95LUCE24LED
95LUCE36LED



SELENA
95SELENA18LED

LED IP40 DIMMABLE

CEILING LAMPS SELENA / LUCE WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95SELENA18LED	C	18	1170	CCT - adjustable	Chrome	400	60	1/5	A++→A
95LUCE24LED	C	24	1480	CCT - adjustable	Chrome	410	70	1/5	A++→A
95LUCE36LED	C	36	2150	CCT - adjustable	Chrome	510	80	1/5	A++→A

Body: Metal | **Surface mounted luminaire** | **Beam angle:** Luce- 130°; Selena- 120° | **LED chip:** Luce- SANAN 2835 with LENS; Selena- SANAN 5730



~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHELLY
95SHELLY18LED/WH



SHELLY
95SHELLY18LED/GR

LED IP40 DIMMABLE

CEILING LAMPS SHELLY WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95SHELLY18LED/WH	C	18	2160	CCT - adjustable	White	400	60	1/5	A++→A
95SHELLY18LED/GR	C	18	2160	CCT - adjustable	Black	400	60	1/5	A++→A

Body: Metal | **Surface mounted luminaire** | **Beam angle:** 120° | **LED chip:** SANAN 2835 with LENS



~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CEILING LAMPS NIGHT SKY WITH REMOTE CONTROL

95NIGHTSKY60LED

LED IP40 DIMMABLE

CEILING LAMPS NIGHT SKY WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95NIGHTSKY60LED	C	60	4800	CCT - ADJUSTABLE	Chrome	400	40	1/1	A++→A

Body: Steel | **Diffuser:** PMMA | **LED chip:** 2835 SMD SANAN | **Surface mounted luminaire**



~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ASTRA
95ASTRA24LED

LED NEUTRAL WHITE 4000K **IP40**

CEILING LAMPS ASTRA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ASTRA24LED	C	21	1750	4000	Chrome	410	90	1/1	A++→A

Body: Metal | **Surface mounted luminaire**

~230V | 50/60 Hz | SMD | 160° | Ra>80 | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NEIL
95NEIL14LED/WH



MALIA
95MALIA12LED/WH



MALIA
95MALIA24LED/BL

LED NEUTRAL WHITE 4000K **IP20**

LED FIXTURES NEIL/ MALIA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95NEIL14LED/WH	C	14	770	4200	white	240		60	1/30	A++→A
95MALIA12LED/WH	C	12	660	4200	white	120	130		1/30	A++→A
95MALIA12LED/BL	C	12	660	4200	black	120	130		1/30	A++→A
95MALIA24LED/WH	C	24	1320	4200	white	265	130	100	1/20	A++→A
95MALIA24LED/BL	C	24	1320	4200	black	265	130	100	1/20	A++→A

Body: Aluminium & acrylic | **Light source:** SANAN SMD2835 | **Flicker free** | **Driver:** isolated IC





~230V | 50/60 Hz | SMD | Ra>80 | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DONUT
95DONUT20LED



DONUT
95DONUT32LED

IP20

ROUND CEILING LAMP DONUT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95DONUT20LED	C	20	1300	4000	white	285	80	1	A++→A
95DONUT32LED	C	32	2000	4000	white	385	95	1	A++→A

Body: Metal+ MS | **Light source:** Nationstar SMD 2835 | **Surface mounted luminaire** | **Beam angle:** 120°

3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AMY SUPER SLIM
95AMYLEDS12/W



AMY SUPER SLIM
95AMYLEDS18/W



AMY SUPER SLIM
95AMYLEDS24/W

LED NEUTRAL WHITE 4000K **IP20**

AMY SUPER SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height 1 (mm)	Packing/Box (pcs)	Energy class
95AMYLEDS12/W	C	12	960	4000	White	276	276	55	1/100	A++→A
95AMYLEDS18/W	C	18	1440	4000	White	330	330	57	1/200	A++→A
95AMYLEDS24/W	C	24	1920	4000	White	375	375	60	1/200	A++→A

Body: Steel| **Reflector:** PMMA | Light source: Sanan SMD2835-Sanan | **Driver isolated:** 180-265V

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



TRACY SUPER SLIM

95TRACYLEDS20
95TRACYLEDS32



TRACY SUPER SLIM

95TRACYLED20
95TRACYLED32
95TRACYLED42

LED NEUTRAL WHITE 4000K **IP20**

TRACY SUPER SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length/Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95TRACYLED20	C	20	1400	4000	white	20	290	-	65	1/10	A++>A
95TRACYLED32	C	32	2400	4000	white	20	390	-	65	1/10	A++>A
95TRACYLED42	C	42	2950	4000	white	20	480	-	65	1/10	A++>A
95TRACYLEDS20	C	20	1400	4000	white	20	280	280	60	1/10	A++>A
95TRACYLEDS32	C	32	2400	4000	white	20	330	330	65	1/10	A++>A

Material: Metal bottom and MS cover | **LED driver:** mounted in the body | **Light source:** 2835 SMD

~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LITE
95LITE12LED
95LITE24LED



SENSOR LIGHT
99DS401



SHINE
95SHINE16LED



SHINE
95SHINE36LED

LED NEUTRAL WHITE 4000K **IP40**

LITE / SHINE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LITE12LED	C	12	960	4000	white	40	250	250	100	1/20	A++→A
95LITE24LED	C	24	1920	4000	white	40	350	350	100	1/10	A++→A
99DS401	C	12	800	4000	white	40	290	290	80	1/10	A++→A
95SHINE16LED	C	16	1040	4000	white	40	330	330	107	1/10	A++→A
95SHINE36LED	C	36	2340	4000	white	40	480	480	115	1/5	A++→A



detail SHINE 16W / 36W

Body: polycarbonate | **LED driver:** mounted in the body | **Light source:** EPISTAR
95DS401 - Detection Distance: max. 6m (<24°), Time Delay: 10 sec ± 3 sec to 3 min ± 30 sec (adjustable), Ambient Light: < 3-2000LUX

~230V | 50/60 Hz | SMD | Ra>80 | 30000h | Hg | RoHS | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



EMERGENCY CEILING LAMP NEPTUN

95NEPTUN18LEDE

LED COOL WHITE 6400K **IP65**

EMERGENCY CEILING LAMP NEPTUN

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95NEPTUN18LEDE	C	18	1800	6000K	White	280	65	1/10	A++→A

Material: Fireproof ABS | **Battery:** 7.4V 4400mAh 18650 | **Charging time:** ≤ 24h | **Emergency time:** ≥ 180 min | **Monthly inspection & Manual simulation check**

~230V | 50/60 Hz | SMD | Ra>80 | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
95LIGHTS6



LED WALL LIGHT
95LIGHTB6
95LIGHTB12

NEUTRAL WHITE 4000K **IP20**

LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIGHTS6	C	6W	480	4000	white	140	70	1/20	A++→A
95LIGHTB6	F*	6W	480	4000	white	135	45	1/36	A++→A
95LIGHTB12	F*	12W	960	4000	white	180	45	1/24	A++→A


95LIGHTS6


95LIGHTS6


95LIGHTB6 / 95LIGHTB12


95LIGHTB6 / 95LIGHTB12


95LIGHTB6 / 95LIGHTB12

Body material: Aluminium | **Light source:** 95LIGHTS6 - Epistar COB, 95LIGHTB6 & 95LIGHTB12 - Epistar SMD2835

* Until Supply Last

~230V 50/60 Hz Ra>80 30000h Hg RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
ROUND IP54
White / Black / Grey



LED WALL LIGHT
SQUARE IP54
White / Black / Grey



LED WALL LIGHT
ROUNDED IP65
White / Black / Grey

LED NEUTRAL WHITE 4000K **IP54** **IP65**

LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
969LED100R/WH	C	2X5W	Round	900	4000	white	130	110	100	1/12	A++→A
969LED100R/BL	C	2X5W	Round	900	4000	black	130	110	100	1/12	A++→A
969LED100R/GR	C	2X5W	Round	900	4000	grey	130	110	100	1/12	A++→A
969LED100S/WH	C	2X5W	Square	900	4000	white	100	100	100	1/10	A++→A
969LED100S/BL	C	2X5W	Square	900	4000	black	100	100	100	1/10	A++→A
969LED100S/GR	C	2X5W	Square	900	4000	grey	100	100	100	1/10	A++→A
969LEDW12/WH	C	**2X6W**	Rounded	1080	4000	white	175	28	90	1/40	A++→A
969LEDW12/BL	C	**2X6W**	Rounded	1080	4000	black	175	28	90	1/40	A++→A
969LEDW12/GR	C	**2X6W**	Rounded	1080	4000	grey	175	28	90	1/40	A++→A





Body material: Aluminium | **Diffuser:** Glass | **Light source 969led100:** Epistar LED COB **Light source 969LEDW12:** Epistar SMD2835

~230V 50/60 Hz Ra>80 30000h Hg RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABINET LAMP WITH SENSOR
99DS408



LED NIGHT LAMP WITH USB
99USB2



CABINET HINGE LED LIGHT
9HINGE2

NEUTRAL WHITE 4000K **IP20**

CABINET LAMP WITH SENSOR / LED NIGHT LAMP WITH USB

Catalogue number	Product category	Watt (W)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99DS408	C	1.5	4000	white	88	26	1/50	A++→A
99USB2	C	0.5	4000	white	90	61	1/64	A++→A
9HINGE2	C	2	-	grey	20	48	1/300	A++→A









High-quality ABS material, environmental-friendly, sturdy and durable to use. Easy to install and convenient to use| Operated by 12V 23A battery (Not included) | When opening the cabinet,lamp will turns on automatically. When closing the cabinet, the light turns off

CABINET LAMP WITH SENSOR - **Mode:** ON/OF & auto | **Battery:** 3 X AAA | **Sensor distance:** max. 4m | **Duration:** 30s | **Sensors:** PIR sensor- workt when light intensity is less than 10lx

LED NIGHT LAMP with USB - **Mode:** ON/OF & auto | **Sensors:** PIR sensor- workt when light intensity is less than 10lx

RoHS COMPLIANT CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DOWNLIGHT



ELR627
92627/W



ELR627
92627/SN

IP44

ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/W	C	ELR627	90	33	60	white	1/100	A++→E
92627/SN	C	ELR627	90	33	60	satin nickel	1/100	A++→E

Body: steel | **Diffuser:** glass

~230V | 12V | 50/60 Hz | max. 50W | IP 44 | RoHS COMPLIANT | III | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELR627
92627/CH



ELR627
92627/AB

IP44

ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/CH	C	ELR627	90	33	60	chrome	1/100	A++→E
92627/AB	C	ELR627	90	33	60	antique brass	1/100	A++→E

Body: steel | **Diffuser:** glass

~230V | 12V | 50/60 Hz | max. 50W | IP 44 | RoHS COMPLIANT | III | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-044
92044/G



SA-144
92144/RAB

IP44

UNTIL SUPPLY LAST

SA

Catalogue number	Product category	Model	Diameter (mm)	Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92044/G	F	SA-044	80	-	37	71	gold	1/50	A++→E
92144/RAB	F	SA-144	-	85	48	72	red antique brass	1/50	A++→E

Body: steel | **Diffuser:** glass | **Ring:** aluminium alloy
With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 IP 44 | RoHS COMPLIANT | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



CR-773
925773R/CL



CR-773
925773S/CL

IP20

CR-773

Catalogue number	Product category	Width/ Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/ Box (pcs)	Energy class
925773R/CL	C	100	-	50	60	1/50	A++→E
925773S/CL	C	105	105	50	60	1/50	A++→E

Material: Stainless steel with crystal, **Lamps Not Included**

12V | MR-16 | GU5.3 | max. 50W | RoHS COMPLIANT | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

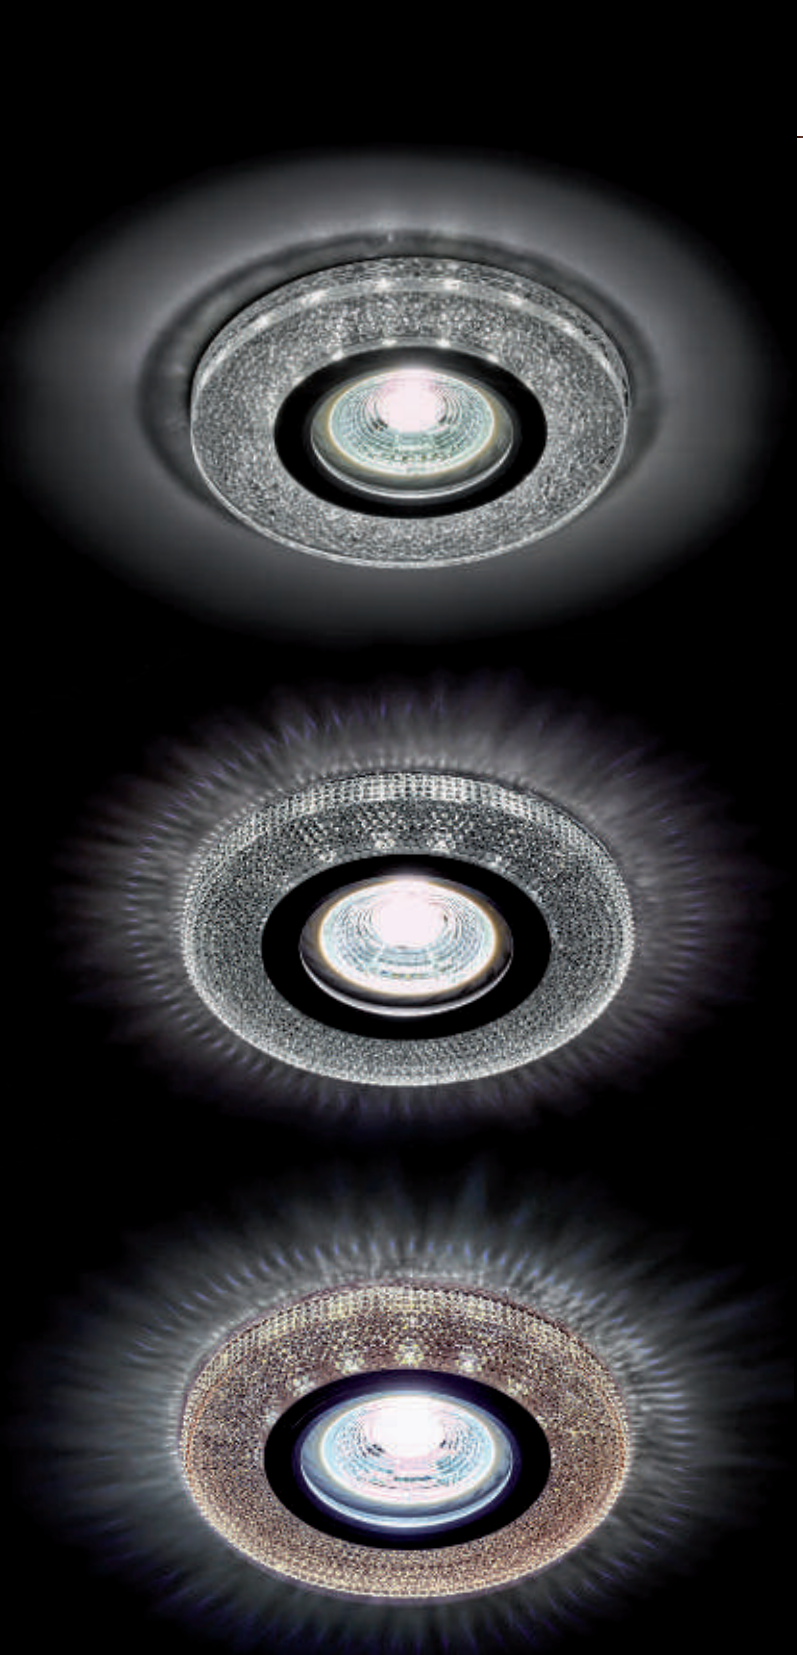



CR-771
925P771R/CL



CR-772
925772S/CL



CR-772
925772S/CF

IP20

CR-771 / CR-772

Catalogue number	Product category	Watt (W)	Diameter (mm)	Height (mm)	Cutting hole (mm)	Colour temp. (K)	Packing/ Box (pcs)	Energy class
925P771R/CL	C	3	95	22	60	4000K	1/50	A++→A
925772S/CL	C	3	100	22	60	4000K	1/50	A++→A
925772S/CF	C	3	100	22	60	4000K	1/50	A++→A

Material: Aluminium & polyester with decorative LED lighting 150lm, **Lamps Not Included,** 3W Driver for LED ring included

12V MR-16 LED GU5.3 RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CR-774
925774S/CL



CR-775
925775S/CL

IP20

CR-774 / CR-775

Catalogue number	Product category	Watt (W)	Diameter (mm)	Height (mm)	Cutting hole (mm)	Colour temp. (K)	Packing/ Box (pcs)	Energy class
925774S/CL	C	3	100	22	60	4000	1/50	A++→A
925775S/CL	C	3	100	22	60	4000	1/50	A++→A

Material: Aluminium & polyester with decorative LED lighting 150lm, **Lamps Not Included,** 3W Driver for LED ring included

12V MR-16 LED GU53 RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY



CR-777
925777R/BK



CR-777
925777S/BK



CR-778
925778R/CL



CR-778
925778S/CL

IP20

CR-777 / CR-778

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
925777R/BK	C	Spotlight	Chrome and black	90	-	22	60	1/50	A++→E
925777S/BK	C	Spotlight	Chrome and black	90	90	22	60	1/50	A++→E
925778R/CL	C	Spotlight	Chrome and clear	90	-	32	60	1/50	A++→E
925778S/CL	C	Spotlight	Chrome and clear	90	90	32	60	1/50	A++→E

Material: Aluminium with glass, **Lamps Not Included**

12V | MR-16 | GU5.3 | max. 50W | RoHS COMPLIANT | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045R1/WHFR



SA-045
92045S1/WHFR



SA-045
92045R1/BLFR



SA-045
92045S1/BLFR

IP20

SA-045

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045R1/WHFR	C	Downlight	white	98		45	70	1/50	A++→E
92045R1/BLFR	C	Downlight	black	98		45	70	1/50	A++→E
92045S1/WHFR	C	Downlight	white	92	92	45	70	1/50	A++→E
92045S1/BLFR	C	Downlight	black	92	92	45	70	1/50	A++→E

Material: Aluminium with acrylic, **Lamps Not Included. LED bulb only**

12V MR-16 GU5.3 RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045S2/WHFR



SA-045
92045S3/WHFR



SA-045
92045S4/WHFR

IP20

SA-045

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045S2/WHFR	C	Downlight	white	92	182	45	165x70	1/50	A++→E
92045S3/WHFR	C	Downlight	white	95	275	45	240x70	1/20	A++→E
92045S4/WHFR	C	Downlight	white	180	180	45	150x150	1/20	A++→E

Material: Aluminium with acrylic, **Lamps Not Included. LED bulb only**

12V MR-16 GU5.3 RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045S2/BLFR



SA-045
92045S3/BLFR



SA-045
92045S4/BLFR

IP20

SA-045

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045S2/BLFR	C	Downlight	black	92	182	45	165x70	1/50	A+→E
92045S3/BLFR	C	Downlight	black	95	275	45	240x70	1/20	A+→E
92045S4/BLFR	C	Downlight	black	180	180	45	150x150	1/20	A+→E

Material: Aluminium with acrylic, Lamps Not Included. LED bulb only

12V MR-16 GU5.3 RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



92GDL05R
92GDL09R



92GDL11R



92GDL06S
92GDL10S



92GDL06SGL



92GDL13S



92GDL14LEDS

IP20

GYPSUM DOWNLIGHTS

Catalogue number	Product category	Model	Lamp holder	Diameter/ Length (mm)	Diameter 1 (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92GDL05R	C	round	GU10	100	90	-	40	white	1/20	A++→E
92GDL09R	C	round	GU10	128	108	-	43	white	1/20	A++→E
92GDL11R	C	round	GU10	131	116	-	72	white	1/20	A++→E
92GDL06S	C	square	GU10	122	107/107	122	57	white	1/20	A++→E
92GDL10S	C	square	GU10	122	107/107	122	60	white	1/20	A++→E
92GDL06SGL	C	square with diffuser	GU10	120	100/100	120	56	white	1/20	A++→E
92GDL13S	C	square	GU10	120	100/100	120	58	white	1/20	A++→E
92GDL14LEDS	C	square	LED CREE 1W	142	-	170	50	white	1/20	A++→E



92GDL06S

92GDL14LEDS: 70 lm/4000K/Beam angle 30°

Material: Plaster | Lamp not included
With the purchase of additional lampholder GU10/G9, spotlights can be used with 230V GU10/G9 lamps.

~230V | 50/60 Hz | max. 20W | IP 20 | RoHS | 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

92GDL08W



92GDL07W



92GDL12W



92GDL15W

IP20

GYPSUM WALL FUXTURES

Catalogue number	Product category	Model	Lamp holder	Diameter/ Length (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92GDL07W	C	square	G9	75	100	100	white	1/20	A++→E
92GDL08W	C	round	G9	70	100	100	white	1/20	A++→E
92GDL12W	C	round	G9	100	180	90	white	1/20	A++→E
92GDL15W	C	round	E27	300	165	120	white	1/12	A++→E



92GDL07W



92GDL08W



92GDL12W

Material: Plaster | Lamp not included
With the purchase of additional lampholder GU10/G9, spotlights can be used with 230V GU10/G9 lamps.

~230V | 50/60 Hz | max. 20W | IP 20 | RoHS | 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BOUTIQUES MINI LED DOWNLIGHTS
99JR1201WW/SN
99JR1201CW/SN



BOUTIQUES MINI LED DOWNLIGHTS
99JR1202WW/GL
99JR1202CW/GL



BOUTIQUES MINI LED DOWNLIGHTS
99JR1203CW/WH

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP20 | 12V DC

UNTIL SUPPLY LAST

BOUTIQUES MINI LED DOWNLIGHTS

Catalogue number	Product category	Wattage (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Body material	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99JR1201WW/SN	F	3	150	2700-3000	30°	satin nickel	aluminium	48	22	32	1/100	A+
99JR1201CW/SN	F	3	150	6000-6400	30°	satin nickel	aluminium	48	22	32	1/100	A+
99JR1202WW/GL	F	3	150	2700-3000	30°	transparent	PMMA+ aluminium	45	41	32	1/100	A+
99JR1202CW/GL	F	3	150	6000-6400	30°	transparent	PMMA+ aluminium	45	41	32	1/100	A+
99JR1203CW/WH	F	3	150	6000-6400	30°	white	aluminium	50	43	32	1/100	A+



Residences, Jewelry, Showrooms, Hotels & Boutiques etc.
Light source: LED COB
Easy installation due to handy clips.

12V DC | 50/60 Hz | COB | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-71
9271/SN-CH



SA-71
9271/PCH-CH



SA-71
9271/GR-CH



SA-91
9291/SN-CH



SA-91
9291/GR-CH



SA-91
9291/PCH-CH

IP20

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9271/SN-CH	C	SA-71	Fixed	78	25	58	satin nickel/chrome	1/100	A++→E
9271/PCH-CH	C	SA-71	Fixed	78	25	58	pearl chrome/chrome	1/100	A++→E
9271/GR-CH	C	SA-71	Fixed	78	25	58	graphite/chrome	1/100	A++→E
9291/SN-CH	C	SA-91	Movable	80	25	72	satin nickel/chrome	1/100	A++→E
9291/PCH-CH	C	SA-91	Movable	80	25	72	pearl chrome/chrome	1/100	A++→E
9291/GR-CH	C	SA-91	Movable	80	25	72	graphite/chrome	1/100	A++→E

Body: aluminium alloy
With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-70
9270/W



SA-70
9270/CH



SA-70
9270/SN



SA-70
9270/AB



SA-90
9290/W



SA-90
9290/CH



SA-90
9290/SN



SA-90
9290/AB

IP20

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9270/W	C	SA-70	Fixed	78	25	58	white	1/100	A++→E
9270/CH	C	SA-70	Fixed	78	25	58	chrome	1/100	A++→E
9270/SN	C	SA-70	Fixed	78	25	58	satin nickel	1/100	A++→E
9270/AB	C	SA-70	Fixed	78	25	58	antique brass	1/100	A++→E
9290/W	C	SA-90	Movable	85	25	70	white	1/100	A++→E
9290/CH	C	SA-90	Movable	85	25	70	chrome	1/100	A++→E
9290/SN	C	SA-90	Movable	85	25	70	satin nickel	1/100	A++→E
9290/AB	C	SA-90	Movable	85	25	70	antique brass	1/100	A++→E

Body: aluminium alloy
With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-702
92702/CH



SA-702H
92702H/G



SA-702H
92702H/SN

IP20

UNTIL SUPPLY LAST

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92702/CH	F	SA-702	Fixed	78	40	58	chrome	1/50	A++→E
92702H/SN	F	SA-702H	Movable	78	40	58	satin nickel	1/50	A++→E
92702H/G	F	SA-702H	Movable	78	40	58	gold	1/50	A++→E

Body: aluminium alloy
With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



SA-712
92712/CH



SA-712H
92712/SN



SA-712
92712/G



SA-712H
92712H/CH



SA-712H
92712H/SN



SA-712H
92712H/G

IP20

UNTIL SUPPLY LAST

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92712/CH	F	SA-712	Fixed	78	40	56	chrome	1/50	A++→E
92712/SN	F	SA-712	Fixed	78	40	56	satin nickel	1/50	A++→E
92712/G	F	SA-712	Fixed	78	40	56	gold	1/50	A++→E
92712H/CH	F	SA-712H	Movable	78	40	56	chrome	1/50	A++→E
92712H/SN	F	SA-712H	Movable	78	40	56	satin nickel	1/50	A++→E
92712H/G	F	SA-712H	Movable	78	40	56	gold	1/50	A++→E

Body: aluminium alloy
With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



SA-710
9271/G



SA-910
9291/G



SIM-5
9205/G



SIM-55
9255/G

IP20

UNTIL SUPPLY LAST

SIM / SA

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9205/G	F	SIM-5	70	20	56	gold	1/100	A++→E
9255/G	F	SIM-55	70	23	-	gold	1/100	A++→E
9271/G	F	SA-710	78	30	60	gold	1/100	A++→E
9291/G	F	SA-910	84	23	66	gold	1/100	A++→E

Body: aluminium alloy

12V | 50/60 Hz | JC | G4 | max. 20W | IP 20 | RoHS COMPLIANT | III | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



89144



89147



89151



89152

IP20

UNTIL SUPPLY LAST

PLASTIC DOWNLIGHTS

Catalogue number	Product category	Model	Diameter -Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
89151	F	PLM- 92W	90	32	70	white	1/1	A++→E
89152	F	PLS- 92W	90	30	70	white	1/1	A++→E
89147	F	PSQ- 92W	92/92	25	74	white	1/1	A++→E
89144	F	PLW- 92W	92/172	27	2X73	white	1/1	A++→E

Body: Plastic | **Lamp not included**

~230V | 12V | 50/60 Hz | max. 20W | IP 20 | RoHS COMPLIANT | III | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY


89153


89145


89154


89156


89155

IP20

UNTIL SUPPLY LAST

DOWNLIGHTS

Catalogue number	Product category	Material	Model	Diameter -Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
89145	F	Plastic	PLQQ- 92W	93/93	30	70	white	1/1	A++→E
89153	F	Metal	MS- 92CH	85/85	26	70	chrome	1/1	
89155	F	Metal	MR- 92CH	79	33	69	chrome	1/1	
89154	F	Metal	MS- 92SN	85/85	27	70	satin nickel	1/1	
89156	F	Metal	MR- 92SN	80	30	70	satin nickel	1/1	

Lamp not included

~230V | 12V | 50/60 Hz | max. 20W | IP 20 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



SAS-11
9211/G



SAS-12
9212/G

IP20

UNTIL SUPPLY LAST

SAS

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9211/G	F	SAS-11	32	33	25	gold	1/1	A++→E
9212/G	F	SAS-12	27	27	24	gold	1/1	A++→E

Body: aluminium alloy

12V | 50/60 Hz | JC | G4 | max. 20W | IP 20 | RoHS COMPLIANT | III | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



SA-914
92914WH/G
92914WW/G



SA-914
92914WH/GR
92914WW/GR



SA-913
92913WH/G
92913WW/G



SAS-14
9214WH/G
9214WW/G

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP40

UNTIL SUPPLY LAST

SAS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
9214WH/G	F	1	80	4000-4300	gold	60	21	50	1/100	A++>A
9214WW/G	F	1	80	2700-3000	gold	60	21	50	1/100	A++>A
92913WH/G	F	3	240	4000-4300	gold	88	40	65	1/100	A++>A
92913WW/G	F	3	240	2700-3000	gold	88	40	65	1/100	A++>A
92914WH/G	F	3	240	4000-4300	gold	90	41	70	1/100	A++>A
92914WW/G	F	3	240	2700-3000	gold	90	41	70	1/100	A++>A
92914WH/GR	F	3	240	4000-4300	graphite	90	41	70	1/100	A++>A
92914WW/GR	F	3	240	2700-3000	graphite	90	41	70	1/100	A++>A

Body: aluminium alloy | **Light source:** Epistar
LED recessed round spotlight. Easy installation due to handy clips.

~230V | 50/60 Hz | High power | 60° | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



92FLD1530/WH
92FLD1540/WH
92FLD1565/WH



92FLD2530/WH
92FLD2540/WH
92FLD2565/WH



92FLD3530/WH
92FLD3540/WH
92FLD3565/WH

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP44**

DEEP RECESSED LED DOWNLIGHT, IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92FLD1530/WH	**92FLD1530/WHE**	C	15	1350	3000	white	128	70	108	1/40	A++→A
92FLD1540/WH	**92FLD1540/WHE**	C	15	1350	4000	white	128	70	108	1/40	A++→A
92FLD1565/WH	**92FLD1565/WHE**	C	15	1350	6500	white	128	70	108	1/40	A++→A
92FLD2530/WH	**92FLD2530/WHE**	C	25	2250	3000	white	183	97	165	1/20	A++→A
92FLD2540/WH	**92FLD2540/WHE**	C	25	2250	4000	white	183	97	165	1/20	A++→A
92FLD2565/WH	**92FLD2565/WHE**	C	25	2250	6500	white	183	97	165	1/20	A++→A
92FLD3530/WH	**92FLD3530/WHE**	C	35	3150	3000	white	220	100	195	1/20	A++→A
92FLD3540/WH	**92FLD3540/WHE**	C	35	3150	4000	white	220	100	195	1/20	A++→A
92FLD3565/WH	**92FLD3565/WHE**	C	35	3150	6500	white	220	100	195	1/20	A++→A

Body: aluminium | **Reflector:** plastic



FRONT



BACK



Emergency kit with a possibility for work in an emergency regime more than two hours.

~230V | 50/60 Hz | SMD | 100° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 44 | RoHS | EMC | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SIM-1552



SIM-155



SIM-1553



SIM-255

IP20

UNTIL SUPPLY LAST

SIM

Catalogue number	Product category	Model	Length (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92255/CH	F	SIM-255	130	130	40	chrome	1/50	A++→E
92255/AB	F	SIM-255	130	130	40	antique brass	1/50	A++→E
92255/G	F	SIM-255	130	130	40	gold	1/50	A++→E
92255K/G	F	SIM-255 with key	130	130	40	gold	1/50	A++→E
92155/CH	F	SIM-155	82	132	85	chrome	1/50	A++→E
92155/SN	F	SIM-155	82	132	85	satin nickel	1/50	A++→E
92155/AB	F	SIM-155	82	132	85	antique brass	1/50	A++→E
92155/G	F	SIM-155	82	132	85	gold	1/50	A++→E
92155K/SN	F	SIM-155 with key	82	132	85	satin nickel	1/50	A++→E
921552K/SN	F	SIM-1552 with key	450	130	80	satin nickel	1/50	A++→E
921553K/SN	F	SIM-1553 with key	600	130	80	satin nickel	1/50	A++→E



SIM-255 with key



SIM-155 with key

Body: stainless steel | **Model SIM-255K** - with switch

12V | 50/60 Hz | JC | G4 | max. 20W | IP 20 | RoHS | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



GL 222



GL 221



GL FILM



RDL60COB

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP40

UNTIL SUPPLY LAST

GL

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92LED221WW	F	GL 221	12X1W	960	2700-3000	aluminium	135	66	120	1/20	A++→A
92LED222WW	F	GL 222	18X1W	1260	2700-3000	aluminium	160	95	145	1/12	A++→A
92LED215WH	F	GL FILM	5	375	4000-5000	white	125	70	110	1/20	A++→A
92LED215WW	F	GL FILM	5	375	2700-3000	white	125	70	110	1/20	A++→A
92LED216WH	F	GL FILM	10	750	4000-5000	white	165	70	140	1/20	A++→A
92DL62040	F	RDL 60 COB	20	1800	4000-4300	white	140	97	120	1/12	A++→A

Body: aluminium | **Diffuser:** glass | **Light source:** Epistar
Power factor: λ>0.9 | **Starting time:** <0.5s | LED recessed round downlight COB. Easy installation due to handy clips.

~230V | 50/60 Hz | COB | 90° | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



GL 201E
satin nickel / white



GL 202E
satin nickel / white



GL 203E
satin nickel / white



GL205E
satin nickel / white



GL 204E
satin nickel / white



GL103E
satin nickel / white

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP44

UNTIL SUPPLY LAST

DOWNLIGHT SET WITH LED STICK LAMPS

Catalogue number 4000K	Catalogue number 2700K	Product category	Type	Watt (W)	LED lamp lumens (lm)	Socket type	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92201LEDW/SN	**92201LEDWW/SN**	F	GL201E	2X9	2x750	E27	satin nickel	226	110	210	1/12	A+ A++→A
92201LEDW/W	**92201LEDWW/W**	F	GL201E	2X9	2x750	E27	white	226	110	210	1/12	A+ A++→A
92202LEDW/SN	**92202LEDWW/SN**	F	GL202E	2X9	2x750	E27	satin nickel	226	110	210	1/12	A+ A++→A
92202LEDW/W	**92202LEDWW/W**	F	GL202E	2X9	2x750	E27	white	226	110	210	1/12	A+ A++→A
92203LEDW/SN	**92203LEDWW/SN**	F	GL203E	2X9	2x750	E27	satin nickel	235	110	210	1/12	A+ A++→A
92203LEDW/W	**92203LEDWW/W**	F	GL203E	2X9	2x750	E27	white	235	110	210	1/12	A+ A++→A
92204LEDW/SN	**92204LEDWW/SN**	F	GL204E	2X9	2x750	E27	satin nickel	230	110	210	1/12	A+ A++→A
92204LEDW/W	**92204LEDWW/W**	F	GL204E	2X9	2x750	E27	white	230	110	210	1/12	A+ A++→A
92205LEDW/SN	**92205LEDWW/SN**	F	GL205E	2X9	2x750	E27	satin nickel	225	110	210	1/12	A+ A++→A
92205LEDW/W	**92205LEDWW/W**	F	GL205E	2X9	2x750	E27	white	225	110	210	1/12	A+ A++→A
92103LEDW/TCH	**92103LEDWW/TCH**	F	GL103E	2X9	2x750	E27	satin nickel	190	100	170	1/12	A+ A++→A
92103LEDW/W	**92103LEDWW/W**	F	GL103E	2X9	2x750	E27	white	190	100	170	1/12	A+ A++→A



Downlight



LED STICKS LAMP



LED STICKS LAMP



White

Satin nickel

~230V | 50/60 Hz | Ra≥80 | >20000 | INSTANT 100% | 30000h | IP 44 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



GL 206E
satin nickel / white



GL 210E
satin nickel / white



GL 213E
satin nickel / white



GL 214E
satin nickel / white



GL 211E
satin nickel / white



GL 120E
satin nickel / white

LED WARM WHITE 2700K NEUTRAL WHITE 4000K **IP44**

UNTIL SUPPLY LAST

DOWNLIGHT SET WITH LED STICK LAMPS

Catalogue number 4000K	Catalogue number 2700K	Product category	Type	Watt (W)	LED lamp lumens (lm)	Socket type	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92206LEDW/GH	**92206LEDWW/GH**	F	GL206E	2X9	2x750	E27	graphite/chrome	225	110	210	1/12	A+ A++→A
92206LEDW/SH	**92206LEDWW/SH**	F	GL206E	2X9	2x750	E27	satin nickel/chrome	225	110	210	1/12	A+ A++→A
92210LEDW/SN	**92210LEDWW/SN**	F	GL210E	2X9	2x750	E27	satin nickel	228	110	210	1/12	A+ A++→A
92210LEDW/W	**92210LEDWW/W**	F	GL210E	2X9	2x750	E27	white	228	110	210	1/12	A+ A++→A
92211LEDW/SN	**92211LEDWW/SN**	F	GL211E	2X9	2x750	E27	white	230	110	210	1/12	A+ A++→A
92211LEDW/W	**92211LEDWW/W**	F	GL211E	2X9	2x750	E27	satin nickel	230	110	210	1/12	A+ A++→A
92213LEDW/SN	**92213LEDWW/SN**	F	GL213E*	2X9	2x750	E27	satin nickel	266	65	-	1/12	A+ A++→A
92213LEDW/W	**92213LEDWW/W**	F	GL213E*	2X9	2x750	E27	white	266	65	-	1/12	A+ A++→A
92214LEDW/SN	**92214LEDWW/SN**	F	GL214E*	2X9	2x750	E27	satin nickel	240	60	-	1/12	A+ A++→A
92214LEDW/W	**92214LEDWW/W**	F	GL214E*	2X9	2x750	E27	white	240	60	-	1/12	A+ A++→A
92120LED6W/TCH	**92120LED6WW/TCH**	F	GL120E	1X9	750	E27	satin nickel	190	200	170	1/12	A+ A++→A
92120LED6W/W	**92120LED6WW/W**	F	GL120E	1X9	750	E27	white	190	200	170	1/12	A+ A++→A
92120LED4W/TCH	**92120LED4WW/TCH**	F	GL120E	1X9	750	E27	satin nickel	140	160	120	1/12	A+ A++→A
92120LED4W/W	**92120LED4WW/W**	F	GL120E	1X9	750	E27	white	140	160	120	1/12	A+ A++→A



Downlight



LED STICKS LAMP



LED STICKS LAMP



White

Satin nickel

*surface mounting

~230V 50/60 Hz Ra≥80 >20000 INSTANT 100% 30000h Hg IP 44 RoHS EMC F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



QUAD612
92Q61240WH
92Q61227WH
92Q61240DGR
92Q61227DGR



QUAD312
92Q31240WH
92Q31227WH



QUAD412
92Q41240WH
92Q41227WH
92Q41240DGR
92Q41227DGR

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20**

UNTIL SUPPLY LAST

QUAD

Catalogue number	Product category	Watt	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92Q31240WH	F	3X15W	3825	4000K	white	490	192	143		A+ A++→A
92Q31227WH	F	3X15W	3825	2700K	white	490	192	143		A+ A++→A
92Q41240WH	F	4X15W	5100	4000K	white	342	342	160		A+ A++→A
92Q41227WH	F	4X15W	5100	2700K	white	342	342	160		A+ A++→A
92Q41240DGR	F	4X15W	5100	4000K	dark grey	342	342	160		A+ A++→A
92Q41227DGR	F	4X15W	5100	2700K	dark grey	342	342	160		A+ A++→A
92Q61240WH	F	6X15W	7650	4000K	white	490	340	140		A+ A++→A
92Q61227WH	F	6X15W	7650	2700K	white	490	340	140		A+ A++→A
92Q61240DGR	F	6X15W	7650	4000K	dark grey	490	340	140		A+ A++→A
92Q61227DGR	F	6X15W	7650	2700K	dark grey	490	340	140		A+ A++→A





white



dark grey

Body: aluminium | **Light source:** LED lamp PAR30 LED recessed downlight. Easy installation due to handy clips.

~230V | 50/60 Hz | LED PAR30 | E27 | 38° | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 20 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



SKY TLOM



SKY TLR

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

UNTIL SUPPLY **LAST**

SKY TLR / SKY TLOM

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
	93TLOM180W/BL	**93TLOM180W/GR**	F	20	1800	4000	aluminium	130	98	24°	1/24	A++→A
		93TLOM180WW/GR	F	20	1800	2700	aluminium	130	98	24°	1/24	A++→A
93TLOM180CW/WH	**93TLOM180CW/BL**	**93TLOM180CW/GR**	F	20	1800	6400	aluminium	130	98	24°	1/24	A++→A
93TLOM190W/WH	**93TLOM190W/BL**	**93TLOM190W/GR**	F	30	2700	4000	aluminium	163	145	24°	1/12	A++→A
93TLOM190WW/WH		**93TLOM190WW/GR**	F	30	2700	2700	aluminium	163	145	24°	1/12	A++→A
93TLOM190CW/WH	**93TLOM190CW/BL**	**93TLOM190CW/GR**	F	30	2700	6400	aluminium	163	145	24°	1/12	A++→A
93TLR503W/WH			F	10	900	4000	aluminium	142	105	24°	1/12	A++→A
93TLR503CW/WH	**93TLR503CW/BL**	**93TLR503CW/GR**	F	10	900	6400	aluminium	142	105	24°	1/12	A++→A
93TLR504W/WH		**93TLR504W/GR**	F	15	1350	4000	aluminium	142	105	24°	1/12	A++→A
93TLR504WW/WH		**93TLR504WW/GR**	F	15	1350	2700	aluminium	142	105	24°	1/12	A++→A
93TLR504CW/WH	**93TLR504CW/BL**	**93TLR504CW/GR**	F	15	1350	6400	aluminium	142	105	24°	1/12	A++→A



SKY TLOM



SKY TLOM



SKY TLR



SKY TLR



white colour



black colour



grey colour

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DL-044 SQUARE
92DL044S1/BL



DL-044 SQUARE
92DL044S1/BLWH



DL-044 SQUARE
92DL044S1/GDWH



DL-044 SQUARE
92DL044S1/GDBL

IP20

DL-044 SQUARE

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044S1/BL	C	Downlight	black	110	110	110	1/30	A++→E
92DL044S1/BLWH	C	Downlight	black & white	110	110	110	1/30	A++→E
92DL044S1/GDWH	C	Downlight	gold & white	110	110	110	1/30	A++→E
92DL044S1/GDBL	C	Downlight	gold & black	110	110	110	1/30	A++→E

Body: Aluminium | **Lamps Not Included** | **Lamp holder:** GU10

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DL-044 SQUARE
92DL044S2/BL



DL-044 SQUARE
92DL044S2/BLWH



DL-044 SQUARE
92DL044S2/GDWH



DL-044 SQUARE
92DL044S2/GDBL

IP20

DL-044 SQUARE

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044S2/BL	C	Downlight	black	210	110	110	1/10	A++→E
92DL044S2/BLWH	C	Downlight	black & white	210	110	110	1/10	A++→E
92DL044S2/GDWH	C	Downlight	gold & white	210	110	110	1/10	A++→E
92DL044S2/GDBL	C	Downlight	gold & black	210	110	110	1/10	A++→E

Body: Aluminium | **Lamps Not Included** | **Lamp holder:** GU10

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DL-044 ROUND
92DL044R1/WH



DL-044 ROUND
92DL044R1/BL

IP20

DL-044 ROUND

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044R1/WH	C	Downlight	white	100	125	1/20	A++→E
92DL044R1/BL	C	Downlight	black	100	125	1/20	A++→E

Body: Aluminium | **Lamps Not Included** | **Lamp holder:** GU10

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FLCOM COB
White



FLCOM COB
Black

LED NEUTRAL WHITE 4000K **IP44**

FLCOM COB

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92FLCOM1040/WH	**92FLCOM1040/BL**	C	10	800	4000	90	90	1/8	A++→A
92FLCOM2040/WH	**92FLCOM2040/BL**	C	20	1600	4000	110	125	1/8	A++→A
92FLCOM3040/WH	**92FLCOM3040/BL**	C	30	2400	4000	130	155	1/8	A++→A
92FLCOM4040/WH	**92FLCOM4040/BL**	C	40	3200	4000	170	185	1/8	A++→A

Voltage: 85-265V AC| **Body:** Aluminium | **Beam angle:** 60°| **Mounting:** surface

~230V | 50/60 Hz | COB | 60° | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECESED FIXTURES GLOM 222
92GLOM222WW



RDLOMCOB
92DLOM1040/S
92DLOM1027/S



RDLOMCOB
92DLOM2040/S
92DLOM2027/S

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP40

UNTIL SUPPLY LAST

RDLOMCOB / RECESED FIXTURES GLOM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
92DLOM1040/S	F	10	800	4000-4300	silver	95	70	1/24	A++→A
92DLOM1027/S	F	10	800	2700-3000	silver	95	70	1/24	A++→A
92DLOM2040/S	F	20	1600	4000-4300	silver	95	110	1/12	A++→A
92DLOM2027/S	F	20	1600	2700-3000	silver	95	110	1/12	A++→A
92GLOM222WW	F	18X1	1260	2700-3000K		165	115	1/1	A++→A





Body: aluminium | **Light source:** Epistar | **Power factor:** λ>0.9 | **Starting time:** <0.5s
LED surface round downlight COB.

~230V | 50/60 Hz | COB | 60° | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



FRANCA 90
96FRANCA90/GR



FRANCA 90
96FRANCA90/BL

LED IP55 Resin

FRANCA

Catalogue number BLACK body	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96FRANCA90/BL	C	Ceiling fixtures	black	6	600	4000	95	115	1xGU10	1/30	A+ A++→A
96FRANCA90/GR	C	Ceiling fixtures	gray	6	600	4000	95	115	1xGU10	1/30	A+ A++→A

Body material: Resin| UV resistant | Lamp included







The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K

99LED729 GU10 LED SMD 6.5W 4000K | **99LED730** GU10 LED SMD 6.5W 2700K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V 50/60 Hz 1,5mm² RoHS 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 60 days.



TRACK LIGHTING



NOT FOLDING LED FLOODLIGHT, MINI SERIES

93MFL2230/BL
93MFL2240/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20 | Ra≥85 | 48V DC

FOUR POLES MAGNETIC LED FLOODLIGHT, MINI SERIES

Catalogue number WHITE	Product category Type		Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MFL2230/BL	C	Not folding	22	1672	3000	120°	585	118	1	A++→A
93MFL2240/BL	C	Not folding	22	1672	4000	120°	585	118	1	A++→A

Input Voltage: 48V | PF≥ 0.9 | **LED Source:** OSRAM | **Body material:** Aluminium | **Diffuser material:** PC | **Body colour:** Black

COB | 30000h | >20000 | 100% | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOLDING LED FLOODLIGHT, MINI SERIES

93MFFL1230/BL
93MFFL1240/BL
93MFFL1830/BL
93MFFL1840/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20** | **Ra≥85** | **48V DC**

FOUR POLES MAGNETIC LED FLOODLIGHT, MINI SERIES

Catalogue number WHITE	Product category Type		Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MFFL1230/BL	C	Folding	12	856	3000	120°	200	118	1	A++→A
93MFFL1240/BL	C	Folding	12	856	4000	120°	200	118	1	A++→A
93MFFL1830/BL	C	Folding	18	1317	3000	120°	305	118	1	A++→A
93MFFL1840/BL	C	Folding	18	1317	4000	120°	305	118	1	A++→A

Input Voltage: 48V | PF≥ 0.9 | **LED Source:** OSRAM | **Body material:** Aluminium | **Diffuser material:** PC | **Body colour:** Black

COB | 30000h | >20000 | INSTANT 100% | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

93MFGL1230/BL
93MFGL1240/BL



FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

93MFGL1830/BL
93MFGL1840/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20** | **Ra≥85** | **48V DC**

FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

Catalogue number WHITE	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MFGL1230/BL	C	Folding	12	835	3000	30°	200	118	1	A++→A
93MFGL1240/BL	C	Folding	12	835	4000	30°	200	118	1	A++→A
93MFGL1830/BL	C	Folding	18	1507	3000	30°	305	118	1	A++→A
93MFGL1840/BL	C	Folding	18	1507	4000	30°	305	118	1	A++→A

Input Voltage: 48V | **LED Source:** OSRAM | **Body material:** Aluminium | **Body colour:** Black

COB | 30000h | >20000 | INSTANT 100% | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC LED LIGHT, MINI SERIES
93MTL0530/BL
93MTL0540/BL



FOUR POLES MAGNETIC LED LIGHT, MINI SERIES
93MTL1030/BL
93MTL1040/BL



FOUR POLES MAGNETIC LED LIGHT, MINI SERIES
93MTL1530/BL
93MTL1540/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20 | Ra≥85 | 48V DC

FOUR POLES MAGNETIC LED LIGHT, MINI SERIES

Catalogue number WHITE	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
93MTL0530/BL	C	Folding	5	286	3000	38°	125	26	1	A++→A
93MTL0540/BL	C	Folding	5	286	4000	38°	125	26	1	A++→A
93MTL1030/BL	C	Folding	10	1230	3000	38°	160	55	1	A++→A
93MTL1040/BL	C	Folding	10	1230	4000	38°	160	55	1	A++→A
93MTL1530/BL	C	Folding	15	1692	3000	38°	200	45	1	A++→A
93MTL1540/BL	C	Folding	15	1692	4000	38°	200	45	1	A++→A

Input Voltage: 48V | PF≥ 0.9 | **LED Source:** CREE | **Body material:** Aluminium | **Body colour:** Black

COB | 30000h | >20000 | INSTANT 100% | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC LED HANGING LIGHT, MINI SERIES

93MPL1530/BL
93MPL1540/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20 | Ra≥85 | 48V DC

FOUR POLES MAGNETIC LED HANGING LIGHT, MINI SERIES

Catalogue number WHITE	Product category Type		Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
93MPL1530/BL	C	Hanging	15	1894	3000	38°	200	45	1	A++→A
93MPL1540/BL	C	Hanging	15	1894	4000	38°	200	45	1	A++→A

Input Voltage: 48V | PF≥ 0.9 | **LED Source:** CREE | **Body material:** Aluminium | **Body colour:** Black

COB | 30000h | >20000 | INSTANT 100% | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


93MRBM1/BL


93MROM1/BL


93MA015
93MA011


93MA001


93MA002


93MA003

FOUR POLES 48V TRACK RAILS AND ACCESSORIES FOR MAGNETIC LIGHTS MINI SERIES

Catalogue number WHITE	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
93MROM1/BL	C	track rail OM	1000	30	53	1
93MROM2/BL	C	track rail OM	2000	30	53	1
93MRBM1/BL	C	track rail BM	1000	30	47	1
93MRBM2/BL	C	track rail BM	2000	30	47	1
93MA015	C	end cap for MRBM				1
93MA011	C	end cap for MROM				1
93MA001	C	L ceiling corner BM				1
93MA002	C	L wall ceiling corner BM				1
93MA003	C	L ceiling corner OM				1
93MA004	C	L wall ceiling corner OM				1
93MA013	C	T ceiling connector BM				1
93MA014	C	T ceiling connector OM				1

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.


93MA006


93MA007


93MA008


93MA005


93MA010


93MA012


93MA009

FOUR POLES ACCESSORIES FOR MAGNETIC LIGHTS MINI SERIES

Catalogue number WHITE	Product category	Type	Packing/Box (pcs)
93MA005	C	I-flexible connector	1
93MA007	C	I-connector	1
93MA016	C	T-connector	1
93MA006	C	rail power adapter with cable 2x1.5mm²/0.5m	1
93MA008	C	fixture adaptor	1
93MA009	C	Inside connector	1
93MA010	C	mouting plate	1
93MA012	C	hanging wire 2m	1

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO LINES SKY TL5016



TWO LINES TRACK LIGHTS SKY TLS

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

TWO LINES SKY TL5016

Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL5016CW/BL	F	30	2400	6400	120	140	36°	1/34	A++→A

Body: aluminium

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

UNTIL SUPPLY LAST

TWO LINES TRACK LIGHTS SKY TLS

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box (pcs)	Energy class
93TLS503W/WH			F	2 LINES	10	900	4000	aluminium	142	105	24°	1/12	A++→A
93TLS503CW/WH		**93TLS503CW/GR**	F	2 LINES	10	900	6400	aluminium	142	105	24°	1/12	A++→A
		93TLS504W/GR	F	2 LINES	15	1350	4000	aluminium	142	105	24°	1/12	A++→A
93TLS504CW/WH	**93TLS504CW/BL**	**93TLS504CW/GR**	F	2 LINES	15	1350	6400	aluminium	142	105	24°	1/12	A++→A



SKY TLR



SKY TLR

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



TWO & FOUR LINES SKY TL5

White / Black

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP40**

TWO & FOUR LINES SKY TL5

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL5LEDW/WH	**93TL5LEDW/BL**	C	2 LINES	6,5	500	4000	57	147	40°	1/100	A+ A++→E
93TL5LEDWW/WH	**93TL5LEDWW/BL**	C	2 LINES	6,5	500	2700	57	147	40°	1/100	A+ A++→E
93TL5	**93TL5LEDBL**	C	2 LINES EMPTY				57	147		1/100	A++→E
94TL5LEDW/WH	**94TL5LEDW/BL**	C	4 LINES	6,5	500	4000	57	147	40°	1/100	A+ A++→E
94TL5LEDWW/WH	**94TL5LEDWW/BL**	C	4 LINES	6,5	500	2700	57	147	40°	1/100	A+ A++→E
94TL5	**94TL5LEDBL**	C	4 LINES EMPTY				57	147		1/100	A++→E

Body: aluminium | **Lampholder:** GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K | **99LED729** GU10 LED SMD 6.5W 4000K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V | 50/60 Hz | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES SKY TL2032
White



TWO & FOUR LINES SKY TL2032
Black

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

TWO & FOUR LINES SKY TL2032

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL2032/WH	**93TL2032/BL**	C	2 LINES EMPTY				55	84	162	1/80	A++→E
93TL2032WW/WH	**93TL2032WW/BL**	C	2 LINES	6,5	585	2700	55	84	162	1/80	A+ A++→E
93TL2032W/WH	**93TL2032W/BL**	C	2 LINES	6,5	585	4000	55	84	162	1/80	A+ A++→E
93TL2032CW/WH	**93TL2032CW/BL**	C	2 LINES	6,5	585	6400	55	84	162	1/80	A+ A++→E
94TL2032/WH	**94TL2032/BL**	C	4 LINES EMPTY				55	84	162	1/80	A++→E
94TL2032WW/WH	**94TL2032WW/BL**	C	4 LINES	6,5	585	2700	55	84	162	1/80	A+ A++→E
94TL2032W/WH	**94TL2032W/BL**	C	4 LINES	6,5	585	4000	55	84	162	1/80	A+ A++→E
94TL2032CW/WH	**94TL2032CW/BL**	C	4 LINES	6,5	585	6400	55	84	162	1/80	A+ A++→E

Body: iron | **Lampholder:** GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K | **99LED729** GU10 LED SMD 6.5W 4000K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V | 50/60 Hz | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES SKY TL2044
White



TWO & FOUR LINES SKY TL2044
Black

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

TWO & FOUR LINES SKY TL2044

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL2044/WH	**93TL2044/BL**	C	2 LINES EMPTY				56	86	135	1/80	A++→E
93TL2044WW/WH	**93TL2044WW/BL**	C	2 LINES	6,5	585	2700	56	86	135	1/80	A+ A++→E
93TL2044W/WH	**93TL2044W/BL**	C	2 LINES	6,5	585	4000	56	86	135	1/80	A+ A++→E
93TL2044CW/WH	**93TL2044CW/BL**	C	2 LINES	6,5	585	6400	56	86	135	1/80	A+ A++→E
94TL2044/WH	**94TL2044/BL**	C	4 LINES EMPTY				56	86	135	1/80	A++→E
94TL2044WW/WH	**94TL2044WW/BL**	C	4 LINES	6,5	585	2700	56	86	135	1/80	A+ A++→E
94TL2044W/WH	**94TL2044W/BL**	C	4 LINES	6,5	585	4000	56	86	135	1/80	A+ A++→E
94TL2044CW/WH	**94TL2044CW/BL**	C	4 LINES	6,5	585	6400	56	86	135	1/80	A+ A++→E

Body: iron | **Lampholder:** GU10





The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K | **99LED729** GU10 LED SMD 6.5W 4000K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V | 50/60 Hz | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO AND FOUR LINES SKY TL2025
White



TWO AND FOUR LINES SKY TL2025
Black

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP40**

TWO AND FOUR LINES SKY TL2025

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL202520WW/WH	**93TL202520WW/BL**	C	2 LINES	20	1400	2700	60	160	24°	1/40	A++→A
93TL202520W/WH	**93TL202520W/BL**	C	2 LINES	20	1400	4000	60	160	24°	1/40	A++→A
93TL202530WW/WH	**93TL202530WW/BL**	C	2 LINES	30	2000	2700	75	180	24°	1/30	A++→A
93TL202530W/WH	**93TL202530W/BL**	C	2 LINES	30	2000	4000	75	180	24°	1/30	A++→A
94TL202520WW/WH	**94TL202520WW/BL**	C	4 LINES	20	1400	2700	60	160	24°	1/40	A++→A
94TL202520W/WH	**94TL202520W/BL**	C	4 LINES	20	1400	4000	60	160	24°	1/40	A++→A
94TL202530WW/WH	**94TL202530WW/BL**	C	4 LINES	30	2000	2700	75	180	24°	1/30	A++→A
94TL202530W/WH	**94TL202530W/BL**	C	4 LINES	30	2000	4000	75	180	24°	1/30	A++→A

Body: aluminium | **Voltage:** 185-265 V AC | **Driver:** Non-isoalted

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES SKY FTL
black



TWO & FOUR LINES SKY FTL
white

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

TWO AND FOUR LINES SKY FTL

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93FTL25WW/WH	**93FTL25WW/BL**	C	2 LINES	25	2250	3000K	100	140	235	38°	1/20	A++→A
93FTL25W/WH	**93FTL25W/BL**	C	2 LINES	25	2250	4000K	100	140	235	38°	1/20	A++→A
93FTL25CW/WH	**93FTL25CW/BL**	C	2 LINES	25	2250	6000K	100	140	235	38°	1/20	A++→A
93FTL35WW/WH	**93FTL35WW/BL**	C	2 LINES	35	3150	3000K	100	140	235	38°	1/20	A++→A
93FTL35W/WH	**93FTL35W/BL**	C	2 LINES	35	3150	4000K	100	140	235	38°	1/20	A++→A
93FTL35CW/WH	**93FTL35CW/BL**	C	2 LINES	35	3150	6000K	100	140	235	38°	1/20	A++→A
934FTL25WW/WH	**934FTL25WW/BL**	C	4 LINES	25	2250	3000K	100	140	235	38°	1/20	A++→A
934FTL25W/WH	**934FTL25W/BL**	C	4 LINES	25	2250	4000K	100	140	235	38°	1/20	A++→A
934FTL25CW/WH	**934FTL25CW/BL**	C	4 LINES	25	2250	6000K	100	140	235	38°	1/20	A++→A
934FTL35WW/WH	**934FTL35WW/BL**	C	4 LINES	35	3150	3000K	100	140	235	38°	1/20	A++→A
934FTL35W/WH	**934FTL35W/BL**	C	4 LINES	35	3150	4000K	100	140	235	38°	1/20	A++→A
934FTL35CW/WH	**934FTL35CW/BL**	C	4 LINES	35	3150	6000K	100	140	235	38°	1/20	A++→A

Body: aluminium



side view black



back view black



side view white



back view white



93SKY01/W

CONNECTOR
TWO LINES RAILS
White: 93SKY01/W
Black: 93SKY01/BL
Grey: 93SKY01/G



93SKY03/W

CONNECTOR
FOUR LINES RAILS
White: 93SKY03/W
Black: 93SKY03/BL

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO LINES SKY TL5030
White / Black / Grey



TWO LINES SKY TL5020
White / Black / Grey

LED WARM WHITE 2700K NEUTRAL WHITE 4000K COOL WHITE 6400K **IP40**

TWO LINES SKY TL 20W

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY*	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box (pcs)	Energy class
93TL5020W/WH	**93TL5020W/BL**		C	20	1800	4000	93	125	36°	1/20	A++→A
93TL5020WW/WH	**93TL5020WW/BL**	**93TL5020WW/GR**	C	20	1800	2700	93	125	36°	1/20	A++→A
93TL5020CW/WH	**93TL5020CW/BL**	**93TL5020CW/GR**	C	20	1800	6400	93	125	36°	1/20	A++→A

* Until Supply Last

LED WARM WHITE 2700K NEUTRAL WHITE 4000K COOL WHITE 6400K **IP40**

UNTIL SUPPLY LAST

TWO LINES SKY TL 30W

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
	93TL5030CW/BL	F	30	2700	6400	93	125	36°	1/20	A++→A

Body: aluminium

~230V 50/60 Hz COB Ra>80 30000h >20000 INSTANT 100% Hg IP40 RoHS COMPLIANT EMC F CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SKY TL809
White / Black / Grey



SKY TL808
White / Black / Grey

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

TWO AND FOUR LINES SKY TL

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL809/WH	**93TL809/BL**	C	2L TL809			empty fixture	130	95	180		1/1	A++→E
93SKY1540		C	2L TL809	15	1275	4000	130	95	180	90°	1/1	A+ A++→E
93SKY1527		C	2L TL809	15	1275	2700	130	95	180	90°	1/1	A+ A++→E
93SKY1564		C	2L TL809	15	1275	6400	130	95	180	90°	1/1	A+ A++→E
93SKY3540	**93SKY4540**	C	2L TL808	15	1275	4000	150	100	210	90°	1/1	A+ A++→E
93SKY3527	**93SKY4527**	C	2L TL808	15	1275	2700	150	100	210	90°	1/1	A+ A++→E
93SKY3564	**93SKY4564**	C	2L TL808	15	1275	6400	150	100	210	90°	1/1	A+ A++→E
94SKY1540		C	4L TL809	15	1275	4000	130	95	180	90°	1/1	A+ A++→E
94SKY1527		C	4L TL809	15	1275	2700	130	95	180	90°	1/1	A+ A++→E
94SKY1564		C	4L TL809	15	1275	6400	130	95	180	90°	1/1	A+ A++→E
94SKY3540	**94SKY4540**	C	4L TL808	15	1275	4000	150	100	210	90°	1/1	A+ A++→E
94SKY3527	**94SKY4527**	C	4L TL808	15	1275	2700	150	100	210	90°	1/1	A+ A++→E
94SKY3564	**94SKY4564**	C	4L TL808	15	1275	6400	150	100	210	90°	1/1	A+ A++→E



15 W Lamp



white colour



black colour

Body: aluminium | **Light source:** LED lamp PAR30 | **Power factor:** λ>0.9 | **Starting time:** <1s

* Until Supply Last

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS | EMC | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES CINEMA SKY
White / Black / Grey



TWO & FOUR LINES CINEMA SKY
White / Black / Grey

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP40

TWO AND FOUR LINES CINEMA SKY

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box	Energy class
955CINEMA15W/WH	**955CINEMA15W/BL**	**955CINEMA15W/GR**	C	2L extendible	15	1275	4000	145	220	90°	1/6	A+ A++→E
955CINEMA15WW/WH	**955CINEMA15WW/BL**	**955CINEMA15WW/GR**	C	2L extendible	15	1275	2700	145	220	90°	1/6	A+ A++→E
955CINEMA15CW/WH	**955CINEMA15CW/BL**	**955CINEMA15CW/GR**	C	2L extendible	15	1275	6400	145	220	90°	1/6	A+ A++→E
955CINEMA115W/WH	**955CINEMA115W/BL**	**955CINEMA115W/GR**	C	2L fixed	15	1275	4000	145	220	90°	1/6	A+ A++→E
955CINEMA115WW/WH	**955CINEMA115WW/BL**	**955CINEMA115WW/GR**	C	2L fixed	15	1275	2700	145	220	90°	1/6	A+ A++→E
955CINEMA115CW/WH	**955CINEMA115CW/BL**	**955CINEMA115CW/GR**	C	2L fixed	15	1275	6400	145	220	90°	1/6	A+ A++→E
94CINEMA15W/WH	**94CINEMA15W/BL**		C	4L extendible	15	1275	4000	145	220	90°	1/6	A+ A++→E
94CINEMA15WW/WH	**94CINEMA15WW/BL**		C	4L extendible	15	1275	2700	145	220	90°	1/6	A+ A++→E
94CINEMA15CW/WH	**94CINEMA15CW/BL**		C	4L extendible	15	1275	6400	145	220	90°	1/6	A+ A++→E
94CINEMA115W/WH	**94CINEMA115W/BL**		C	4L fixed	15	1275	4000	145	220	90°	1/6	A+ A++→E
94CINEMA115WW/WH	**94CINEMA115WW/BL**		C	4L fixed	15	1275	2700	145	220	90°	1/6	A+ A++→E
94CINEMA115CW/WH	**94CINEMA115CW/BL**		C	4L fixed	15	1275	6400	145	220	90°	1/6	A+ A++→E



15 W Lamp



white colour



grey colour



black colour

Body: aluminium | **Light source:** LED lamp PAR30 | **Power factor:** λ>0.9 | **Starting time:** <1s | * Until Supply Last

~230V | 50/60 Hz | COB | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES SKY
TL 2211
White / Black



TWO & FOUR LINES SKY
TL 2211
White / Black

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP40**

TWO AND FOUR LINES SKY TL 2211

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box	Energy class
93SKY2215WW/WH	**93SKY2215WW/BL**	C	2 LINES	15	1275	2700	235	100	160	90°	1/6	A+ A++→E
93SKY2215W/WH	**93SKY2215W/BL**	C	2 LINES	15	1275	4000	235	100	160	90°	1/6	A+ A++→E
93SKY2215CW/WH	**93SKY2215CW/BL**	C	2 LINES	15	1275	6400	235	100	160	90°	1/6	A+ A++→E
94SKY2215WW/WH	**94SKY2215WW/BL**	C	4 LINES	15	1275	2700	230	100	160	90°	1/1	A+ A++→E
94SKY2215W/WH	**94SKY2215W/BL**	C	4 LINES	15	1275	4000	230	100	160	90°	1/1	A+ A++→E
94SKY2215CW/WH	**94SKY2215CW/BL**	C	4 LINES	15	1275	6400	230	100	160	90°	1/1	A+ A++→E



15 W Lamp



93SKY01/W

CONNECTOR
TWO LINES RAILS
White: 93SKY01/W
Black: 93SKY01/BL
Grey: 93SKY01/G



93SKY03/W

CONNECTOR
FOUR LINES RAILS
White: 93SKY03/W
Black: 93SKY03/BL

Body: aluminium | **Light source:** LED lamp PAR30 | **Power factor:** λ>0.9 | **Starting time:** <1s | *Until Supply Last

~230V | 50/60 Hz | SMD 2835 | Ra>80 | 30000h | >20000 | INSTANT 100% | Hg | IP 40 | RoHS | EMC | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SKY FIXTURES TLOM
White / Black



SKY FIXTURES TLBM
White / Black

LED NEUTRAL WHITE 4000K **IP40**

SKY FIXTURES TLOM / TLBM

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TLOM1540/WH	**93TLOM1540/BL**	C	15	1350	4000K	Aluminum	55	145	24°	1/24	A++→A
93TLOM3040/WH	**93TLOM3040/BL**	C	30	2700	4000K	Aluminum	90	240	24°	1/15	A++→A
93TLBM1540/WH	**93TLBM1540/BL**	C	15	1350	4000K	Aluminum	73	118	30°	1/50	A++→A



TLBM



TLBM

~230V 50/60 Hz COB Ra>80 30000h >20000 INSTANT 100% Hg IP 40 RoHS COMPLIANT EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MH 2000
982000150



MH 2001
98200170
98200170FSCH

IP21

UNTIL SUPPLY LAST

MH 2000/2001

Catalogue number	Product category	Model	Watt (W)	Lamp	Colour body	Length (mm)	Width (mm)	Diameter/Height (mm)	Energy class
982000150	F	MH 2000	-	-	white	370	185	190	A++→C
98200170	F	MH 2001	-	-	white	190	215	240	A++→C
98200170FSCH	F	MH 2001	70	MHL	white	190	215	240	A++→C

Body: aluminium casting | **Ambient Temperature:** -30°C÷ +65°C | **Diffuser:** Tempered glass | Lamp not included

~230V | 50/60 Hz | Rx7s | IP 21 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

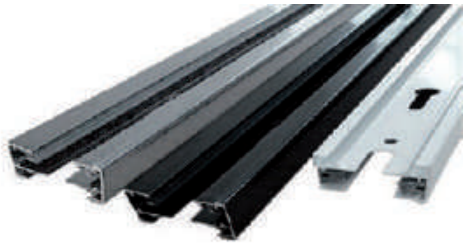

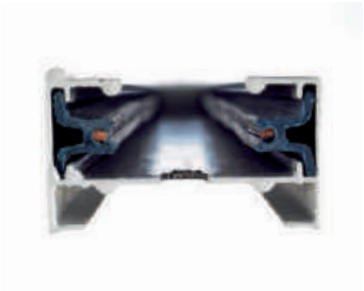

SINGLE-PHASE RAILS

ADAPTER POWER SUPPLY



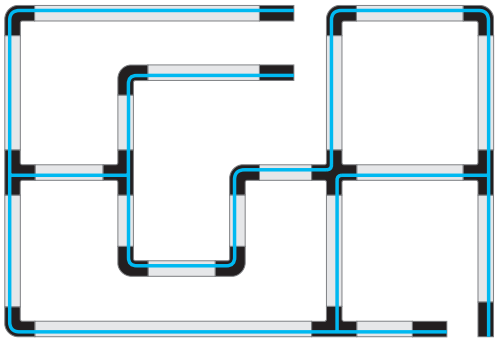

I - TYPE



L - TYPE



T - TYPE



X - TYPE



IP20

TWO LINES TRACK RAILS AND ADAPTERS

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY*	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
93101	**93301**	**93501**	C	SKYWAY 101 track rails	1000	40	20	1/20
93102	**93302**		C	SKYWAY 102 track rails	2000	40	20	1/20
93110	**93310**		C	SKYWAY 110 I-type adapter	80	40	20	1/100
93120	**93320**	**93520**	C	SKYWAY 120 L-type adapter	70	40	20	1/100
93130	**93330**	**93530**	C	SKYWAY 130 T-type adapter	106	40	20	1/100
93140	**93340**	**93540**	C	SKYWAY 140 X-type adapter	106	40	20	1/100

Body material: aluminium
* Until Supply Last: Product category F

~230V | 50/60 Hz | max. 10A | IP 20 | RoHS COMPLIANT | F | CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



POWER SUPPLY



I - TYPE



L - TYPE



SOFT L - TYPE



FOUR LINES TRACK RAILS



T - TYPE



X - TYPE

IP20

FOUR LINES TRACK RAILS AND ADAPTERS

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
94101	**94301**	C	four lines track rails*	1000	33.5	42	1/10
94102	**94302**	C	four lines track rails*	2000	33.5	42	1/10
94110	**94310**	C	four line I-type connector	160	30	42	1/50
94120	**94320**	C	four line L-type connector	100	30	100	1/70
94120M	**94320M**	C	four line soft L-type connector	100	30	100	1/70
94130	**94330**	C	four line T-type connector	160	30	100	1/50
94140	**94340**	C	four line X-type connector	160	30	160	1/25
94150	**94350**	C	four line power supply	160	30	42	1/100
94160	**94360**	C	end cap				1/100

Material: track rails- aluminium | **Accessories:** ABS antiflaming + cooper sheet

*four lines track rails come without power supply

~230V | 50/60 Hz | max. 10A | IP 20 | RoHS COMPLIANT

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





NEUTRAL WHITE 4000K

IP44

COMERCIAL LED FIXTURES TRITON

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99TR602640/GR	C	26	3120	4000	90°	grey	600	90	57,6	1/1	A++→A
99TR903840/GR	C	38	4560	4000	90°	grey	900	90	57,6	1/1	A++→A
99TR1205040/GR	C	50	6000	4000	90°	grey	1200	90	57,6	1/1	A++→A
99TR1506440/GR	C	64	7680	4000	90°	grey	1500	90	57,6	1/1	A++→A





INSTALATION ACCESSORIES FOR LED PROFILES
Suspension wire
Catalogue number: **99ACC54**

As per personal request, COMERCIAL LED FIXTURES TRITON can be produced with beam angle of 30°, 60° , 25°/25°.



Sharp distribution apply to focusing on objects with tight gap.
Mount up to 20 meters



Narrow distribution apply to narrow passageway.
Mount up to 10 meters



Wide distribution apply to wider passageway.
Mount up to 6 meters



Double asymmetric distribution apply to large gap between shelves.
Mount up to 3 meters



Body: aluminium | **Reflector:** polycarbonate (PC)

~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 50000h | Hg | IP 44 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

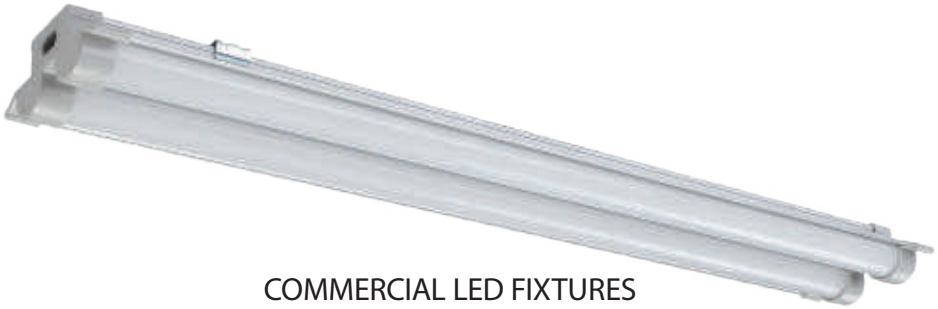

COMMERCIAL LED FIXTURES
95204518



COMMERCIAL LED FIXTURES
95204609
95204550

LED NEUTRAL WHITE 4000K **IP40**

COMMERCIAL LED FIXTURES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95204609	F	9*	820	4000	aluminium	90°	610	65	40	1/10	A++→A
95204518	F	18*	1640	4000	aluminium	120°	605	100	43	1/10	A++→A
95204550	C	50	4800	4000	aluminium	120°	1200	75	35	1/10	A++→A

Body: Alu+PC | **Light source:** SMD2835| **Input voltage:** 220-240V | **Mounting:** Surface

* Until Supply Last - 3 year standard + extended warranty









Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
92ACC03

Body: Alu+PC | **Light source:** SMD2835| **Input voltage:** 220-240V | **Mounting:** Surface

~230V | 50/60 Hz | SMD | Ra≥80 | >20000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

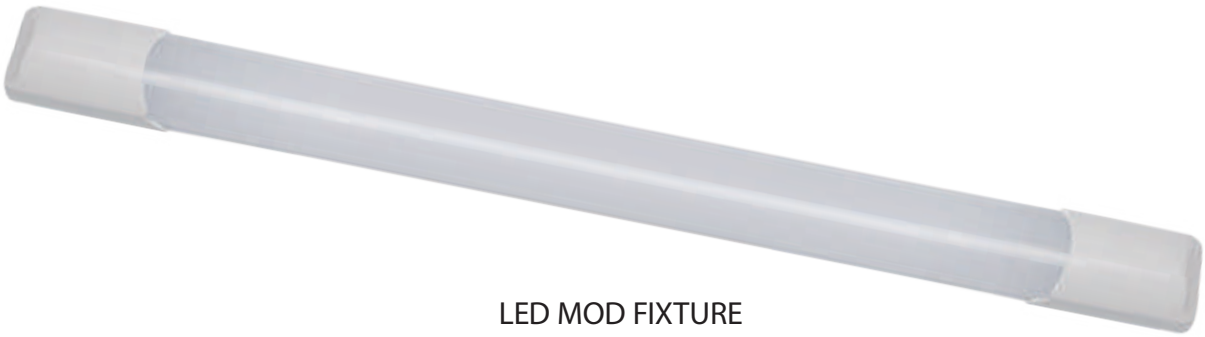

LED MOD FIXTURE
9MOD18W
9MOD36W



CONNECTOR 90° L-TYPE
9MODL



COUPLING 180° I-TYPE
9MODI



T-JOINT
9MODT

LED NEUTRAL WHITE 4000K **IP40**

MOD FIXTURE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9MOD18W	C	18	1100	4000	white	615	54	34	1/20	A++>A
9MOD36W	C	36	2200	4000	white	1215	54	34	1/20	A++>A



Connector 90° L-type

Catalogue number
9MODL
135x135x45mm



Coupling 180° I-type

Catalogue number
9MODI
210x58x45mm



T-joint

Catalogue number
9MODT
210x135x45mm

Body: PC+Iron | **Clips:** inox | **Light source:** Sanan 2835 SMD| **Starting time:** <1s

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 40 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NEDA

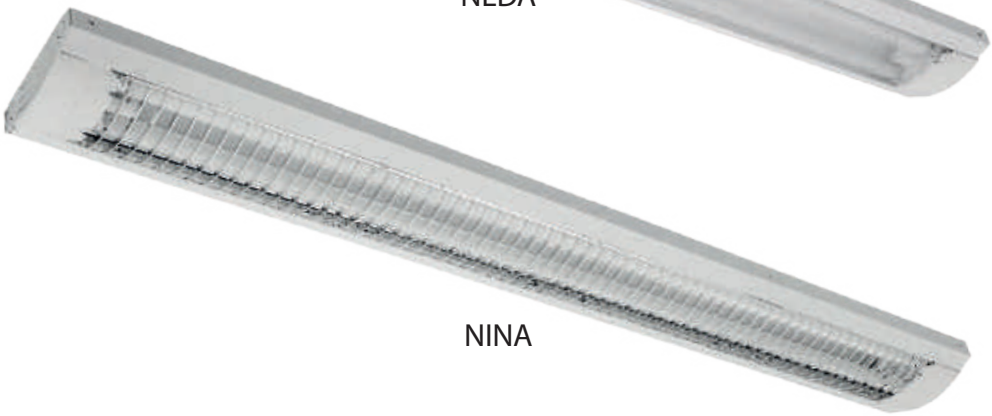

NINA

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP21**

UNTIL SUPPLY **LAST**

NEDA / NINA Luminaire with LED Tubes T8 STELLAR

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LED209CW	F	Neda	2X9	1170	6400	white	740	160	55	1/6	A+ A++→A
95LED209W	F	Neda	2X9	1170	4000	white	740	160	55	1/6	A+ A++→A
920118LED	F	Nina	1X9	585	4000	white	740	118	48	1/12	A+ A++→A
920118LEDCW	F	Nina	1X9	585	6400	white	740	118	48	1/12	A+ A++→A

with LED tubes STELLAR



Body: white powder painted steel | **Reflector:** plastic cover (Neda); ABS plastic grid (Nina) | **Light source:** LED tubes

~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >20000 | INSTANT 100% | 15000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



REMY STELLAR

9XREMY18LED
9XREMY36LED

LED NEUTRAL WHITE 4000K **IP40**

REMY LUMINAIRE STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XREMY18LED	C	18	1650	4000K	white	600	75	46	1/20	A++→A
9XREMY36LED	C	36	3300	4000K	white	1200	75	46	1/20	A++→A

Body: PP+PC | **LED driver:** mounted in the body | **Light source:** SMD2835 | **Input voltage:** 220-240V | **Beam angle:** 115°

~230V | 50/60 Hz | SMD | Ra≥80 | >20000 | INSTANT 100% | 15000h | Hg | IP 40 | RoHS COMPLIANT | EMC | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

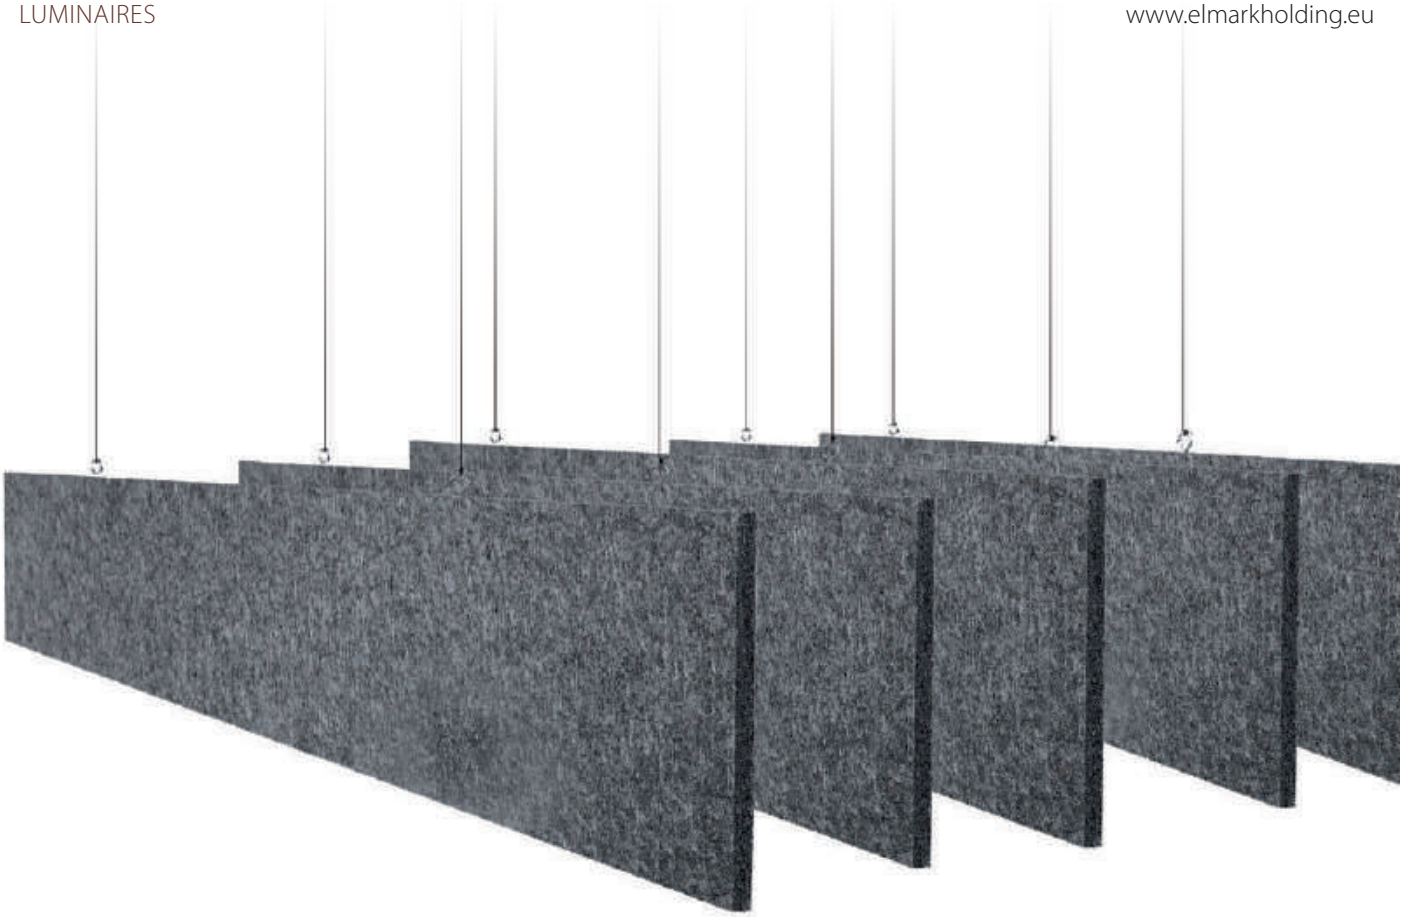

ACOUSTIC BAFFLES

Catalogue number	Product category	Colour	Material	Acoustic rating	Length (mm)	Height (mm)	Depth (mm)
99ACOUSTIC1200/BL	C	Black	Polyester	0.85 NRC	1200	200	9
99ACOUSTIC1200/WH	C	White	Polyester	0.85 NRC	1200	200	9
99ACOUSTIC1200/GR	C	Grey	Polyester	0.85 NRC	1200	200	9
99ACOUSTIC2400/BL	C	Black	Polyester	0.85 NRC	2400	200	9
99ACOUSTIC2400/WH	C	White	Polyester	0.85 NRC	2400	200	9
99ACOUSTIC2400/GR	C	Grey	Polyester	0.85 NRC	2400	200	9



Acoustic sound baffle find application in many work and office spaces, conference and presentation halls, meeting rooms, retails, institutional and more. They significantly reduce noise pollution, minimizing reverberation and echo in the room, absorbing any reflect sounds from other surfaces, thereby increasing speech intelligibility and communication. They are mounted on the ceiling in rows or columns.

Features: High quality and easy mounting | Lightweight | Safe and non-toxic | Available in three colours | Possibilty to create custom design

Mounting: Hanging. Attach one piece of wire/cord onto each of the 2 eye hooks on the baffle.Then attach the other end of the wire to two equally-spaced hooks in the ceiling

RoHS COMPLIANT CE

The products are not held on stock and are supplied only by a customer`s request.



LED NEUTRAL WHITE 4000K **IP40** **HIGH POWER**

ACOUSTIC HIGH POWER LED PROFILES S36 SERIES FOR HANGING MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM36S4020A/BL	**99SM36S4020A/WH**	**99SM36S4020A/GR**	C	20	1600	4000	600	200	55	1/1	A++→A
99SM36S4040A/BL	**99SM36S4040A/WH**	**99SM36S4040A/GR**	C	40	3200	4000	1200	200	55	1/1	A++→A
99SM36S4050A/BL	**99SM36S4050A/WH**	**99SM36S4050A/GR**	C	50	4000	4000	1500	200	55	1/1	A++→A





INSTALATION ACCESSORIES FOR LED PROFILES
Suspension wire
Catalogue number: **99ACC51**
Suspension wire with console
Catalogue number: **99ACC52**

Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

The products are not held on stock and are supplied only by a customer`s request.



LED NEUTRAL WHITE 4000K **IP40**

ACOUSTIC LED RINGS

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99RING6004035A/BL	**99RING6004035A/WH**	**99RING6004035A/GR**	C	35	3500	4000	600	25	1/1	A++→A
99RING8004060A/BL	**99RING8004060A/WH**	**99RING8004060A/GR**	C	42	4200	4000	800	25	1/1	A++→A
99RING10004075A/BL	**99RING10004075A/WH**	**99RING10004075A/GR**	C	50	5000	4000	1000	25	1/1	A++→A
99RING11504096A/BL	**99RING11504096A/WH**	**99RING11504096A/GR**	C	63	6300	4000	1150	25	1/1	A++→A



99ACC52 99ACC51



Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver

~230V 50/60 Hz SMD 90° Ra≥80 >15000 INSTANT 100% 20000h Hg IP 40 RoHS COMPLIANT EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

The products are not held on stock and are supplied only by a customer`s request.



LED RINGS
99RING8004060/GR



LED RINGS
99RING6004035/BL

NEUTRAL WHITE 4000K

IP40

LED RINGS

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99RING6004035/BL	**99RING6004035/WH**	**99RING6004035/GR**	C	35	3500	4000	600	25	1/1	A++→A
99RING8004060/BL	**99RING8004060/WH**	**99RING8004060/GR**	C	42	4200	4000	800	25	1/1	A++→A
99RING10004075/BL	**99RING10004075/WH**	**99RING10004075/GR**	C	50	5000	4000	1000	25	1/1	A++→A
99RING11504096/BL	**99RING11504096/WH**	**99RING11504096/GR**	C	63	6300	4000	1150	25	1/1	A++→A

Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver







99ACC52 99ACC51



~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

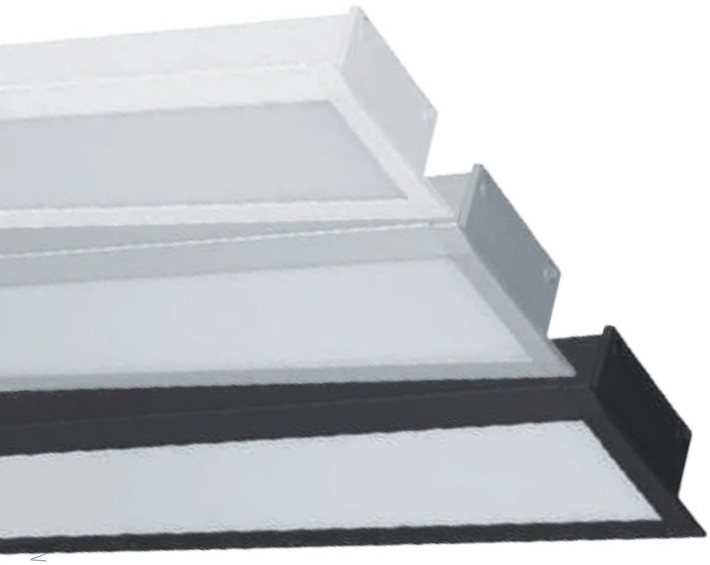

LED | NEUTRAL WHITE 4000K | **IP40** | **ULTRA THIN**

ULTRA THIN LED PROFILES S36 SERIES, RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM36S4009/BL	**99FM36S4009/WH**	**99FM36S4009/GR**	C	9	630	4000	600	47.74	35.33	13.5	1/1	A++→A
99FM36S4018/BL	**99FM36S4018/WH**	**99FM36S4018/GR**	C	18	1260	4000	1200	47.74	35.33	13.5	1/1	A++→A
99FM36S40225/BL	**99FM36S40225/WH**	**99FM36S40225/GR**	C	22.5	1575	4000	1500	47.74	35.33	13.5	1/1	A++→A



Body: aluminium | **Reflector:** polycarbonate (PC) | **Clamps:** inox | **Driver:** 24V | **Light Source:** SAMSUNG

~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

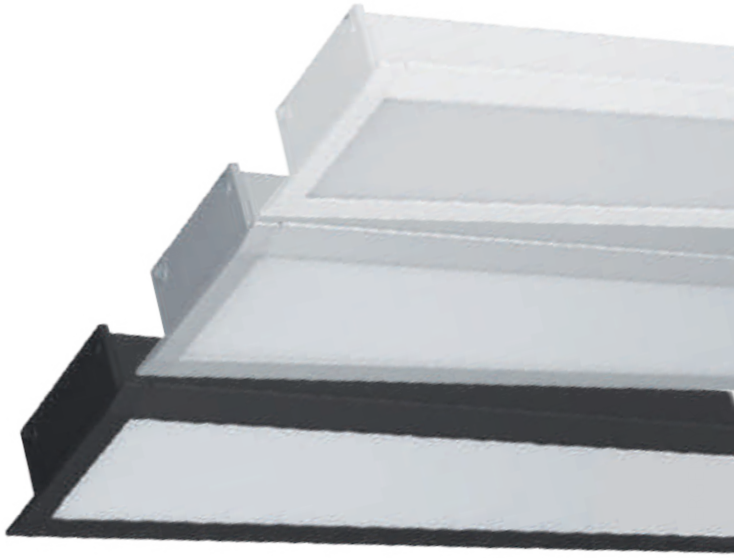

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S48 SERIES RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604012/BLE	**99FM604012/WHE**	**99FM604012/GRE**	C	12	1140	4000	600	70	47.8	22.4	1/1	A++→A
99FM1204024/BLE	**99FM1204024/WHE**	**99FM1204024/GRE**	C	24	2280	4000	1200	70	47.8	22.4	1/1	A++→A
99FM1504032/BLE	**99FM1504032/WHE**	**99FM1504032/GRE**	C	32	3040	4000	1500	70	47.8	22.4	1/1	A++→A

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S48 SERIES RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604012/BL	**99FM604012/WH**	**99FM604012/GR**	C	12	1140	4000	600	70	47.8	22.4	1/1	A++→A
99FM1204024/BL	**99FM1204024/WH**	**99FM1204024/GR**	C	24	2280	4000	1200	70	47.8	22.4	1/1	A++→A
99FM1504032/BL	**99FM1504032/WH**	**99FM1504032/GR**	C	32	3040	4000	1500	70	47.8	22.4	1/1	A++→A





L-corner for LED profiles S48series recessed
White: **99FML/WH**
Black: **99FML/BL**
Grey: **99FML/GR**
size: 420x420mm



Inside corner for LED profiles S48 series recessed
White: **99FMI/WH**
Black: **99FMI/BL**
Grey: **99FMI/GR**
size: 420x420mm

Body: aluminium | **Reflector:** polycarbonate (PC) | **Clamps:** inox | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.

~230V 50/60 Hz SMD 90° Ra≥80 >15000 INSTANT 100% 20000h Hg IP 40 RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

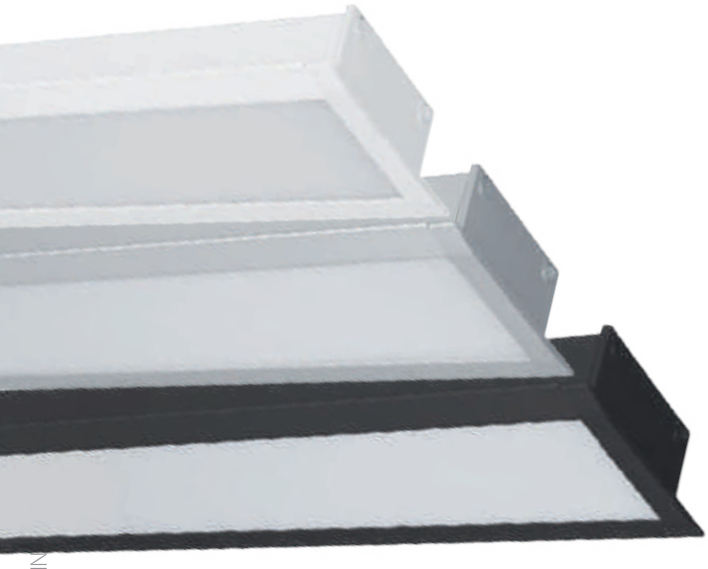

NEUTRAL WHITE 4000K **IP40** **HIGH POWER**

HIGH POWER LED PROFILES S48 SERIES FOR RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604020/BLE	**99FM604020/WHE**	**99FM604020/GRE**	C	20	1600	4000	600	70	47.8	22.4	1/1	A++→A
99FM1204040/BLE	**99FM1204040/WHE**	**99FM1204040/GRE**	C	40	3200	4000	1200	70	47.8	22.4	1/1	A++→A

NEUTRAL WHITE 4000K **IP40** **HIGH POWER**

HIGH POWER LED PROFILES S48 SERIES FOR RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604020/BL	**99FM604020/WH**	**99FM604020/GR**	C	20	1600	4000	600	70	47.8	22.4	1/1	A++→A
99FM1204040/BL	**99FM1204040/WH**	**99FM1204040/GR**	C	40	3200	4000	1200	70	47.8	22.4	1/1	A++→A
99FM1504050/BL	**99FM1504050/WH**	**99FM1504050/GR**	C	50	4000	4000	1500	70	47.8	22.4	1/1	A++→A



Body: aluminium | **Reflector:** polycarbonate (PC) | **Clamps:** inox | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

~230V 50/60 Hz SMD 90° Ra≥80 >15000 INSTANT 100% 20000h Hg IP 40 RoHS EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

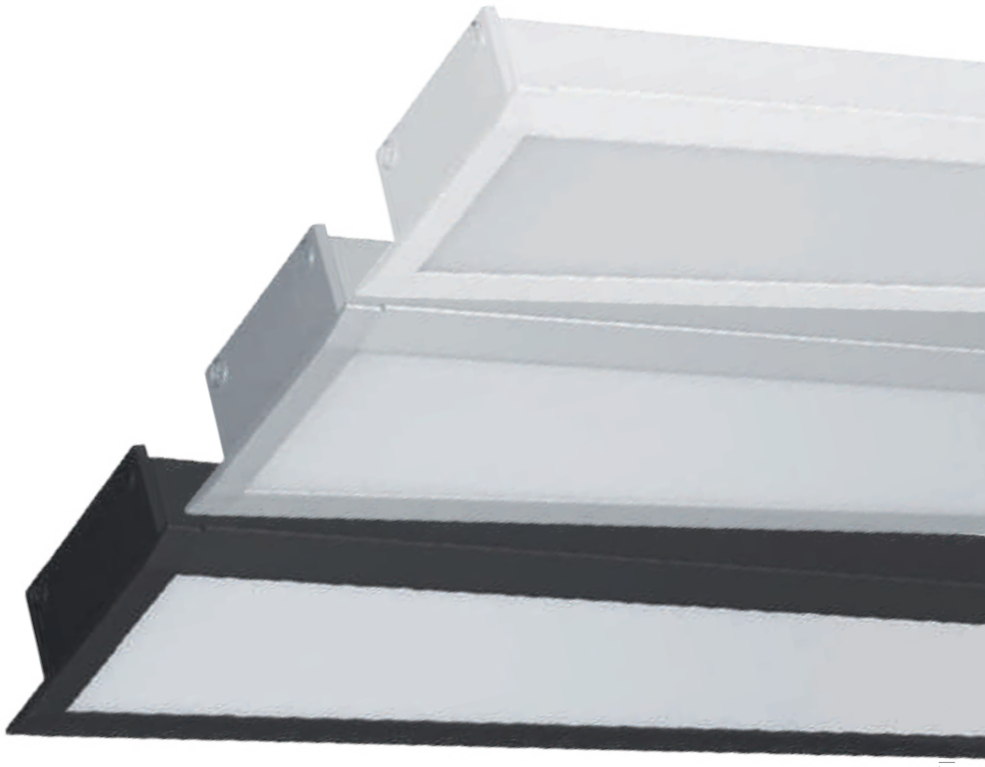

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S77 SERIES RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99BM604024/BLE	**99BM604024/WHE**	**99BM604024/GRE**	C	24	2280	4000	600	98.5	77.5	27	1/1	A++→A
99BM1204048/BLE	**99BM1204048/WHE**	**99BM1204048/GRE**	C	48	4560	4000	1200	98.5	77.5	27	1/1	A++→A

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S77 SERIES RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99BM604024/BL	**99BM604024/WH**	**99BM604024/GR**	C	24	2280	4000	600	98.5	77.5	27	1/1	A++→A
99BM1204048/BL	**99BM1204048/WH**	**99BM1204048/GR**	C	48	4560	4000	1200	98.5	77.5	27	1/1	A++→A
99BM1504064/BL	**99BM1504064/WH**	**99BM1504064/GR**	C	64	6080	4000	1500	98.5	77.5	27	1/1	A++→A





L-corner for LED profiles S77series recessed
White: **99BML/WH**
Black: **99BML/BL**
Grey: **99BML/GR**
size: 450x450mm



Inside corner for LED profiles S77 series recessed
White: **99BMI/WH**
Black: **99BMI/BL**
Grey: **99BMI/GR**
size: 450x450mm

Body: aluminium | **Reflector:** polycarbonate (PC) | **Clamps:** inox | **Driver:** 42V SELV driver

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.

~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

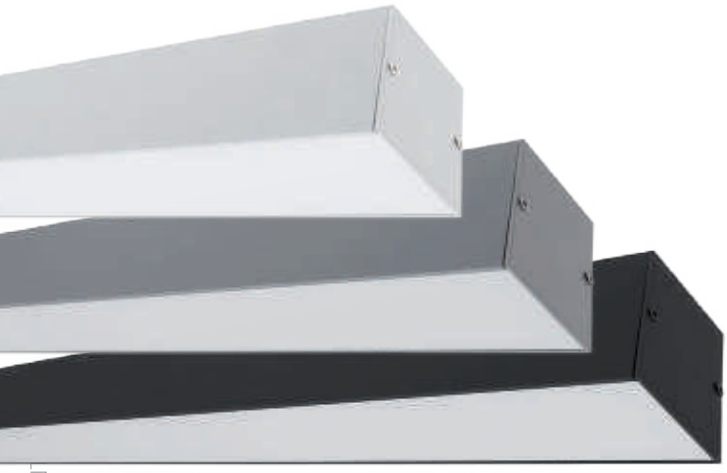

LED NEUTRAL WHITE 4000K **IP40** **HIGH POWER**

HIGH POWER LED PROFILES S36 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM36S4020/BL	**99SM36S4020/WH**	**99SM36S4020/GR**	C	20	1600	4000	600	65.64	35.6	1/1	A++→A
99SM36S4040/BL	**99SM36S4040/WH**	**99SM36S4040/GR**	C	40	3200	4000	1200	65.64	35.6	1/1	A++→A
99SM36S4050/BL	**99SM36S4050/WH**	**99SM36S4050/GR**	C	50	4000	4000	1500	65.64	35.6	1/1	A++→A



99ACC50 99ACC52 99ACC51



INSTALATION ACCESSORIES FOR LED PROFILES
Connector
Catalogue number: **99ACC50**
Suspension wire
Catalogue number: **99ACC51**
Suspension wire with console
Catalogue number: **99ACC52**

Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

~230V 50/60 Hz SMD 90° Ra≥80 >15000 INSTANT 100% 20000h Hg IP 40 RoHS COMPLIANT EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

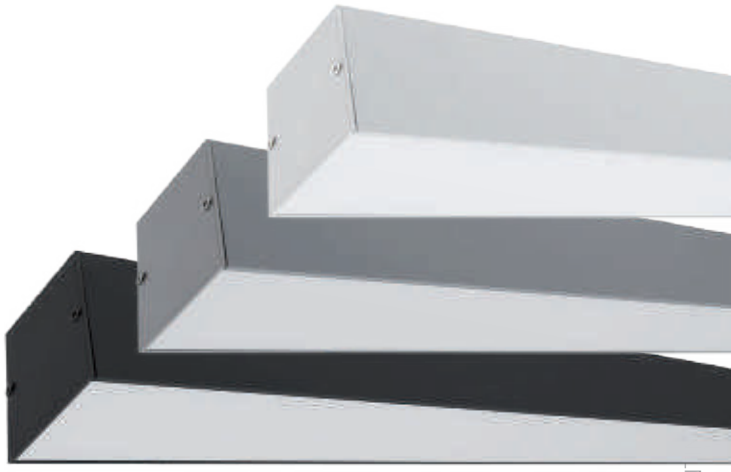

LED NEUTRAL WHITE 4000K **IP40** **HIGH POWER**

HIGH POWER LED PROFILES S48 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM604020/BL	**99SM604020/WH**	**99SM604020/GR**	C	20	1600	4000	600	70	47.8	1/1	A++→A
99SM1204040/BL	**99SM1204040/WH**	**99SM1204040/GR**	C	40	3200	4000	1200	70	47.8	1/1	A++→A
99SM1504050/BL	**99SM1504050/WH**	**99SM1504050/GR**	C	50	4000	4000	1500	70	47.8	1/1	A++→A

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S48 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM604012/BL	**99SM604012/WH**	**99SM604012/GR**	C	12	1140	4000	600	70	47.8	1/1	A++→A
99SM1204024/BL	**99SM1204024/WH**	**99SM1204024/GR**	C	24	2280	4000	1200	70	47.8	1/1	A++→A
99SM1504032/BL	**99SM1504032/WH**	**99SM1504032/GR**	C	32	3040	4000	1500	70	47.8	1/1	A++→A



L-corner for LED profiles S48series surface
White: **99SML/WH**
Black: **99SML/BL**
Grey: **99SML/GR**
size: 420x420mm



99ACC50



99ACC52



99ACC51



INSTALATION ACCESSORIES FOR LED PROFILES
Connector
Catalogue number: **99ACC50**
Suspension wire
Catalogue number: **99ACC51**
Suspension wire with console
Catalogue number: **99ACC52**

Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.

~230V 50/60 Hz SMD 90° Ra≥80 >15000 INSTANT 100% 20000h Hg IP 40 RoHS COMPLIANT EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

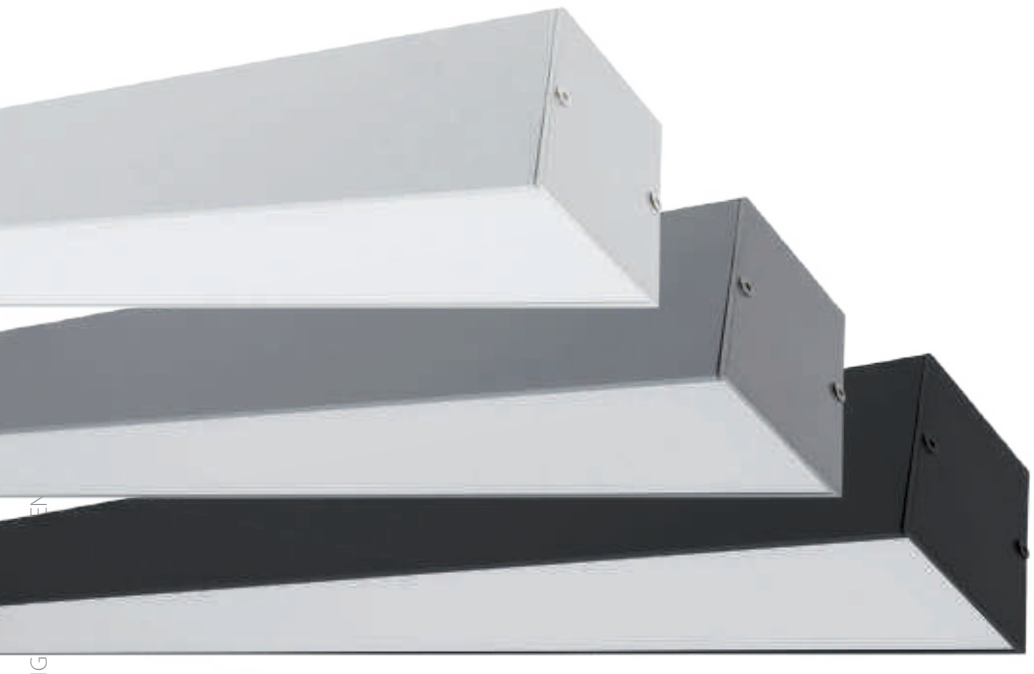

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S77 SERIES FOR SURFACE MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99OM604024/BLE	**99OM604024/WHE**	**99OM604024/GRE**	C	24	2280	4000	600	100	77	1/1	A++→A
99OM1204048/BLE	**99OM1204048/WHE**	**99OM1204048/GRE**	C	48	4560	4000	1200	100	77	1/1	A++→A

LED NEUTRAL WHITE 4000K **IP40**

LED PROFILES S77 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99OM604024/BL	**99OM604024/WH**	**99OM604024/GR**	C	24	2280	4000	600	100	77	1/1	A++→A
99OM1204048/BL	**99OM1204048/WH**	**99OM1204048/GR**	C	48	4560	4000	1200	100	77	1/1	A++→A
99OM1504064/BL	**99OM1504064/WH**	**99OM1504064/GR**	C	64	6080	4000	1500	100	77	1/1	A++→A



L-corner for LED profiles S77series surface
White: **99OML/WH**
Black: **99OML/BL**
Grey: **99OML/GR**
size: 450x450mm



99ACC55



99ACC52



99ACC51



INSTALATION ACCESSORIES FOR LED PROFILES
Connector
Catalogue number: **99ACC55**
Suspension wire
Catalogue number: **99ACC51**
Suspension wire with console
Catalogue number: **99ACC52**

Body: aluminium | **Reflector:** polycarbonate (PC) | **Driver:** 42V SELV driver | **Light Source:** SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.

~230V | 50/60 Hz | SMD | 90° | Ra≥80 | >15000 | INSTANT 100% | 20000h | Hg | IP 40 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



IP20

UNTIL SUPPLY LAST

RAINBOW LED SMD

Catalogue number	Product category	Watt (W)	Colou	LED lamp lumens (lm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9RT5300/WH	F	5	White	400	320	22	35	1/25	A++→A
9RT5300/WW	F	5	Warm white	400	320	22	35	1/25	A++→A
9RT5300/R	F	5	Red	-	320	22	35	1/25	A++→A
9RT5300/G	F	5	Green	-	320	22	35	1/25	A++→A
9RT5300/B	F	5	Blue	-	320	22	35	1/25	A++→A
9RT5600/WH	F	9	White	720	555	22	35	1/25	A++→A
9RT5600/WW	F	9	Warm white	720	555	22	35	1/25	A++→A
9RT5600/R	F	9	Red	-	555	22	35	1/25	A++→A
9RT5600/G	F	9	Green	-	555	22	35	1/25	A++→A
9RT5900/WH	F	14	White	1120	860	22	35	1/25	A++→A
9RT5900/WW	F	14	Warm white	1120	860	22	35	1/25	A++→A
9RT5900/G	F	14	Green	-	860	22	35	1/25	A++→A
9RT51200/WH	F	18	White	1440	1165	22	35	1/25	A++→A
9RT51200/WW	F	18	Warm white	1440	1165	22	35	1/25	A++→A
9RT51200/G	F	18	Green	-	1165	22	35	1/25	A++→A





9RT505

Body: PVC | **Diffuser:** Glass | **Light source:** SMD 2835

~230V | 50/60 Hz | SMD 2835 | 270° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

Light is one of the most important space-shaping elements. Therefore it is worth to consider the quality of the selected lighting fittings.

The SMD LED series of modern fittings is an innovative solution of lighting that is functional and decorative at the same time. The fittings emit high quality light and their compact form, matching contemporary furniture, enables a multitude of arrangements. The fittings can be connected in order to achieve the lighting line of the desired length, and the energy-efficient LED light makes it possible to achieve a spectacular effect in any interior.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

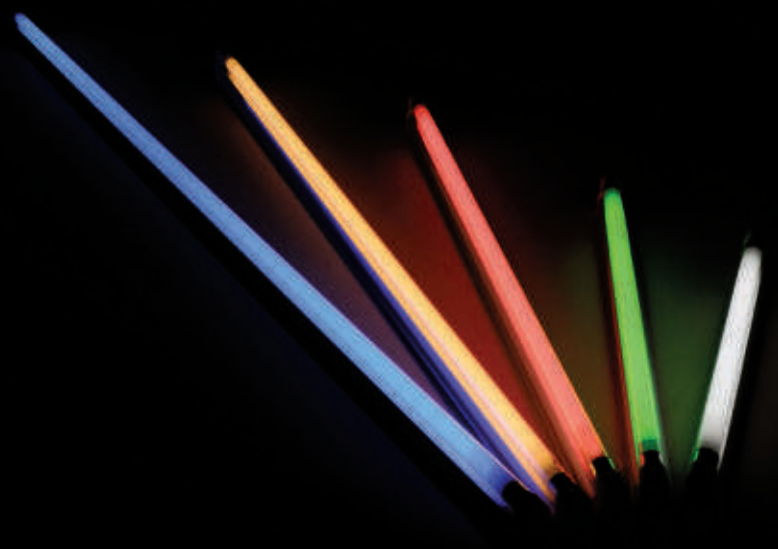

IP20

UNTIL SUPPLY LAST

FLUORESCENT LIGHT FIXTURES RAINBOW

Catalogue number	Product category	Type	Watt (W)	Colour body	Ballast	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9RT513/W	F	RAINBOW	13	white	electronic	545	24	35	1/30	B
9RT521/W	F	RAINBOW	21	white	electronic	875	24	35	1/30	B
9RT508/B	F	RAINBOW	8	blue	electronic	315	24	35	1/30	B
9RT513/B	F	RAINBOW	13	blue	electronic	545	24	35	1/30	B
9RT521/B	F	RAINBOW	21	blue	electronic	875	24	35	1/30	B
9RT528/B	F	RAINBOW	28	blue	electronic	1174	24	35	1/30	B
9RT508/G	F	RAINBOW	8	green	electronic	315	24	35	1/30	B
9RT513/G	F	RAINBOW	13	green	electronic	545	24	35	1/30	B
9RT521/G	F	RAINBOW	21	green	electronic	875	24	35	1/30	B
9RT528/G	F	RAINBOW	28	green	electronic	1174	24	35	1/30	B
9RT513/Y	F	RAINBOW	13	yellow	electronic	545	24	35	1/30	B
9RT521/Y	F	RAINBOW	21	yellow	electronic	875	24	35	1/30	B
9RT528/Y	F	RAINBOW	28	yellow	electronic	1174	24	35	1/30	B
9RT508/R	F	RAINBOW	8	red	electronic	315	24	35	1/30	B
9RT513/R	F	RAINBOW	13	red	electronic	545	24	35	1/30	B
9RT521/R	F	RAINBOW	21	red	electronic	875	24	35	1/30	B
9RT528/R	F	RAINBOW	28	red	electronic	1174	24	35	1/30	B





This lighting fixture is compatible with lamps from energy classes: B A A+ A++.

This lighting fixture comes with lamp from energy class: B

~230V | 50/60 Hz | G5 | 270° | >20000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



IP20

UNTIL SUPPLY LAST

COLOUR LIGHTING TUBES T5

Catalogue number	Product category	Type	Watt (W)	Colour	Length (mm)	Packing/Box (pcs)	Energy class
99217177	F	FLUORESCENT TUBE	8	blue	303	1/100	B
99217181	F	FLUORESCENT TUBE	8	green	303	1/100	B
99217182	F	FLUORESCENT TUBE	13	green	531	1/100	B
99217183	F	FLUORESCENT TUBE	21	green	863	1/100	B
99217184	F	FLUORESCENT TUBE	28	green	1160	1/100	B
99217185	F	FLUORESCENT TUBE	8	yellow	303	1/100	B
99217187	F	FLUORESCENT TUBE	21	yellow	863	1/100	B
99217188	F	FLUORESCENT TUBE	28	yellow	1160	1/100	B
99217190	F	FLUORESCENT TUBE	13	red	531	1/100	B
99217191	F	FLUORESCENT TUBE	21	red	863	1/100	B
99217192	F	FLUORESCENT TUBE	28	red	1160	1/100	B

~230V | 50/60 Hz | G5 | 270° | >20000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



SHINA WITH LED TUBE

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP21**

Shina with LED tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
910109LCW	C	9	630	6400	white	612	33	44	1/12	A A++→A
910109LW	C	9	630	4000	white	612	33	44	1/12	A A++→A
910118LCW	C	18	1260	6400	white	1218	33	44	1/8	A A++→A
910118LW	C	18	1260	4000	white	1218	33	44	1/8	A A++→A

with LED tubes STELLAR



~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | Hg | IP 21 | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHINA
910218

IP20

UNTIL SUPPLY LAST

SHINA

Catalogue number	Product category	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Ballast	Packing/Box (pcs)	Energy class
910218	F	2X18	white	618	89	70	magnetic	1/8	A++→B

~230V | 50/60 Hz | G13 | IP 20 | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



LENA-V OM
9LOM260LEDCW
9LOM260LED
9LOM460LEDCW
9LOM460LED
9LOM2120LEDCW
9LOM2120LED



LENA-V BM
9LBM260LEDCW
9LBM260LED
9LBM460LEDCW
9LBM460LED
9LBM2120LEDCW
9LBM2120LED

LED NEUTRAL WHITE 4000K COOL WHITE 6400K **IP21**

LENA-V BM/OM with LED Tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9LBM260LEDCW	C	2X9	1170	6400	white	595	295	70	1/1	A+ A++→A
9LBM260LED	C	2X9	1170	4000	white	595	295	70	1/1	A+ A++→A
9LBM460LEDCW	C	4X9	2340	6400	white	595	595	70	1/1	A+ A++→A
9LBM460LED	C	4X9	2340	4000	white	595	595	70	1/1	A+ A++→A
9LBM2120LEDCW	C	2X18	2340	6400	white	1195	295	70	1/1	A+ A++→A
9LBM2120LED	C	2X18	2340	4000	white	1195	295	70	1/1	A+ A++→A
9LOM260LEDCW	C	2X9	1170	6400	white	630	330	70	1/1	A+ A++→A
9LOM260LED	C	2X9	1170	4000	white	630	330	70	1/1	A+ A++→A
9LOM460LEDCW	C	4X9	2340	6400	white	630	630	70	1/1	A+ A++→A
9LOM460LED	C	4X9	2340	4000	white	630	630	70	1/1	A+ A++→A
9LOM2120LEDCW	C	2X18	2340	6400	white	1230	330	70	1/1	A+ A++→A
9LOM2120LED	C	2X18	2340	4000	white	1230	330	70	1/1	A+ A++→A

with LED tubes STELLAR



Body: white powder painted steel | **Reflector:** aluminium mirror double parabolic grid - type V | **BM** - recessed mounted luminaire | **OM** - surface mounted luminaire | **Light source:** LED tubes

~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



LENA-V OM
9LOM260LEDCWE
9LOM260LEDWE
9LOM460LEDCWE
9LOM460LEDWE
9LOM2120LEDCWE
9LOM2120LEDWE



LENA-V BM
9LBM260LEDCWE
9LBM260LEDWE
9LBM460LEDCWE
9LBM460LEDWE
9LBM2120LEDCWE
9LBM2120LEDWE

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP21**

LENA-V BM/OM with LED Tubes T8 and emergency kit

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9LBM260LEDCWE	C	2X9	1170	6400K	white	595	295	70	1/1	A+ A++→A
9LBM260LEDWE	C	2X9	1170	4000K	white	595	295	70	1/1	A+ A++→A
9LBM460LEDCWE	C	4X9	2340	6400K	white	595	595	70	1/1	A+ A++→A
9LBM460LEDWE	C	4X9	2340	4000K	white	595	595	70	1/1	A+ A++→A
9LBM2120LEDCWE	C	2X18	2340	6400K	white	1195	295	70	1/1	A+ A++→A
9LBM2120LEDWE	C	2X18	2340	4000K	white	1195	295	70	1/1	A+ A++→A
9LOM260LEDCWE	C	2X9	1170	6400K	white	630	330	70	1/1	A+ A++→A
9LOM260LEDWE	C	2X9	1170	4000K	white	630	330	70	1/1	A+ A++→A
9LOM460LEDCWE	C	4X9	2340	6400K	white	630	630	70	1/1	A+ A++→A
9LOM460LEDWE	C	4X9	2340	4000K	white	630	630	70	1/1	A+ A++→A
9LOM2120LEDCWE	C	2X18	2340	6400K	white	1230	330	70	1/1	A+ A++→A
9LOM2120LEDWE	C	2X18	2340	4000K	white	1230	330	70	1/1	A+ A++→A

with LED tubes STELLAR





We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime 60-180min

Body: white powder painted steel | **Reflector:** aluminium mirror double parabolic grid - type V | **BM** - recessed mounted luminaire | **OM** - surface mounted luminaire | **Light source:** LED tubes

~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 21 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VIKI

9VBM214LEDW
9VOM214LEDW

LED | NEUTRAL WHITE 4000K | **IP21**

UNTIL SUPPLY LAST

VIKI luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9VBM214LEDW	F	2X10	recessed	1800	4000	white	595	295	55	1/1	A++→A
9VOM214LEDW	F	2X10	surface	1800	4000	white	600	300	55	1/1	A++→A

Body: white powder painted steel | **Reflector:** prismatic lens | **Ballast:** fixed inside the body | **BM** - recessed fixture for mounting in suspended ceiling Armstrong type | **OM** - surface mounted fixture

with LED tubes ELMARK



~230V | 50/60 Hz | LED T5 | G5 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



POLA
9PBME255LEDCW



POLA
9PMBME255LEDCW

LED COOL WHITE 6400K **IP21**

UNTIL SUPPLY LAST

POLA luminaire with LED PLL ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PMBME255LEDCW	F	recessed	2x20	3600	5500	white	595	595	80	1/1	A++→A
9PBME255LEDCW	F	recessed	2x20	3700	5500	white	595	595	80	1/1	A++→A

with LED PLL ELMARK



~230V | 50/60 Hz | PLL | 2G11 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



PRISMATIC T5

IP21

UNTIL SUPPLY LAST

PRISMATIC T5

Catalogue number	Product category	Watt (W)	Colour body	Ballast	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PROM249	F	2X49	white	electronic	1500	300	70	1/1	A++→B

Body: white powder painted steel | **Reflector:** prismatic lens | **Ballast:** fixed inside the body | **BM** - recessed fixture for mounting in suspended ceiling Armstrong type | **OM** - surface mounted fixture

~230V | 50/60 Hz | T5 | IP 21 | RoHS | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



PRISMATIC
9PROM214LEDW
9PROM414LEDW



PRISMATIC
9PRBME214LEDW

LED

UNTIL SUPPLY LAST

PRISMATIC luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PRBME214LEDW	F	2X10	recessed	1700	4000	white	595	295	70	1/1	A++→A
9PROM214LEDW	F	2X10	surface	1700	4000	white	608	308	70	1/1	A++→A
9PROM414LEDW	F	4X10	surface	3400	4000	white	595	595	70	1/1	A++→A

with LED tubes ELMARK



~230V | 50/60 Hz | LED T5 | G5 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 3+0 standard +extended 3 YEAR TOTAL WARRANTY



PRISMATIC
9PRBME209LEDW
9PRBME209LEDCW
9PRBME218LEDW
9PRBME218LEDCW



PRISMATIC
9PROME209LEDW
9PROME209LEDCW

UNTIL SUPPLY LAST

PRISMATIC luminaire with LED tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PRBME209LEDW	F	2X9	RECESSED	1080	4000K	white	595	295	70	1/1	A+ A++→A
9PRBME209LEDCW	F	2X9	RECESSED	1080	6400K	white	595	295	70	1/1	A+ A++→A
9PRBME218LEDW	F	2X18	RECESSED	2160	4000K	white	1195	295	70	1/1	A+ A++→A
9PRBME218LEDCW	F	2X18	RECESSED	2160	6400K	white	1195	295	70	1/1	A+ A++→A
9PROME209LEDW	F	2X9	SURFACE	1080	4000K	white	608	308	70	1/1	A+ A++→A
9PROME209LEDCW	F	2X9	SURFACE	1080	6400K	white	608	308	70	1/1	A+ A++→A

with LED tubes STELLAR



~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >20000 | INSTANT 100% | 15000h | Hg | IP 21 | RoHS | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

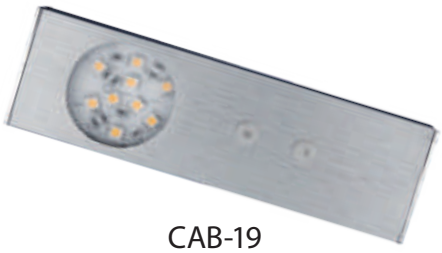

CAB-19
919LED010
919LED110



CAB-20
920LED011
920LED111



CAB-11
911LED04
911LED14



CAB-12
912LED06
912LED16

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

CAB

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
920LED011	F	12	1050	4000	grey	500	42	15	1/60	A++→A
920LED111	F	12	1050	2700	grey	500	42	15	1/60	A++→A
919LED010	F	2,8	185	4000	grey	160	50	9	1/10	A++→A
919LED110	F	2,8	185	2700	grey	160	50	9	1/10	A++→A
911LED04	F	3,5	270	4000	grey	450	23	7	1/10	A++→A
911LED14	F	3,5	270	2700	grey	450	23	7	1/10	A++→A
912LED06	F	7	480	4000	grey	450	50	9	1/10	A++→A
912LED16	F	7	480	2700	grey	450	50	9	1/10	A++→A

Body: Aluminium | **Diffuser:** PMMA | **Sensor:** NO | w/o driver | **Light source:** Epistar | **Assemble:** Surface Mounted

Starting time: <0.01s | **With integrated door sensor(CAB-19)** - The lamp will switch on when the door is open and switch off when the door is closed. Reaction distance is 50mm - 100mm. | w/o driver

12V DC | SMD 5050 | 120° | Ra≥80 | >10000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



CAB-13
913LED11



CAB-14
914LED02
914LED12



CAB-15
915LED03
915LED13



CAB-16
916LED05
916LED15

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20**

UNTIL SUPPLY **LAST**

CAB

Catalogue number	Product category	Watt (W)	Voltage (V)	Lumen (lm)	Colour temp. (K)	Colour body	Beam angle	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
914LED12	F	2,4	12 DC	210	2700	silver	120°	57	57	10	-	1/100	A++↦A
915LED03	F	1,8	12 DC	160	4000	silver	120°	57	57	10	-	1/100	A++↦A
915LED13	F	1,8	12 DC	160	2700	silver	120°	57	57	10	-	1/100	A++↦A
916LED05	F	1	12 DC	90	4000	chrome	120°	52	52	10	-	1/100	A++↦A
916LED15	F	1	12 DC	90	2700	chrome	120°	52	52	10	-	1/100	A++↦A



JUNCTION BOX FOR CAB-18
3 mouths with 10 cm wire - **99LED456**
6 mouths with 10 cm wire - **99LED457**
12 mouths with 10 cm wire - **99LED458**

Body: ABS | **Diffuser:** PC | **Sensor:** NO | w/o driver | **Light source:** Epistar | **Assemble:** Surface Mounted | **Starting time:** <0.01s

12V DC | Ra≥80 | >10000 | INSTANT 100% | 30000h | Hg | IP 20 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



CAB-08
908508
908521



CAB-03
903508
903513
903521

IP21

UNTIL SUPPLY LAST

CAB

Catalogue number	Product category	Model	Watt (W)	Colour body	Body	Length (mm)	Width (mm)	Height (mm)	Ballast	Packing/Box (pcs)	Energy class
903508	F	CAB-03	8	grey	Aluminium	363	88	45	electronic	1/20	B A++→B
903513	F	CAB-03	13	grey	Aluminium	592	88	45	electronic	1/20	B A++→B
903521	F	CAB-03	21	grey	Aluminium	925	88	45	electronic	1/20	B A++→B
908508	F	CAB-08	8	grey	Aluminium	365	58	70	electronic	1/16	B A++→B
908521	F	CAB-08	21	grey	Aluminium	935	58	70	electronic	1/12	B A++→B

~230V | 50/60 Hz | T5 | G5 | 6500K | Ra≥80 | IP 21 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY


EXIT



EL3LED
92EL3LED



XL102
9XL102LED



EL1LED
92EL1LED

LED COOL WHITE 6400K **IP21**

EMERGENCY FIXTURE XL102 / EL3LED / EL1LED

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Discharge time (h)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92EL1LED	C	EL1LED	3W	90	6000	3	white	60	40	26.5	1/1	A++→A
92EL3LED	C	EL3LED	5 W	150	6000	3	white	140	140	20	1/1	A++→A
9XL102LED	C	XL102LED	30X0,067W	100	6000	5	white	200	54	32	1/60	A++→A

EL1LED - Voltage: 220-240V/50HZ | **Battery:** 18650 3.7V/3Ah | **Charging:** 220V- 12h; 120V | **Light source:** 1 pc 3W LED | **Cut out size:** 40mm | Auto self-test

XL102LED - Voltage: 127-220V/50HZ | **Battery:** Lithium 3.7V/1000mAh | **Charging:** 220V- 12h; 120V- 24h | **Light source:** SMD 2835 | Two files dimming | Over charge protection | **Body:** PVC

~230V | 50/60 Hz | 20000h | Hg | IP 21 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock for EL3LED, the delivery time after order confirmation will be 45 days, and for XL102 will be 90 days.



XL101
9XL101BLED
9XL101CLED

LED COOL WHITE 6400K **IP21**

XL101

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL101BLED	C	XL101BLED	18X0,1W	60	6200-6500	white	246	76	41	1/10	A++→A
9XL101CLED	C	XL101CLED	24X0,1W	75	6200-6500	white	327	76	43	1/10	A++→A



Body: PVC | **Diffuser:** PVC | Duration time approx 4 hours | **Battery:** 3,6V / 800mAh Ni-Cd

Note: with stickers

~230V | 50/60 Hz | Ra>70 | 20000h | Hg | IP 21 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



XL88
9XL88 LED



XL88
9XL88A LED

LED IP21

XL88

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Lamp	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL88LED	C	XL88 LED / DOUBLE FACE	3	35	LED	360	150	25	1/10	A++→A
9XL88A LED	C	XL88A LED / ONE FACE ONLY	3	35	LED	360	150	25	1/10	A++→A

Frame: aluminium | **Diffuser:** glass | Duration time approx 3 hours | **battery:** 2,4V / 800mAh Ni-Cd

~230V | 50/60 Hz | IP 21 | RoHS | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



9XL3114



9XL5113



9XL3115



9XL5114



9AL3116
Plasterboard Mounting



9AL3117
Plasterboard Mounting

LED **IP21**

XL/AL EMERGENCY LIGHT

Catalogue number	Product category	Model	LED Type	Discharge time (h)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL5113	C	XL5113	6 super bright SMD LED	3	220	260	22	1/20	A++→A
9XL5114	C	XL5114	6 super bright SMD LED	3	220	260	22	1/20	A++→A
9XL3114	C	XL3114	6 super bright SMD LED	3	220	260	22	1/20	A++→A
9XL3115	C	XL3115	6 super bright SMD LED	3	220	260	22	1/20	A++→A
9AL3116	C	AL3116 Plasterboard	6 pieces D5 LED	3	380	210	50	1/20	A++→A
9AL3117	C	AL3117 Plasterboard	6 pieces D5 LED	3	380	210	50	1/20	A++→A

XL Models
Frame: PVC | **Diffuser:** PVC | **Battery:** 3,6V/300mAh | **Charge time:** 8-12h | **Conversion time:** <0.2sek | **Ambient temperature:** -10+40°C | With test button

AL Model
Frame: Aluminium alloy | **Power:** 1,5W | **Battery:** 1,2V/800mAh | **Conversion time:** <0.2sek | **Ambient temperature:** -10+40°C | **Mounting:** Plasterboard

~230V | 50/60 Hz | 20000h | Hg | IP 21 | RoHS | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

AUTONOMY EMERGENCY LIGHTING

The emergency lighting is aimed to be used in all cases when the power of the normal lighting is canceled due to occur of the emergency situation – an electric shock, fire, earthquake and etc. This assures the lighting needed and its continuous visibility, needed for the unimpeded leaving of the building through the emergency exits and it assures the ability for the easy recognition of the fireproof equipment and the signalization tools, positioned on the emergency roads.
The emergency blocks, offered by us, are suitable for autonomic lighting systems. They are with built in batteries and guarantee the autonomic switching on of the lighting body to which they are connected, if an emergency situation occurs, using the energy reserve of the battery. Similar lighting bodies do not need special power lines and they can be mounted anywhere, without a special need of support. Its main advantage is their independency of special built emergency lines and even if there is a damage in one of the emergency lightings, all of the others will keep on working. This gives an additional security and reliability of the whole emergency system.

EMERGENCY DRIVER FOR LAMP WITH EXTERNAL DRIVERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



The housing of this emergency driver adopts good-quality aluminum and flame-retardant plastic. It has low weight and being convenient to install, so you can rest assure its safety. Battery adopts Li-ion battery with long lifespan. Its PCB adopts SMT technology, using IC control design in charging/discharging and power supply part. PCB uses fully automatic SMT technology, PCB core use PN8355, DW01 and M8205A IC chips which are especially for emergency lights and Li-ion battery protections. PCB circuit has the complete protection designs for over charging/discharging.

OPERATED PRINCIPE:
The emergency driver is being charged when AC power works, when fully charged, the circuit will protect the battery from over being-charged, and the emergency is standing by as soon as the battery is fully charged. When AC power is down, emergency driver supplies power to LED fixtures and they up light to the way to escape.

TECHNICAL DATA:
- Input voltage: 85-265V AC
- Battery: 3.7V 2400mAh
- Emergency switch time: <2s
- Suitable: for LED lamp with external driver and power 3-50W
- Emergency time: >120min
- Working temperature: from -5 to +45°C
- Size: 130x58x22mm
- IP 30

RECOMMENDED:
For all LED panels and fixtures with external driver and power from 3-50W

Working voltage	Charging time	Emergency time	Emergency switch time	Packing / Box (pcs)	Product category	Catalogue number
85-265V AC	24h	>120min	<2s	1/100	C	**89229**

LED PANELS STELLAR WITH EMERGENCY DRIVER 3-50W

2+0 standard +extended 2 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANELS STELLAR	**99XPANEL020WE**	C	48	4320	4000	595	595	30	1/6	A++→A
LED PANELS STELLAR	**99XPANEL020CWE**	C	48	4320	6400	595	595	30	1/6	A++→A
LED PANELS STELLAR	**99XPANEL021WE**	C	48	4320	4000	295	1195	30	1/6	A++→A




LED PANELS IP44 WITH EMERGENCY DRIVER 3-50W

4+1 standard +extended 5 YEAR TOTAL WARRANTY **IP44**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANEL ELMARK IP44	**92PANEL012WIP44E**	C	24	2400	4000	295	295	11	1/12	A++→A
LED PANEL ELMARK IP44	**92PANEL013WIP44E**	C	36	3600	4000	595	295	11	1/6	A++→A
LED PANEL ELMARK IP44	**92PANEL020WIP44E**	C	48	4800	4000	595	595	30	1/6	A++→A
LED PANEL ELMARK IP44	**92PANEL020CWIP44E**	C	48	4800	6400	595	595	30	1/6	A++→A
LED PANEL ELMARK IP44	**92PANEL018WIP44E**	C	45	4500	4000	595	595	9	1/5	A++→A
LED PANEL ELMARK IP44	**92PANEL021WIP44E**	C	48	4800	4000	1195	295	30	1/6	A++→A




LED PANELS WITH EMERGENCY DRIVER 3-50W

4+1 standard +extended 5 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANEL ELMARK	**92PANEL012WE**	C	24	2400	4000	295	295	11	1/12	A++→A
LED PANEL ELMARK	**92PANEL013WE**	C	36	3600	4000	595	295	11	1/6	A++→A
LED PANEL ELMARK	**92PANEL018WE**	C	45	4500	4000	595	595	9	1/5	A++→A
LED PANEL ELMARK	**92PANEL020WE**	C	48	4800	4000	595	595	30	1/6	A++→A
LED PANEL ELMARK	**92PANEL020CWE**	C	48	4800	6400	595	595	30	1/6	A++→A
LED PANEL ELMARK	**92PANEL021WE**	C	48	4800	4000	1195	295	30	1/6	A++→A
LED PANEL ELMARK	**92PANEL030WE**	C	48	4800	4000	595	595	9	1/6	A++→A
LED PANEL ELMARK	**92PANEL030CWE**	C	48	4800	6400	595	595	9	1/6	A++→A




LED PANEL STELLAR ROUND BM WITH EMERGENCY DRIVER 3-50W

2+0 standard +extended 2 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
LED PANELS ROUND STELLAR	**99XLED610E**	C	6	330	2700	118	18	100	1/30	A++→A
LED PANELS ROUND STELLAR	**99XLED609E**	C	6	330	4000	118	18	100	1/30	A++→A
LED PANELS ROUND STELLAR	**99XLED609CWE**	C	6	330	6500	118	18	100	1/30	A++→A
LED PANELS ROUND STELLAR	**99XLED612E**	C	12	840	2700	167	18	150	1/24	A++→A
LED PANELS ROUND STELLAR	**99XLED611E**	C	12	840	4000	167	18	150	1/24	A++→A
LED PANELS ROUND STELLAR	**99XLED611CWE**	C	12	840	6500	167	18	150	1/24	A++→A
LED PANELS ROUND STELLAR	**99XLED615E**	C	18	1350	2700	225	18	205	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED614E**	C	18	1350	4000	225	18	205	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED614CWE**	C	18	1350	6500	225	18	205	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED621E**	C	24	1800	2700	295	18	268	1/24	A++→A
LED PANELS ROUND STELLAR	**99XLED620E**	C	24	1800	4000	295	18	268	1/24	A++→A
LED PANELS ROUND STELLAR	**99XLED620CWE**	C	24	1800	6500	295	18	268	1/20	A++→A




LED PANEL ROUND IP44 WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended 5 YEAR TOTAL WARRANTY **IP44**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANELS ROUND ELMARK IP44	**99LED609IP44E**	C	5	400	4000	90	21	40	A++→A
LED PANELS ROUND ELMARK IP44	**99LED609IP44CWE**	C	5	400	6500	90	21	40	A++→A
LED PANELS ROUND ELMARK IP44	**99LED611IP44E**	C	12	960	4000	175	21	20	A++→A
LED PANELS ROUND ELMARK IP44	**99LED611IP44CWE**	C	12	960	6500	175	21	20	A++→A
LED PANELS ROUND ELMARK IP44	**99LED617IP44E**	C	18	1440	4000	225	21	20	A++→A
LED PANELS ROUND ELMARK IP44	**99LED617IP44CWE**	C	18	1440	6500	225	21	20	A++→A




LED PANEL ROUND IP65 WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended 5 YEAR TOTAL WARRANTY **IP65**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Diameter 1 (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
LED PANELS ROUND ELMARK IP65	**99LED607IP65E**	C	7	660	4000	115	100-110	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED607IP65CWE**	C	7	660	6500	115	100-110	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED610IP65E**	C	10	770	4000	170	150-160	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED610IP65CWE**	C	10	770	6500	170	150-160	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED616IP65E**	C	16	1300	4000	220	200-210	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED616IP65CWE**	C	16	1300	6500	220	200-210	27	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED623IP65E**	C	23	1750	4000	240	220-230	39	1/20	A++→A
LED PANELS ROUND ELMARK IP65	**99LED623IP65CWE**	C	23	1750	6500	240	220-230	39	1/20	A++→A




LED PANEL STELLAR ROUND OM WITH EMERGENCY DRIVER 3-50W

2+0 standard +extended 2 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANELS ROUND STELLAR	**99XLED623E**	C	18	1350	2700	219	32	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED622E**	C	18	1350	4000	219	32	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED622CWE**	C	18	1350	6500	219	32	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED628E**	C	24	1800	2700	295	32	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED627E**	C	24	1800	4000	295	32	1/20	A++→A
LED PANELS ROUND STELLAR	**99XLED627CWE**	C	24	1800	6500	295	32	1/20	A++→A



LED PANEL STELLAR SQUARE OM/BM WITH EMERGENCY DRIVER 3-50W

2+0 standard +extended | 2 YEAR TOTAL WARRANTY | IP40

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANELS SQUARE STELLAR BM	**99XLED633E**	C	12	840	2700	167	167	18	1/24	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED632E**	C	12	840	4000	167	167	18	1/24	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED632CWE**	C	12	840	6500	167	167	18	1/24	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED635E**	C	18	1350	2700	221	221	18	1/20	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED634E**	C	18	1350	4000	221	221	18	1/20	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED634CWE**	C	18	1350	6500	221	221	18	1/20	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED637E**	C	24	1800	2700	296	296	18	1/20	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED636E**	C	24	1800	4000	296	296	18	1/20	A++→A
LED PANELS SQUARE STELLAR BM	**99XLED636CWE**	C	24	1800	6500	296	296	18	1/20	A++→A
LED PANELS SQUARE STELLAR OM	**99XLED969E**	C	18	1350	4000	220	220	32	1/20	A++→A
LED PANELS SQUARE STELLAR OM	**99XLED970E**	C	24	1800	4000	300	300	32	1/20	A++→A




LED PANEL SQUARE OM/BM WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended | 5 YEAR TOTAL WARRANTY | IP40

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED PANELS SQUARE ELMARK BM	**99LED967CWE**	C	12	890	6400	175	175	13	1/20	A++→A
LED PANELS SQUARE ELMARK BM	**99LED967E**	C	12	890	4000	175	175	13	1/20	A++→A
LED PANELS SQUARE ELMARK BM	**99LED967WWE**	C	12	890	2700	175	175	13	1/20	A++→A
LED PANELS SQUARE ELMARK BM	**99LED968CWE**	C	18	1420	6400	225	225	13	1/20	A++→A
LED PANELS SQUARE ELMARK BM	**99LED968E**	C	18	1420	4000	225	225	13	1/20	A++→A
LED PANELS SQUARE ELMARK BM	**99LED968WWE**	C	18	1420	2700	225	225	13	1/20	A++→A
LED PANELS SQUARE ELMARK OM	**99LED969CWE**	C	18	1420	6400	220	220	32	1/20	A++→A
LED PANELS SQUARE ELMARK OM	**99LED969E**	C	18	1420	4000	220	220	32	1/20	A++→A
LED PANELS SQUARE ELMARK OM	**99LED969WWE**	C	18	1420	2700	220	220	32	1/20	A++→A



LED GLASS PANELS SQUARE WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended 5 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter/ Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED GLASS PANELS SQUARE ELMARK	**99LED642E**	C	6	480	4000	97	40	1/100	A++→A
LED GLASS PANELS SQUARE ELMARK	**99LED643E**	C	6	480	2700	97	40	1/100	A++→A
LED GLASS PANELS SQUARE ELMARK	**99LED644E**	C	18	1440	4000	200	40	1/20	A++→A
LED GLASS PANELS SQUARE ELMARK	**99LED645E**	C	18	1440	2700	200	40	1/20	A++→A




LED GLASS PANELS ROUND WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended 5 YEAR TOTAL WARRANTY **IP40**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Diameter 1 (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
LED GLASS PANELS ROUND ELMARK	**99LED638E**	C	6	480	4000	100	35	60	1/100	A++→A
LED GLASS PANELS ROUND ELMARK	**99LED639E**	C	6	480	2700	100	35	60	1/100	A++→A
LED GLASS PANELS ROUND ELMARK	**99LED640E**	C	18	1440	4000	200	35	148	1/20	A++→A
LED GLASS PANELS ROUND ELMARK	**99LED641E**	C	18	1440	2700	200	35	148	1/20	A++→A




DEEP RECESSED LED DOWNLIGHT, WITH EMERGENCY DRIVER 3-50W

4+1 standard +extended 5 YEAR TOTAL WARRANTY **IP44**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LED DOWNLIGHT ELMARK	**92FLD1530/WHE**	C	15	1350	3000	128	70	1/40	A++→A
LED DOWNLIGHT ELMARK	**92FLD1540/WHE**	C	15	1350	4000	128	70	1/40	A++→A
LED DOWNLIGHT ELMARK	**92FLD1565/WHE**	C	15	1350	6500	128	70	1/40	A++→A
LED DOWNLIGHT ELMARK	**92FLD2530/WHE**	C	25	2250	3000	183	97	1/20	A++→A
LED DOWNLIGHT ELMARK	**92FLD2540/WHE**	C	25	2250	4000	183	97	1/20	A++→A
LED DOWNLIGHT ELMARK	**92FLD2565/WHE**	C	25	2250	6500	183	97	1/20	A++→A
LED DOWNLIGHT ELMARK	**92FLD3530/WHE**	C	35	3150	3000	220	100	1/20	A++→A
LED DOWNLIGHT ELMARK	**92FLD3540/WHE**	C	35	3150	4000	220	100	1/20	A++→A
LED DOWNLIGHT ELMARK	**92FLD3565/WHE**	C	35	3150	6500	220	100	1/20	A++→A




LED PROFILES S48 RECESSED WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended | 5 YEAR TOTAL WARRANTY | IP40

Model	Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Energy class
PROFILES S48 SERIES BM	**99FM604012/BLE**	**99FM604012/WHE**	**99FM604012/GRE**	C	12	1140	4000	600	A++→A
PROFILES S48 SERIES BM	**99FM604020/BLE**	**99FM604020/WHE**	**99FM604020/GRE**	C	20	1600	4000	600	A++→A
PROFILES S48 SERIES BM	**99FM1204024/BLE**	**99FM1204024/WHE**	**99FM1204024/GRE**	C	24	2280	4000	1200	A++→A
PROFILES S48 SERIES BM	**99FM1204040/BLE**	**99FM1204040/WHE**	**99FM1204040/GRE**	C	40	3200	4000	1200	A++→A
PROFILES S48 SERIES BM	**99FM1504032/BLE**	**99FM1504032/WHE**	**99FM1504032/GRE**	C	32	3040	4000	1500	A++→A




LED PROFILES S77 RECESSED WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended | 5 YEAR TOTAL WARRANTY | IP40

Model	Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Energy class
PROFILES S77 SERIES BM	**99BM604024/BLE**	**99BM604024/WHE**	**99BM604024/GRE**	C	24	2280	4000	600	A++→A
PROFILES S77 SERIES BM	**99BM1204048/BLE**	**99BM1204048/WHE**	**99BM1204048/GRE**	C	48	4560	4000	1200	A++→A




LED PROFILES S48 SURFACE WITH EMERGENCY DRIVER 3-50W

3+2 standard +extended | 5 YEAR TOTAL WARRANTY | IP40

Model	Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Energy class
PROFILES S77 SERIES OM	**99OM604024/BLE**	**99OM604024/WHE**	**99OM604024/GRE**	C	24	2280	4000	600	A++→A
PROFILES S77 SERIES OM	**99OM1204048/BLE**	**99OM1204048/WHE**	**99OM1204048/GRE**	C	48	4560	4000	1200	A++→A




BELLA SMD2835 AND EMERGENCY DRIVER 3-50W

4+1 standard +extended | 5 YEAR TOTAL WARRANTY | IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
BELLA SMD2835	**9BR40LEDE**	C	40	3800	4000	1200	80	70	1/12	A++→A
BELLA SMD2835	**9BR40LEDCWE**	C	40	3800	6500	1200	80	70	1/12	A++→A
BELLA SMD2835	**9BR55LEDE**	C	55	5000	4000	1476	80	70	1/9	A++→A
BELLA SMD2835	**9BR55LEDCWE**	C	55	5000	6500	1476	80	70	1/9	A++→A




EMERGENCY DRIVER FOR LAMP WITH INTERNAL IC DRIVERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



The housing of this emergency driver adopts good-quality steel models with powder coating. It has low weight and being convenient to install, so you can rest assure its safety. It mainly includes housing, PCB and battery etc. Its battery adopts Li-ion battery with long lifespan. Its PCB adopts automatic SMT technology, uses IC control design in charging/discharging and power supply part. PCB uses fully automatic SMT technology, PCB core use 3525 IC chips which is especially for emergency lights and Li-ion battery protections. PCB circuit has the complete protection for over charging/discharging,output Short Circuit, Open Circuit,input/output reverse connection.

OPERATED PRINCIPE:
The emergency driver is being charged when AC power works, when fully charged, the circuit will protect the battery from over being-charged, and the emergency is standing by as soon as the battery is fully charged. When AC power is down, emergency driver supplies power to LED fixtures and they up light to the way to escape.

TECHNICAL DATA:
- Input voltage: 85-265V AC
- Battery: 11.1V 2600mAh
- Emergency switch time: <2s
- Suitable: for LED lamp with internal driver and power 3-20W
- Emergency time: 60-180min
- Working temperature: from -10 to +50°C
- Size: 248x40x28mm
- IP 30

RECOMMENDED:
For all LED tubes and bulbs with external IC driver and power from 3-20W

Working voltage	Charging time	Emergency time	Emergency switch time	Packing / Box (pcs)	Product category	Catalogue number
85-265V AC	24h	60-180min	<2s	1/50	C	**89231**

LENA-V WITH LED TUBES T8 STELLAR AND EM 3-20W

2+0 standard +extended 2 YEAR TOTAL WARRANTY **IP21**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
LENA-V BM	**9LBM260LEDCWE**	C	2X9	1170	6400K	595	295	70	1/1	A++→A
LENA-V BM	**9LBM260LEDWE**	C	2X9	1170	4000K	595	295	70	1/1	A++→A
LENA-V BM	**9LBM460LEDCWE**	C	4X9	2340	6400K	595	595	70	1/1	A++→A
LENA-V BM	**9LBM460LEDWE**	C	4X9	2340	4000K	595	595	70	1/1	A++→A
LENA-V BM	**9LBM2120LEDCWE**	C	2X18	2340	6400K	1195	295	70	1/1	A++→A
LENA-V BM	**9LBM2120LEDWE**	C	2X18	2340	4000K	1195	295	70	1/1	A++→A
LENA-V OM	**9LOM260LEDCWE**	C	2X9	1170	6400K	630	330	70	1/1	A++→A
LENA-V OM	**9LOM260LEDWE**	C	2X9	1170	4000K	630	330	70	1/1	A++→A
LENA-V OM	**9LOM460LEDCWE**	C	4X9	2340	6400K	630	630	70	1/1	A++→A
LENA-V OM	**9LOM460LEDWE**	C	4X9	2340	4000K	630	630	70	1/1	A++→A
LENA-V OM	**9LOM2120LEDCWE**	C	2X18	2340	6400K	1230	330	70	1/1	A++→A
LENA-V OM	**9LOM2120LEDWE**	C	2X18	2340	4000K	1230	330	70	1/1	A++→A




BELLA WITH LED TUBES T8 ELMARK AND EMERGENCY DRIVER 3-20W

3+0 standard +extended 3 YEAR TOTAL WARRANTY **IP65**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
BELLA T8 ELMARK	**9BM218LEDCWE**	C	2X18	2880	6500	1270	131	100	1/6	A++→A
BELLA T8 ELMARK	**9BM218LEDE**	C	2X18	2880	4000	1270	131	100	1/6	A++→A
BELLA T8 ELMARK	**9BM224LEDCWE**	C	2X24	3840	6500	1570	166	110	1/4	A++→A
BELLA T8 ELMARK	**9BM224LEDE**	C	2X24	3840	4000	1570	166	110	1/4	A++→A




EMERGENCY CEILING LAMP NEPTUN

3+2 standard +extended 5 YEAR TOTAL WARRANTY **IP65**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
NEPTUN	**95NEPTUN18LEDE**	C	18	1800	6000K	280	65	1/10	A++→A



EMERGENCY DRIVER FOR INDUSTRIAL LAMP WITH INTERNAL IC DRIVERS

3+0 standard +extended 3 YEAR TOTAL WARRANTY



This emergency driver is suitable for all 20-100W LED lamps with internal IC driver (This device CANNOT be used for the LED lights with RC driver). It can be used in public places to ensure LED lights work normally when power fail suddenly because of fire and earthquake and etc. The housing of this emergency driver adopts good-quality steel models with powder coating. It has low weight and being convenient to install, so you can rest assure its safety. It mainly includes housing, PCB and battery etc. Its battery adopts Li-ion battery with long lifespan. Its PCB adopts automatic SMT technology, uses IC control design in charging/discharging and power supply part. PCB uses fully automatic SMT technology, PCB core use 3525 IC chips which is especially for emergency lights and Li-ion battery protections. PCB circuit has the complete protection for over charging/discharging,output Short Circuit, Open Circuit,input/output reverse connection.

OPERATED PRINCIPE:
The emergency driver is being charged when AC power works, when fully charged, the circuit will protect the battery from over being-charged, and the emergency is standing by as soon as the battery is fully charged. When AC power is down, emergency driver supplies power to LED fixtures and they up light to the way to escape.

TECHNICAL DATA:
- Input voltage: 85-265V AC
- Battery: 18.5V 8800mAh
- Emergency switch time: <5s
- Suitable: for LED lamp with internal driver and power 20-100W
- Emergency time: 60-120min
- Working temperature: from -10 to +50°C
- Size: 290x105x50mm
- IP 44

RECOMMENDED:
For all LED road fixturec, high bayc, flood lights and lighting fixtures with internal IC driver and power from 20-100W

Working voltage	Charging time	Emergency time	Emergency switch time	Packing / Box (pcs)	Product category	Catalogue number
85-265V AC	24h	60-120min	<5s	1/10	C	**89228**

HELIOS SMD, BLACK
WITH EMERGENCY DRIVER 20-100W

2+0 standard +extended 2 YEAR TOTAL WARRANTY **IP65**

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
HELIOS SMD	**98HELIOS30E**	C	30	2400	5000-5500	153	25	111	1/20	A++→A
HELIOS SMD	**98HELIOS50E**	C	50	4000	5000-5500	205	30	160	1/20	A++→A
HELIOS SMD	**98HELIOS100E**	C	100	8000	5000-5500	300	30	205	1/10	A++→A
HELIOS SMD WITH SENSOR	**98HELIOS30SENE**	C	30	2400	5000-5500	173	35	136	1/10	A++→A
HELIOS SMD WITH SENSOR	**98HELIOS50SENE**	C	50	4000	5000-5500	210	35	163	1/10	A++→A





HELIOS SMD, WHITE
WITH EMERGENCY DRIVER 20-100W

2+0 standard +extended 2 YEAR TOTAL WARRANTY IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
HELIOS SMD	**98HELIOS30/WHE**	C	30	2400	4000	153	25	111	1/30	A++→A
HELIOS SMD	**98HELIOS50/WHE**	C	50	4000	4000	205	30	160	1/20	A++→A
HELIOS SMD	**98HELIOS100/WHE**	C	100	8000	4000	300	30	205	1/10	A++→A




VEGA SLIM, BLACK
WITH EMERGENCY DRIVER 20-100W

3+2 standard +extended 5 YEAR TOTAL WARRANTY IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
VEGA SLIM	**98VEGA30SLIME**	C	30	2700	5500	95	130	22	1/20	A++→A
VEGA SLIM	**98VEGA50SLIME**	C	50	4500	5500	132	186	25	1/20	A++→A
VEGA SLIM	**98VEGA100SLIME**	C	100	9000	5500	190	280	28	1/10	A++→A
VEGA SLIM WITH SENSOR	**98VEGA30SSE**	C	30	2700	5500	118	158	25	1/20	A++→A
VEGA SLIM WITH SENSOR	**98VEGA50SSE**	C	50	4500	5500	145	200	26	1/10	A++→A




VEGA SLIM, WHITE
WITH EMERGENCY DRIVER 20-100W

3+2 standard +extended 5 YEAR TOTAL WARRANTY IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
VEGA SLIM	**98VEGA30S/WHE**	C	30	2700	4000	95	130	22	1/20	A++→A
VEGA SLIM	**98VEGA50S/WHE**	C	50	4500	4000	132	186	25	1/20	A++→A
VEGA SLIM	**98VEGA100S/WHE**	C	100	9000	4000	190	280	28	1/10	A++→A
VEGA SLIM WITH SENSOR	**98VEGA30SS/WHE**	C	30	2700	4000	118	158	25	1/20	A++→A
VEGA SLIM WITH SENSOR	**98VEGA50SS/WHE**	C	50	4500	4000	145	200	26	1/10	A++→A




MADRID SMD, GREY, WITH EMERGENCY DRIVER 20-100W

5+0 standard +extended | 5 YEAR TOTAL WARRANTY | IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Diameter of the pole (mm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
MADRID SMD	**98MADRID30SMDE**	C	30	3600	5500	90°	38	362	54	143	1/10	A++→A
MADRID SMD	**98MADRID50SMDE**	C	50	6000	5500	90°	60	476	74	194	1/5	A++→A
MADRID SMD	**98MADRID100SMDE**	C	100	12000	5500	90°	60	567	87	233	1/4	A++→A




ROUTE SMD STELLAR, WITH EMERGENCY DRIVER 20-100W

2+0 standard +extended | 2 YEAR TOTAL WARRANTY | IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
ROUTE SMD STELLAR	**98ROUTE30SMDE**	C	30	3000	5000-5500	90°	130	57	316	1/20	A++→A
ROUTE SMD STELLAR	**98ROUTE50SMDE**	C	50	5000	5000-5500	90°	155	57	355	1/10	A++→A
ROUTE SMD STELLAR	**98ROUTE100SMDE**	C	100	10000	5000-5500	90°	160	67	420	1/10	A++→A




DUBLIN SMD STELLAR, WITH EMERGENCY DRIVER 20-100W

2+0 standard +extended | 2 YEAR TOTAL WARRANTY | IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
DUBLIN SMD STELLAR	**98DUBLIN100SMDE**	C	100	10000	5500	100°	Grey	237	90	1/10	A++→A




VIENA SMD, WITH EMERGENCY DRIVER 20-100W

5+0 standard +extended | 5 YEAR TOTAL WARRANTY | IP65

Model	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
VIENA SMD	**98VIENA100SMDE**	C	100	13000	5500	90°	290	140	1/1	A++→A






BATHROOM



POSEIDON
955POSEIDON12
955POSEIDON18
955POSEIDON24



TRITON
955TRITON7

LED NEUTRAL WHITE 4000K **IP44**

POSEIDON / TRITON

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955TRITON7	C	7	576	4000	Chrome	60	480	125	1/20	A++→A
955POSEIDON12	C	12	960	4000	Chrome	60	420	40	1/10	A++→A
955POSEIDON18	C	18	1440	4000	Chrome	60	655	40	1/10	A++→A
955POSEIDON24	C	24	1920	4000	Chrome	60	965	40	1/10	A++→A

Body: aluminium alloy | LED Bath Light.

~230V 50/60 Hz SMD 30° Ra>80 >50000 INSTANT 100% 30000h Hg IP 44 RoHS COMPLIANT EMC F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MIRROR LIGHT
95IP4411/2
over cabinet



MIRROR LIGHT
95IP4411
95IP4414

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP44

LED MIRROR LIGHT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95IP4411	C	8	504	4000	120°	400	106	42	1/20	A++→A
95IP4414	C	8	504	2700	120°	400	106	42	1/20	A++→A
95IP4411/2	C	8	504	4000	120°	400	106	42	1/20	A++→A

Body: Aluminium + PC | **Light source:** SMD 2835

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | IP 44 | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MIRROR LIGHT
95IP4412



MIRROR LIGHT
95IP4413

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP44

LED MIRROR LIGHT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95IP4412	C	15	1200	4000	133°	600	65	53	1/12	A++→A
95IP4413	C	20	1600	4000	133°	900	65	53	1/12	A++→A

Body: Aluminium + PC | **Light source:** SMD 2835

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 44 | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RODA
95IP4403



NILOS
95IP4405



OCEAN
95IP4409



OCEAN
95IP4410

IP44

UNTIL SUPPLY LAST

MIRROR LIGHT

Catalogue number	Product category	Description	Body	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95IP4403	F	Wall lamp	Metal and glass	Satin nickel	275	70	120	1 x E14	1/1	A++→A
95IP4405	F	Wall lamp	Metal and glass	Chrome	310	80	80	1 x E14	1/1	A++→A
95IP4409	F	Wall lamp	Metal and glass	Chrome	55	421	67	1 x T5 / 8W	1/1	A++→A
95IP4410	F	Wall lamp	Metal and glass	Chrome	55	650	67	1 x T5 / 14W	1/1	A++→A

~230V | 50/60 Hz | IP 44 | RoHS | F | CE | 2+0 standard +extended 2 YEAR TOTAL WARRANTY



LED PANEL ROUND IP44
99LED609IP44
99LED609IP44CW



LED PANEL ROUND IP44
99LED611IP44
99LED611IP44CW



LED PANEL ROUND IP44
99LED617IP44
99LED617IP44CW

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP44**

LED PANEL ROUND IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP44	**99LED609IP44E**	C	5	400	4000	white	90	21	40	A++→A
99LED609IP44CW	**99LED609IP44CWE**	C	5	400	6500	white	90	21	40	A++→A
99LED611IP44	**99LED611IP44E**	C	12	960	4000	white	175	21	20	A++→A
99LED611IP44CW	**99LED611IP44CWE**	C	12	960	6500	white	175	21	20	A++→A
99LED617IP44	**99LED617IP44E**	C	18	1440	4000	white	225	21	20	A++→A
99LED617IP44CW	**99LED617IP44CWE**	C	18	1440	6500	white	225	21	20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | **Light source:** SMD 2835 | **Recessed mounted luminaire** | **Beam angle:** 120°| **Driver:** Isolated
Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED607IP65
99LED607IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED610IP65
99LED610IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED616IP65
99LED616IP65CW



LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE
99LED623IP65
99LED623IP65CW

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP65

LED PANEL ROUND WATERPROOF, DUSTPROOF AND OILY SMOKE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter1 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED607IP65	**99LED607IP65E**	C	7	660	4000	white	115	100-110	27	1/20	A++→A
99LED607IP65CW	**99LED607IP65CWE**	C	7	660	6500	white	115	100-110	27	1/20	A++→A
99LED610IP65	**99LED610IP65E**	C	10	770	4000	white	170	150-160	27	1/20	A++→A
99LED610IP65CW	**99LED610IP65CWE**	C	10	770	6500	white	170	150-160	27	1/20	A++→A
99LED616IP65	**99LED616IP65E**	C	16	1300	4000	white	220	200-210	27	1/20	A++→A
99LED616IP65CW	**99LED616IP65CWE**	C	16	1300	6500	white	220	200-210	27	1/20	A++→A
99LED623IP65	**99LED623IP65E**	C	23	1750	4000	white	240	220-230	39	1/20	A++→A
99LED623IP65CW	**99LED623IP65CWE**	C	23	1750	6500	white	240	220-230	39	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.



Body: policarbonate (pc) | **Reflector:** policarbonate (pc) | Light source: SMD2835 | **Starting time:** <0.5s | Power factor: >0.9
Waterproof, dustproof and oily smoke|Milky white mask, soft light, not dazzling| Ultra-thin lamp body

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WATERPROOF LED PANEL ROUND
99LED609IP65



WATERPROOF LED PANEL ROUND
99LED611IP65CW

WATERPROOF LED PANEL ROUND
99LED617IP65CW

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP65

UNTIL SUPPLY LAST

WATERPROOF LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP65	**99LED609IP65E**	F	5	400	4000	white	90	27	1/40	A++→A
99LED611IP65CW	**99LED611IP65CWE**	F	10	800	6500	white	150	27	1/40	A++→A
99LED617IP65CW	**99LED617IP65CWE**	F	18	1440	6500	white	225	27	1/20	A++→A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: policarbonate (pc) | **Reflector:** policarbonate (pc) | **Light source:** Epistar | **Starting time:** <0.5s | **Power factor:** λ>0.8
Easy installation due to handy clips | Recessed mounted luminaire.

~230V | 50/60 Hz | SMD | 120° | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELR627
92627/W



ELR627
92627/SN

IP44

ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/W	C	ELR627	90	33	60	white	1/100	A++→E
92627/SN	C	ELR627	90	33	60	satin nickel	1/100	A++→E

Body: steel | **Diffuser:** glass

~230V | 12V | 50/60 Hz | max. 50W | IP 44 | RoHS COMPLIANT | III | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELR627
92627/CH



ELR627
92627/AB

IP44

ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/CH	C	ELR627	90	33	60	chrome	1/100	A++→E
92627/AB	C	ELR627	90	33	60	antique brass	1/100	A++→E

Body: steel | **Diffuser:** glass

~230V | 12V | 50/60 Hz | max. 50W | IP 44 | RoHS COMPLIANT | III | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-044
92044/G



SA-144
92144/RAB

IP44

UNTIL SUPPLY LAST

SA

Catalogue number	Product category	Model	Diameter (mm)	Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92144/RAB	F	SA-144	-	85	48	72	red antique brass	1/50	A++→E
92044/G	F	SA-044	80	-	37	71	gold	1/50	A++→E

Body: steel | **Diffuser:** glass | **Ring:** aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

12V | 50/60 Hz | MR-16 | GU5.3 | max. 50W | IP 20 IP 44 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



OUTDOOR



BELT LIGHT

961527

IP44

BELT LIGHT

Catalogue number	Product category	Cable length (m)	Cable specification	Lamp holder	QTY of lamp holder	IP	Packing/Box (pcs)	Energy class
961527	C	5	H05RN-F 2x1.0mm²	E27	15	44	1/5	A++→E



Length 5m / 15 lamps holders



Voltage: 220-240V AC | **Conectors type:** 3 pcs male/female | **Lamps not included**

IP 44 RoHS CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JOSH
96402WD/BK



JOSH
96403P/BK



JOSH
96404MF/BK



JOSH
96405MF/BK

IP44

JOSH

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96402WD/BK	C	Wall lantern	Matt black	185	240	450	1 x E27	1/6	A++→E
96403P/BK	C	Hanging lantern	Matt black	185	-	290	1 x E27	1/6	A++→E
96404MF/BK	C	Lantern floor post	Matt black	185	-	460	1 x E27	1/6	A++→E
96405MF/BK	C	Lantern floor post	Matt black	185	-	2000	1 x E27	1/20	A++→E



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Product category: G
Height: 600 - **93SP60BL**
Height: 800 - **93SP80BL**
Height: 1000 - **93SP100BL**
Height: 1200 - **93SP120BL**

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JOSH
96402WD/AB



JOSH
96403P/AB



JOSH
96404MF/AB



JOSH
96405MF/AB

IP44

JOSH

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96402WD/AB	C	Wall lantern	Antique brass	185	240	450	1 x E27	1/6	A++→E
96403P/AB	C	Hanging lantern	Antique brass	185	-	290	1 x E27	1/6	A++→E
96404MF/AB	C	Lantern floor post	Antique brass	185	-	460	1 x E27	1/6	A++→E
96405MF/AB	C	Lantern floor post	Antique brass	185	-	2000	1 x E27	1/20	A++→E



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Product category: G
Height: 600 - **93SP60BL**
Height: 800 - **93SP80BL**
Height: 1000 - **93SP100BL**
Height: 1200 - **93SP120BL**

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEK
96301WD/BK



ALEK
96301WU/BK



ALEK
96305F/BK



ALEK
96303P/BK



ALEK
96304MF/BK

IP44

ALEK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96301WD/BK	C	Wall lantern	Matt black	150	175	295	1 x E27	1/6	A++→E
96301WU/BK	C	Wall lantern	Matt black	150	175	365	1 x E27	1/6	A++→E
96303P/BK	C	Hanging lantern	Matt black	150	150	230	1 x E27	1/6	A++→E
96304MF/BK	C	Lantern floor post	Matt black	150	150	370	1 x E27	1/6	A++→E
96305F/BK	C	Lantern floor post	Matt black	150	150	830	1 x E27	1/6	A++→E

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS COMPLIANT | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEK
96301WD/BRB



ALEK
96301WU/BRB



ALEK
96305F/BRB



ALEK
96303P/BRB



ALEK
96304MF/BR

IP44

ALEK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96301WD/BRB	C	Wall lantern	Antique copper	150	175	295	1 x E27	1/6	A++→E
96301WU/BRB	C	Wall lantern	Antique copper	150	175	365	1 x E27	1/6	A++→E
96303P/BRB	C	Hanging lantern	Antique copper	150	150	230	1 x E27	1/6	A++→E
96304MF/BRB	C	Lantern floor post	Antique copper	150	150	370	1 x E27	1/6	A++→E
96305F/BRB	C	Lantern floor post	Antique copper	150	150	830	1 x E27	1/6	A++→E

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ERIK
96101WU/BK



ERIK
96102WD/BK



ERIK
96105F/BK



ERIK
96103P/BK



ERIK
96104MF/BK

IP44

ERIK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96101WU/BK	C	Wall lantern	Matt black	155	170	325	1 x E27	1/6	A++→E
96102WD/BK	C	Wall lantern	Matt black	155	170	285	1 x E27	1/6	A++→E
96103P/BK	C	Hanging lantern	Matt black	155	-	300	1 x E27	1/6	A++→E
96104MF/BK	C	Lantern floor post	Matt black	155	-	370	1 x E27	1/6	A++→E
96105F/BK	C	Lantern floor post	Matt black	155	-	775	1 x E27	1/6	A++→E

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ERIK
96101WU/AB



ERIK
96102WD/AB



ERIK
96105F/AB



ERIK
96103P/AB



ERIK
96104MF/AB

IP44

ERIK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96101WU/AB	C	Wall lantern	Antique brass	155	170	325	1 x E27	1/6	A++→E
96102WD/AB	C	Wall lantern	Antique brass	155	170	285	1 x E27	1/6	A++→E
96103P/AB	C	Hanging lantern	Antique brass	155	-	300	1 x E27	1/6	A++→E
96104MF/AB	C	Lantern floor post	Antique brass	155	-	370	1 x E27	1/6	A++→E
96105F/AB	C	Lantern floor post	Antique brass	155	-	775	1 x E27	1/6	A++→E

Body: Aluminium with glass

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NICK
96501WU/BK



NICK
96504MF/BK



NICK
96503P/BK



NICK
96505F/BK

IP44

NICK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96501WU/BK	C	Wall lantern	Matt black	210	175	230	1 x E27	1/12	A++→E
96503P/BK	C	Hanging lantern	Matt black	175	175	220	1 x E27	1/12	A++→E
96504MF/BK	C	Lantern floor post	Matt black	175	175	240	1 x E27	1/12	A++→E
96505F/BK	C	Lantern floor post	Matt black	175	175	720	1 x E27	1/6	A++→E

Body: Aluminium with PVC

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NICK
96501WU/AB



NICK
96504MF/AB



NICK
96503P/AB



NICK
96505F/AB

IP44

NICK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96501WU/AB	C	Wall lantern	Antique brass	210	175	230	1 x E27	1/12	A++→E
96503P/AB	C	Hanging lantern	Antique brass	175	175	220	1 x E27	1/12	A++→E
96504MF/AB	C	Lantern floor post	Antique brass	175	175	240	1 x E27	1/12	A++→E
96505F/AB	C	Lantern floor post	Antique brass	175	175	720	1 x E27	1/6	A++→E

Body: Aluminium with PVC

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MARK
96202WD/BK



MARK
96201WU/BRB



MARK
96201WU/BK

IP44

UNTIL SUPPLY LAST

MARK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96201WU/BRB	F	Wall lantern	Antique copper	200	230	420	1 x E27	1/6	A++→E
96202WD/BK	F	Wall lantern	Matt black	200	230	420	1 x E27	1/6	A++→E
96201WU/BK	F	Wall lantern	Matt black	200	230	420	1 x E27	1/6	A++→E

Body: Aluminium with glass | **Lamps not included**

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



50073
9350073WH



50313
9350313AC

IP44

UNTIL SUPPLY LAST

LANTERN

Catalogue number	Product category	Model	Colour	Width (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9350073WH	F	50073 HANGING	white	165	340	200	1/12	A++→E
9350313AC	F	50313 HANGING	oxidated copper	195	330	195	1/12	A++→E

Body: aluminium | **Diffuser:** glass | **Colour:** white - 93SO63WH | **Colour:** oxidized copper - 93SO63AC | **Lamps not included**

~230V | 50/60 Hz | E27 | 1,5mm² | IP 44 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



IESSE
96IESSEWL/BL



GOLIA
96GOLIAP/BL



GOLIA
96GOLIAWL/BL



GOLIA
96GOLIAMF/BL

IP55 **Resin**

MEDIUM SIZE GOLIA/ IESSE

Catalogue number	Product category	Description	Colour	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96GOLIAWL/BL	C	Wall lantern	Black	300	450	1xE27	1/12	A++→C
96GOLIAP/BL	C	Hanging lantern	Black	230	800	1xE27	1/12	A++→C
96GOLIAMF/BL	C	Lantern floor post	Black	230	470	1xE27	1/12	A++→C
96IESSEWL/BL	C	Wall half lantern	Black	220	350	1xE27	1/16	A++→C

Lantern body: Resin with clear glass| UV resistant | Lamp not included






Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K
99LED773D LED Vintage 8W 2700K

~230V | 50/60 Hz | E27 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GOLIA
96GOLIAGG/BL



GOLIA
96GOLIAMG/BL

LED | NEUTRAL WHITE 4000K | IP55 | Resin

GOLIA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width/ Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GOLIAMG/BL	C	8	800	4000	Black	230	1100	1	A+ A++→A
96GOLIAGG/BL	C	8	800	4000	Black	230	2110	1	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lampholder:** E27 | **Lamp included**



~230V | 50/60 Hz | E27 | RoHS COMPLIANT | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ANNA
96120WU/BL



ANNA
96120MF/BL



ANNA
96120P/BL

IP55 **Resin**

SMALL SIZES GARDEN LANTERN ANNA

Catalogue number	Product category	Model	Lamp included	Colour	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96120WU/BL	C	Wall lantern- UP	no	black	275	450	E27	1/18	A++→C
96120P/BL	C	Wall lantern- Hanging	no	black	220	800	E27	1/18	A++→C
96120MF/BL	C	Lantern floor post	no	black	130	385	E27	1/18	A++→C

Lantern body: Resin with glass | UV resistant | Lamp not included

Post lantern body: steel+resin | Anticorrosion | UV-rays stabilized| Not affected by chenical fertilizes





Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K
99LED773D LED Vintage 8W 2700K

~230V | 50/60 Hz | E27 | RoHS | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ANNA 2x6W
96120GB2L/BL



ANNA 6W
96120F/BL

LED NEUTRAL WHITE 4000K **IP55** **Resin**

SMALL SIZES GARDEN LANTERN ANNA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width/ Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96120F/BL	C	6	800	4000	Black	220	1100	1	A+ A++→A
96120GB2L/BL	C	2x6	1600	4000	Black	610	2090	1	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lampholder:** E27 | Lamp included



~230V 50/60 Hz E27 RoHS 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GLOBE 250
96G250WL/BL



GLOBE 250
96G250P/BL



GLOBE 250
96G250MF/BL

IP55 **Resin**

GLOBE 250

Catalogue number	Product category	Description	Colour	Width/ Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96G250WL/BL	C	Wall lamp	Black	300	360	1xE27	1/36	A++→C
96G250MF/BL	C	Floor lamp	Black	250	350	1xE27	1/36	A++→C
96G250P/BL	C	Hanging lamp	Black	250	700	1xE27	1/36	A++→C

Lantern body: Resin with clear glass| UV resistant | Lamp not included






Recommended bulbs:

99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K

99LED773D LED Vintage 8W 2700K

~230V | 50/60 Hz | E27 | RoHS | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GLOBE 250
96G250M/BL



GLOBE 250
96G250GB2L/BL

LED NEUTRAL WHITE 4000K | IP55 | Resin

GLOBE 250

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width/ Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96G250M/BL	C	6	800	4000	Black	250	1000	1	A+ A++→A
96G250GB2L/BL	C	2x6	1600	4000	Black	250	2050	1	A+ A++→A

Body: Resin with clear glass| UV resistant | Lampholder: E27 | Lamp included

~230V | 50/60 Hz | E27 | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF157 LED
96LEDW157



GRF157 LED
96LEDP15780



GRF507 LED
96LEDW507

LED NEUTRAL WHITE 4000K **IP54**

UNTIL SUPPLY LAST

GRF157 LED / GRF507 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW157	F	10	800	4000	dark gray	250	90	80	1/9	A++→A
96LEDP15780	F	10	800	4000	dark gray	800		100	1/9	A++→A
96LEDW507	F	10	800	4000	graphite black	160	112	170	1/12	A++→A

Material: Alu+PC | **Chip:** 8 pcs Osram SMD3030

~230V | 50/60 Hz | SMD 2835 | 30000h | >20000 | IP 54 | Ra>80 | Hg | RoHS | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY



GRF206 LED
96LEDW206
96LEDW206W



GRF206 LED
96LEDP20678
96LEDP20678W

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP54

GRF206 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW206	C	10	800	4000	graphite black	164	80	263	1/16	A++→A
96LEDP20678	C	10	800	4000	graphite black	154	110	780	1/6	A++→A
96LEDW206WW	C	10	800	3000	graphite black	164	80	263	1/16	A++→A
96LEDP20678WW	C	10	800	3000	graphite black	154	110	780	1/6	A++→A

Material: Alu+PC | **Chip:** Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm

~230V | 50/60 Hz | SMD 2835 | 30000h | >20000 | IP 54 | Ra>80 | RoHS COMPLIANT | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

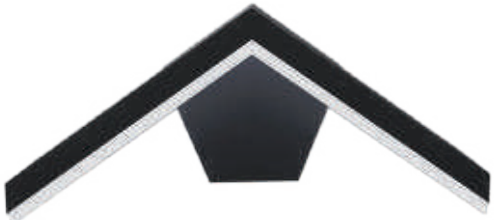

GRF302 LED
96LEDW302



GRF302 LED
96LEDP30278

LED NEUTRAL WHITE 4000K **IP54**

GRF302 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW302	C	10	800	4000	graphite black	82	284	126	1/12	A++→A
96LEDP30278	C	10	800	4000	graphite black	82	284	780	1/6	A++→A

Material: Alu+PC | **Chip:** Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm

~230V | 50/60 Hz | SMD 2835 | 30000h | >20000 | IP 54 | Ra>80 | RoHS COMPLIANT | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF506 LED
96LEDW506



GRF506 LED
96LEDP50678

LED NEUTRAL WHITE 4000K **IP54**

GRF506 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW506	C	10	800	4000	graphite black	157	92	83	1/16	A++→A
96LEDP50678	C	10	800	4000	graphite black	157	92	787	1/6	A++→A

Material: Alu+PC | **Chip:** Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm

~230V | 50/60 Hz | SMD 2835 | 30000h | >20000 | IP 54 | Ra>80 | Hg | RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LUCIA
95LUCIA/BL



GABRI
96GABRI/BL



BEPPE 50W
96BEPPE40/BL

IP66 **IP65** **Resin**

GABRI / LUCIA / BEPPE 50W

Catalogue number	Product category	Model	Lamp included	Colour body	Body material	IP Rating	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GABRI/BL	C	Bollard	no	black	Resin	IP 66	750		750	1/24	A++→C
95LUCIA/BL	C	Bulkhead	no	black	Resin	IP 66	300	175	255	1/16	A++→C
96BEPPE40/BL	C	Post	yes	black	Resin	IP 65	3065		3065	1/1	A+ A++→A

96GABRI/BL: UV resistant | Lamp not included

96BEPPE40/BL: UV resistant | Lamp included 50 W / 5000 lm / 4000K






Recommended bulbs for **96GABRI/BL** and **95LUCIA/BL**:

99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | 1,5mm² | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



MIRELLA
955MIRELLAWL/GR



SAURO
95SAURO500L/GR



SAURO
95SAURO800L/BL



SAURO
95SAURO1100L/BL

IP55 **Resin**

SAURO/MIRELLA

Catalogue number	Product category	Model	Colour body	Length/ Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95SAURO500L/BL	C	SAURO 500	Black	150	500	1xE27	1	A++→C
95SAURO500L/GR	C	SAURO 500	Grey	150	500	1xE27	1	A++→C
95SAURO800L/BL	C	SAURO 800	Black	150	800	1xE27	1	A++→C
95SAURO800L/GR	C	SAURO 800	Grey	150	800	1xE27	1	A++→C
95SAURO1100L/BL	C	SAURO 1100	Black	150	1100	1xE27	1	A++→C
95SAURO1100L/GR	C	SAURO 1100	Grey	150	1100	1xE27	1	A++→C
955MIRELLAWL/BL	C	MIRELLA	Black	240	520	1xE27	1	A++→C
955MIRELLAWL/GR	C	MIRELLA	Grey	240	520	1xE27	1	A++→C

Body: Resin with white resin louvre | UV resistant | Lamp not included






Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K

~230V | 50/60 Hz | 1,5mm² | RoHS | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO DECO
95CARLOWLDFS/BL



CARLO DECO
95CARLOWLD/BL



CARLO DECO
95CARLO800D/BL



CARLO DECO
95CARLO400D/BL

LED 3000 K 4000 K **IP55** **Resin**

CARLO DECO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width / Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800D/BL	C	6	600	2700/4000 settable	Black	100	800	1/6	A+ A++→A
95CARLO400D/BL	C	6	600	2700/4000 settable	Black	100	400	1/12	A+ A++→A
95CARLOWLD/BL	C	6	600	2700/4000 settable	Black	110	260	1/20	A+ A++→A
95CARLOWLDFS/BL	C	6	600	2700/4000 settable	Black	170	340	1/20	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lamp holder:** G10 | **Lamp included**







The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | **99XLED730** GU10 LED SMD 7W 2700K | **99XLED796** GU10 LED SMD 7W 6400K

~230V 50/60 Hz 1,5mm² RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO DECO
95CARLOWLFS/BL



CARLO
95CARLOWL/BL



CARLO
95CARLO800/BL



CARLO
95CARLO400/BL

LED 3000 K 4000 K **IP55** **Resin**

CARLO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width / Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800/BL	C	6	600	2700/4000 settable	Black	100	800	1/6	A+ A++→A
95CARLO400/BL	C	6	600	2700/4000 settable	Black	100	400	1/12	A+ A++→A
95CARLOWL/BL	C	6	600	2700/4000 settable	Black	110	260	1/20	A+ A++→A
95CARLOWLFS/BL	C	6	600	2700/4000 settable	Black	170	340	1/20	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lamp holder:** G10 | **Lamp included**







The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | **99XLED730** GU10 LED SMD 7W 2700K | **99XLED796** GU10 LED SMD 7W 6400K

~230V | 50/60 Hz | 1,5mm² | RoHS COMPLIANT | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO DECO
95CARLOWLFS/GR



CARLO
95CARLOWL/GR



CARLO
95CARLO800/GR



CARLO
95CARLO400/GR

LED 3000 K 4000 K **IP55** **Resin**

CARLO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width / Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800/GR	C	6	600	2700/4000 settable	Grey	100	800	1/6	A+ A++→A
95CARLO400/GR	C	6	600	2700/4000 settable	Grey	100	400	1/12	A+ A++→A
95CARLOWL/GR	C	6	600	2700/4000 settable	Grey	110	260	1/20	A+ A++→A
95CARLOWLFS/GR	C	6	600	2700/4000 settable	Black	170	340	1/20	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lamp holder:** G10 | **Lamp included**







The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | **99XLED730** GU10 LED SMD 7W 2700K | **99XLED796** GU10 LED SMD 7W 6400K

~230V 50/60 Hz 1,5mm² RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ESTER
95ESTER800/BL



ESTER
95ESTER500/BL



ESTER
95ESTERWL/BL



SAURO
95SAURO800/BL

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

ESTER/ SAURO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ESTER800/BL	C	10	1200	3000/4000/6500- settable	Black	126	126	800	1/6	A+ A++→A
95ESTER500/BL	C	10	1200	3000/4000/6500- settable	Black	126	126	480	1/12	A+ A++→A
95ESTERWL/BL	C	10	1200	3000/4000/6500- settable	Black	126	165	126	1/18	A+ A++→A
95SAURO800/BL	C	10	1200	3000/4000/6500- settable	Black	150		800	1/6	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lamp holder:** GX53 | **Lamp included**





~230V | 50/60 Hz | 1,5mm² | RoHS COMPLIANT | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ESTER
95ESTER800/GR



ESTER
95ESTER500/GR



ESTER
95ESTERWL/GR

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

ESTER

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ESTER800/GR	C	10	1200	3000/4000/6500- settable	Grey	126	126	800	1/6	A+ A++→A
95ESTER500/GR	C	10	1200	3000/4000/6500- settable	Grey	126	126	480	1/12	A+ A++→A
95ESTERWL/GR	C	10	1200	3000/4000/6500- settable	Grey	126	165	126	1/18	A+ A++→A

Body: Resin with clear glass | UV resistant | **Lamp holder:** GX53 | **Lamp included**





~230V | 50/60 Hz | cable 1,5mm² | RoHS COMPLIANT | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF966
966W250



GRF966
966P500



GRF966
966P300



GRF966
966P800

IP65

GRF966

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
966W250	C	GRF966-W	MAX 18W	dark grey	250	72	107	1/16	A++→C
966P300	C	GRF966-30	MAX 18W	dark grey	300	72	72	1/9	A++→C
966P500	C	GRF966-50	MAX 18W	dark grey	500	72	72	1/9	A++→C
966P800	C	GRF966-80	MAX 18W	dark grey	800	72	72	1/9	A++→C

Body: aluminium | **Diffuser:** polycarbonate (PC) | **Operating temperature:** -20°C÷+65°C

~230V | 50/60 Hz | CFL | E27 | 1,5mm² | IP 65 | RoHS COMPLIANT | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF965
965W200



GRF965
965P500



GRF965
965P300



GRF965
965P800

IP65

GRF965

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
965W200	C	GRF965	MAX 23W	dark grey	200	175	190	1/8	A++→C
965P300	C	GRF965-30	MAX 23W	dark grey	300	175	-	1/8	A++→C
965P500	C	GRF965-50	MAX 23W	dark grey	500	175	-	1/4	A++→C
965P800	C	GRF965-80	MAX 23W	dark grey	800	175	-	1/4	A++→C

Body: aluminium | Diffuser: polycarbonate (PC) | Operating temperature: -20°C÷+65°C

~230V | 50/60 Hz | CFL | E27 | 1,5mm² | IP 65 | RoHS COMPLIANT | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PMMA CLEAR
96400023A60LED



PMMA CLEAR
96400024G95LED
96400025G95LED



PMMA CLEAR
9640002730LED
9640002740LED

LED NEUTRAL WHITE 4000K **IP65**

PMMA CLEAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96400023A60LED	C	18	1700	4000	clear	200	100	210	1/16	A+ A++→A
96400024G95LED	C	20	1800	4000	clear	250	125	260	1/12	A+ A++→A
96400025G95LED	C	20	1800	4000	clear	300	145	310	1/6	A+ A++→A
9640002730LED	C	30	2700	4000	clear	400	220	410	1/2	A+ A++→A
9640002740LED	C	40	3600	4000	clear	400	220	410	1/2	A+ A++→A

Diffuser: PMMA (polymethil methacrilate) | **Lamp holder:** E27 | **Mounting:** Metal pole ϕ60



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Product category: G
Height: 600 - **93SP60BL**
Height: 800 - **93SP80BL**
Height: 1000 - **93SP100BL**
Height: 1200 - **93SP120BL**

~230V | E27 | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | F | CE | 2+1 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PMMA OPAL
96300016
96300017
96300018
96300019



PMMA CLEAR
96400023
96400024
96400025
96400027

IP65

PMMA OPAL / CLEAR

Catalogue number	Product category	Watt (W)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96300016	C	max 11W	opal	200	100	210	1/16	A++→B
96300017	C	max 15W	opal	250	125	260	1/12	A++→B
96300018	C	max 20W	opal	300	145	310	1/6	A++→B
96300019	C	max 40W	opal	400	220	410	1/2	A++→B
96400023	C	max 11W	clear	200	100	210	1/16	A++→B
96400024	C	max 15W	clear	250	125	260	1/12	A++→B
96400025	C	max 20W	clear	300	145	310	1/6	A++→B
96400027	C	max 40W	clear	400	220	410	1/2	A++→B

Diffuser: PMMA (polymethil methacrilate) | **Lamp holder:** E27 | **Mounting:** Metal pole ϕ60 | Lamps not included



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Product category: G
Height: 600 - **93SP60BL**
Height: 800 - **93SP80BL**
Height: 1000 - **93SP100BL**
Height: 1200 - **93SP120BL**

~230V | E27 | IP 65 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NINA 150
96NINA150/BL



NINA 150
96NINA150/GR



NINA 190
96NINA190/BL



NINA 190
96NINA190/GR

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

NINA 150 / NINA 190

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96NINA150/BL	C	3,2	400	3000/4000/6500- SETTABLE	black	145	50	50	1	A+ A+→A
96NINA150/GR	C	3,2	400	3000/4000/6500- SETTABLE	grey	145	50	50	1	A+ A+→A
96NINA190/BL	C	7,5	850	3000/4000/6500- SETTABLE	black	185	50	50	1/50	A+ A+→A
96NINA190/GR	C	7,5	850	3000/4000/6500- SETTABLE	grey	185	50	50	1/50	A+ A+→A

Body: Resin | **Lamp holder:** R7s | Lamp included






~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days. .



LETI 100
96LETI100/BL
96LETI100/GR



LETI 100GR
96LETI100GR/BL
96LETI100GR/GR



LETI 100EL
96LETI100EL/BL
96LETI100EL/GR

LED | 3000 K | 4000 K | 6000 K | IP66 | Resin

LETI 100

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96LETI100/BL	C	LETI 100	3	350	3000/4000/6500- settable	Black	134	96	80	1/48	A+ A++→A
96LETI100/GR	C	LETI 100	3	350	3000/4000/6500- settable	Grey	134	96	80	1/48	A+ A++→A
96LETI100GR/BL	C	LETI 100GR	3	350	3000/4000/6500- settable	Black	134	96	80	1/48	A+ A++→A
96LETI100GR/GR	C	LETI 100GR	3	350	3000/4000/6500- settable	Grey	134	96	80	1/48	A+ A++→A
96LETI100EL/BL	C	LETI 100EL	3	350	3000/4000/6500- settable	Black	134	96	80	1/48	A+ A++→A
96LETI100EL/GR	C	LETI 100EL	3	350	3000/4000/6500- settable	Grey	134	96	80	1/48	A+ A++→A

Body: Resin with opal glass | **UV resistant** | **Lamp holder:** GX53 | Lamp included







~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days. .



EXTRALETI 100EL
96LETI100REL/BL
96LETI100REL/GR



EXTRALETI 100GR
96ELETI100RGR/BL
96ELETI100RGR/GR

LED 3000 K 4000 K 6000 K **IP66** **Resin**

EXTRALETI 100

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96ELETI100RGR/BL	C	EXTRALETI 100GR	3	350	2700/4000/6500 SETTABLE	Black	140	67	1/48	A+ A++→A
96ELETI100RGR/GR	C	EXTRALETI 100GR	3	350	2700/4000/6500 SETTABLE	Grey	140	67	1/48	A+ A++→A
96LETI100REL/BL	C	EXTRALETI 100EL	3	350	2700/4000/6500 SETTABLE	Black	140	67	1/48	A+ A++→A
96LETI100REL/GR	C	EXTRALETI 100EL	3	350	2700/4000/6500 SETTABLE	Grey	140	67	1/48	A+ A++→A

Body: Resin with opal glass | **UV resistant** | **Lamp holder:** GX53 | Lamp included






~230V 50/60 Hz Ra>80 >15000 INSTANT 100% 30000h Hg RoHS COMPLIANT F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days. .



LETI 300HVP
96LETI300HVP/BL

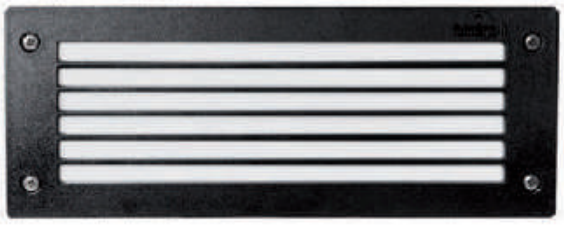

LETI 300GL
96LETI300GL/BL



LETI 300HS
96LETI300VP/BL
96LETI300VP/GR



LETI 300
96LETI300/BL
96LETI300/GR

IP66 **Resin**

LETI 300

Catalogue number	Product category	Model	Colour body	Length (mm)	Height (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
96LETI300/BL	C	LETI 300	Black	293	113	98	1xE27	1/24	A++→C
96LETI300/GR	C	LETI 300	Grey	293	113	98	1xE27	1/24	A++→C
96LETI300GL/BL	C	LETI 300GL	Black	293	113	98	1xE27	1/24	A++→C
96LETI300VP/BL	C	LETI 300HS	Black	293	113	98	1xE27	1/24	A++→C
96LETI300VP/GR	C	LETI 300HS	Grey	293	113	98	1xE27	1/24	A++→C
96LETI300HVP/BL	C	LETI 300HVP	Black	113	293	98	1xE27	1/24	A++→C
96LETI300HVP/GR	C	LETI 300HVP	Grey	113	293	98	1xE27	1/24	A++→C

Body: Resin with opal glass | **UV resistant** | Lamp not included








3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days. .



LED WALL FIXTURE 1.5W
96GRFLED52/DGR



LED WALL FIXTURES 1.8W
96GRFLED02/WH

LED NEUTRAL WHITE 4000K **IP65**

GRF LED WALL FIXTURES

Catalogue number WHITE	Catalogue number GREY	Catalogue number DARK GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96GRFLED52/WH	**96GRFLED52/GR**	**96GRFLED52/DGR**	C	1.5	60	4000	125	125	20.5	1/40	A++→A
96GRFLED02/WH	**96GRFLED02/GR**	**96GRFLED02/DGR**	C	1.8	90	4000	230	80	16.5	1/24	A++→A

Body material: ABS | **Diffuser:** PVC | **Light source:** 2835 SMD
Light source: LED type Φ5mm recessed fixture | **Operating temperature:** -20°C÷+65°C

~230V 50/60 Hz Ra>80 >15000 INSTANT 100% 30000h Hg IP 65 RoHS EMC CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LORENZA 150
95LORENZA150/BL



LORENZA 150
95LORENZA150/GR



LORENZA 190
95LORENZA190/BL



LORENZA 190
95LORENZA190/GR

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

LORENZA

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95LORENZA150/BL	C	LORENZA 150	3.2	400	3000/4000/6500 - settable	Black	150	150	45	1/24	A+ A++→A
95LORENZA150/GR	C	LORENZA 150	3.2	400	3000/4000/6500 - settable	Grey	150	150	45	1/24	A+ A++→A
95LORENZA190/BL	C	LORENZA 190	7.5	850	3000/4000/6500 - settable	Black	190	150	45	1/24	A+ A++→A
95LORENZA190/GR	C	LORENZA 190	7.5	850	3000/4000/6500 - settable	Grey	190	150	45	1/24	A+ A++→A

Body material: Resin with clear glass | **UV resistant** | **Lamp holder:** R7s | **Lamp included**





~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LORENZA 270
95LORENZA270/BL



LORENZA 270
95LORENZA270/GR

LED 3000 K 4000 K 6000 K **IP55** **Resin**

LORENZA 270

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95LORENZA270/BL	C	LORENZA 270	10,5	1100	3000/4000/6500 - settable	Black	260	150	45	1/14	A+ A++→A
95LORENZA270/GR	C	LORENZA 270	10,5	1100	3000/4000/6500 - settable	Grey	260	150	45	1/14	A+ A++→A

Body material: Resin with clear glass | **UV resistant** | **Lamp holder:** R7s | **Lamp included**






~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ABRAM 150
95ABRAM150/BL



ABRAM 150
95ABRAM150/GR



ABRAM 190
95ABRAM190/BL



ABRAM 190
95ABRAM190/GR

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

ABRAM

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95ABRAM150/BL	C	ABRAM 150	3.2	400	3000/4000/6500 - settable	Black	155	60	120	1/30	A+ A++→A
95ABRAM150/GR	C	ABRAM 150	3.2	400	3000/4000/6500 - settable	Grey	155	60	120	1/30	A+ A++→A
95ABRAM190/BL	C	ABRAM 190	7.5	850	3000/4000/6500 - settable	Black	195	60	120	1/30	A+ A++→A
95ABRAM190/GR	C	ABRAM 190	7.5	850	3000/4000/6500 - settable	Grey	195	60	120	1/30	A+ A++→A

Body material: Resin with clear glass | **UV resistant** | **Lamp holder:** R7s | **Lamp included**






~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRFLED0041
96GRFLED0031



GRF
96GRFLED010



GRF
96GRFLED0091

LED COOL WHITE 6400K **IP65**

GRF LED RECESSED FIXTURES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Light angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GRFLED0031	C	1,5	55/32	6000-6500	30°	120	53	61	1/50	A++→A
96GRFLED0091	C	1,5	75/42	6000-6500	30°	80	80	61	1/50	A++→A
96GRFLED0041	C	3,5	187/165	6000-6500	30°	205	95	65	1/27	A++→A
96GRFLED010	F	2W*	35	6000-6500	105	105	57	1/50	1/27	A++→A

Body: Stainless steel +Aluminium | **Cable:** 3G0.75mm2-10cm | **Light source:** SMD2835 | **LED driver:** mounted in the body
Operating temperature: -20°C÷+65°C

*Until Supply Last



Each of the models comes with additional decorative grid, shown in the picture.

~230V 50/60 Hz Ra>80 >15000 INSTANT 100% 30000h Hg IP 65 RoHS COMPLIANT EMC F CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF9617 LED
9617LEDW



GRF9617 LED
9619LEDW



GRF9617 LED
9618LEDW

LED NEUTRAL WHITE 4000K **IP54**

GRF9617 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9617LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++→A
9618LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++→A
9619LEDW	C	2X3W	380	4000-4300	dark grey	44	138	143	1/24	A++→A



Body: aluminium | **Diffuser:** tempered glass | **LED driver:** mounted in the body | **Light source:** CREE LED
Operating temperature: -20°C÷+65°C

~230V 50/60 Hz Ra>80 >15000 INSTANT 100% 30000h IP 54 RoHS COMPLIANT EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WALL LAMP
95WL001/BL



WALL LAMP
95WL001/WH

IP44

GARDEN WALL LAMP E27

Catalogue number	Product category	Description	Colour	Widthr (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95WL001/BL	C	Wall lamp	Black	245	180	100	1 x E27	1/10	A++→E
95WL001/WH	C	Wall lamp	White	245	180	100	1 x E27	1/10	A++→E

Voltage: 220-240V AC | **Lamps not included**

IP 44 RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
ROUND IP54
White / Black / Grey



LED WALL LIGHT
SQUARE IP54
White / Black / Grey



LED WALL LIGHT
ROUNDED IP65
White / Black / Grey

LED NEUTRAL WHITE 4000K **IP54** **IP65**

LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
969LED100R/WH	C	2X5W	Round	900	4000	white	130	110	100	1/12	A++→A
969LED100R/BL	C	2X5W	Round	900	4000	black	130	110	100	1/12	A++→A
969LED100R/GR	C	2X5W	Round	900	4000	grey	130	110	100	1/12	A++→A
969LED100S/WH	C	2X5W	Square	900	4000	white	100	100	100	1/10	A++→A
969LED100S/BL	C	2X5W	Square	900	4000	black	100	100	100	1/10	A++→A
969LED100S/GR	C	2X5W	Square	900	4000	grey	100	100	100	1/10	A++→A
969LEDW12/WH	C	**2X6W**	Rounded	1080	4000	white	175	28	90	1/40	A++→A
969LEDW12/BL	C	**2X6W**	Rounded	1080	4000	black	175	28	90	1/40	A++→A
969LEDW12/GR	C	**2X6W**	Rounded	1080	4000	grey	175	28	90	1/40	A++→A





Body material: Aluminium | **Diffuser:** Glass | **Light source 969led100:** Epistar LED COB **Light source 969LEDW12:** Epistar SMD2835

~230V 50/60 Hz Ra>80 30000h Hg RoHS EMC CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TINA IP65
95TINA12/BL



LED WALL FIXTURE 6W IP65
96GRFLED05/GR



FRANCY IP66
95FRANCY/BL

LED | NEUTRAL WHITE 4000K | **IP65** | **IP66** | **Resin**

FRANCY / GRF LED / TINA

Catalogue number BLACK body	Catalogue number WHITE body	Catalogue number GREY body	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95FRANCY/BL	**95FRANCY/WH**		C	6	800	4000	300	85	130	1xE27	1/24	A+ A++→A
96GRFLED05/DGR	**96GRFLED05/WH**	**96GRFLED05/GR**	C	6	480	4000	220	28	113		1/20	A++→A
95TINA12/BL			C	12	1080	4000	230	72	105		1	A+ A++→A

FANCY, TINA: Body material: Resin | UV resistant
GRF LED: Body material: ABS | **Diffuser:** PVC | **Light source:** 2835 SMD





The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED583 LED PEAR A60 8W 2700K | **99LED584** LED PEAR A60 8W 6400K | **99LED794** LED PEAR A60 8W 6400K

99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K

~230V | 50/60 Hz | 1,5mm² | RoHS COMPLIANT | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of FRANCY IP66 the delivery time after order confirmation will be 45 days, and for others products 90 days.



STUCCHI
95STUCCHI/BL



BERTA
95BERTA/BL

IP66 **Resin**

BERTA / STUCCHI

Catalogue number BLACK body	Catalogue number WHITE body	Product category	Description	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95BERTA/BL	**95BERTA/WH**	C	BULKHEAD	275	80	275	1xE27	1/16	A++→C
95STUCCHI/BL	**95STUCCHI/WH**	C	BULKHEAD WITH BACKLIGHT	310	90	338	1xE27+ backlights	1/16	A++→C

Body material: Resin| UV resistant | Lamp not included





Recommended bulbs:

99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | Ra>80 | 30000h | Hg | RoHS | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



UMBERTA
95UMBERTA/BL
95UMBERTAS/BL

UMBERTA
95UMBERTA/WH
95UMBERTAS/WH

IP66 **Resin**

UMBERTA

Catalogue number	Product category	Model	Colour body	Lampholder	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95UMBERTA/BL	C	BULKHEAD	Black	2xE27	350	94	1/12	A++→C
95UMBERTA/WH	C	BULKHEAD	White	2xE27	350	94	1/12	A++→C
95UMBERTAS/BL	C	BULKHEAD WITH SENSOR	Black	2xE27	350	94	1/12	A++→C
95UMBERTAS/WH	C	BULKHEAD WITH SENSOR	White	2xE27	350	94	1/12	A++→C

Body: Resin with opal diffuser | **UV resistant** | Sensor: Motion & daylight | **Detection angle:** 30° - 150° | **Fields of detection:** from 1 up to 5 mt (adjustable) | **Lamp holder:** E27 | Lamp not included






Recommended bulbs:

99LED588 LED PEAR A60 12W 4000K | **99LED587** LED PEAR A60 12W 2700K | **99LED821** LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LUCIA
95LUCIA/BL



LUCIA EL
95LUCIAEL/BL

IP66 **Resin**

LUCIA / LUCIA EL

Catalogue number	Product category	Colour	Diameter (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
95LUCIA/BL	C	Black	300	175	1xE27	1/16	A++→C
95LUCIAEL/BL	C	Black	300	90	1xE27	1/16	A++→C
95LUCIAEL/GR	C	Grey	300	90	1xE27	1/16	A++→C

Body: Resin with opal glass | **UV resistant** | **Lamp not included**







Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K
99LED587 LED PEAR A60 12W 2700K
99LED821 LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | Ra>80 | 30000h | Hg | RoHS | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FRANCY OP IP66
95FRANCYOP/WH



BRLED ROUND
95BRLED6WH
95BRLED6BL
95BRLED12WH
95BRLED12BL



BRLED OVAL
95BELED6WH
95BELED6BL
95BELED12WH
95BELED12BL

LED NEUTRAL WHITE 4000K **IP54** **IP66**

BRLED / FRANCY OP

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRLED6WH	F	6*	540	4000	white	54	170	170	100	1/24	A++→A
95BRLED6BL	F	6*	540	4000	black	54	170	170	100	1/24	A++→A
95BRLED12WH	F	12*	1080	4000	white	54	220	220	100	1/24	A++→A
95BRLED12BL	F	12*	1080	4000	black	54	220	220	100	1/24	A++→A
95BELED6WH	F	6*	540	4000	white	54	187	127	100	1/24	A++→A
95BELED6BL	F	6*	540	4000	black	54	187	127	100	1/24	A++→A
95BELED12WH	F	12*	1080	4000	white	54	239	162	100	1/24	A++→A
95BELED12BL	F	12*	1080	4000	black	54	239	162	100	1/24	A++→A
95FRANCYOP/BL	C	empty			black	66	300	85	130	1/24	A++→C
95FRANCYOP/WH	C	empty			white	66	300	85	130	1/24	A++→C

BRLED: Body: polycarbonate | **LED driver:** mounted in the body | **Light source:** EPISTAR | *Until supply last
FRANCY OP: Body material: Resin | UV resistant | Lamp not included







Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K
99LED587 LED PEAR A60 12W 2700K
99LED821 LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | Ra>80 | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

BRICE
95BRICE12LED

BRICE
95BRICE24LED

LED NEUTRAL WHITE 4000K **IP44**

BRICE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRICE12LED	C	12	1080	4000	white	44	260	260	90	1/16	A++→A
95BRICE24LED	C	24	2160	4000	white	44	380	380	110	1/10	A++→A

Body: polycarbonate | **LED driver:** mounted in the body | **Light source:** EPISTAR

~230V 50/60 Hz SMD Ra>80 30000h Hg RoHS EMC 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED BULKHEAD LAMP BLACK / WHITE

95BLN1540/WH
95BLN1540/BK
95BLN2040/WH
95BLN2040/BK



LED BULKHEAD LAMP

95BSLED12WH



LED BULKHEAD LAMP BLACK / WHITE

95BLN1540S/WH
95BLN1540S/BK

LED NEUTRAL WHITE 4000K **IP54**

LED BULKHEAD LAMP

Catalogue number	Product category	Watt (W)	Whole fixtures lumens (lm)	Colour temp. (K)	Colour of body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95BSLED12WH	F*	12	1080	4500	white	220	78	143	143	A++→A
95BLN1540/WH	C	15	1350	4000	white	175	52	175	1/40	A++→A
95BLN1540/BK	C	15	1350	4000	black	175	52	175	1/40	A++→A
95BLN2040/WH	C	20	1800	4000	white	210	52	210	1/20	A++→A
95BLN2040/BK	C	20	1800	4000	black	210	52	210	1/20	A++→A
95BLN1540S/WH	C	15	1350	4000	white	200	46	98	1/40	A++→A
95BLN1540S/BK	C	15	1350	4000	black	200	46	98	1/40	A++→A

Body: polycarbonate | **LED driver:** linear I C driver | **Light source:** 2835SMD | * Until Supply Last





ULTRA THIN



EASY INSTALLATION



BACK HIDDEN CABLE



~230V | 50/60 Hz | SMD | Ra>80 | 30000h | IP 54 | RoHS | EMC | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ARIA
91AT5201



LINIA4
91AT6126
91AT6127



LINIA1
91AT6117



SIRIUS
91AT1210
91AT1209

IP54

SIRIUS / ARIA / LINIA

Catalogue number	Product category	Model	Watt (W)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
91AT1210	C	SIRIUS1	MAX 20W	white	230	-	110	1/21	A++→C
91AT1209	C	SIRIUS2	MAX 20W	white	280	-	115	1/14	A++→C
91AT5201	C	ARIA	MAX 23W	white	350	120	80	1/12	A++→C
91AT6117	C	LINIA1	MAX 20W	white	320	137	110	1/26	A++→C
91AT6126	C	LINIA4	MAX 20W	white	320	200	110	1/18	A++→C
91AT6127	F	LINIA4	MAX 20W	grey*	320	200	110	1/18	A++→C

Body: polycarbonate (PC) | **Diffuser:** polycarbonate (PC)

*Until Supply Last

~230V | 50/60 Hz | CFL | E27 | IP 54 | RoHS | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



TERESA
96TERESA/GR



TERESA
96TERESA/BL



TERESA2L
96TERESA2L/GR



TERESA2L
96TERESA2L/BL

LED NEUTRAL WHITE 4000K **IP67** **Resin**

TERESA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96TERESA/BL	C	1,7	170	4000	Black	50	75	1/75	A+ A++→A
96TERESA/GR	C	1,7	170	4000	Grey	50	75	1/75	A+ A++→A
96TERESA2L/BL	C	1,7	170	4000	Black	50	75	1/75	A+ A++→A
96TERESA2L/GR	C	1,7	170	4000	Grey	50	75	1/75	A+ A++→A

Body: Resin with frosted diffuser | **UV resistant** | **Lamp holder:** G9 | Lamp included








50/60 Hz | IP 67 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



LIVIA 90
95LIVIA90/BL



LIVIA 90
95LIVIA90/GR



LIVIA 90
95LIVIA90/WH

LED 3000 K 4000 K **IP55** **Resin**

LIVIA 90

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIVIA90/BL	C	6	600	2700/4000 settable	Black	96	105	1/75	A+ A++→A
95LIVIA90/GR	C	6	600	2700/4000 settable	Grey	96	105	1/75	A+ A++→A
95LIVIA90/WH	C	6	600	2700/4000 settable	White	96	105	1/75	A+ A++→A

Body: Resin with frosted glass | **UV resistant** | **Lamp holder:** GU10 | Lamp included





~230V 50/60 Hz 1,5mm² RoHS F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LIVIA 160
95LIVIA160/BL



LIVIA 160
95LIVIA160/GR



LIVIA 160
95LIVIA160/WH

LED | 3000 K | 4000 K | 6000 K | IP55 | Resin

LIVIA 160

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIVIA160/BL	C	10	1200	3000/4000/6500- settable	Black	160	100	1/18	A+ A++→A
95LIVIA160/GR	C	10	1200	3000/4000/6500- settable	Grey	160	100	1/18	A+ A++→A
95LIVIA160/WH	C	10	1200	3000/4000/6500- settable	White	160	100	1/18	A+ A++→A

Body: Resin with frosted glass | **UV resistant** | **Lamp holder:** GX53 | Lamp included





~230V | 50/60 Hz | 1,5mm² | RoHS | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LIVIA 180
95LIVIA180/BL



LIVIA 180
95LIVIA160/WH

LED NEUTRAL WHITE 4000K **IP43** **Resin**

LIVIA 180

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIVIA180/BL	C	15	1800	4000	Black	180	200	1/12	A+ A++→A
95LIVIA180/GR	C	15	1800	4000	Grey	180	200	1/12	A+ A++→A
95LIVIA180/WH	C	15	1800	4000	White	180	200	1/12	A+ A++→A

Body: Resin with frosted glass | **UV resistant** | **Lamp holder:** E27 | Lamp included





~230V 50/60 Hz 1,5mm² RoHS F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





GRF

96GRF1482

IP65

GRF

Catalogue number	Product category	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96GRF1482	C	254	498.5	1482.6	1 x E27	1/2	A++→E

Body: aluminium, antique bronze

220-240V | 50/60 Hz | CFL | E27 | 1,5mm² | IP 65 | RoHS COMPLIANT | F | CE

3+0 standard +extended 3 YEAR TOTAL WARRANTY



MARTA 90-1
96MARTA901L/BL



MARTA 90-2
96MARTA902L/BL

LED 3000 K 4000 K **IP55** **Resin**

MARTA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/ Box (pcs)	Energy class
96MARTA901L/BL	C	Facade lighting	black	1x6	600	2700/4000 settable	92	80	170	1xGU10	1/36	A+ A++→A
96MARTA901L/GR	C	Facade lighting	gray	1x6	600	2700/4000 settable	92	80	170	1xGU10	1/36	A+ A++→A
96MARTA902L/BL	C	Facade lighting	black	2x6	1200	2700/4000 settable	92	80	170	2xGU10	1/36	A+ A++→A
96MARTA902L/GR	C	Facade lighting	gray	2x6	1200	2700/4000 settable	92	80	170	2xGU10	1/36	A+ A++→A

Body material: Resin| UV resistant | **Lamp included** | **Lamp holder:** GU10





The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K

99LED729 GU10 LED SMD 6.5W 4000K | **99LED730** GU10 LED SMD 6.5W 2700K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V 50/60 Hz 1,5mm² RoHS 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



FRANCA 90
96FRANCA90/GR



FRANCA 90-1
96FRANCA901L/BL



FRANCA 90-2
96FRANCA902L/GR

LED 3000 K 4000 K **IP55** **Resin**

FRANCA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/ Box (pcs)	Energy class
96FRANCA90/BL	C	Ceiling fixtures	black	6	600	2700/4000 settable	95		115	1xGU10	1/30	A+ A++→A
96FRANCA90/GR	C	Ceiling fixtures	gray	6	600	2700/4000 settable	95		115	1xGU10	1/30	A+ A++→A
96FRANCA901L/BL	C	Facade lighting	black	6	600	2700/4000 settable	95	110	128	1xGU10	1/30	A+ A++→A
96FRANCA901L/GR	C	Facade lighting	gray	6	600	2700/4000 settable	95	110	128	1xGU10	1/30	A+ A++→A
96FRANCA902L/BL	C	Facade lighting	black	2x6	1200	2700/4000 settable	95	110	240	2xGU10	1/20	A+ A++→A
96FRANCA902L/GR	C	Facade lighting	gray	2x6	1200	2700/4000 settable	95	110	240	2xGU10	1/20	A+ A++→A

Body material: Resin| UV resistant | Lamp included | **Lamp holder:** GU10







The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | **99XLED728** GU10 LED SMD 3.5W 2700K | **99XLED731** GU10 LED SMD 3.5W 6400K

99LED729 GU10 LED SMD 6.5W 4000K | **99LED730** GU10 LED SMD 6.5W 2700K | **99LED796** GU10 LED SMD 6.5W 6400K

~230V 50/60 Hz 1.5mm² RoHS CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



OL9612-W1 LED
9612LEDW1



OL9611-W1 LED
9611LEDW1



OL9612-W2 LED
9612LEDW2



OL9611-W2 LED
9611LEDW2

LED NEUTRAL WHITE 4000K **IP54**

OL9611 / OL9612

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9611LEDW1	C	3	210	4000-4300	dark grey	153	72.6	106.4	1/16	A++→A
9611LEDW2	C	2X3W	320	4000-4300	dark grey	231.6	72.6	106.4	1/16	A++→A
9612LEDW1	C	3	210	4000-4300	dark grey	170	92	65	1/12	A++→A
9612LEDW2	C	2X3W	320	4000-4300	dark grey	200	92	65	1/12	A++→A









Body: aluminium | **Diffuser:** tempered glass | **LED driver:** mounted in the body | **Light source:** CREE LED
Operating temperature: -20°C÷+65°C

~230V 50/60 Hz Ra>80 >15000 INSTANT 100% 30000h Hg IP 54 RoHS COMPLIANT EMC 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

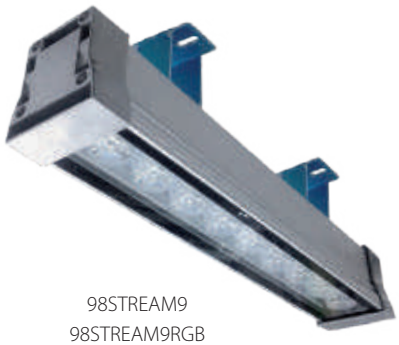

98STREAM9
98STREAM9RGB



98STREAM36
98STREAM36RGB

LED **IP65**

STREAM STELLAR

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREAM9	C	STREAM9	9	720	5500	grey	300	50	56	1/9	A++→A
98STREAM18	C	STREAM18	18	1440	5500	grey	600	50	56	1/9	A++→A
98STREAM36	C	STREAM36	36	2880	5500	grey	1000	50	56	1/9	A++→A
98STREAM9RGB	C	STREAM9 RGB	9	-	RGB	grey	300	50	56	1/9	A++→A
98STREAM18RGB	C	STREAM18 RGB	18	-	RGB	grey	500	55	60	1/9	A++→A
98STREAM36RGB	C	STREAM36 RGB	36	-	RGB	grey	1000	50	56	1/9	A++→A

Body: aluminium casting | **LED driver:** mounted in the body | **Light source:** Epistar | **Ambient Temperature:** -25°C÷ +55°C

~230V | 50/60 Hz | High power | Ra>70 | 20000h | Hg | IP 65 | RoHS | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED WALL LIGHTS WITH SENSOR
98SOL200



SOLAR LED WALL LIGHTS WITH SENSOR
98SOL201

LED IP54 Solar

SOLAR LED WALL LIGHTS WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixtures lumens (lm)	Solar panel (Wp)	Sensor range (m)	Colour of body	Length (mm)	Height (mm)	Width (mm)	Packing/ Box (pcs)	Energy class
98SOL200	C	14 (FRONT 14+BACK 2PCS)	7	200	0.7- POLY CRISTALLINE	6	white	144.5	96	79	1	A++→A
98SOL201	C	17 (FRONT 16+BACK 1PCS)	10	240	0.7- POLY CRISTALLINE	6	white	200	105	90	1	A++→A

Material: ABS + PC, anti UV and glossy | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | Detection angle: 120° | **Installation height:** ≤ 4meters | **Battery:** 3.7V/ 1200mAh

98SOL200 Auto on at night; Full brightnessby motion activated. Weak brightness when no motion | **Time delay:** 10 sek | **Modes:** A- Full brightness+Weak brightness (front and back lights ON); B- Full brightness+Weak brightness (front light OFF, back lights ON) | Auto on at night; Full brightnes

98SOL201 Auto on at night; Full brightnessby motion activated. Weak brightness when no motion | **Time delay:** 10 sek | Battery >30%: Full brightness+Weak brightness (front and back lights ON); Battery<30%: Full brightness+Weak brightness (front light OFF, back lights ON) | Auto on at night; Full brightnes



98SOL200



98SOL201



SMD 30000h IP 54 RoHS CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR FIXTURE SOL WITH SENSOR
98SOL300



SOLAR FIXTURE SOL WITH SENSOR
98SOL302



SOLAR FIXTURE SOL WITH SENSOR
98SOL301

LED IP65 Solar

SOLAR LED FLOOD LIGHT WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixture lumens (lm)	Battery (V/mAh)	Sensor range (m)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL300	C	30	30	500	3.7V/ 2X1500mAh	6	black	217.4	149.3	33.7	1	A++→A
98SOL301	C	72	50	1080	3.7V/7200mAh	6	black	300	215	35	1	A++→A
98SOL302	C	55	50	1100	3.7V/ 7200mAh	6	black	-	165	35	1	A++→A

Material: ABS + PC, anti UV and glossy | **3working mode** | **98SOL302:** Portable solar panel.Can use as portable power bank

SMD Ra>80 Hg RoHS CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF190B/AB

IP68

UNTIL SUPPLY LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF190B/AB	F	Ground recessed fixtures	Antique bronze	98	190	1 x GU5.3	Composite material	1/12	A++→E

Lamps not included. The fixtures are with 6m cable.

12V 50/60 Hz MR-16 GU5.3 1,5mm² IP68 RoHS III F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



UNDERWATER LED
98LED012SW



UNDERWATER LED
98LED007SW



UNDERWATER LED
98LED003SW

LED **IP68**

UNDERWATER LED LIGHTS, IP68

Catalogue number	Product category	Voltage (V)	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Packing/Box (pcs)	Energy class
98LED003SW	C	12V AC	3 X 1	150	4000	silver	1/30	A++→A
98LED007SW	C	12V AC	7 X 1	350	4000	silver	1/1	A++→A
98LED012SW	C	24V AC	12 X 1	600	4000	silver	1/1	A++→A
98LED006RGB	C	12V AC	6 X 1	-	RGB	silver	1/1	A++→A

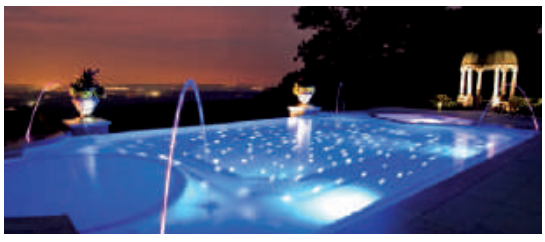

Body: Stainless steel | **Light source:** Epistar | **Beam angle:** 90° | **without driver**

Ra>70 IP68 >15000 INSTANT 100% 20000h RoHS COMPLIANT F CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINI TOMMY ELSP
96TOMMYELSP/BL



MINI TOMMY EL
96TOMMYEL/BL

IP66 **Resin**

MINI TOMMY EL / MINI TOMMY ELSP

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/ Box (pcs)	Energy class
96TOMMYEL/BL	C	Ground/Wall fixture	6	600	2700/4000K settable	black	122	118	127	1xGU10	1/30	A+ A++→A
96TOMMYEL/GR	C	Ground/Wall fixture	6	600	2700/4000K settable	gray	122	118	127	1xGU10	1/30	A+ A++→A
96TOMMYELSP/BL	C	Spike ground fixture	6	600	2700/4000K settable	black	122	118	310	1xGU10	1/30	A+ A++→A
96TOMMYELSP/GR	C	Spike ground fixture	6	600	2700/4000K settable	gray	122	118	310	1xGU10	1/30	A+ A++→A

Body material: Resin | **UV resistant** | **Lamp not included** | **Fully adjustable position** | **Lamp holder:** GU10





The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | **99LED730** GU 10 LED SMD 6.5W 2700K | **99LED796** GU 10 LED SMD 6.5W 6400K
99LED733 GU 10 LED SMD RED | **99LED734** GU 10 LED SMD BLUE | **99LED735** GU 10 LED SMD GREEN

~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF 9615 LED
9615LEDP



GRF 9616 LED
9616LEDW



GRF 9617 LED
9617LEDP

LED NEUTRAL WHITE 4000K COOL WHITE 6400K **IP65**

GRF 9615 / 9616 / 9617

Catalogue number	Product category	Watt (W)	Body	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9615LEDP	C	3	aluminium	210	4000-4300	dark grey	279	73	112	1/16	A++→A
9616LEDW	C	3	aluminium	210	4000-4300	dark grey		73	110	1/16	A++→A
9617LEDP	C	5	PP+PC	360	5500-6000	dark grey	265	25	130	1/16	A++→A

Diffuser: tempered glass | **LED driver:** mounted in the body | **Operating temperature:** -20°C÷+65°C



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31072

~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF187/CU



GRF
96GRF457LSP/AB



GRF
96GRF76B/AB



GRF
96GRF70B/AB

IP65

UNTIL SUPPLY LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF187/CU	F	Ground recessed fixtures	Copper	54	187	1 x GU10	Copper	1/12	A++→E

~230V 50/60 Hz IP 65 RoHS 3+0 standard +extended 3 YEAR TOTAL WARRANTY

UNTIL SUPPLY LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Material	Packing/Box (pcs)
96GRF70B/AB	F	Connector for wall recessed fixtures	Antique bronze	70	28	Brass	1/50
96GRF76B/AB	F	connector for pole D50-70 mm	Antique bronze	76	73	Brass	1/60
96GRF457LSP/AB	F	riser type for ground recessed fixtures	Antique bronze	25	457	Brass	1/30



SOLAR TORCH LIGHT

98SOL96

LED WARM WHITE 2700K | IP54 | Solar

SOLAR TORCH LIGHT

Catalogue number	Product category	LED qty	Power (W)	Colour temp. (K)	Whole fixture lumens (lm)	Solar panel (V/mA)	Battery (V/mAh)	Colour body	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
98SOL96	C	51	max 1W	1500-1800	20	5.5V/0.66W	3.7V/1200mAh	black	120	770	1/10	A++→A

Material: ABS+PC | **Charge time (h):** 8h | **Working Time:** 8h | **Light souce:** 2835 | **Mode:** Dark On>Off | **Beam angle:** 360° | **Battery:** Included





RoHS COMPLIANT | CE | 1+0 standard +extended | 1 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PATHWAY LIGHTS

98SOL11128

LED IP44 Solar

SOLAR WALL & PATHWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL11128	C	0,32	10	mono	Ni-Mh AA battery	8h	metal & glass	black	127	127	456	1/24	A++→A



RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL5420



SOLAR GROUND LIGHT
98SOL5520



SOLAR GROUND LIGHT
98SOL9620



SOLAR GROUND LIGHT
98SOL23310

LED IP44 Solar

SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL5420	C	0,06	1	amorphous	Ni-Mh/100mAh AA 1.2V	8h	plastic	black	370	75/75	1/12	A++→A
98SOL5520	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	365	85/85	9/8	A++→A
98SOL9620	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	380	64	1/24	A++→A
98SOL23310	C	0.08	2	amorphous	Ni-Mh AAA 2V	8h	plastic	black	373	57/57	1/24	A++→A

RoHS COMPLIANT CE 1+0 standard +extended 1 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL4320



SOLAR GROUND LIGHT
98SOL8120



SOLAR GROUND LIGHT
98SOL5821

LED IP44 Solar

SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL4320	C	0,5	15	polycrystal	NI-MH AA 300mAh 1.2V	8h	plastic	black	425	130/110	1/12	A++→A
98SOL8120	C	0,06	1	amorphous	Ni-Mh/40mAh button battery 1.2V	8h	plastic	black	340	100	1/16	A++→A
98SOL5821	C	0,24	4	amorphous	Ni-Mh/200mAh AA 1.2V	8h	plastic	silver	510	200	1/8	A++→A

RoHS COMPLIANT CE 1+0 standard +extended 1 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL6721



SOLAR GROUND LIGHT
98SOL3122



SOLAR GROUND LIGHT
98SOL6921

LED IP44 Solar

SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL3122	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel+plastic	brass	390	85	4/12	A++→A
98SOL6721	C	0,06	1	amorphous	Ni-Mh/200mAh AA 1.2V	8h	stainless steel+plastic	silver	370	128	1/6	A++→A
98SOL6921	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel + plastic	black	355	72	1/12	A++→A

RoHS CE 1+0 standard +extended 1 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR WALL
98SOL23423



SOLAR WALL
98SOL23428



DRIVEWAY LIGHTS
98SOL41029

LED IP44 Solar

SOLAR WALL & DRIVEWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL23423	C	0,8	30	mono	LiFePO4/800mAh 18500 4.5V	8h	plastic	black	100	100	100	1/24	A++→A
98SOL23428	C	0,3	10	mono	Ni-Mh/ 900mAh 2V	8h	plastic	black	145	145	55	1/24	A++→A
98SOL41029	C	0,24	6	poly	Ni-Mh/ 600mAh	8h	aluminium	grey	69	26	100	1/24	A++→A






RoHS CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALDO 2L
96ALDO2L/BL



ALDO
96ALDO/GR

LED | NEUTRAL WHITE 4000K | IP67 | DRIVE OVER | Resin

ALDO

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Beam angle	Packing/Box (pcs)	Energy class
96ALDO/BL	C	ALDO	1.7	170	4000	Black	50	47	110	1/50	A+ A++→A
96ALDO/GR	C	ALDO	1.7	170	4000	Grey	50	47	110	1/50	A+ A++→A
96ALDO2L/BL	C	ALDO 2L	1.7	170	4000	Black	50	47	110	1/50	A+ A++→A
96ALDO2L/GR	C	ALDO 2L	1.7	170	4000	Grey	50	47	110	1/50	A+ A++→A

Body: Resin with opal glass | **UV resistant** | **Lamp holder:** G9 | **Lamp included**






The product ALDO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED933 G9 LED 7W 3000K | **99LED933W** G9 LED 7W 4000K | **99LED933CW** G9 LED 7W 6400K

50/60 Hz | IP 67 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



CECI 90 SQUARE
96CECI90SQ/GR



CECI 90 SQUARE
96CECI90SQ/BL

LED | 3000 K 4000 K | IP67 | DRIVE OVER

CECI 90 SQUARE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96CECI90SQ/BL	C	6	600	2700/4000 settable	BLACK	90/92	127	1/40	A+ A++→A
96CECI90SQ/GR	C	6	600	2700/4000 settable	GREY	90/92	127	1/40	A+ A++→A

Body: Resin with frosted diffuser | **UV resistant** | Drive-over | **Lamp holder:** GU10 | Lamp included





50/60 Hz | IP 67 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



CECI 160 ROUND
96CECI160/GR



CECI 160 ROUND
96CECI160/BL

LED | 3000 K | 4000 K | 6000 K | IP67 | DRIVE OVER

CECI 160 ROUND

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96CECI160/BL	C	10	1200	2700/4000/6500 settable	BLACK	160	111	1/18	A+ A++→A
96CECI160/GR	C	10	1200	2700/4000/6500 settable	GREY	160	111	1/18	A+ A++→A

Body: Resin with frosted diffuser | **UV resistant** | Drive-over | **Lamp holder:** GX53 | Lamp included



50/60 Hz | IP 67 | RoHS COMPLIANT | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



CECI 90 3L
96CECI3L/BL



CECI 90
96CECI90/GR



GRF
96GRFLED068

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP67 | DRIVE OVER

GRF068 / CECI 90 ROUND

Catalogue number	Product category	Model	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
96CECI90/BL	C	CECI 90	Black	3.5	400	2700/4000K settable	95	127	45°	1/40	A+ A++→A
96CECI90/GR	C	CECI 90	Gray	3.5	400	2700/4000K settable	95	127	45°	1/40	A+ A++→A
96CECI3L/BL	C	CECI 90 3L	Black	3.5	400	2700/4000K settable	95	127	45°	1/40	A+ A++→A
96CECI3L/GR	C	CECI 90 3L	Gray	3.5	400	2700/4000K settable	95	127	45°	1/40	A+ A++→A
96GRFLED068	C	GRF	Gray	1	60	6000-6500	100	61	45°	1/40	A++→A

GRF067: Material: 304 Stainless steel | **Voltage:** 100-240V | **LED** source: Integrated SMD Epistar | IK10 | Corrosion proof
CECI: Material: Resin | UV resistant | Lamp included | **Lamp holder:** GU10





The product CECI 90 and CECI 90 3L are accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | **99LED730** GU 10 LED SMD 6.5W 2700K | **99LED796** GU 10 LED SMD 6.5W 6400K
99LED733 GU 10 LED SMD RED | **99LED734** GU 10 LED SMD BLUE | **99LED735** GU 10 LED SMD GREEN

50/60 Hz | IP 67 | RoHS | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



GRF109 IP67

IP67

UNTIL SUPPLY LAST

EMPTY FIXTURE GRF 109, IP67

Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp	Colour	Current (A)	Balast	Diameter (mm)	Length (mm)	Height (mm)	Energy class
96GRF109/150	F		230	MHL	satin nickel		empty	260	280	185	A++→E

Body: PVC | **Diffuser:** aluminium ring and tempered glass | Lamp not included
Load capacity is 3 ton. | w/o driver

~230V | IP 67 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



GRF105 IP65
96GRF105



GRF106 IP65
96GRF106

IP65

EMPTY FIXTURE GRF, IP65

Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp holder	Colour	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96GRF105	C	max.50W	12	1 x GU5.3	satin nickel	107	145	1/20	A++→A
96GRF106	C	max.50W	220	1 x GU10	satin nickel	107	145	1/20	A++→A

Body: PVC | **Diffuser:** aluminium ring and tempered glass | Lamp not included
Load capacity is 3 ton. | w/o driver

2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RAY
96RAY40



RAY
96RAY30



RAY
96RAY20



RAY
96RAY10

LED COOL WHITE 6400K **IP67**

RAY

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Diameter 1 (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96RAY10	C	13	1000	5500	satin nickel	160	150	100	1/12	A++→A
96RAY20	C	20	1800	5500	satin nickel	180	160	123	1/8	A++→A
96RAY30	C	30	2700	5500	satin nickel	230	210	135	1/6	A++→A
96RAY40	C	40	3600	5500	satin nickel	230	215	135	1/6	A++→A

Body: aluminium | **Diffuser:** aluminium ring and tempered glass | Load capacity is 2.5 ton | **LED driver:** mounted in the body
Light source: Epistar LED

~230V | 50/60 Hz | Ra>80 | >15000 | INSTANT 100% | 30000h | Hg | IP 67 | RoHS COMPLIANT | EMC | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WADE FIXTURE IP65

LED COOL WHITE 6400K **IP65**

WADE FIXTURE IP65

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9WF18CW	C	18	1600	6500	white	700	55	35	1/20	A++→A
9WF36CW	C	36	3500	6500	white	1230	55	35	1/12	A++→A
9WF45CW	C	45	4300	6500	white	1530	53	35	1/12	A++→A

Body: polycarbonate (PC) | **Diffuser:** polycarbonate (PC) | **Clamps:** inox | **Light source:** Sanan 2835 SMD| **Power factor:** λ>0.9 | **Starting time:** <1s | **Beam angle:** 120°
Cable gland, metal clips for wall fixing.

~230V | 50/60 Hz | SMD | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | CE | 2+1 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA STELLAR SMD2835

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

BELLA STELLAR SMD2835

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XBR18LED	C	18	1620	4000	Grey	610	75	62	1/8	A++→A
9XBR18LEDCW	C	18	1620	6500	Grey	610	75	62	1/8	A++→A
9XBR36LED	C	36	3240	4000	Grey	1210	75	62	1/8	A++→A
9XBR36LEDCW	C	36	3240	6500	Grey	1210	75	62	1/8	A++→A
9XBR54LED	C	54	4860	4000	Grey	1510	75	62	1/8	A++→A
9XBR54LEDCW	C	54	4860	6500	Grey	1510	75	62	1/8	A++→A





Body: PC | **Diffuser:** PC Opal | **Clips:** polycarbonate | **Cable gland, metal clips for wall fixing** | **Light source:** Sanan 2835SMD

~230V | 50/60 Hz | SMD | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA SMD2835

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

BELLA LUMINAIRE SMD2835

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR20LED	-	C	20	1800	4000	grey	600	80	70	1/16	A++→A
9BR20LEDCW	-	C	20	1800	6500	grey	600	80	70	1/16	A++→A
9BR40LED	**9BR40LEDE**	C	40	3800	4000	grey	1200	80	70	1/12	A++→A
9BR40LEDCW	**9BR40LEDCWE**	C	40	3800	6500	grey	1200	80	70	1/12	A++→A
9BR55LED	**9BR55LEDE**	C	55	5000	4000	grey	1476	80	70	1/9	A++→A
9BR55LEDCW	**9BR55LEDCWE**	C	55	5000	6500	grey	1476	80	70	1/9	A++→A





Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: polycarbonate (PC), grey | **Diffuser:** polycarbonate (PC), Opal cover | **Reflector:** steel white | **Light source:** Epistar | Cable gland.

~230V | 50/60 Hz | SMD | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA with LED Tubes T8 STELLAR

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

BELLA with LED Tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR109LEDCW	C	1X9	585	6200-6500	grey	655	68	58	1/8	A+ A++>A
9BR109LED	C	1X9	585	4000-4300	grey	655	68	58	1/8	A+ A++>A
9BR209LEDCW	C	2X9	1170	6200-6500	grey	655	113	58	1/6	A+ A++>A
9BR209LED	C	2X9	1170	4000-4300	grey	655	113	58	1/6	A+ A++>A
9BR118LEDCW	C	1X18	1170	6200-6500	grey	1270	68	58	1/8	A+ A++>A
9BR118LED	C	1X18	1170	4000-4300	grey	1270	68	58	1/8	A+ A++>A
9BR218LEDCW	C	2X18	2340	6200-6500	grey	1270	113	58	1/8	A+ A++>A
9BR218LED	C	2X18	2340	4000-4300	grey	1270	113	58	1/8	A+ A++>A
9BR122LEDCW	C	1X24	1430	6200-6500	grey	1565	68	58	1/8	A+ A++>A
9BR122LED	C	1X24	1430	4000-4300	grey	1565	68	58	1/8	A+ A++>A
9BR222LEDCW	C	2X24	2860	6200-6500	grey	1565	113	58	1/6	A+ A++>A
9BR222LED	C	2X24	2860	4000-4300	grey	1565	113	58	1/6	A+ A++>A

with LED tubes STELLAR







Body: ABC | **Diffuser:** polycarbonate (PC) | **Reflector:** without | **Clips:** polycarbonate | Cable gland, metal clips for wall fixing. | **Light source:** LED tubes

~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >10000 | INSTANT 100% | 15000h | Hg | IP 65 | RoHS | EMC | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

BELLA with LED Tubes T8 ELMARK

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BM110LEDCW	-	C	1X10	800	6500	grey	670	86	100	1/12	A+ A++→A
9BM110LED	-	C	1X10	800	4000	grey	670	86	100	1/12	A+ A++→A
9BM118LEDCW	-	C	1X18	1440	6500	grey	1270	86	100	1/9	A+ A++→A
9BM118LED	-	C	1X18	1440	4000	grey	1270	86	100	1/9	A+ A++→A
9BM124LEDCW	-	C	1X24	1920	6500	grey	1570	106	110	1/6	A+ A++→A
9BM124LED	-	C	1X24	1920	4000	grey	1570	106	110	1/6	A+ A++→A
9BM210LEDCW	-	C	2X10	1600	6500	grey	670	131	100	1/9	A+ A++→A
9BM210LED	-	C	2X10	1600	4000	grey	670	131	100	1/9	A+ A++→A
9BM218LEDCW	**9BM218LEDCWE**	C	2X18	2880	6500	grey	1270	131	100	1/6	A+ A++→A
9BM218LED	**9BM218LEDE**	C	2X18	2880	4000	grey	1270	131	100	1/6	A+ A++→A
9BM224LEDCW	**9BM224LEDCWE**	C	2X24	3840	6500	grey	1570	166	110	1/4	A+ A++→A
9BM224LED	**9BM224LEDE**	C	2X24	3840	4000	grey	1570	166	110	1/4	A+ A++→A

with LED tubes ELMARK





We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime 60-180min



Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
92ACC03

Body: polycarbonate (PC) | **Diffuser:** polycarbonate (PC) | **Reflector:** steel white | Ballast: fixed inside the body | **Clamps:** polycarbonate | Cable gland, metal clips for wall fixing.

~230V | 50/60 Hz | LED T8 | G13 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP65**

UNTIL SUPPLY **LAST**

BELLA luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BE114LEDW	F	1X10	1000	4000	grey	670	74	80	1/12	A+ A++→A
9BE128LEDW	F	1X20	2000	4000	grey	1210	64	85	1/9	A+ A++→A
9BE214LEDW	F	2X10	2000	4000	grey	670	106	80	1/9	A+ A++→A
9BE114LEDCW	F	1X10	1000	6400	grey	670	74	80	1/12	A+ A++→A
9BE128LEDCW	F	1X20	2000	6400	grey	1210	64	85	1/9	A+ A++→A
9BE214LEDCW	F	2X10	2000	6400	grey	670	106	80	1/9	A+ A++→A

with LED tubes ELMARK



Body: polycarbonate (PC) | **Diffuser:** polycarbonate (PC) | **Reflector:** steel white | **Clamps:** inox | Cable gland, metal clips for wall fixing.

~230V | 50/60 Hz | LED T5 | G5 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | IP 65 | RoHS COMPLIANT | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



IP65

EMPTY FIXTURES BELLA FOR SINGLE ENDED LED TUBES T8

Catalogue number	Variant	Product category	Led tube size	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
89084	Slim	C	1x600mm	grey	670	86	100	1/12	A++→B
89085	Slim	C	2x600mm	grey	670	131	100	1/9	A++→B
89086	Slim	C	1x1200mm	grey	1270	86	100	1/9	A++→B
89087	Slim	C	2x1200mm	grey	1270	131	100	1/6	A++→B
89088	Slim	C	1x1500mm	grey	1570	86	100	1/6	A++→B
89089	Slim	C	2x1500mm	grey	1570	131	100	1/4	A++→B





Body: polycarbonate (PC) | **Diffuser:** polycarbonate (PC) | **Reflector:** steel white | **Clips:** polycarbonate | Cable gland, metal clips for wall fixing. | Lamp not included

~230V | 50/60 Hz | G13 | IP 65 | RoHS COMPLIANT | EMC | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GERMANA
95GERMANA/BL



GERMANA
95GERMANA/GR



GERMANA G
95GERMANAG/BL



GERMANA G
95GERMANAG/GR

IP66 **Resin**

GERMANA

Catalogue number	Product category	Colour body	Lampholder	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95GERMANA/BL	C	Black	1xE27	180	160	250	1/18	A++→C
95GERMANA/GR	C	Grey	1xE27	180	160	250	1/18	A++→C
95GERMANAG/BL	C	Black	1xE27	180	300	250	1/18	A++→C
95GERMANAG/GR	C	Grey	1xE27	180	300	250	1/18	A++→C

Body: Resin with opal diffuser | **UV resistant** | **Lamp holder:** E27 | **Lamp not included**





Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K |
99LED587 LED PEAR A60 12W 2700K |
99LED821 LED PEAR A60 12W 6400K

~230V | 50/60 Hz | E27 | RoHS COMPLIANT | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LED | COOL WHITE 6400K | **IP65**

HELIOS SMD

Catalogue number	Catalogue number with Emergency kit	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10	-	C	HELIOS10	10	800	5000-5500	black	105	25	85	1/40	A++→A
98HELIOS20	-	C	HELIOS20	20	1600	5000-5500	black	128	25	88	1/40	A++→A
98HELIOS30	**98HELIOS30E**	C	HELIOS30	30	2400	5000-5500	black	153	25	111	1/20	A++→A
98HELIOS50	**98HELIOS50E**	C	HELIOS50	50	4000	5000-5500	black	205	30	160	1/20	A++→A
98HELIOS100	**98HELIOS100E**	C	HELIOS100	100	8000	5000-5500	black	300	30	205	1/10	A++→A
98HELIOS150	-	C	HELIOS150	150	10000	5000-5500	black	333	40	254	1/10	A++→A
98HELIOS200	-	C	HELIOS200	200	12000	5000-5500	black	360	42	280	1/10	A++→A
98HELIOS20SEN	-	C	HELIOS20SEN	20	1600	5000-5500	black	134	35	109	1/20	A++→A
98HELIOS30SEN	**98HELIOS30SENE**	C	HELIOS30SEN	30	2400	5000-5500	black	173	35	136	1/10	A++→A
98HELIOS50SEN	**98HELIOS50SENE**	C	HELIOS50SEN	50	4000	5000-5500	black	210	35	163	1/10	A++→A

Body: Aluminium casting | **LED driver:** mounted in the body | **Light source:** Epistar SMD2835 | **Input voltage:** 176 - 264V | **Ambient Temperature:** -20°C÷ +55°C
Sensor: detection range:120° | **Detection distance:** MAX 8 m(±2 m) | **Time setting:** 140±20 s | **Ambient light:** 25±10 lux



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31072

~230V | 50/60 Hz | 120° | Ra>70 | 15000h | Hg | IP 65 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED NEUTRAL WHITE 4000K **IP65**

HELIOS SMD

Catalogue number	Catalogue number with Emergency kit	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10/WH	-	C	HELIOS10	10	800	4000	white	105	25	85	1/50	A++⇨A
98HELIOS20/WH	-	C	HELIOS20	20	1600	4000	white	128	25	88	1/50	A++⇨A
98HELIOS30/WH	**98HELIOS30/WHE**	C	HELIOS30	30	2400	4000	white	153	25	111	1/30	A++⇨A
98HELIOS50/WH	**98HELIOS50/WHE**	C	HELIOS50	50	4000	4000	white	205	30	160	1/20	A++⇨A
98HELIOS100/WH	**98HELIOS100/WHE**	C	HELIOS100	100	8000	4000	white	300	30	205	1/10	A++⇨A

Body: Aluminium casting | **LED driver:** mounted in the body | **Light source:** Epistar SMD2835 | **Input voltage:** 176 - 264V | **Ambient Temperature:** -20°C÷ +55°C



Side View



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2

Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072

~230V | 50/60 Hz | 120° | Ra>70 | 15000h | Hg | IP 65 | RoHS COMPLIANT | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





VEGA SLIM WITH SENSOR

98VEGA10SENSLIM
98VEGA20SENSLIM
98VEGA30SENSLIM
98VEGA50SENSLIM

VEGA SLIM

98VEGA10SLIM
98VEGA20SLIM
98VEGA30SLIM
98VEGA50SLIM
98VEGA100SLIM

LED | COOL WHITE 6400K | IP65 | INDUSTRIAL

VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM	-	C	10	900	5500	black	66	90	18	1/40	A+ A++→A
98VEGA20SLIM	-	C	20	1800	5500	black	75	110	21	1/40	A+ A++→A
98VEGA30SLIM	**98VEGA30SLIME**	C	30	2700	5500	black	95	130	22	1/20	A+ A++→A
98VEGA50SLIM	**98VEGA50SLIME**	C	50	4500	5500	black	132	186	25	1/20	A+ A++→A
98VEGA100SLIM	**98VEGA100SLIME**	C	100	9000	5500	black	190	280	28	1/10	A+ A++→A
98VEGA10SENSLIM	-	C	10	900	5500	black	90	120	25	1/50	A+ A++→A
98VEGA20SENSLIM	-	C	20	1800	5500	black	91	121	25	1/30	A+ A++→A
98VEGA30SENSLIM	**98VEGA30SSE**	C	30	2700	5500	black	118	158	25	1/20	A+ A++→A
98VEGA50SENSLIM	**98VEGA50SSE**	C	50	4500	5500	black	145	200	26	1/10	A+ A++→A

Body: Plastic+Aluminium | **LED driver:** linear | **Light source:** SANAN | **Input voltage:** 220V-240V AC | **Cable length:** 300 mm | **Ambient Temperature:** -30°C÷ +65°C
Sensor: | **Detection Range:**110° | **Detection Distance:** MAX 8m | **Ambient Light:** 50lux | **Detection Motion Speed:** 0.6-1.5m/s;



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2

Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072

~230V | 50/60 Hz | SMD | 110° | Ra>70 | 20000h | Hg | IP 65 | RoHS | F | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA10SLIM/WH
98VEGA20SLIM/WH
98VEGA30SLIM/WH
98VEGA50SLIM/WH
98VEGA100SLIM/WH

LED | NEUTRAL WHITE 4000K | IP65 | INDUSTRIAL

VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM/WH	-	C	10	900	4000	white	66	90	18	1/40	A+ A++→A
98VEGA20SLIM/WH	-	C	20	1800	4000	white	75	110	21	1/40	A+ A++→A
98VEGA30SLIM/WH	**98VEGA30S/WHE**	C	30	2700	4000	white	95	130	22	1/20	A+ A++→A
98VEGA50SLIM/WH	**98VEGA50S/WHE**	C	50	4500	4000	white	132	186	25	1/20	A+ A++→A
98VEGA100SLIM/WH	**98VEGA100S/WHE**	C	100	9000	4000	white	190	280	28	1/10	A+ A++→A
98VEGA20SENSLIM/WH	-	C	20	1800	4000	white	91	121	25	1/30	A+ A++→A
98VEGA30SENSLIM/WH	**98VEGA30SS/WHE**	C	30	2700	4000	white	118	158	25	1/20	A+ A++→A
98VEGA50SENSLIM/WH	**98VEGA50SS/WHE**	C	50	4500	4000	white	145	200	26	1/10	A+ A++→A

Body: Plastic+Aluminium | **LED driver:** linear | **Light source:** SANAN | **Input voltage:** 220V-240V AC | **Cable length:** 300 mm | **Ambient Temperature:** -30°C÷ +65°C
Sensor: | **Detection Range:**110° | **Detection Distance:** MAX 8m | **Ambient Light:** 50lx | **Detection Motion Speed:** 0.6-1.5m/s;



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2
Cat. Number: 31072

~230V | 50/60 Hz | SMD | 110° | Ra>70 | 20000h | Hg | IP 65 | RoHS | F | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA150SLIM
98VEGA200SLIM

LED | COOL WHITE 6400K | IP65 | INDUSTRIAL

VEGA SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA150SLIM	C	150	15000	5500	black	226	315	35	1/1	A+ A++→A
98VEGA200SLIM	C	200	20000	5500	black	320	400	85	1/1	A+ A++→A

Body: Plastic+Aluminium | **LED driver:** linear | **Light source:** SANAN | **Input voltage:** 220V-240V AC | **Cable length:** 300 mm | **Ambient Temperature:** -30°C÷ +65°C



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2

Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072

~230V | 50/60 Hz | SMD | 110° | Ra>70 | 20000h | Hg | IP 65 | RoHS | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LYRA RGB
98LYRA15RGB



LYRA RGB
98LYRA50RGB



LYRA RGB
98LYRA30RGB

LED IP65 INDUSTRIAL

LYRA RGB

Catalogue number	Product category	Model	Watt (W)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98LYRA15RGB	C	LYRA15	15	RGB	black	140	195	50	1/20	A++→A
98LYRA30RGB	C	LYRA30	30	RGB	black	184	254	57	1/10	A++→A
98LYRA50RGB	C	LYRA50	50	RGB	black	233	300	67	1/5	A++→A

Body: Aluminium casting | **LED driver:** mounted in the body | **Light source:** Epistar SMD2835 | **Input voltage:** 200-240V | **Remote-controlled distance:** 6-8M
Ambient Temperature: - 30°C÷ +55°C | **Diffuser:** Tempered glass



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2

Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070



Cable connector IP68

Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072

~230V | 50/60 Hz | 120° | Ra>70 | 20000h | Hg | IP 65 | RoHS COMPLIANT | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX720CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX960CW/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP67 | INDUSTRIAL

STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX720CW/BL	C	720	86400	5500K	30°	833,4	442	201	1/1	A++→A
98PHOENIX960CW/BL	C	960	115200	5500K	30°	1090	442	201	1/1	A++→A





Body: Aluminium | **LED driver:** MEANWELL| **Light source:** PHILIPS | **Input voltage:** 230V AC | **Ambient Temperature:** -20°C÷ +65°C

~230V | 50000h | >20000 | Hg | IP 67 | RoHS | EMC | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX240CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX480CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX360CW/BL

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP67 | INDUSTRIAL

STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX240CW/BL	C	240	28800	5500K	30°	435,4	341	190	1/1	A++→A
98PHOENIX360CW/BL	C	360	43200	5500K	30°	618,4	341	200	1/1	A++→A
98PHOENIX480CW/BL	C	480	57600	5500K	30°	579,4	442	201	1/1	A++→A

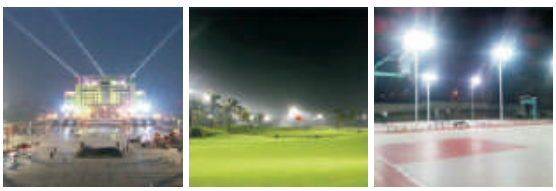

Body: Aluminium | **LED driver:** MEANWELL| **Light source:** PHILIPS | **Input voltage:** 230V AC | **Ambient Temperature:** -20°C÷ +65°C

~230V | 50000h | >20000 | Hg | IP 67 | RoHS COMPLIANT | EMC | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED | COOL WHITE 6400K | IP65 | 110° | INDUSTRIAL

UNTIL SUPPLY LAST

SIRIUS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SIRIUS50SMD	F	SIRIUS50SMD	50	5000	6500	black	137	35	170	1/10	A++→A
98SIRIUS100SMD	F	SIRIUS100SMD	100	10000	5500	black	310	80	430	1/10	A++→A
98SIRIUS150SMD	F	SIRIUS150SMD	150	15000	5500	black	310	80	430	1/10	A++→A
98SIRIUS200SMD	F	SIRIUS200SMD	200	20000	5500	black	386	106	560	1/10	A++→A
98SIRIUS250SMD	F	SIRIUS250SMD	250	25000	5500	black	386	106	560	1/10	A++→A
98SIRIUS300SMD	F	SIRIUS300SMD	300	30000	5500	black	386	106	560	1/10	A++→A





Body: Aluminium | **LED driver:** mounted in the body | **Light source:** 2835SMT Epistar | **Input voltage:** 100V-240V AC | **Ambient Temperature:** -30°C÷ +65°C



Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm2

Cat. Number: 31071

Terminal box IP44



Material: Polypropylene 94-V2 grade
Sunscreen Rating:Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part:Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31070

Terminal box IP65



Rated operational voltage:AC250V
Rated operational Ampere(A):≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals:Nickle-plated brass
Withstand voltage(normal temperature):3KV
Operating remperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm2

Cat. Number: 31072

Cable connector IP68

~230V | 50/60 Hz | SMD | 110° | Ra>70 | 30000h | Hg | IP 65 | RoHS | F | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECHARGEABLE WORKLAMP SMD

98FLOOD10Y

UNTIL SUPPLY LAST

LED NEUTRAL WHITE 4000K **IP44**

RECHARGEABLE WORKLAMP SMD

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FLOOD10Y	F	FLOOD10Y	10	600	4000	yellow	242	25	215	1/10	A++→A

Body: Aluminium | **Light source:** SMD2835| **Input voltage:** 100V-240V | All-round rotation 360° | Any angle hover | With adaptor and car charge
Time of battery work: 100% light-2h; 50% light-4h

~230V | 50/60 Hz | 110° | 20000h | IP 44 | RoHS | 3+0 standard +extended 3 YEAR TOTAL WARRANTY



LED WORK FLOODLIGHTS

98FLOOD30S
98FLOOD50S

LED | IP65 | 220V

LED WORK FLOODLIGHTS

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98FLOOD30S	C	FLOOD30S	30	2700	5500	110°	163.5	210	30.5	1/20	A++→A
98FLOOD50S	C	FLOOD50S	50	4500	5500	110°	171	227	32	1/20	A++→A

Material: Aluminium | **Color body:** Yellow | **Working Temperature:** -20°C +45°C |Two meters 3*1.0mm2 rubber cable with plug





~230V | 50/60 Hz | 110° | 20000h | RoHS | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ATLAS 45
98ATLAS45/BL2



ATLAS Sim
98ATLASSIM/1
98ATLASSIM/2



ATLAS Ring
98ATR107
98ATLASRING/1
98ATLASRING/2

IP65 INDUSTRIAL

UNTIL SUPPLY LAST

ATLAS

Catalogue number	Product category	Watt (W)	Lampholder	Colour	Length1 (mm)	Length2 (mm)	Width (mm)	Width2 (mm)	Height (mm)	Current (A)	Control gear	Packing/Box (pcs)	Energy class
98ATLAS45/BL1	F	70	Rx7s	black	435	350	232	-	85	-	empty fixture	1/4	A++→C
98ATLAS45/W1	F	70	Rx7s	white	435	350	232	-	85	-	empty fixture	1/4	A++→C
98ATLASSIM/1	F	70	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++→C
98ATLASSIM/2	F	150	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++→C
98ATR107	F	70	Rx7s	black	325	280	230	210	93	0,95	magnetic	1/6	A++→C
98ATLASRING/1	F	70	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++→C
98ATLASRING/2	F	150	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++→C







Body: aluminium | **Diffuser:** tempered glass | **Control gear:** mounted in the body
Ambient Temperature: -20°C ÷ +65°C

~230V | 50/60 Hz | MH-7 | Rx7s | 2,5mm² | IP 65 | RoHS | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



VEGA IP44
989009LED
989012LED
989008LED



VEGA WITH SENSOR IP44
989019LED

LED | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP44 | IP65

UNTIL SUPPLY LAST

VEGA

Catalogue number	Product category	Model	Watt (W)	Lamp	Whole fixture lumens (lm)	Colour temp. (K)	Socket	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
989009LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	grey	200	145	120	1/20	A+ A++→A
989012LED	F	VEGA J-118	7.5	LED	700	4000	R7s	grey	260	210	230	1/10	A+ A++→A
989008LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	black	200	145	120	1/20	A+ A++→A
989019LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	white	260	210	230	1/10	A+ A++→A
989020LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	black	260	210	230	1/10	A+ A++→A

Body: aluminium casting | **Ambient Temperature:** -30°C÷ +65°C | **Diffuser:** Tempered glass

~230V | 50/60 Hz | 120° | Ra>70 | 20000h | Hg | IP 65 | IP 44 | RoHS | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



MADRID SMD

98MADRID30SMD

LED | COOL WHITE 6400K | IP65 | INDUSTRIAL

MADRID SMD, LED CHIP PHILIPS

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	LED chip lumens (lm)	Colour temp (K)	Beam angle	Colour body	Diameter of the pole (mm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98MADRID30SMD	**98MADRID30SMDE**	C	30	3600	5500	90°	Grey	38	362	54	143	1/10	A++→A
98MADRID50SMD	**98MADRID50SMDE**	C	50	6000	5500	90°	Grey	60	476	74	194	1/5	A++→A
98MADRID100SMD	**98MADRID100SMDE**	C	100	12000	5500	90°	Grey	60	567	87	233	1/4	A++→A
98MADRID150SMD	-	C	150	18000	5500	90°	Grey	60	673	101	395	1/4	A++→A
98MADRID200SMD	-	C	200	24000	5500	90°	Grey	60	742	114	337	1/2	A++→A
98MADRID250SMD	-	C	250	28800	5500	90°	Grey	60	742	114	337	1/2	A++→A







WALL MOUNTING ACCESSORIES
Diam.: 38mm
Suitable: for 98MADRID30SMD
Catalogue number: 98POLE38
Diam.: 60mm
Suitable: for road fixtures Madrid from 50W to 250W
Catalogue number: 98POLE60



POLE MOUNTING ACCESSORIES
Diam.: 38mm
Suitable: for 98MADRID30SMD
Catalogue number: 98POLE38P
Diam.: 60mm
Suitable: for road fixtures Madrid from 50W to 250W
Catalogue number: 98POLE60P

Body: Alu+PC cover | **LED driver:** Isolated driver | **Light source:** Philips | **Input voltage:** 180V-265V AC | **Ambient temperature:** -25°C÷ +45°

~230V | 50/60 Hz | SMD | 90° | Ra>80 | 35000h | IP 65 | RoHS | F | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STREET 300 SMD

98STREET300SMD

LED | COOL WHITE 6400K | IP65 | DIMMABLE | INDUSTRIAL

STREET SMD, LED CHIP SAMSUNG

Catalogue number	Product category	Dimmable	Watt (W)	LED chip lumens (lm)	Colour temp (K)	Beam angle	Colour body	Diameter of the pole (mm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREET150SMD	F*	-	150	18000	5500	85°x135°	Silver aluminium	60	501	290	87	1/1	A++→A
98STREET200SMD	F*	-	200	24000	5500	85°x135°	Silver aluminium	60	582	290	87	1/1	A++→A
98STREET300SMD	C	Yes	300	36000	5500	85°x135°	Silver aluminium	60	796	347	142	1/1	A++→A







WALL MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60
Packing (pcs): 1



POLE MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60P
Packing (pcs): 1

Body: Silver aluminium | **LED driver:** mounted in the body | **Light source:** Samsung 3030SMD | **Input voltage:** 100V-240V AC | **Ambient temperature:** -30°C÷ +65°C

*Until supply last

~230V | 50/60 Hz | SMD | 135° | Ra>80 | 30000h | Hg | IP 65 | RoHS | F | CE | 5+2 standard +extended | 7 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ROUTE SMD STELLAR

98ROUTE30SMD
98ROUTE50SMD
98ROUTE100SMD
98ROUTE150SMD

LED COOL WHITE 6400K **IP65**

ROUTE SMD STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98ROUTE30SMD	**98ROUTE30SMDE**	C	30	3000	5000-5500	90°	130	57	316	1/20	A++→A
98ROUTE50SMD	**98ROUTE50SMDE**	C	50	5000	5000-5500	90°	155	57	355	1/10	A++→A
98ROUTE100SMD	**98ROUTE100SMDE**	C	100	10000	5000-5500	90°	160	67	420	1/10	A++→A
98ROUTE150SMD	-	C	150	15000	5000-5500	90°	170	67	546	1/5	A++→A

Ultra thin design





WALL MOUNTING ACCESSORIES
Diam.: 45mm
Suitable: for 98ROUTE30SMD, 98ROUTE50SMD and 98ROUTE100SMD
Catalogue number: 98POLE45
Diam.: 60mm
Suitable: 98ROUTE150SMD
Catalogue number: 98POLE60



POLE MOUNTING ACCESSORIES
Diam.: 45mm
Suitable: for 98ROUTE30SMD, 98ROUTE50SMD and 98ROUTE100SMD
Catalogue number: 98POLE45P
Diam.: 60mm
Suitable: for 98ROUTE150SMD
Catalogue number: 98POLE60P

Body: Aluminium | **Cover:** PC | **Voltage:** 100-265 VAC | **Light source:** Focus | **Ambient temperature:** -35°C÷ +45°C

~230V | 50/60 Hz | Ra>80 | 20000h | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AVENUE 100 SMD
98AVENUE100SMD



AVENUE 50 SMD
98AVENUE50SMD



AVENUE 30 SMD
98AVENUE30SMD

LED COOL WHITE 6400K **IP67**

UNTIL SUPPLY LAST

AVENUE SMD, LED CHIP PHILIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98AVENUE30SMD	F	30	3000	5500	70°x150°	365	18	90	1/1	A++→A
98AVENUE50SMD	F	50	5000	5500	70°x150°	420	15	234	1/1	A++→A
98AVENUE100SMD	F	100	10000	5500	120°x65°	605	15	295	1/1	A++→A

Ultra thin design





WALL MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60
Packing (pcs): 1



POLE MOUNTING ACCESSORIES
Diam.: 60mm
Colour body: grey
Size (mm): Diameter 60 / Width 150 / Height 250
Catalogue number: 98POLE60P
Packing (pcs): 1

Body: Aluminium casting | **LED driver:** mounted in the body | **Light source:** SMD3030 | **Input voltage:** 220-240V | **Working temperature:** -25+55°C

~230V | 50/60 Hz | Ra>80 | 35000h | Hg | IP 67 | RoHS | EMC | F | CE | 5+0 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED STREET LIGHTS WITH SENSOR

98SOL100
98SOL101
98SOL102

LED | COOL WHITE 6400K | IP65 | Solar

SOLAR LED STREET LIGHTS WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Solar panel (Wp)	Battery (V/mAh)	Sensor range (m)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL100	C	20	400	6000	2.3	3.7V/2400mAh	2-6	137	224.4	41.5	1/1	A++→A
98SOL101	C	40	850	6000	7	3.7V/6000mAh	3-8	193.7	351.4	50.8	1/1	A++→A
98SOL102	C	80	1600	6000	9.5	7.4V/5400mAh	3-8	232	413	58	1/1	A++→A

Material: ABS + PC, anti UV and glossy, V0 fireproof | **Colour body:** Black | **Detection angle:** 120° | **Beam angle:** 140°x 70° | **Installation height 98SOL100:** 2-4meters, other models: 3-5m | Posibility to mounting on Wall or Lamp-post | **First 5 hours lighting:** Full brightness+ Weak brightness | After 5 hours or battery capacity<30%: Full brightness+ Weak brightnes+ OFF | **Solar panels:** Poly-cristalline silicone; Frosted surface- scratch resistant | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | Accessory for wall mounted installation: included

Accessory for wall mounted installation



SMD | Ra>80 | RoHS COMPLIANT | 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DUBLIN SMD STELLAR

98DUBLIN100SMD
98DUBLIN150SMD
98DUBLIN200SMD

LED | COOL WHITE 6400K | **IP65**

DUBLIN SMD STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98DUBLIN100SMD	**98DUBLIN100SMDE**	C	100	10000	5500	100°	Grey	237	90	1/10	A++→A
98DUBLIN150SMD	-	C	150	15000	5500	100°	Grey	302	96	1/5	A++→A
98DUBLIN200SMD	-	C	200	20000	5500	100°	Grey	360	96	1/5	A++→A





Gear box: Alu+Glass | **LED driver:** Linear | **Light source:** Sanan | **Input voltage:** 220V-240V AC | **Ambient temperature:** -25°C÷ +45°C

~230V | 50/60 Hz | Ra>80 | 20000h | Hg | IP 65 | RoHS | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FESTA SMD STELLAR

98FESTA150SMD
98FESTA200SMD

LED COOL WHITE 6400K **IP65**

UNTIL SUPPLY LAST

FESTA SMD STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FESTA150SMD	F	150	15000	5000-5500	120°	black	320	159	1/1	A++→A
98FESTA200SMD	F	200	20000	5000-5500	120°	black	380	166	1/1	A++→A





Gear box: Aluminium + Graphene | **Cover:** PC | **Voltage:** 180-265 VAC | **Light source:** Sanan| **Ambient temperature:** -25°C÷ +45°C

~230V | 50/60 Hz | Ra>80 | 25000h | Hg | IP 65 | RoHS COMPLIANT | EMC | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VIENA SMD

98VIENA100SMD
98VIENA150SMD
98VIENA200SMD
98VIENA250SMD

LED | COOL WHITE 6400K | **IP65**

VIENA SMD

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VIENA100SMD	**98VIENA100SMDE**	C	100	13000	5500	90°	Black	290	140	1/1	A++→A
98VIENA150SMD	-	C	150	19500	5500	90°	Black	350	140	1/1	A++→A
98VIENA200SMD	-	C	200	26000	5500	90°	Black	400	140	1/1	A++→A
98VIENA250SMD	-	C	250	31200	5500	90°	Black	400	140	1/1	A++→A

Gear box: Alu+PC | **LED driver:** Isolated | **Input voltage:** 180-265 VAC | **Light source:** Sanan| **Ambient temperature:** -25°C÷ +45°C

~230V | 50/60 Hz | Ra>80 | 35000h | Hg | IP 65 | RoHS COMPLIANT | EMC | F | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VECA SMD
98VECA150SMD



VECA SMD
98VECA120SMD



VECA SMD
98VECA200SMD
(98VECA200SMDDGR)
98VECA250SMD
(98VECA250SMDDGR)

LED COOL WHITE 6400K **IP65**

UNTIL SUPPLY LAST

VECA SMD, LED CHIP PHILIPS

Catalogue number	Variant	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VECA120SMD		F	120	12000	5500	120°	grey	400	120.3	1/1	A++→A
98VECA150SMD		F	150	15000	5500	120°	grey	382	60	1/1	A++→A
98VECA200SMD	DGR	F	200	20000	5500	120°	black	460	170.3	1/1	A++→A
98VECA250SMD	DGR	F	250	25000	5500	120°	black	500	180	1/1	A++→A

Gear box: Aluminium | **LED driver:** mounted in the gear box | **Light source:** Philips | **Ambient temperature:** -25°C÷ +55°C

~230V | 50/60 Hz | Ra>80 | 25000h | Hg | IP 65 | RoHS | EMC | F | CE | 5+0 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINICOLOR
98MINICOL-BL



MINICOLOR
98MINICOL-WT



MINICOLOR
98MINICOL-R



MINICOLOR
98MINICOL-G



MINICOLOR
98MINICOL-B

LED | COOL WHITE 6400K | **IP20**

UNTIL SUPPLY LAST

MINICOLOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter1 (mm)	Height (mm)	Height1 (mm)	Packing/Box (pcs)	Energy class
98MINICOL-BL	F	30	2400	5500	black	220	115	280	120	1/1	A++→A
98MINICOL-WT	F	30	2400	5500	white	220	115	280	120	1/1	A++→A
98MINICOL-R	F	30	2400	5500	red	220	115	280	120	1/1	A++→A
98MINICOL-G	F	30	2400	5500	green	220	115	280	120	1/1	A++→A
98MINICOL-B	F	30	2400	5500	blue	220	115	280	120	1/1	A++→A



Reflector: aluminium | **Gear box:** aluminium casting | **LED driver:** mounted in the gear box | **Light source:** Epistar | **Ambient Temperature:** - 30°C÷ +65°C

~230V | 50/60 Hz | COB | 90° | Ra>80 | 30000h | Hg | IP 20 | RoHS | EMC | F | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



LAMPS AND COMPONENTS



A60
99LED773D



ST64
99LED769D



C35
99LED772D

LED | WARM WHITE 2700K | IP20 | DIMMABLE

LED FILAMENT VINTAGE C35 / A60 / ST64

Catalogue number	Product category	Dimmable	Watt (W)	Socket type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED772D	C	yes	4	E14	360	2800-3200K	360°	99	35	1/100	A+
99LED773D	C	yes	8	E27	580	2800-3200K	360°	106	60	1/100	A+
99LED769D	C	yes	8	E27	580	2800-3200K	360°	145	64	1/100	A+

Material: Golden glass

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



G125
99LED771D

G95
99LED770D

G80
99LED975D

LED | WARM WHITE 2700K | IP20 | DIMMABLE

LED FILAMENT VINTAGE G80 / G95 / G125

Catalogue number	Product category	Dimmable	Watt (W)	Socket type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED975D	C	yes	8	E27	580	2700	360°	120	80	1/100	A+
99LED770D	C	yes	8	E27	580	2800-3200K	360°	135	95	1/50	A+
99LED771D	C	yes	8	E27	580	2800-3200K	360°	165	125	1/20	A+

Material: Golden glass

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





VINTAGE LAMP
99LED863G
99LED863S

VINTAGE LAMP
99LED858G

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED863G	F	8	E27	800	2800-3200K	Golden glass	250	125	1/1	A+
99LED858G	F	8	E27	800	2800-3200K	Golden glass	295	160	1/1	A+
99LED863S	F	8	E27	800	2800-3200K	Smoked glass	250	125	1/1	A+





~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED857G
99LED857S



VINTAGE LAMP
99LED856G

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED857G	F	8	E27	800	2800-3200K	Golden glass	210	110	1/1	A+
99LED856G	F	8	E27	800	2800-3200K	Golden glass	245	130	1/1	A+
99LED857S	F	8	E27	800	2800-3200K	Smoked glass	210	110	1/1	A+





~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED888G

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED888G	F	**8**	E27	**800**	**2800-3200K**	Golden glass	390	200	1/1	A+

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED888S



VINTAGE LAMP
99LED889S

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED888S	F	**8**	E27	**800**	**2800-3200K**	Smoked glass	390	200	1/1	A+
99LED889S	F	**8**	E27	**800**	**2800-3200K**	Smoked glass	400	200	1/1	A+

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED859G
99LED859S



VINTAGE LAMP
99LED860G
99LED860S

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED859G	F	8	E27	800	2800-3200K	Golden glass	310	185	1/1	A+
99LED860G	F	8	E27	800	2800-3200K	Golden glass	280	120	1/1	A+
99LED859S	F	8	E27	800	2800-3200K	Smoked glass	310	185	1/1	A+
99LED860S	F	8	E27	800	2800-3200K	Smoked glass	280	120	1/1	A+





~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED861G



VINTAGE LAMP
99LED862G

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED861G	F	8	E27	800	2800-3200K	Golden glass	255	150	1/1	A+
99LED862G	F	8	E27	800	2800-3200K	Golden glass	305	200	1/1	A+





~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED100G



VINTAGE LAMP
99LED979G



VINTAGE LAMP
99LED101G

LED WARM WHITE 2700K DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED100G	F	**4**	E27	**250**	**2000**	Golden glass	265	220	1	A+
99LED101G	F	**8**	E27	**500**	**2000**	Golden glass	300	200	1	A+
99LED979G	F	**4**	E27	**270**	**2200**	Golden glass	330	120	1/15	A+

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED100S



VINTAGE LAMP
99LED101S



VINTAGE LAMP
99LED104G

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED100S	F	**4**	E27	**150**	**2000**	Smoked glass	265	220	1	A+
99LED101S	F	**8**	E27	**300**	**2000**	Smoked glass	300	200	1	A+
99LED104G	F	8	E27	**500**	**2000**	Golden glass	240	200	1	A+





~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VINTAGE LAMP
99LED102S



VINTAGE LAMP
99LED103S

LED | WARM WHITE 2700K | DIMMABLE

UNTIL SUPPLY LAST

VINTAGE LAMPS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Material	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED102S	F	**8**	E27	**300**	**2000**	Smoked glass	250	180	1	A+
99LED103S	F	**8**	E27	**300**	**2000**	Smoked glass	295	180	1	A+

~230V | 50/60 Hz | 360° | >15000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED GLOBE P45 FILAMENT
99LED664D



LED GLOBE G45 FILAMENT
99LED665D



LED CANDLE C35 FILAMENT
99LED662D



LED A60 FILAMENT
99LED663

LED | WARM WHITE 2700K | IP20 | DIMMABLE

LED FILAMENT

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED662D	C	yes	4	E14	400	2700	360°	mat	100	35	1/100	A+
99LED664D	C	yes	4	E14	400	2700	360°	mat	76	45	1/100	A+
99LED665D	C	yes	4	E27	400	2700	360°	mat	72	45	1/100	A+
99LED660	C	no	4	E27	400	2700	360°	mat	104	60	1/100	A+

~230V | 50/60 Hz | 360° | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FILAMENT
99LED828WW



LED FILAMENT
99LED829WW



LED FILAMENT
99LED830WW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

LED FILAMENT

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED828WW	C	5	E14	550	2700	360°	78	45	1/100	A+
99LED828W	C	5	E14	550	4000	360°	78	45	1/100	A+
99LED829WW	C	5	E14	550	2700	360°	98	35	1/100	A+
99LED829W	C	5	E14	550	4000	360°	98	35	1/100	A+
99LED830WW	C	8	E27	1055	2700	360°	105	60	1/100	A+
99LED830W	C	8	E27	1055	4000	360°	105	60	1/100	A+

~230V | 50/60 Hz | 360° | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED CANDLE C37
99LED914
99LED915



LED FLAME
99LED753
99LED754
99LED820



LED CANDLE C37
99LED916
99LED917
99LED917CW



LED CANDLE C37
DIMMABLE
99LED855

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | DIMMABLE

LED CANDLE C37 / LED FLAME

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED855	C	Yes	5	E14	500	3000	180°	100	37	1/100	A+
99LED914	C	-	8	E27	800	4000	180°	110	37	1/100	A+
99LED915	C	-	8	E27	800	2700	180°	110	37	1/100	A+
99LED916	C	-	8	E14	800	4000	180°	110	37	1/100	A+
99LED917	C	-	8	E14	800	2700	180°	110	37	1/100	A+
99LED917CW	C	-	8	E14	800	6400	180°	110	37	1/100	A+
99LED753	C	-	6	E14	500	4000	220°	100	37	1/100	A+
99LED754	C	-	6	E14	500	2700	220°	100	37	1/100	A+
99LED820	C	-	6	E14	500	6400	220°	100	37	1/100	A+

~230V | 50/60 Hz | SMD 2835 | Ra≥80 | >25000 | INSTANT 100% | 30000h | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED GLOBE P45
99LED912
99LED913
99LED925



LED GLOBE P45
99LED746
99LED747
99LED800



LED GLOBE G45
99LED910
99LED911
99LED911CW



LED GLOBE G45
99LED744
99LED745
99LED801

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LED GLOBE P45 / GLOBE G45

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED746	C	6	E14	540	4000	240°	80	45	1/100	A+
99LED747	C	6	E14	540	2700	240°	80	45	1/100	A+
99LED800	C	6	E14	540	6400	240°	80	45	1/100	A+
99LED744	C	6	E27	540	4000	240°	80	45	1/100	A+
99LED745	C	6	E27	540	2700	240°	80	45	1/100	A+
99LED801	C	6	E27	540	6400	240°	80	45	1/100	A+
99LED910	C	8	E27	800	4000	180°	80	45	1/100	A+
99LED911	C	8	E27	800	2700	180°	80	45	1/100	A+
99LED911CW	C	8	E27	800	6400	180°	80	45	1/100	A+
99LED912	C	8	E14	800	4000	180°	80	45	1/100	A+
99LED913	C	8	E14	800	2700	180°	80	45	1/100	A+
99LED925	C	8	E14	800	6400	180°	80	45	1/100	A+

~230V | 50/60 Hz | SMD 2835 | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DIMMABLE LED CORN BULBS
99LED976



DIMMABLE LED CORN BULBS
99LED977WW
99LED977CW



DIMMABLE LED CORN BULBS
99LED978WW
99LED978CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | DIMMABLE

DIMMABLE LED CORN BULBS

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED976	C	7	E14	420	4000	360°	65	16	1/100	A+
99LED977WW	F	6*	E14	500	3000	360°	98	35	1/100	A+
99LED977CW	F	6*	E14	500	5500	360°	98	35	1/100	A+
99LED978WW	F	6*	E27	500	3000	360°	98	35	1/100	A+
99LED978CW	F	6*	E27	500	5500	360°	98	35	1/100	A+

*Until supplay last

~230V | 50/60 Hz | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60 STELLAR
99LED742
99LED743



LED PEAR A60 STELLAR
99XLED795
99XLED586
99XLED585



LED PEAR A60 STELLAR
99XLED588
99XLED587

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LED PEAR STELLAR

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED795	C	10	720	6400	240°	110	60	1/100	A+
99XLED586	C	10	720	4000	240°	110	60	1/100	A+
99XLED585	C	10	720	2700	240°	110	60	1/100	A+
99XLED821	C	12	860	6400	240°	110	60	1/100	A+
99XLED588	C	12	860	4000	240°	110	60	1/100	A+
99XLED587	C	12	860	2700	240°	110	60	1/100	A+
99LED742	C	15	1080	4000	240°	110	60	1/100	A+
99LED743	C	15	1080	2700	240°	110	60	1/100	A+

*Until supplay last

~230V | 50/60 Hz | SMD 2835 | E27 | 240° | Ra≥80 | >20000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60
99LED794
99LED583



LED PEAR A60
99LED795
99LED586
99LED585



LED PEAR A60
+ RADAR SENSOR
99LED852



LED PEAR DIMMABLE
99LED425
99LED426

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LED PEAR

Catalogue number	Product category	Dimmable	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED794	F	-	8*	720	6400	240°	110	60	1/100	A+
99LED583	F	-	8*	720	2700	240°	110	60	1/100	A+
99LED795	C	-	10	900	6400	240°	110	60	1/100	A+
99LED586	C	-	10	900	4000	240°	110	60	1/100	A+
99LED585	C	-	10	900	2700	240°	110	60	1/100	A+
99LED852	C	-	10	900	4000	240°	110	60	1/100	A+
99LED425	F	Yes	10*	800	4000	240°	114	60	1/100	A+
99LED426	F	Yes	10*	800	2700	240°	114	60	1/100	A+

*Until supplay last

~230V | 50/60 Hz | SMD 2835 | E27 | Ra≥80 | >30000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PEAR A60
99LED818
99LED819
99LED797



LED PEAR A65
99LED850WW
99LED850W
99LED850CW



LED PEAR A80
99LED909
99LED722



LED PEAR A60
99LED588
99LED587
99LED821



LED PEAR A60 DIMMABLE
99LED582
99LED581

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | DIMMABLE

LED PEAR

Catalogue number	Product category	Dimmable	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED588	C	-	12	1080	4000	240°	127	60	1/100	A+
99LED587	C	-	12	1080	2700	240°	127	60	1/100	A+
99LED821	C	-	12	1080	6400	240°	127	60	1/100	A+
99LED582	C	Yes	12	1080	4000	180°	127	60	1/60	A+
99LED581	C	Yes	12	1080	2700	180°	127	60	1/60	A+
99LED818	C		15	1500	4000	180°	115	60	1/100	A+
99LED819	C		15	1500	2700	180°	115	60	1/100	A+
99LED797	C		15	1500	6400	180°	115	60	1/100	A+
99LED722	F		15*	1200	2700	160°	153	80	1/100	A+
99LED850WW	C	-	18	1700	2700	180°	133	65	1/100	A+
99LED850W	C	-	18	1700	4000	180°	133	65	1/100	A+
99LED850CW	C	-	18	1700	6400	180°	133	65	1/100	A+
99LED909	F	-	20*	1800	2700	180°	153	80	1/50	A+

*Until supplay last -3 year standard+0 year extended warranty

~230V | 50/60 Hz | SMD 2835 | E27 | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+2 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MOSQUITO LED 8W IP20
99LED8M



MOSQUITO LED 6W IP20
99LED6KM

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20 | DIMMABLE

MOSQUITO LED PEAR IP20

Catalogue number	Product category	Type	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED8M	C	Mosquito repellent	8	780	3500	180°	105	60	1/50	A+
99LED6KM	C	Mosquito killer	6	400	4000	200°	113	60	1/50	A+



MOSQUITO LED PEAR: No smell | No noise | No flicker | No UV | Frendly to eyes | Produced with a large amount of light (530-580nm), that repel mosquitoes, thus to achieve the special repellet effect.

~230V | 50/60 Hz | SMD 2835 | E27 | >20000 | INSTANT 100% | 25000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED GLOBE G95
99LED694
99LED695



LED GLOBE G120
99LED748
99LED749



LED FLAME
99LED851

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

LED GLOBE / LED FLAME

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED694	C	15	1350	4000	240°	130	95	1/20	A+
99LED695	C	15	1350	2700	240°	130	95	1/20	A+
99LED748	C	20	1650	4000	240°	157	120	1/20	A+
99LED749	C	20	1650	2700	240°	157	120	1/20	A+
99LED851	C	1.5-5	200	1500-1800	360°	138	65	1/100	A+



LED Flame effect
99LED851

~230V | 50/60 Hz | SMD 2835 | E27 | 240° | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED STICKS
99LED902
99LED903
99LED903CW
99LED900
99LED901
99LED901CW



LED R50
99LED439
99LED440
99LED827W
99LED827CW



LED SMD E27
99LED736
99LED736CW
99LED737
99LED737CW
99LED812
99LED812CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20**

LED SMD E27 / LED STICK / LED R50 / LED R80

Catalogue number	Product category	Type	Watt (W)	Lamp holder	LED lamp lumens (lm)	Beam angle	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED736	C	LED SMD	30	E27	2700	200°	4000	190	100	1/20	A+
99LED736CW	C	LED SMD	30	E27	2700	200°	6000	190	100	1/20	A+
99LED737	C	LED SMD	40	E27	3600	200°	4000	220	120	1/20	A+
99LED737CW	C	LED SMD	40	E27	3600	200°	6000	220	120	1/20	A+
99LED812	C	LED SMD	50	E27	4500	200°	4000	255	140	1/20	A+
99LED812CW	C	LED SMD	50	E27	4500	200°	6000	255	140	1/20	A+
99LED902	C	LED STICKS	9	E27	720	180°	4000	122	37	1/100	A+
99LED903	C	LED STICKS	9	E27	720	180°	2700	122	37	1/100	A+
99LED903CW	C	LED STICKS	9	E27	720	180°	6400	122	37	1/100	A+
99LED900	C	LED STICKS	15	E27	1350	180°	4000	140	45	1/100	A+
99LED901	C	LED STICKS	15	E27	1350	180°	2700	140	45	1/100	A+
99LED901CW	C	LED STICKS	15	E27	1350	180°	6400	140	45	1/100	A+
99LED439	C	LED R50	5,5	E14	500	180°	4000	85	50	1/100	A+
99LED440	C	LED R50	5,5	E14	500	180°	2700	85	50	1/120	A+
99LED827W	C	LED R80	11	E27	950	180°	4000	112	80	1/100	A+
99LED827CW	C	LED R80	11	E27	950	180°	6400	112	80	1/100	A+

~230V | 50/60 Hz | SMD 2835 | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HIGH POWER LED LAMP
99LED854
99LED854CW



HIGH POWER LED LAMP
99LED853
99LED853CW

LED NEUTRAL WHITE 4000K COOL WHITE 6400K **IP20**

HIGH POWER LED LAMP

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED853	C	40	E27	3600	4000	360°	235	87	1/30	A+
99LED853CW	C	40	E27	3600	6500	360°	235	87	1/30	A+
99LED854	C	60	E27	5400	4000	360°	274	98	1/20	A+
99LED854CW	C	60	E27	5400	6500	360°	274	98	1/20	A+

Material: Thermal conductive plastic and aluminium & PC milky white cover

~230V | 50/60 Hz | SMD 2835 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FLYING SAUCER U95
99LED780



LED FLYING SAUCER U95
99LED778



LED FLYING SAUCER U95
99LED776

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

LED FLYING SAUCER U95

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED776	F	18	1620	3000	120°	81	150	1/50	A+
99LED778	F	24	2160	3000	120°	81	150	1/50	A+
99LED780	F	32	2880	3000	120°	81	235	1/30	A+

~230V | 50/60 Hz | SMD 5730 | 120° | E27 | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



99LED766
99LED791
99LED766T



99LED767
99LED792
99LED767T



99LED768
99LED793

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20**

LED MOULD FOR CELLING LAMP

Catalogue number	Product category	Rated voltage	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED766	C	230V AC	9W	900	4000K	120°	160	27	1/40	A+
99LED791	C	230V AC	9W	900	2700K	120°	160	25	1/40	A+
99LED766T	C	12V DC	9W	900	4000K	120°	160	27	1/40	A+
99LED767	C	230V AC	18W	1800	4000K	120°	220	25	1/40	A+
99LED792	C	230V AC	18W	1800	2700K	120°	220	27	1/40	A+
99LED767T	C	12V DC	18W	1800	4000K	120°	220	25	1/40	A+
99LED768	C	230V AC	22W	2200	4000K	120°	270	25	1/40	A+
99LED793	C	230V AC	22W	2200	2700K	120°	270	25	1/40	A+

Body: epoxy board+PC

50/60 Hz | Ra≥80 | SMD 5730 | IP 20 | 120° | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED COLOR
99LED825



LED COLOR
99LED826



LED COLOR
99LED822



LED COLOR
99LED823



LED COLOR
99LED824

IP20

LED COLOR

Catalogue number	Product category	Watt (W)	Colour of light	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED825	C	3	red	360°	84	60	1/200	A+
99LED826	C	3	yellow	360°	84	60	1/200	A+
99LED822	C	3	blue	360°	84	60	1/200	A+
99LED823	C	3	green	360°	84	60	1/200	A+
99LED824	C	3	white	360°	84	60	1/200	A+

~230V | 50/60 Hz | SMD 2835 | E27 | INSTANT 100% | 20000h | Hg | RoHS COMPLIANT | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PAR30 IP65
99LED932CW



PAR30
99LED931



PAR30
99LED936W
99LED936WW
99LED936CW



LEDT25
99LED445
99LED446



LED AR111 DIMMABLE
99LED904
99LED905

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | IP65 | DIMMABLE

PAR30 / LED AR111 / LEDT25

Catalogue number	Product category	Dimmable	Watt (W)	Lamp holder	LED type	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter/Width (mm)	Packing/Box (pcs)	Energy class
99LED931	F		12*	E27	SMD 2835	1080	6400	38⁰	93	95	1/20	A+
99LED936W	C		15	E27	SMD 2835	1350	4000	38°	93	95	1/50	A+
99LED936WW	C		15	E27	SMD 2835	1350	2700	38°	93	95	1/50	A+
99LED936CW	C		15	E27	SMD 2835	1350	6500	38°	93	95	1/50	A+
99LED932CW	F		15*	E27	SMD 2835	1275	6400	90⁰	93	95	1/50	A+
99LED904	C	yes	11	G53	high power	990	4000	36⁰	58	111	1/100	A+
99LED905	C	yes	11	G53	high power	990	2700	36⁰	58	111	1/100	A+
99LED445	C		1	E14	SMD 2835	90	4000	180⁰	63	25	1/500	A+
99LED446	C		1	E14	SMD 2835	90	2700	180⁰	63	25	1/500	A+

* Until Supply Last

~230V | 50/60 Hz | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED7 HIGH POWER PAR16
99LED524
99LED525



LED7 HIGH POWER PAR16
99LED526
99LED527



LEDCOB
99LED376



LEDCOB
99LED378
99LED379
99LED380
99LED381

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

LED7 HIGH POWER / LEDCOB

Catalogue number	Product category	Watt (W)	Voltage	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED524	F	6	~230V	E14	480	4000	36°	74	50	1/100	A+
99LED525	F	6	~230V	E14	480	2700	36°	74	50	1/100	A+
99LED526	F	6	~230V	E27	480	4000	36°	64	50	1/100	A+
99LED527	F	6	~230V	E27	480	2700	36°	64	50	1/100	A+
99LED376	F	5	~230V	GU10	350	4000	120°	85	50	1/100	A+
99LED378	F	5	~230V	E14	350	4000	120°	85	50	1/100	A+
99LED379	F	5	~230V	E27	350	2700	120°	85	50	1/100	A+
99LED380	F	5	~230V	E14	350	4000	120°	85	50	1/100	A+
99LED381	F	5	~230V	E27	350	2700	120°	85	50	1/100	A+

50/60 Hz | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



STELLAR LEDSMD GU10

99XLED727
99XLED728
99XLED729
99XLED730
99XLED796
99XLED731

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LEDSMD

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED727	C	3.5	GU10	250	4000	120°	53	50	1/100	A+
99XLED728	C	3.5	GU10	250	2700	120°	53	50	1/100	A+
99XLED731	C	3.5	GU10	250	6400	120°	53	50	1/100	A+
99XLED729	C	7	GU10	500	4000	120°	53	50	1/100	A+
99XLED730	C	7	GU10	500	2700	120°	53	50	1/100	A+
99XLED796	C	7	GU10	500	6400	120°	53	50	1/100	A+

~230V | 50/60 Hz | Ra≥80 | >25000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LEDSMD GU10
99LED725



LEDSMD GU10
99LED727
99LED728
99LED796
99LED729
99LED730
99LED733
99LED734
99LED735
99LED831CW
99LED831W
99LED831WW



LEDSMD GU10 DIMMABLE
99LED731
99LED732



LEDSMD GU5.3 12V
99LED880
99LED880WW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | DIMMABLE

LEDSMD / LEDSMD DIMMABLE

Catalogue number	Product category	Dimmable	Voltage (V)	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED725	F	-	230 V	6	GU10*	540	4000	40°	53	50	1/100	A+
99LED727	C	-	230 V	3	GU10	270	4000	120°	53	50	1/100	A+
99LED728	C	-	230 V	3	GU10	270	2700	120°	53	50	1/100	A+
99LED796	C	-	230 V	6.5	GU10	585	6400	120°	53	50	1/100	A+
99LED729	C	-	230 V	6.5	GU10	585	4000	120°	53	50	1/100	A+
99LED730	C	-	230 V	6.5	GU10	585	2700	120°	53	50	1/100	A+
99LED831CW	C	-	230 V	8	GU10	720	6400	120°	56	50	1/100	A+
99LED831W	C	-	230 V	8	GU10	720	4000	120°	56	50	1/100	A+
99LED831WW	C	-	230 V	8	GU10	720	2700	120°	56	50	1/100	A+
99LED733	F	-	230 V	6	GU10*	-	red	120°	53	50	1/100	A+
99LED734	F	-	230 V	6	GU10*	-	blue	120°	53	50	1/100	A+
99LED735	F	-	230 V	6	GU10*	-	green	120°	53	50	1/100	A+
99LED731	C	Yes	230 V	6.5	GU10	585	4000	120°	53	50	1/100	A+
99LED732	C	Yes	230 V	6.5	GU10	585	2700	120°	53	50	1/100	A+
99LED880	C	-	12V	6	GU5.3	480	4000	120°	54	50	1/100	A+
99LED880WW	C	-	12V	6	GU5.3	480	2700	120°	54	50	1/100	A+

* Until Supply Last

~230V | 50/60 Hz | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LEDSMD PAR16
99LED606
99LED605



LEDSMD PAR16
99LED608
99LED607



LED48SMD
99LED365



LED48SMD
99LED363

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

LEDSMD

Catalogue number	Product category	Voltage (V)	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED606	F	230	3	E14	240	4000	120°	75	50	1/100	A+
99LED605	F	230	3	E14	240	2700	120°	75	50	1/100	A+
99LED608	F	230	3	E27	240	4000	120°	75	50	1/100	A+
99LED607	F	230	3	E27	240	2700	120°	75	50	1/100	A+
99LED363	F	230	3,5	E14	250	2700	120°	76	50	1/100	A
99LED365	F	230	3,5	E27	250	2700	120°	76	50	1/100	A

50/60 Hz | SMD 2835 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



LED60SMD
99LED414



LEDCOB
99LED374
99LED375
99LED562
99LED563



LED3X2 230VAC
99LED296



LED3X2 230VAC
99LED297



LED3X2 230VAC
99LED300

LED WARM WHITE 2700K COOL WHITE 6400K **IP20**

UNTIL SUPPLY LAST

LED60SMD / LED3X2 / LEDCOB

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Voltage (V)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED414	F	3	E27	250	230	2700-3000	120°	76	50	1/100	A+
99LED296	F	6	E14	420	230	2700-3000	60°	65	50	1/100	A
99LED297	F	6	E27	420	230	6000-6400	60°	72	50	1/100	A
99LED300	F	6	GU10	360	230	2700-3000	60°	85	50	1/100	A
99LED374	F	5	GU5.3	350	12	4000-4300	120°	75	50	1/100	A
99LED375	F	5	GU5.3	350	12	2700-3000	120°	75	50	1/100	A
99LED562	F	7	GU5.3	400	12	4000-4300	120°	75	50	1/100	A
99LED563	F	5	GU5.3	400	12	4000-4300	120°	75	50	1/100	A

50/60 Hz · Ra≥80 · >20000 · INSTANT 100% · 30000h · Hg · RoHS COMPLIANT · EMC · CE · 2+0 standard +extended · 2 YEAR TOTAL WARRANTY



LEDG4
99LED813



LEDG9
99LED815
99LED816
99LED817



LEDG9
99LED933
99LED933W
99LED933CW



LED DECORATIVE CANDLE
99CANDLE



CABINET HINGE LED LIGHT
9HINGE2

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LEDG4 / LEDG9 / CABINET HINGE LED LIGHT / LED DECORATIVE CANDLE WITH REMOTE

Catalogue number	Product category	Description	Lamp holder	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED813	C	LED G4-12V	G4	1,2	100	3000	300°	38	12	1/500	A
99LED815	C	LED G9-230V	G9	4	350	3000	300°	51	15	1/500	A
99LED816	C	LED G9-230V	G9	4	350	4000	300°	51	15	1/500	A
99LED817	C	LED G9-230V	G9	4	350	6500	300°	51	15	1/500	A
99LED933	C	LED G9-230V	G9	7	630	3000	300°	65	19	1/500	A
99LED933W	C	LED G9-230V	G9	7	630	4000	300°	65	19	1/500	A
99LED933CW	C	LED G9-230V	G9	7	630	6400	300°	65	19	1/500	A
9HINGE2	C	CABINET HINGE LED LIGHT	-	2	-	-	-	48	20	0/300	A
99CANDLE	F	LED CANDLE WITH REMOTE*	-	-	-	-	-	2.25	1.45	1/120	A

*Until Supply Last







High-quality ABS material, environmental-friendly, sturdy and durable to use. Easy to install and convenient to use| Operated by 12V 23A battery (Not included) | When opening the cabinet,lamp will turns on automatically. When closing the cabinet, the light turns off



LED DECORATIVE CANDLE WITH REMOTE
Power supply:DC3.7V/200MAH(Rechargable Polymer Li-battery)
4hours to recharge,12hours working
LED lights identify the charging state
With ON/OFF and dimmer function
Time funtion 2H/4H/6H/8H
1set = 1 Candle + 1 charge + 1 remote

Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



2U
99200029



3U
99216165

ESL WARM WHITE 2700K NEUTRAL WHITE 4000K COOL WHITE 6400K **IP20**

UNTIL SUPPLY **LAST**

2U / 3U

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99200028	F	2U/T3	5	E14	175	2700K	37	110	9	1/100	A
99200029	F	2U/T3	5	E27	175	2700K	37	110	9	1/100	A
99200030	F	2U/T3	9	E14	405	2700K	37	130	9	1/100	A
99200032	F	2U/T3	11	E14	530	2700K	37	140	9	1/100	A
99200033	F	2U/T3	11	E14	530	6400K	37	140	9	1/100	A
99216166	F	3U/T2	7	E14	285	4000K	33	100	7	1/100	A
99216165	F	3U/T2	7	E27	285	4000K	33	100	7	1/100	A
99216168	F	3U/T2	11	E14	530	4000K	33	110	7	1/100	A
99216170	F	4U/T2	15	E14	800	4000K	40	115	7	1/100	A

~230V 50/60 Hz Ra≥82 >10000 INSTANT LIGHT < 2 s 8000h Hg < 2 mg RoHS COMPLIANT EMC CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



FULL SPIRAL
99210046
99210048



FULL SPIRAL
99210047



HALF SPIRAL
99210144



HALF SPIRAL
99210145
99210147

ESL | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

FULL SPIRAL / HALF SPIRAL

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99210046	F	FULL SPIRAL	5	E14	175	2700K	32	78	7	1/100	A
99210048	F	FULL SPIRAL	9	E14	405	2700K	32	96	7	1/100	A
99210047	F	FULL SPIRAL	5	E27	175	2700K	32	78	7	1/100	A
99210145	F	HALF SPIRAL/T2	9	E14	405	4000K	40	96	8	1/100	A
99210147	F	HALF SPIRAL/T2	11	E14	530	4000K	40	100	8	1/100	A
99210144	F	HALF SPIRAL/T2	9	E27	405	4000K	40	90	8	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2s | 8000h | Hg <2mg | RoHS | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



SPIRAL G9
99211152
99211418
99211419
99211153



ESLJ
99217304



GU10/SPIRAL
99212156
99212422

ESL | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

UNTIL SUPPLY LAST

G9 / GU10 / ESLJ

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99211152	F	G9/SPIRAL	5	G9	175	4000K	31	66	7	1/100	A
99211418	F	G9/SPIRAL	5	G9	175	2700K	31	66	7	1/100	A
99211419	F	G9/SPIRAL	7	G9	285	2700K	31	76	7	1/100	A
99211153	F	G9/SPIRAL	7	G9	285	4000K	31	76	7	1/100	A
99212156	F	GU10/SPIRAL	5	GU10	175	4000K	31	68	7	1/100	A
99212422	F	GU10/SPIRAL	5	GU10	175	2700K	31	68	7	1/100	A
99217304	F	ESLJ78	9	R7s	370	6400K	60	78	-	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2s | 8000h | Hg <2mg | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



GLOBE
99280093



PEAR
99290100
99290101
99290102
99290103
99290104
99290105

ESL WARM WHITE 2700K COOL WHITE 6400K **IP20**

UNTIL SUPPLY **LAST**

GLOBE / PEAR

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99280093	F	15	800	6400	80	115	1/20	A
99290100	F	9	405	2700	100	55	1/100	A
99290101	F	9	405	6400	100	55	1/100	A
99290102	F	11	530	2700	106	55	1/100	A
99290103	F	11	530	6400	106	55	1/100	A
99290104	F	15	800	2700	140	65	1/100	A
99290105	F	15	800	6400	140	65	1/100	A

~230V 50/60 Hz E27 Ra≥82 >10000 < 2 s 8000h Hg < 2 mg RoHS COMPLIANT EMC CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



CANDLE
99213159
99213160



G45
9918305
9918356



G45
9918357



GU10
99214358
99214161
99214359
99214162
99214163

ESL | WARM WHITE 2700K | NEUTRAL WHITE 4000K | IP20

UNTIL SUPPLY LAST

CANDLE / G45 / GU10

Catalogue number	Product category	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99213159	F	7	E14	285	4000	100	38	1/100	A
9918305	F	7	E14	285	2700	85	45	1/100	A
9918356	F	7	E14	285	4000	85	45	1/100	A
9918357	F	7	E27	285	4000	85	45	1/100	A
99214358	F	7	GU10	285	2700	58	50	1/100	A
99214161	F	7	GU10	285	4000	58	50	1/100	A
99214359	F	9	GU10	405	2700	58	50	1/100	A
99214162	F	9	GU10	405	4000	58	50	1/100	A
99214360	F	11	GU10	530	2700	58	50	1/100	A
99214163	F	11	GU10	530	4000	58	50	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2s | 8000h | Hg <2mg | RoHS | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



R50
99215351



T45
9918307
9918352



T45
9918308
9918353

ESL WARM WHITE 2700K NEUTRAL WHITE 4000K **IP20**

UNTIL SUPPLY **LAST**

R50 / T45

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99215351	F	R50	9	E14	405	2700	88	50	1/100	A
99215164	F	R50	9	E14	405	4000	88	50	1/100	A
9918307	F	T45	8	E27	380	2700	92	45	1/100	A
9918352	F	T45	8	E27	380	4000	92	45	1/100	A
9918308	F	T45	8	E27	380	2700	92	45	1/100	A
9918353	F	T45	8	E27	380	4000	92	45	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2 s | 8000h | Hg <2mg | RoHS | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



R7s
99LED444/CCT



R7s
99LED443/CCT



LED PLL
99LED930



GX53
99LED445/CCT



GX53
99LED446/CCT

IP20

LED PLL / R7s / GX53

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter/ (mm)	Packing/Box (pcs)	Energy class
99LED930	C	20	2G11	2000	5500	170°	530	43	1/50	A+
99LED443/CCT	C	3,2	R7S	400	2700/4000/6500 settable	360°	78	22	1/50	A+
99LED444/CCT	C	7,5	R7S	850	2700/4000/6500 settable	360°	118	22	1/50	A+
99LED445/CCT	C	3	GX53	250	2700/4000/6500 settable	120°	20	75	1/50	A+
99LED446/CCT	C	10	GX53	1200	2700/4000/6500 settable	120°	37	100	1/50	A+

~230V 50/60 Hz Ra≥80 >20000 INSTANT 100% 30000h RoHS EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



LED PLC

99LED553

LED WARM WHITE 2700K **IP20**

UNTIL SUPPLY LAST

LED PLC

Catalogue number	Product category	Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED553	F	15	G24d	1350	2700	120°	193	-	-	38	1/10	A+

~230V | 50/60 Hz | SMD 2835 | Ra≥80 | >20000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY



PLC2P
99250367



PLC4P
99270375
99270376
99270089

ESL | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

UNTIL SUPPLY LAST

PLC / PLL

Catalogue number	Product category	Model	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Ø (mm)	Packing/Box (pcs)	Energy class
99250367	F	PLC2P	10	G24d	530	2700	35	35	110	12	1/100	A
99270375	F	PLC4P	13	G24d	780	2700	35	35	136	12	1/100	A
99270376	F	PLC4P	13	G24d	780	4000	35	35	136	12	1/100	A
99270089	F	PLC4P	13	G24d	780	6400	35	35	136	12	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2s | 8000h | Hg <2mg | RoHS COMPLIANT | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



LED TUBE T5
99LED929
99LED927



LED TUBE T5
99LED928
99LED926

ROTATING T5

LED NEUTRAL WHITE 4000K COOL WHITE 6400K IP20

LED TUBE T5

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED928	C	10W	1100	4000	170°	549	16	1/100	A+
99LED926	C	10W	1100	6400	170°	549	16	1/100	A+
99LED929	C	20W	2200	4000	170°	1149	16	1/100	A+
99LED927	C	20W	2200	6400	170°	1149	16	1/100	A+

~230V 50/60 Hz SMD 2835 LED T5 G5 Ra≥80 >20000 INSTANT 100% 30000h Hg RoHS COMPLIANT EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MEAT FRESH LIGHT LED TUBE T8

99LED960M
99LED962M



VEGETABLES FRESH LIGHT LED TUBE T8

99LED963F
99LED965F



BREAD FRESH LIGHT LED TUBE T8

99LED966B
99LED968B

FOOD

LED IP20

FRESH LIGHT LED TUBE T8

Catalogue number	Product category	Watt (W)	Colour temp. (K)	LED lamp lumens (lm)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED960M	C	9	6000+red (660nm)	585	300°	600	26	1/25	A+
99LED962M	C	18	6000+red (660nm)	1170	300°	1200	26	1/25	A+
99LED963F	C	9	6000+green (470nm)	720	300°	600	26	1/25	A+
99LED965F	C	18	6000+green (470nm)	1440	300°	1200	26	1/25	A+
99LED966B	C	9	3000	810	300°	600	26	1/25	A+
99LED968B	C	18	3000	1620	300°	1200	26	1/25	A+





This special lighting mostly use for meat, fruit, vegetable, bread and so on in supermarket. Through the colour mixing technology to achieve unparalleled lighting effect and effectively improve the fresh food area to attract customer different occasions, green for vegetable and fruit departament. Red in generally used for meat lighting to show the delicios meat and you could always find the lighting that you need. Application- supermarket, shelves, freezer stores, departament stores counters.

~230V | 50/60 Hz | SMD 4014 | G13 | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED TUBE T8 STELLAR
99XLED447
99XLED448



LED TUBE T8 STELLAR
99XLED354
99XLED355



LED TUBE T8 STELLAR
99XLED351
99XLED352

ROTATING

NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LED TUBE T8 STELLAR

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99XLED351	C	9	630	6400	270°	603	26	1/25	A+
99XLED352	C	9	630	4000	270°	603	26	1/25	A+
99XLED354	C	18	1260	6400	270°	1213	26	1/25	A+
99XLED355	C	18	1260	4000	270°	1213	26	1/25	A+
99XLED447	C	24	1680	6400	270°	1513	26	1/25	A+
99XLED448	C	24	1680	4000	270°	1513	26	1/25	A+

~230V | 50/60 Hz | SMD 2835 | LED T8 | G13 | 270° | Ra≥80 | >20000 | INSTANT 100% | 15000h | Hg | RoHS COMPLIANT | EMC | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED TUBE T8
99LED447M
99LED448M



LED TUBE T8
99LED354M
99LED355M



LED TUBE T8
99LED351M
99LED352M

ROTATING

NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

LED TUBE T8

Catalogue number	Product category	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
99LED351M	C	10	900	6400	300°	604	28	1/25	A+
99LED352M	C	10	900	4000	300°	604	28	1/25	A+
99LED354M	C	18	1850	6400	300°	1213	28	1/25	A+
99LED355M	C	18	1850	4000	300°	1213	28	1/25	A+
99LED447M	C	24	2400	6400	300°	1514	28	1/25	A+
99LED448M	C	24	2400	4000	300°	1514	28	1/25	A+

~230V | 50/60 Hz | SMD 4014 | G13 | 120° | Ra≥80 | >25000 | INSTANT 100% | 30000h | Hg | RoHS COMPLIANT | EMC | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



EST3F-T8



EST-T5

ESL | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20

UNTIL SUPPLY LAST

EST3F-T8 & T5 TRIPHOSPHOR

Catalogue number	Product category	Model	Watt (W)	Lumen (lm)	Colour temp. (K)	Length 1 (mm)	Length 2 (mm)	Packing/Box (pcs)	Energy class
992304163F	F	EST3F-T8	58	4450	2700	1500	1515	1/25	A
992304173F	F	EST3F-T8	58	4450	4000	1500	1515	1/25	A
99220383	F	EST-T5	4	195	2700	144	150	1/100	A
99220384	F	EST-T5	4	195	4000	144	150	1/100	A
99220063	F	EST-T5	4	195	6400	144	150	1/100	A
99220385	F	EST-T5	6	380	2700	210	220	1/100	A
99220393	F	EST-T5	21	1850	2700	847	863	1/100	A
99220394	F	EST-T5	21	1850	4000	847	863	1/100	A
99220395	F	EST-T5	28	2550	2700	1148	1200	1/100	A
99220397	F	EST-T5	35	3250	2700	1445	1500	1/100	A
99220400	F	EST-T5	49	3850	2700	1445	1500	1/100	A
99220425	F	EST-T5	54	4250	2700	1148	1200	1/100	A

~230V | 50/60 Hz | Ra≥82 | >10000 | <2s | 8000h | Hg <2mg | RoHS | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



MHL GR

99410132
99410133

IP20

UNTIL SUPPLY LAST

MHL / MHL GR

Catalogue number	Product category	Watt (W)	Lamp holder	Lumen (lm)	Colour temp. (K)	Colour	Length 1 (mm)	Length 2 (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99410132	F	70	Rx7s	-	-	green	104	117	20	1/20	A+
99410133	F	150	Rx7s	-	-	green	121	134	24	1/20	A+

~230V | 50/60 Hz | Rx7s | Ra≥82 | 10000h | RoHS | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY



LED STRIPS AND ALUMINIUM PROFILES



LED 150 RGB 12V DC STELLAR IP20
99XLED311



LED 300 12V DC STELLAR IP65
99XLED312
99XLED313

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP20 | IP65 | 12V DC

LED 150 RGB / 300 STELLAR

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99XLED311	C	LED- 5050 *	30pcs/m	7.2 W/M	-	RGB	IP 20	5/20	A++→A
99XLED316	C	LED- 5050*	30pcs/m	7.2W/M		RGB	IP65	5/20	A++→A
99XLED306	C	LED- 3528-60WW ***	60pcs/m	4.8W/M	2700-3000K	warm white	IP 20	5/20	A++→A
99XLED305	C	LED- 3528-60CW ***	60pcs/m	4.8W/M	6000-6500K	cold white	IP 20	5/20	A++→A
99XLED312	C	LED- 3528-60CW ***	60pcs/m	4.8W/M	6000-6500	cold white	IP65	5/20	A++→A
99XLED313	C	LED- 3528-60WW ***	60pcs/m	4.8W/M	2700-3000	warm white	IP65	5/20	A++→A

* Flex white FCB, 10mm, double layer, mark cut
** Luminous efficiency: 10-12 lm/LED, 10mm Flex white FCB, double layer, mark cut
*** Luminous efficiency: 3-4 lm/LED, 8mm Flex yellow PCB, single layer, mark cut
**** Luminous efficiency: 3-4 lm/LED, 8mm Flex white FCB, double layer, mark cut

12V DC | SMD 5050 | REEL 5m | 120° | 15000h | Hg | RoHS COMPLIANT | III | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 300 12V DC IP20

99LED670
99LED671
99LED672
99LED673
99LED674
99LED675
99LED676



LED 300 12V DC IP65

99LED677
99LED678
99LED679
99LED680
99LED681
99LED682
99LED683

LED | WARM WHITE 2700K | COOL WHITE 6400K | **IP20** | **IP65** | **12V DC**

LED 300

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED670	C	LED-5050-60-WW	60pcs/m	14.4W/M	2700~3000	warm white	IP 20	5/20	A++→A
99LED671	C	LED-5050-60-CW	60pcs/m	14.4W/M	6200~6500	cold white	IP 20	5/20	A++→A
99LED672	C	LED-5050-60-Y	60pcs/m	14.4W/M	587-592	yellow	IP 20	5/20	A++→A
99LED673	C	LED-5050-60-G	60pcs/m	14.4W/M	520-525	green	IP 20	5/20	A++→A
99LED674	C	LED-5050-60-B	60pcs/m	14.4W/M	465-470	blue	IP 20	5/20	A++→A
99LED675	C	LED-5050-60-R	60pcs/m	14.4W/M	620-630	red	IP 20	5/20	A++→A
99LED676	C	LED-5050-60-RGB*	60pcs/m	14.4W/M	-	RGB	IP 20	5/20	A++→A
99LED677	C	LED-5050-60-WW	60pcs/m	14.4W/M	2700~3000	warm white	IP 65	5/20	A++→A
99LED678	C	LED-5050-60-CW	60pcs/m	14.4W/M	6200~6500	cold white	IP 65	5/20	A++→A
99LED679	C	LED-5050-60-Y	60pcs/m	14.4W/M	587-592	yellow	IP 65	5/20	A++→A
99LED680	C	LED-5050-60-G	60pcs/m	14.4W/M	520-525	green	IP 65	5/20	A++→A
99LED681	C	LED-5050-60-B	60pcs/m	14.4W/M	465-470	blue	IP 65	5/20	A++→A
99LED682	C	LED-5050-60-R	60pcs/m	14.4W/M	620-630	red	IP 65	5/20	A++→A
99LED683	C	LED-5050-60-RGB*	60pcs/m	14.4W/M	-	RGB	IP 65	5/20	A++→A

Luminous efficiency: 20-22Lm/LED, 10mm Flex white PCB, with 3M adhere attached, mark cut.

12V DC | SMD 5050 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 12V DC STELLAR IP20

99XLED308
99XLED307
99XLED321



LED 300 12V DC STELLAR IP65

99XLED317
99XLED318
99XLED319

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | IP20 | IP65 | 12V DC

LED 600 / 300 STELLAR

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99XLED308	C	LED- 3528-120WW ****	120pcs/m	9.6W/M	2700-3000	warm white	IP 20	5/20	A++→A
99XLED321	C	LED- 3528-120W ****	120pcs/m	9.6W/M	4000-4300	neutral white	IP 20	5/20	A++→A
99XLED307	C	LED- 3528-120CW ****	120pcs/m	9.6W/M	6000-6500	cold white	IP 20	5/20	A++→A
99XLED315	C	LED- 3528-120WW ****	120pcs/m	9.6W/M	2700-3000	warm white	IP65	5/20	A++→A
99XLED320	C	LED- 3528-120W ****	120pcs/m	9.6W/M	4000-4300	neutral white	IP65	5/20	A++→A
99XLED314	C	LED- 3528-120CW ****	120pcs/m	9.6W/M	6000-6500	cold white	IP65	5/20	A++→A
99XLED310	C	LED- 5050-60WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 20	5/20	A++→A
99XLED322	C	LED- 5050-60W **	60pcs/m	14.4W/M	4000-4300	neutral white	IP 20	5/20	A++→A
99XLED309	C	LED- 5050-60CW **	60pcs/m	14.4W/M	6000-6500	cold white	IP 20	5/20	A++→A
99XLED318	C	LED- 5050-60WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP65	5/20	A++→A
99XLED319	C	LED- 5050-60W **	60pcs/m	14.4W/M	4000-4300	neutral white	IP65	5/20	A++→A
99XLED317	C	LED- 5050-60CW **	60pcs/m	14.4W/M	6000-6500	cold white	IP65	5/20	A++→A

* Flex white FCB, 10mm, double layer, mark cut
** Luminous efficiency: 10-12 lm/LED, 10mm Flex white FCB, double layer, mark cut
*** Luminous efficiency: 3-4 lm/LED, 8mm Flex yellow PCB, single layer, mark cut
**** Luminous efficiency: 3-4 lm/LED, 8mm Flex white FCB, double layer, mark cut

12V DC | SMD 5050 | REEL 5m | 120° | 15000h | Hg | RoHS COMPLIANT | III | F | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 12V DC IP20
99LED666
99LED667



LED 600 12V DC IP65
99LED668
99LED669

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP20 | IP65 | 12V DC

LED 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED666	C	LED-3528-120-WW	120pcs/m	9,6W/M	2700-3000	warm white	IP20	5/20	A++→A
99LED667	C	LED-3528-120-CW	120pcs/m	9,6W/M	6200-6500	cold white	IP20	5/20	A++→A
99LED668	C	LED-3528-120-WW	120pcs/m	9,6W/M	2700-3000	warm white	IP65	5/20	A++→A
99LED669	C	LED-3528-120-CW	120pcs/m	9,6W/M	6200-6500	cold white	IP65	5/20	A++→A

Luminous efficiency: 20-22Lm/LED, with 3M adhere attached, mark cut.

12V DC | SMD 5050 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 1200 12V DC IP20
99LED684
99LED685

LED 1200 12V DC IP65
99LED686
99LED687



LED 600 12V DC IP20
99LED688
99LED689
99LED690

LED 600 12V DC IP65
99LED691
99LED692
99LED693

LED | WARM WHITE 2700K | COOL WHITE 6400K | **IP20** | **IP65** | **12V DC**

LED 1200 / 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED684	C	LED-3528-2X120-WW	2X120pcs/m	20W/M	2700-3000	warm white	IP20	5/20	A++→A
99LED685	C	LED-3528-2X120-CW	2X120pcs/m	20W/M	6200-6500	cold white	IP20	5/20	A++→A
99LED686	C	LED-3528-2X120-WW	2X120pcs/m	20W/M	2700-3000	warm white	IP65	5/20	A++→A
99LED687	C	LED-3528-2X120-CW	2X120pcs/m	20W/M	6200-6500	cold white	IP65	5/20	A++→A
99LED688	C	LED-5050-2X60-WW	2X60pcs/m	29W/M	2700-3000	warm white	IP 20	5/20	A++→A
99LED689	C	LED-5050-2X60-CW	2X60pcs/m	29W/M	6200-6500	cold white	IP 20	5/20	A++→A
99LED690	C	LED-5050-2X60-RGB	2X60pcs/m	29W/M	-	RGB	IP 20	5/20	A++→A
99LED691	C	LED-5050-2X60-WW	2X60pcs/m	29W/M	2700-3000	warm white	IP 65	5/20	A++→A
99LED692	C	LED-5050-2X60-CW	2X60pcs/m	29W/M	6200-6500	cold white	IP 65	5/20	A++→A
99LED693	C	LED-5050-2X60-RGB	2X60pcs/m	29W/M	-	RGB	IP 65	5/20	A++→A

Luminous efficiency: 6-7Lm/LED, 15mm Flex white PCB, with 3M adhere attached, mark cut.
Luminous efficiency: 6-7Lm/LED, 17mm Flex white PCB hollow tube waterproof IP65, with 3M adhere attached, mark cut.

12V DC | SMD 3528 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 300 RGBW

99LED884

WARM WHITE 2700K | NEUTRAL WHITE 4000K | **IP20** | **12V DC**

LED 300 RGBW

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED884	C	LED-5050-RGBW	60pcs/m	14.4W/M	RGB+WHITE	IP 20	5/50	A++→A

Dimensions: 5000 x 10 x 1mm





12V DC | SMD 5050 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 300 24V DC - IP20

99LED866
99LED867



LED 300 24V DC - IP65

99LED874
99LED875

WARM WHITE 2700K | COOL WHITE 6400K | **IP20** | **IP65** | **24V DC**

LED 300

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED866	C	LED-5050-60-WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 20	5/100	A++→A
99LED867	C	LED-5050-60-CW **	60pcs/m	14.4W/M	6200-6500	cold white	IP 20	5/100	A++→A
99LED874	C	LED-5050-60-WW **	60pcs/m	14.4W/M	2700-3000	warm white	IP 65	5/100	A++→A
99LED875	C	LED-5050-60-CW **	60pcs/m	14.4W/M	6200-6500	cold white	IP 65	5/100	A++→A

* Luminous efficiency: 20-22 lm/LED, with 3M adhere attached, mark cut.
** Luminous efficiency: 20-22 lm/LED, with 3M adhere attached, mark cut.

24V DC | SMD 5050 | SMD 3528 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 600 24V DC - IP20

99LED864
99LED865
99LED868
99LED869
99LED870
99LED871



LED 600 24V DC - IP65

99LED872
99LED873
99LED876
99LED877
99LED878
99LED879

LED | WARM WHITE 2700K | COOL WHITE 6400K | IP20 | IP65 | 24V DC

LED 600

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing/Box (pcs)	Energy class
99LED864	C	LED-3528-120-WW *	120pcs/m	9.6W/M	2700-3000	warm white	IP 20	5/100	A++→A
99LED865	C	LED-3528-120-CW *	120pcs/m	9.6W/M	6200-6500	cold white	IP 20	5/100	A++→A
99LED868	C	LED-3528-120-Y *	120pcs/m	9.6W/M	587-592	yellow	IP 20	5/100	A++→A
99LED869	C	LED-3528-120-G *	120pcs/m	9.6W/M	520-525	green	IP 20	5/100	A++→A
99LED870	C	LED-3528-120-B *	120pcs/m	9.6W/M	465-470	blue	IP 20	5/100	A++→A
99LED871	C	LED-3528-120-R *	120pcs/m	9.6W/M	620-630	red	IP 20	5/100	A++→A
99LED872	C	LED-3528-120-WW *	120pcs/m	9.6W/M	2700-3000	warm white	IP 65	5/100	A++→A
99LED873	C	LED-3528-120-CW *	120pcs/m	9.6W/M	6200-6500	cold white	IP 65	5/100	A++→A
99LED876	C	LED-3528-120-Y *	120pcs/m	9.6W/M	587-592	yellow	IP 65	5/50	A++→A
99LED877	C	LED-3528-120-G *	120pcs/m	9.6W/M	520-525	green	IP 65	5/50	A++→A
99LED878	C	LED-3528-120-B *	120pcs/m	9.6W/M	465-470	blue	IP 65	5/50	A++→A
99LED879	C	LED-3528-120-R *	120pcs/m	9.6W/M	620-630	red	IP 65	5/50	A++→A

* Luminous efficiency: 22-24 lm/LED, with 3M adhere attached, mark cut.
** Luminous efficiency: 22-24 lm/LED, with 3M adhere attached, mark cut.

24V DC | SMD 5050 | SMD 3528 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED 960 24V DC - IP20

99LED881WW
99LED881
99LED881CW



LED 960 24V DC - IP65

99LED882WW
99LED882
99LED882CW

WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20** | **IP65** | **24V DC**

LED 960

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED881WW	C	LED-3528-192-WW	192pcs/m	20W/M	2700-3000	warm white	IP20	5/50	A++→A
99LED881	C	LED-3528-192-W	192pcs/m	20W/M	4000-4300	neutral white	IP20	5/50	A++→A
99LED881CW	C	LED-3528-192-CW	192pcs/m	20W/M	6000-6500	cold white	IP20	5/50	A++→A
99LED882WW	C	LED-3528-192-WW	192pcs/m	20W/M	2700-3000	warm white	IP65	5/50	A++→A
99LED882	C	LED-3528-192-W	192pcs/m	20W/M	4000-4300	neutral white	IP65	5/50	A++→A
99LED882CW	C	LED-3528-192-CW	192pcs/m	20W/M	6000-6500	cold white	IP65	5/50	A++→A

Luminous efficiency: 22-24 lm/LED, 8mm Flex white PCB, with 3M adhere attached, mark cut.

24V DC | SMD 3528 | REEL 5m | 120° | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HIGH EFFICIENCY LED STRIP- 200lm/W

99LED982WW
99LED982
99LED982CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20** | **24V DC** | **HIGH EFFICIENCY**

HIGH EFFICIENCY LED STRIP- 200lm/W

Catalogue number	Product category	Model	LEDs (pcs/m)	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED982WW	C	LED-5630-WW	72pcs/m	9.6W/M	3000	warm white	IP20	5/100	A++→A
99LED982	C	LED-5630-W	72pcs/m	9.6W/M	4000	neutral white	IP20	5/100	A++→A
99LED982CW	C	LED-5630-CW	72pcs/m	9.6W/M	6500	cold white	IP20	5/100	A++→A

Luminous efficiency: 1920 lm/m, 200lm/W, 10mm, self adhesive, mark cut.

24V DC | SMD 3528 | REEL 5m | 120° | Ra≥80 | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



COB LED STRIP

99LED980WW
99LED980
99LED980CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20** | **IP67** | **24V DC**

COB LED STRIP

Catalogue number	Product category	Model	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED980WW	C	LED-COB-WW	10W/M	3000	warm white	IP20	5/100	A++→A
99LED980	C	LED-COB-W	10W/M	4000	neutral white	IP20	5/100	A++→A
99LED980CW	C	LED-COB-CW	10W/M	6500	cold white	IP20	5/100	A++→A
99LED981CW	C	LED-COB-CW	10W/M	6500	cold white	IP67	5/100	A++→A

Luminous efficiency: 1000 lm/m, 10mm, self adhesive, mark cut.

24V DC | REEL 5m | 120° | Ra≥90 | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BENDABLE LED STRIP

99LED983WW
99LED983
99LED983CW

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20** | **24V DC**

S-TYPE BENDABLE LED STRIP

Catalogue number	Product category	Model	Watts / meter	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED983WW	C	LED-SMD2835	12W/M	3000	warm white	IP20	5/100	A++→A
99LED983	C	LED-SMD2835	12W/M	4000	neutral white	IP20	5/100	A++→A
99LED983CW	C	LED-SMD2835	12W/M	6500	cold white	IP20	5/100	A++→A

Luminous efficiency: 700 lm/m, 8mm, self adhesive, mark cut.

24V DC | SMD 3528 | REEL 5m | 120° | Ra≥90 | 30000h | Hg | RoHS COMPLIANT | III | F | CE | 4+1 standard +extended | 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



USB RGB LED STRIP AND CONTROLLER

99LED984RGB
99LEDDIMMER5V2

IP20 **5V DC**

USB RGB LED STRIP

Catalogue number	Product category	Model	LEDs (pcs/m)	Colour temp. (K)	Colour of light	Protection Raiting	Packing/Box (pcs)	Energy class
99LED984RGB	C	LED-2835-RGB	30pcs/m	RGB	RGB	IP20	5/100	A++→A

Driven by any devices with output 5V USB port- computer, desktop, laptop, TV, USB socket. In order to connect the LED strip to the USB port, it is necessary to buy a controller additionally.

Width: 8mm, self adhesive, mark cut.

5V DC · SMD 3528 · REEL 5m · 120° · Ra≥80 · Hg · RoHS · III · F · CE · 2+0 standard +extended · 2 YEAR TOTAL WARRANTY

IP20

CONTROLLER FOR LED STRIP 5V WITH REMOTE CONTROL

Catalogue number	Product category	Current (A)	Voltage (V)	Remote distance (m)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LEDDIMMER5V2	C	3x2A	5V DC	15	40	12	5	5/100	A++→A

Remote controller battery: 3V: 1xCR2025- included

IP 20 · RoHS · EMC · CE · 3+0 standard +extended · 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED MODULES

99LEDMOD2430
99LEDMOD2440
99LEDMOD2460



LED MODULES

99LEDMOD1230
99LEDMOD1240
99LEDMOD1260



L5050 LED MODULE

99LED360

LED | COOL WHITE 6400K | **IP65**

UNTIL SUPPLY LAST

LED MODULE

Catalogue number	Product category	Watt (W)	LEDs (pcs)	LED Type	Colour temp. (K)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED360	F	0,72	3	SMD5050	5500	78	14	7.5	1/2000	A++→A

Body: aluminium alloy | **Light source:** Epistar | LED recessed round spotlight COB. Easy installation due to handy clips.

12V DC | Ra>80 | 120° | 30000h | IP 67 | RoHS | CE | 3+0 standard +extended | 3 YEAR TOTAL WARRANTY

LED | WARM WHITE 2700K | NEUTRAL WHITE 4000K | COOL WHITE 6400K | **IP20** | **230V AC**

LED MODULES EPISTAR

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LEDMOD1230	C	12	1140	3000	63	63	1/100	A++→A
99LEDMOD1240	C	12	1140	4000	63	63	1/100	A++→A
99LEDMOD1260	C	12	1140	6000	63	63	1/100	A++→A
99LEDMOD2430	C	24	2280	3000	120	63	1/80	A++→A
99LEDMOD2440	C	24	2280	4000	120	63	1/80	A++→A
99LEDMOD2460	C	24	2280	6000	120	63	1/80	A++→A

LED Chip: Epistar | Lens angle: 160°| Mounting: With magnet, for the lamps with iron plates, the modules have magnets that can be attached to the installation.
For the plastic lamps, the modules have double-sided conductive adhesive tape, which can be pasted and installed.
Aplication: Suitable for ceiling lamp, wall lamp ,Bulkhead light etc.

Ra>80 | 160° | 30000h | RoHS | CE | 2+0 standard +extended | 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RGBW BASE 120 + LENS
97LED120LRGB



BASE 120
97LED120WW
97LED120CW
97LED120RGB



RGBW BASE 65
97LED65RGB

LED WARM WHITE 2700K COOL WHITE 6400K

RECHARGEABLE LED BASES

Catalogue number	Product category	Type	Battery type	LEDs (qty)	Colour temp. (K)	Diameter (mm)	Diameter1 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
97LED65RGB	C	RGBW BASE 65	LI- 3.7V/ 800MAH	1+1	RGBW	85	68	65	1/50	A++→A
97LED120LRGB	C	RGBW BASE 120 + LENS	LI- 3.7V/ 5200MAH	7+7	RGBW	120	95	58	1/36	A++→A
97LED120WW	C	WW BASE 120	LI- 3.7V/ 5200MAH	12	3000	120	102	73	1/36	A++→A
97LED120CW	C	CW BASE 120	LI- 3.7V/ 5200MAH	12	5500	120	102	73	1/36	A++→A
97LED120RGB	C	RGBW BASE 120	LI- 3.7V/ 5200MAH	9+9	RGBW	120	102	73	1/36	A++→A

Remote control



Charger



Imput Voltage: 100-240VAC, 50/60Hz | **Output Voltage:** 5V 1A | **Charging time:** 6h | **Discharging time:** 10-12h

All LED bases are equipped with remote control and charger German type

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

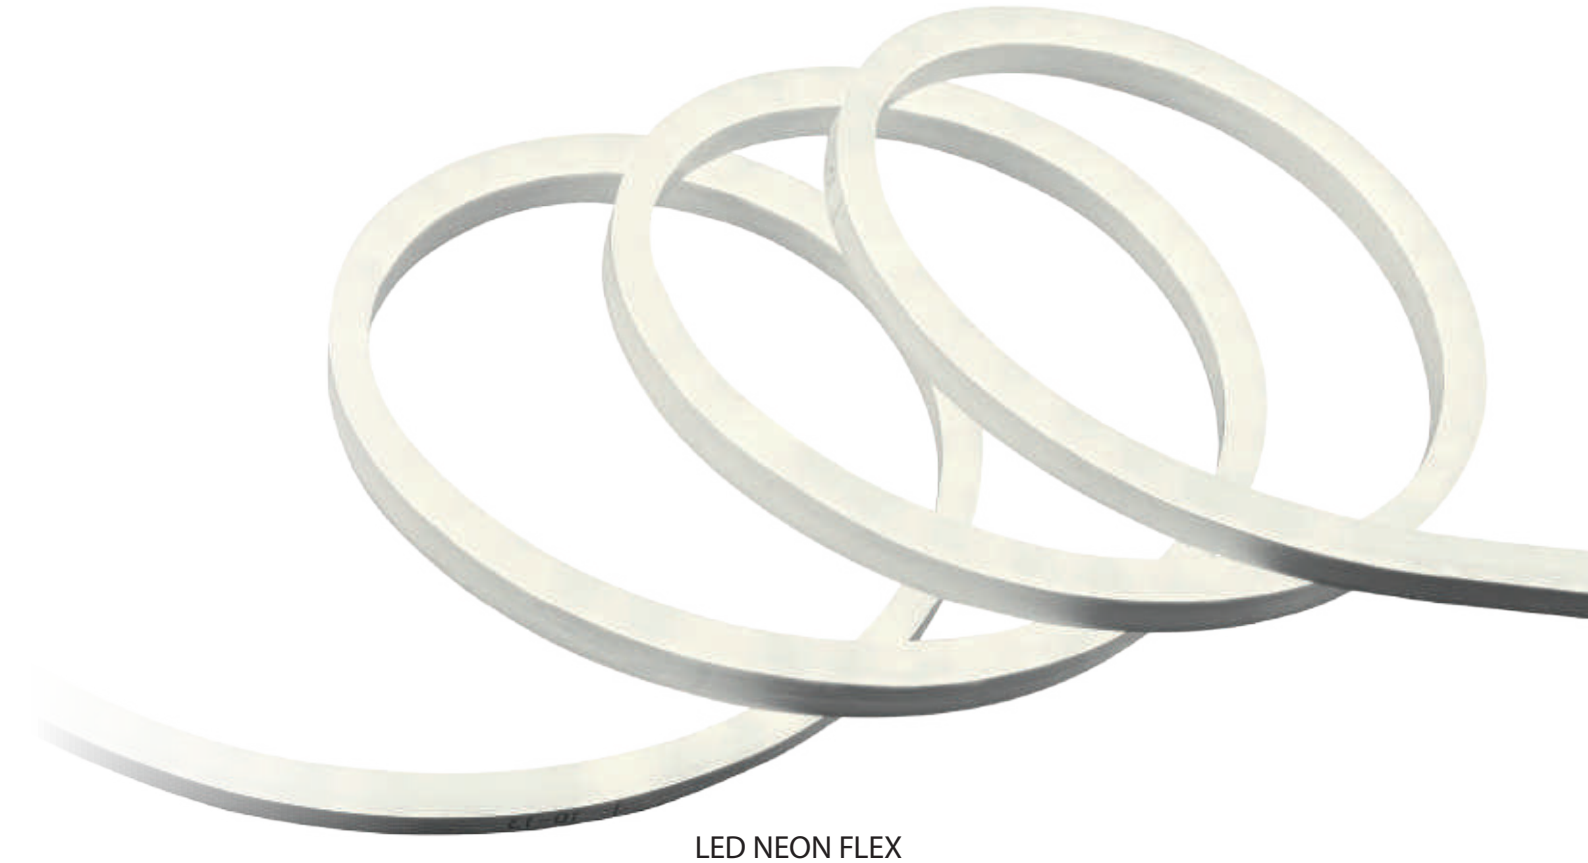

LED NEON FLEX

99LED950
99LED951



LED NEON FLEX

Catalogue number	Product category	Watts / meter	Colour temp. (K)	Colour of light	Protection rating	Packing (m)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED950	C	12W/M	2700-3000	warm white	IP 65	10	10	16	10/500	A++→A
99LED951	C	12W/M	6000-6500	cold white	IP 65	10	10	16	10/500	A++→A
99LED952	C	12W/M	-	pink	IP 65	10	10	16	10/500	A++→A
99LED953	C	12W/M	380-440	violet	IP 65	10	10	16	10/500	A++→A
99LED954	C	12W/M	520-525	green	IP 65	10	10	16	10/500	A++→A
99LED955	C	12W/M	465-470	blue	IP 65	10	10	16	10/500	A++→A
99LED956	C	12W/M	620-630	red	IP 65	10	10	16	10/500	A++→A
99LED957	C	12W/M	587-592	yellow	IP 65	10	10	16	10/500	A++→A
99LED958	C	12W/M	-	RGB	IP 65	10	10	19.5	10/500	A++→A



Luminous efficiency: 18-20 lm/LED, mark cut 1m.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CAPS FOR LED NEON FLEX
99ACC73



POWER CABLE FOR LED RGB NEON FLEX
99ACC77



FIXING BRACKED FOR LED NEON FLEX
99ACC72



POWER CABLE FOR LED NEON FLEX
99ACC76



CONNECTOR FOR RGB COLOR LED NEON FLEX
99ACC75



CONNECTOR FOR SINGLE COLOR LED NEON FLEX
99ACC74

LED

ACCESSORIES FOR LED NEON FLEX

Catalogue number	Product category	Model	Packing/Box (pcs)
99ACC72	C	Fixing bracked for Led Neon Flex	0/500
99ACC73	C	Caps for Led Neon Flex	1/500
99ACC74	C	Connector for single color Led Neon Flex	0/500
99ACC75	C	Connector for RGB color Led Neon Flex	0/500
99ACC76	C	Power cable for Led Neon Flex	0/500
99ACC77	C	Power cable for Led RGB Neon Flex	0/500

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

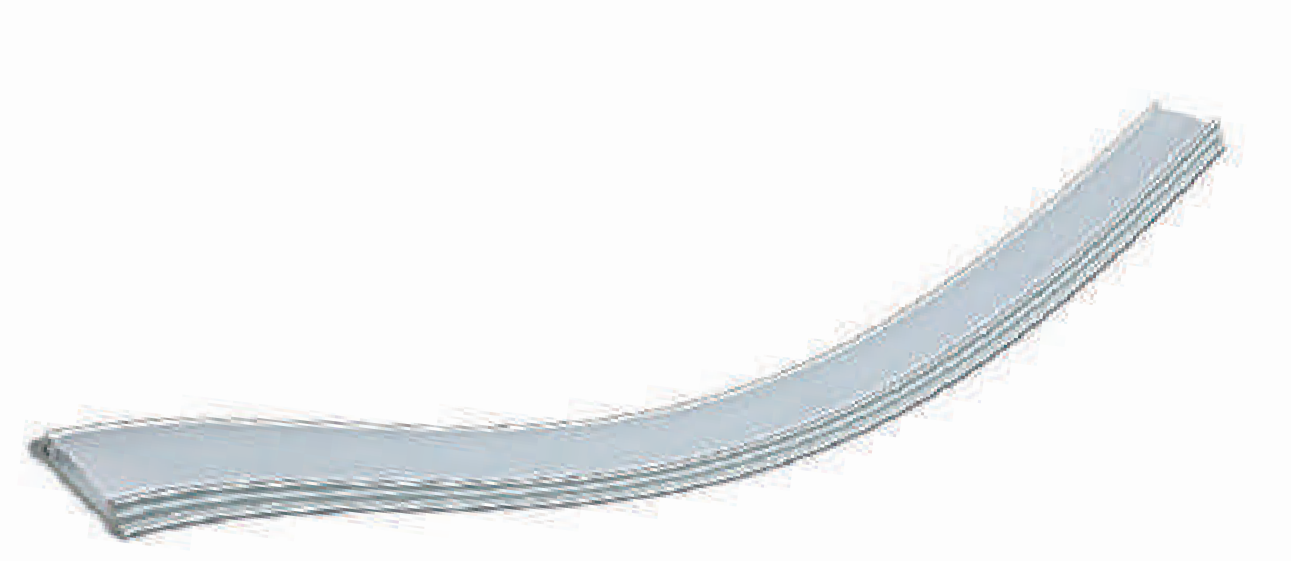

FLEXIBLE ALUMINIUM PROFILE
99ACC07FL

IP20

FLEXIBLE ALUMINIUM PROFILE FOR LED STRIPS & ACCESSORIES

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC07FL	C	ELM6063/1-1000	LED profile	2	13.8	19	5	1/1
99ACC78	C	ELM6063/1-connector	Fixing bracket					1/1
99ACC51	C	Suspension wire	Suspension wire without console					1/1





99ACC51

99ACC78


RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DP61
99ACC61



DP62
99ACC62



DP63
99ACC63



DP64
99ACC64



DP65
99ACC65

IP20

LED PROFILES FOR DRYWALL

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC61	C	DP61	Inside corner aluminum LED profile for recessed mounting in drywal	2	9.7	12.1	10	1/50
99ACC62	C	DP62	Outside corner aluminum LED profile for recessed mounting in drywal	2	9.7	-	10	1/20
99ACC63	C	DP63	Aluminum LED profile for recessed mounting in drywall	2	19.04	27.76	12.2	1/25
99ACC65	C	DP65	Aluminum LED profile for recessed mounting in drywall	2	28.58	36.91	12.2	1/21
99ACC64	C	DP64	Connectors for aluminum LED profiles DP63 and DP65	-	-	-	-	1/21

Frosted PC cover with high light transparency | Aluminium Extrusion 2mm with Acid Sand Oxidation treatment on the surface | No mechanical line



Montage



99ACC61



99ACC62



99ACC63



99ACC65



RoHS CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DP67
99ACC67



DP66
99ACC66



DP70
99ACC70



DP68
99ACC68



DP69
99ACC69



OUTSIDE CLIP
99ACC71



SUSPENSION WIRE
99ACC54

IP20

LED PROFILES

Catalogue number	Product category	Model	Description	Length (m)	Dimension A (mm)	Dimension B (mm)	Dimension C (mm)	Packing/Box (pcs)
99ACC66	C	DP66	Base profile	2	40.1	50	35	1/32
99ACC67	C	DP67	Replaceable profile for mounting on DP66 or DP70	2	19.04	17.74	40	1/132
99ACC68	C	DP68	End cap	-	-	-	-	1/200
99ACC69	C	DP69	Connectors for aluminum LED profiles DP66 and DP70	-	-	-	-	1/50
99ACC70	C	DP70	Fixing bracket for aluminum LED profiles DP67	-	-	-	-	1/25
99ACC71	C	DP71	Outside Clip for suspension wire and LED profiles DP66 and DP70	-	-	-	-	1/50
99ACC54	C		Installation Suspension Wire for LED profile	-	-	-	-	1/1

Frosted PC cover with high light transparency | Aluminium Extrusion 2mm with Acid Sand Oxidation treatment on the surface | No mechanical line



99ACC67



99ACC66





In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ACC01 Silicone clips for LED strip.
99ACC01



ACC02 One colour LED strip connector, 150mm cable
99ACC02



ACC021 CONNECTOR FOR 8mm ONE COLOR LED STRIP, 150mm cable
99ACC021



ACC02 One colour LED strip connector, 150mm cable
99ACC03



ACC05 One colour LED strip connector.
99ACC05



ACC051 CONNECTOR FOR 8mm ONE COLOR LED STRIP.
99ACC051



ACC06 RGB LED strip connector.
99ACC06



Female connector with cable 15cm, white D-5.5
99ACC19



4pin connector with cable 20cm, white
99ACC20



FRONT CAPS for LED strip
SMD3528 IP65
99LED450



FRONT CAPS for LED strip
SMD5050 IP65
99LED452



FRONT CAPS for RGB LED strip
SMD5050 IP65
99LED454



END CAPS for LED strip
SMD3528 IP65
99LED451



END CAPS for LED strip
SMD5050 IP65
99LED453



END CAPS for RGB LED strip
SMD5050 IP65
99LED455

RoHS CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELM718/1
99ACC07
99ACC08



ELM718/2
99ACC11
99ACC12



ELM9012
99ACC14
99ACC15



PVC END CAP
99ACC16



FIXING BRACKET
99ACC17



PVC END CAP
99ACC13



PVC END CAP
99ACC09



FIXING BRACKET
99ACC10

IP20

PROFILES AND ACCESSOIRES FOR LED STRIP

Catalogue number	Product category	Model		Width (mm)	Height (mm)	Packing/Box (pcs)
99ACC07	C	ELM718/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	15	6	1/50
99ACC08	C	ELM718/1-2000	Aluminium profile for LED strip with matt PVC cover-2m	15	6	1/50
99ACC09	C	ELM718/1-end cap	PVC end cap	-	-	1/400
99ACC10	C	ELM718/1-connector	Fixing bracket	-	-	1/1000
99ACC11	C	ELM718/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	15	6	1/50
99ACC12	C	ELM718/2-2000	Aluminium profile for LED strip with matt PVC cover-2m	15	6	1/50
99ACC13	C	ELM718/2-end cap	PVC end cap	-	-	1/1000
99ACC14	C	ELM9012/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	16	16	1/50
99ACC15	C	ELM9012/2-2000	Aluminium profile for LED strip with matt PVC cover-2m	16	16	1/50
99ACC16	C	ELM9012/2-end cap	PVC end cap	-	-	1/1000
99ACC17	C	ELM9012/1-connector	Fixing bracket	-	-	1/1500

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

ELM6220/1
99ACC23



ELM6220/2
99ACC26



ELM950/1
99ACC28



ELM950/2
99ACC31





PVC END CAP
99ACC24
99ACC27



PVC END CAP
99ACC32
99ACC29



FIXING BRACKET
99ACC30



FIXING BRACKET
99ACC25

IP20

PROFILES AND ACCESSOIRES FOR LED STRIP

Catalogue number	Product category	Model		Width (mm)	Height (mm)	Packing/Box (pcs)
99ACC23	C	ELM6220/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	23,8	6	1/50
99ACC24	C	ELM6220/1-end cap	PVC end cap	-	-	1/500
99ACC25	C	ELM6220/1-connector	Fixing bracket	-	-	400
99ACC26	C	ELM6220/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	23,8	6	1/50
99ACC27	C	ELM6220/2-end cap	PVC end cap	-	-	1/500
99ACC31	C	ELM950/2-1000	Aluminium profile for LED strip with matt PVC cover-1m	49,2	6	1/1
99ACC32	C	ELM950/2-end cap	PVC end cap	-	-	1/500
99ACC28	C	ELM950/1-1000	Aluminium profile for LED strip with matt PVC cover-1m	56,6	6	1/20
99ACC29	C	ELM950/1-end cap	PVC end cap	-	-	1/500
99ACC30	C	ELM950/1-connector	Fixing bracket	-	-	1/150

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



24 KEY
IR CONTROLLER
99RGBCR3



4 KEY
RF CONTROLLER
99RGBCONTROL



24 KEY
IR CONTROLLER
99RGBCONTROL1



RGBW 4 WAYS
CONTROLER
99RGB4W

IP20

CONTROLLERS FOR RGB/RGBW STRIPS

Catalogue number	Product category	Model	Current (A)	Voltage (V)	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)
99RGBCONTROL	C	RGB controller 7 stationary colours and 4 dynamic modes with regulation	4A (each channel)	12-24V DC	128	64	25	1/100
99RGB4W	C	RGBW 4 ways controler with 20 automatical changing modes to choose	4A (each channel)	12-24V DC	110	52	20	1/50
99RGBCR3	C	RGB controller 16 stationary colour and 4 dynamic modes with regulation	4A (each channel)	12-24V DC	128	64	25	1/50
99RGBCONTROL1	C	RGB controller 16 stationary colour and 4 dynamic modes with regulation	2A (each channel)	12V DC	60	35	25	1/100

IP 20 RoHS EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



Wireless Mini Single color controller
99LEDDIMMER1



Wireless Mini RGB controller
99LEDDIMMER2



RGB AMPLIFIER
99RGBAMPLIFIER



44 KEY IR CONTROLLER
99RGBCONTROL2

IP20

POWER SUPPLIES AND CONTROLS

Catalogue number	Product category	Model	Current (A)	Voltage (V)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99RGBCONTROL2	C	RGB controller 20 stationary colour and 6 dynamic modes with regulation and RGB mixer mode.	2A (each channel)	12V DC	60	35	25	1/50
99RGBAMPLIFIER	C	RGB AMPLIFIER	4A (each channel)	12-24V DC	107	65	25	1/100
99LEDDIMMER1	C	Wireless Mini Single color controller	5A	5-24V DC	40	12	5	1/250
99LEDDIMMER2	C	Wireless Mini RGB controller	3x2A	5-24V DC	40	12	5	1/250

99LEDDIMMER1 - **10-level** Dimmer; **Auto Save Function; Output power:** 5V<30W; 12V<72W

99LEDDIMMER2 - **Shortcuts:** Directly switch to 100%, 80%, 60%, 40%, 20% or 10% of full brightness; **Output power:** 5V<60W; 12V<144W

IP 20 RoHS EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



48V MW VOLTAGE DRIVERS FOR MAGNET TRACK LIGHT

99SETDCMW100/IP20
99SETDCMW200/IP20

IP20 **48V DC**

48V MW VOLTAGE DRIVERS FOR MAGNET TRACK LIGHT

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDCMW100/IP20	C	SETDC100	100	IP20	230V AC / 48V DC	159	97	38	1
99SETDCMW200/IP20	C	SETDC200	200	IP20	230V AC / 48V DC	215	115	50	1

RoHS COMPLIANT EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



48V CONSTANT VOLTAGE DRIVERS
FOR MAGNET TRACK LIGHT
99SETDC5048IP20



48V CONSTANT VOLTAGE DRIVERS
FOR MAGNET TRACK LIGHT
99SETDC10048IP20



48V CONSTANT VOLTAGE DRIVERS
FOR MAGNET TRACK LIGHT
99SETDC15048IP20



48V CONSTANT VOLTAGE DRIVERS
FOR MAGNET TRACK LIGHT
99SETDC20048IP20

IP20 **48V DC**

48V CONSTANT VOLTAGE DRIVERS FOR MAGNET TRACK LIGHT

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDC5048IP20	C	SETDC5048	50	IP20	176-240V AC/48V DC	120	40	30	1/100
99SETDC10048IP20	C	SETDC10048	100	IP20	176-240V AC/48V DC	160	40	32	1/60
99SETDC15048IP20	C	SETDC15048	150	IP20	176-240V AC/48V DC	188	45	35	1/50
99SETDC20048IP20	C	SETDC25048	200	IP20	176-240V AC/48V DC	200	60	40	1/36

RoHS COMPLIANT EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STELLAR SET12DC
CONSTANT VOLTAGE DRIVERS
9XSETDC60IP20



STELLAR SET12DC
CONSTANT VOLTAGE DRIVERS
9XSETDC120IP20
9XSETDC150IP20
9XSETDC250IP20



STELLAR SET12DC
CONSTANT VOLTAGE DRIVERS
9XSETDC360IP20

IP20 **12V DC**

STELLAR SLIM XSET12DC CONSTANT STELLAR VOLTAGE DRIVERS FOR LED

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
9XSETDC60IP20	C	XSETDC60	60	IP20	176/264V AC - 12V DC	160	40	33	1/100
9XSETDC120IP20	C	XSETDC120	120	IP20	176/264V AC - 12V DC	188	47	36	1/60
9XSETDC150IP20	C	XSETDC150	150	IP20	176/264V AC - 12V DC	199	58	39	1/50
9XSETDC250IP20	C	XSETDC250	250	IP20	176/264V AC - 12V DC	223	68	40	1/36
9XSETDC360IP20	C	XSETDC360	1360	IP20	176/264V AC - 12V DC	223	68	40	1/36

RoHS COMPLIANT EMC CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SETDC CONSTANT VOLTAGE DRIVERS
99SETDC12PVC
99SETDC24PVC



SETDC CONSTANT VOLTAGE DRIVERS
99SETDC15IP20
99SETDC36IP20
99SETDC60IP20
99SETDC100IP20
99SETDC150IP20
99SETDC200IP20
99SETDC250IP20
99SETDC360IP20



SETDC CONSTANT VOLTAGE DRIVERS
99SETDC30IP67
99SETDC60IP67
99SETDC100IP67
99SETDC150IP67
99SETDC200IP67

IP20 **IP67** **12V DC**

SETDC CONSTANT ELMARK VOLTAGE DRIVERS FOR LED

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDC12PVC	C	SETDC12PVC	12	IP20	230V AC / 12V DC	90	48	34	1/50
99SETDC24PVC	C	SETDC24PVC	24	IP20	230V AC / 12V DC	115	48	34	1/100
99SETDC15IP20	C	SETDC15	15	IP20	230V AC / 12V DC	70	39	31	1/250
99SETDC36IP20	C	SETDC36	36	IP20	230V AC / 12V DC	85	58	38	1/100
99SETDC60IP20	C	SETDC60	60	IP20	230V AC / 12V DC	110	78	38	1/50
99SETDC100IP20	C	SEDC100	100	IP20	230V AC / 12V DC	159	98	38	1/24
99SETDC150IP20	C	SETDC150	150	IP20	230V AC / 12V DC	199	98	38	1/28
99SETDC200IP20	C	SETDC200	200	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC250IP20	C	SETDC250	250	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC360IP20	C	SETDC360	360	IP20	230V AC / 12V DC	200	110	50	1/24
99SETDC30IP67	C	SETDC30I	30	IP67	230V AC / 12V DC	200	30	20	1/60
99SETDC60IP67	C	SETDC60I	60	IP67	230V AC / 12V DC	178	68	34	1/20
99SETDC100IP67	C	SETDC100I	100	IP67	230V AC / 12V DC	250	72	45	1/10
99SETDC150IP67	C	SETDC150I	150	IP67	230V AC / 12V DC	250	128	60	1/10
99SETDC200IP67	C	SETDC200I	200	IP67	230V AC / 12V DC	200	120	53	1/5

RoHS COMPLIANT EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STELLAR SET24DC
CONSTANT VOLTAGE DRIVERS
99XSETDC6024IP20



STELLAR SET24DC
CONSTANT VOLTAGE DRIVERS
99XSETDC10024IP20
99XSETDC15024IP20
99XSETDC25024IP20



STELLAR SET24DC
CONSTANT VOLTAGE DRIVERS
99XSETDC36024IP20

IP20 **24V DC**

STELLAR SLIM XSETDC 24V CONSTANT VOLTAGE DRIVERS IP20

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99XSETDC6024IP20	C	XSET24DC60	60	20	AC180-240V - 24V DC	160	40	33	1/100
99XSETDC10024IP20	C	XSET24DC100	100	20	AC180-240V - 24V DC	188	47	36	1/60
99XSETDC15024IP20	C	XSET24DC150	150	20	AC180-240V - 24V DC	200	58	39	1/50
99XSETDC25024IP20	C	XSET24DC250	250	20	176/264V AC - 24V DC	223	68	40	1/36
99XSETDC36024IP20	C	XSET24DC360	360	20	176/264V AC - 24V DC	223	68	40	1/36

RoHS COMPLIANT EMC CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SET24DC CONSTANT VOLTAGE DRIVERS IP20

99SETDC2524IP20
99SETDC6024IP20
99SETDC10024IP20
99SETDC15024IP20



SET24DC CONSTANT VOLTAGE DRIVERS IP66

99SETDC6024IP66
99SETDC10024IP66
99SETDC15024IP66

IP20 **IP66** **24V DC**

SETDC 24V CONSTANT VOLTAGE DRIVERS IP20/66

Catalogue number	Product category	Model	Watt (W)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99SETDC2524IP20	C	SET24DC25	25	20	AC180-240V - 24V DC	85	58	38	1/100
99SETDC6024IP20	C	SET24DC60	60	20	AC180-240V - 24V DC	104	82	30	1/90
99SETDC10024IP20	C	SET24DC100	100	20	AC180-240V - 24V DC	137	97	30	1/75
99SETDC15024IP20	C	SET24DC150	150	20	AC180-240V - 24V DC	164	97	30	1/45
99SETDC6024IP66	C	SET24DC60	60	66	AC100-240V - 24V DC	180	56	34	1/20
99SETDC10024IP66	C	SET24DC100	100	66	AC100-240V - 24V DC	210	72	42	1/20
99SETDC15024IP66	C	SET24DC150	150	66	AC100-240V - 24V DC	210	112	56	1/8

RoHS COMPLIANT EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SETDC 12V / 24V CONSTANT VOLTAGE DIMMABLE DRIVERS IP20

IP20 **12V DC** DIMMABLE

UNTIL SUPPLY LAST

SETDC CONSTANT VOLTAGE DIMMABLE DRIVERS

Catalogue number	Product category	Model	Watt (W)	Output Voltage (V DC)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)
99SETDC6012IP20D	F	SET12DC60D	60	12	20	AC180-240V - 12V DC	128	98	35	1/30
99SETDC10012IP20D	F	SET12DC100D	100	12	20	AC180-240V - 12V DC	160	98	38	1/25
99SETDC15012IP20D	F	SET12DC150D	150	12	20	AC180-240V - 12V DC	198	110	50	1/20

IP20 **24V DC** DIMMABLE

UNTIL SUPPLY LAST

SETDC CONSTANT VOLTAGE DIMMABLE DRIVERS

Catalogue number	Product category	Model	Watt (W)	Output Voltage (V DC)	IP code	Voltage Uin / Uout	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)
99SETDC6024IP20D	F	SET24DC60D	60	24	20	AC180-240V - 24V DC	128	98	35	1/30
99SETDC10024IP20D	F	SET24DC100D	100	24	20	AC180-240V - 24V DC	160	98	38	1/25
99SETDC15024IP20D	F	SET24DC150D	150	24	20	AC180-240V - 24V DC	198	110	50	1/20

RoHS EMC CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELMARK POWER SUPPLIES FOR LED PANELS



SET 12V/24V
CONSTANT VOLTAGE DRIVERS IP67

IP20 **IP67** **12V DC** **24V DC**

ELMARK POWER SUPPLIES FOR LED PANELS / DRIVERS

Catalogue number	Product category	Dimmable	Watt (W)	Input voltage (V)	Output voltage (V)	Output current (mA)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DRIVERPN6	C	No	6W	220-240V	12-25V DC	300mA	68	33	22	1/200
99DRIVERPN12	C	No	12W	220-240V	24-50V DC	300mA	89	38	22	1/200
99DRIVERPN18	C	No	18W	220-240V	36-75V DC	300mA	89	38	22	1/200
99DRIVERPN24	C	No	24W	220-240V	50-84V DC	300mA	89	38	22	1/200
99DRIVERPN40	C	No	40W	220-240V	30-42V DC	1000mA	142	42	30	1/20
99SETDC1224TIP67	F	No	24W*	AC180-240V	12V DC		266	20	22	1/50
99SETDC1248TIP67	C	No	48W	AC180-240V	12V DC		285	20	22	1/50
99SETDC2448TIP67	C	No	48W	AC180-240V	24V DC		285	20	22	1/50

* UNTIL SUPPLY LAST

~230V 50/60 Hz EMC CE 2+1 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MAGNETIC BALLAST FOR COMPACT FLUORESCENT LAMPS (TC-D)
990153008



ELECTRONIC BALLAST FOR FLUORESCENT LAMPS



MAGNETIC BALLAST FOR FLUORESCENT LAMPS - TYPE T8
990153818

IP20

UNTIL SUPPLY LAST

POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Current (A)	cos φ	Uinput	Uoutput	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
990153818	F	BALLAST 18W	1X18W	0,370	0.32	230VAC	230VAC	155	41	32	1/50
990153008	F	BALLAST	18	0,220	0.48	230VAC	230VAC	105	41	26	1/50
99EB0218	F	EB218	2X18	T8	-	-	-	274	27	27	1/50
99EB0114	F	EB114	1X14	T5	-	-	-	274	27	27	1/50
99EB0214	F	EB214	2X14	T5	-	-	-	250	25	25	1/50
99EB0128	F	EB128	1X28	T5	-	-	-	274	27	27	1/50
99EB0228	F	EB228	2X28	T5	-	-	-	250	25	25	1/50
99EB0135	F	EB135	1X35	T5	-	-	-	320	30	27	1/50

~230V 50Hz EEI=B2 CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



POWER SUPPLY
for LED bulbs 12V

99DRIVER12
99DRIVER18
99DRIVER24
99DRIVER36

IP20

POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Current (A)	Uinput	Uoutput	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DRIVER12	C	SETDC12	12	1	230VAC	12V DC	80	32	22	1/250
99DRIVER18	C	SETDC18	18	1,5	230VAC	12V DC	95	45	28	1/100
99DRIVER24	C	SETDC24	24	2	230VAC	12V DC	115	45	28	1/100
99DRIVER36	C	SETDC36	36	2	230VAC	12V DC	140	45	28	1/100

~230V 50Hz EEI=B2 CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY



ELECTRONIC BALLAST FOR
FLUORESCENT LAMPS - TYPE PLC4P
99EB0218PL



MAGNETIC BALLAST STELLAR
FOR FL LAMP T8
990136W



MAGNETIC BALLAST STELLAR
FOR PLC2P LAMP
9913142
9913143

IP20

UNTIL SUPPLY LAST

POWER SUPPLIES

Catalogue number	Product category	Model	Watt (W)	Lamp type	Voltage	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
9913142	F	BALLAST	18	PLC2P	230V AC	155	42	28	1/1
9913143	F	BALLAST	36	PLC2P	230V AC	155	42	28	1/1
99EB0218PL	F	EB218PL	2X18W	PLC4P	230V AC	103	67	30	1/100
990136W	F	BALLAST	36	EST 3F-T8	230V AC	160	43	30	1/1

~230V 50Hz EEI=B2 CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY



LAMP HOLDER
99292



LAMP HOLDER E14
99296



LAMP HOLDER E40
99298



LAMP HOLDER E27
99294



LAMP HOLDER E27 with support
99295



LAMP HOLDER
99293

IP20

LAMP HOLDERS

Catalogue number	Product category	Lamp	Length of the cable:	Material	Diameter (mm)	Height (mm)	Length (mm)	Packing/Box (pcs)
99292	C	GU 10	140 mm	ceramic	27	16	-	1/1000
99293	C	G 4 / G 5.3 / GY 6.35	90 mm	ceramic	16	10	-	1/2000
99296	C	E 14	-	ceramic	33	20	44	1/400
99298	C	E 40	-	ceramic	56	23	72	1/100
99294	C	E 27	-	ceramic	42	-	48	1/400
99295	C	E 27	-	ceramic	-	-	48	1/400

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LAMP BASE
99199



LAMP BASE
99200



TWIN SOCKET LAMP HOLDER
99198



LAMP HOLDER ADAPTORS TO E27
192168



LAMP HOLDER ADAPTORS TO E27
192169

IP20

LAMP BASES / TWIN SOCKET LAMP HOLDER / ADAPTORS

Catalogue number	Product category	Type	Lamp	Rated current	Material	Diameter (mm)	Length (mm)	Section of power supply conductors	Packing/Box (pcs)
99199	C	straight	E27	4A	PET	63	40	0.5-2.5mm²	1/250
99200	C	oblique	E27	4A	PET	78	38	0.5-2.5mm²	1/250
99198	C	E27-2xE27	E27	4A	Iron + PBT	76	74	0.5-2.5mm²	1/300
192168	C	E40/E27	E27	4A	iron/plastic	78	45	0.5-2.5mm²	15/500
192169	C	G24/E27	E27	4A	PBT+ copper	78	50	0.5-2.5mm²	25/300

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HANGING LAMP HOLDER
99194



HANGING LAMP HOLDER
99195



HANGING LAMP HOLDER
99196



HANGING LAMP HOLDER
99197

IP20

HANGING LAMP HOLDERS

Catalogue number	Product category	Type	Lamp	Material	Diameter (mm)	Length (mm)	Section of power supply conductors	Packing/Box (pcs)
99194	C	screwless	E14	plastic	44	56,3	0.5-2.5mm^2	1/500
99195	C	screwless	E27	plastic	55	62,5	0.5-2.5mm^2	1/200
99196	C	screw	E27	bakelite	38.5	55	0.5-2.5mm^2	1/250
99197	C	screw	E27	bakelite	38.5	55	0.5-2.5mm^2	1/200

RoHS COMPLIANT CE

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABLE CONNECTOR IP68
31072



TERMINAL BOX IP44
31071



TERMINAL BOX IP65
31070

IP44 **IP65** **IP68**

WATERPROOF TERMINAL CONNECTORS

Catalogue number	Product category	Type	Material	Voltage (V)	Rated current (A)	Wiring Capacity (mm^2)	Packing/Box (pcs)
31071	C	Terminal box IP44	Polycarbonate	450	6	0.5-4.0	1/500
31070	C	Terminal box IP65	Polypropylene	450	10	0.5-2.5	1/500
31072	C	Cable connector IP68	Anti UV nylon	250	≤30A	0.5-2.5	1/500

RoHS COMPLIANT CE



ST42
99DS104



ST41
99DS103



ST02A
99DS100



ST40
99DS402



ST 11
99DS403

IP40

INFRARED MOTION SENSORS

Catalogue number	Product category	Type	Detection range	Rated load	Detection distance	Colour body	Installation height	Length (mm)	Diameter 1 (mm)	Diameter 2 (mm)	Packing/Box (pcs)
99DS402	C	ST40	360°	800W (110-130V/AC); 1200W (220-240V/AC)	max. 6m	white	-	-	-	-	1/100
99DS403	C	ST11	180°	500W (110-130V/AC) 800W (220-240V/AC)	max. 12m	white	-	-	-	-	1/50
99DS100	C	ST02A	160°	ESL/LED - 100W, IL - 500W	max. 9m	white	1 - 1.8m	80	48.5	24.7	1/100
99DS104	C	ST42	360°	ESL/LED - 300W, IL - 1200W	max.6m	white	2.2 - 4m	75,6	76	100	1/50
99DS103	C	ST41	360°	ESL/LED - 300W, IL - 1200W	max.6m	white	2.2 - 4m	75,6	61,5	76	1/50

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable) | **Ambient light:** <3 - 2000lux (adjustable) | **Detection motion speed:** 0.6 - 1.5m/s

~230V 50/60 Hz F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TOUCHING SENSOR ST125
99DS115



MOVING HAND SENSOR
99DS122



MICROWAVE SENSOR ST701F
99DS400

IP40

MICROWAVE / INFRARED / TOUCHING

Catalogue number	Product category	Detection range	Rated load	Detection distance	Time-Delay	Ambient Light	Detection motion speed	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/ Box (pcs)
99DS115	C	touch	ESL/LED - 200W, IL - 500W	-	-	-	-	89.7	40.2	16.8	-	1/100
99DS400	C	180°/360°	ESL/LED - 200W, IL - 500W	max. 15m	10s to 12min	<3 - 2000LUX		58	40.5	25.5	-	1/100
99DS122	C	5-6cm	ELS/LED - 500W	5-6cm	-	-	-	78.2	35.5	20.6	-	1/100

~230V 50/60 Hz F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INFRARED MOTION SENSOR ST24
99DS109



INFRARED MOTION SENSOR ST07
99DS101
99DS102



INFRARED MOTION SENSOR ST05CA
99DS110

IP40

INFRARED

Catalogue number	Product category	Detection range	Rated load	Detection distance	Time-Delay	Ambient Light	Detection motion speed	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/ Box (pcs)
99DS109	C	120°/360°	ESL/LED - 200W, IL - 800W	max. 6m	5s, 30s, 1,3,5,8min	10 - 2000LUX	0.6-1.5m/s	55.8	34	24.6	-	1/100
99DS101	C	360°	ESL/LED - 300W, IL - 1200W	max. 6m	10s to 7min	<3 - 2000LUX	0.6-1.5m/s	-	-	58	115	1/50
99DS102	C	360°	ESL/LED - 300W, IL - 1200W	max. 6m	10s to 7min	<3 - 2000LUX	0.6-1.5m/s	-	-	58	115	1/50
99DS110	C	360°	ESL/LED - 300W, IL - 800W	max. 6m	10s to 15min	<3 - 2000LUX	0.6-1.5m/s	-	-	24.9	102	1/50

~230V 50/60 Hz F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



INFRARED MOTION SENSOR ST10A
99DS107



INFRARED MOTION SENSOR ST15
99DS108

IP40

INFRARED MOTION SENSOR ST10A / ST15

Catalogue number	Product category	Type	Detection range	Rated load	Detection distance	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DS107	C	ST10A	180°	ESL - 300W, IL - 1200W	5-12m	white	87,4	120	144	1/30
99DS108	C	ST15	180°	ESL/LED - 300W, IL - 1200W	max.12m	white	80	117,2	31,5	1/50

Time-Delay: 10sec ± 3sec to 7min ± 2min (adjustable) | **Ambient light:** <3 - 2000lux (adjustable) | **Detection motion speed:** 0.6 - 1.5m/s | **Installation height:** 2.2 - 4m

~230V 50/60 Hz F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LIGHT-CONTROL SENSOR ST303
99DS300



LIGHT-CONTROL SENSOR ST300
99DS404



LIGHT-CONTROL SENSOR ST302
99DS301



LIGHT-CONTROL SENSORS ST306
99DS405



LIGHT-CONTROL SENSOR ST308
99DS302

IP44 **IP65**

LIGHT-CONTROL SENSORS

Catalogue number	Product category	Type	Rated current	Colour body	Ambient light	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
99DS404	C	ST300	10A	white	3-500LUX(adjustable) IP44	35	70	108,6	1/50
99DS300	C	ST303	25A	white	<5 - 50lux (adjustable) IP44	70,5	78,3	-	1/50
99DS301	C	ST302	10A	white	<5 - 50lux (adjustable) IP44	76,7	63	-	1/100
99DS405	C	ST306	6A	white	<5 - 15lux (adjustable) IP44	100	200	-	1/100
99DS302	C	ST308	20A	white	<2 - 100lux (adjustable) IP65	35	66	90	1/100

99DS404 - Timer Built-in from 1-9 hours

~230V 50/60 Hz F CE 3+0 standard +extended 3 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FURNITURE & DESIGN



PEPPER
97PEPPER27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP PEPPER

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97PEPPER27/NE	F	LED lamp	3000	Neutral	Warm White	A+ A++→A
97PEPPER64/NE	F	LED lamp	5500	Neutral	Cold White	A+ A++→A
97PEPPERRGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type
At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 650x710

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



OSLO
97OSLO27/NE

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP OSLO

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97OSLO27/NE	F	LED lamp	3000	Neutral	Warm White	A+ A++>A
97OSLO64/NE	F	LED lamp	5500	Neutral	Cold White	A+ A++>A
97OSLORGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type
At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 600x430

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







SPHERE

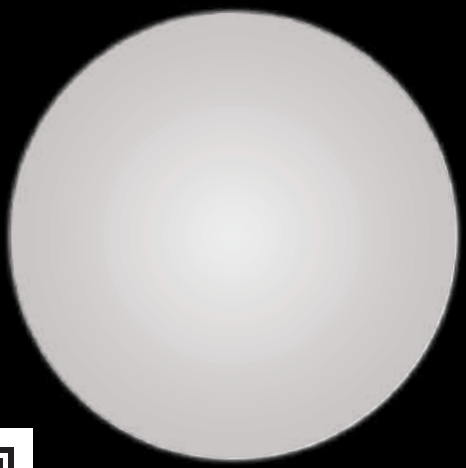

BALL

LED IP54 DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP BALL

Catalogue number TYPE 30	Product category	Catalogue number TYPE 60	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97BALL30RGB	F	**97BALL60RGB**	**LED LAMP**	RGBW	Neutral	RGBW	A+ A++→A

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: LLDPE | All glowing products are equipped with remote control and charger German type | Light source: Rechargeable LED bases | Dimensions TYPE30: DxH(mm): 300x300; TYPE60: DxH (mm): 600x600

RoHS COMPLIANT CE 2+0 standard +extended 2 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP SPHERE

Catalogue number TYPE 30	Product category	Catalogue number TYPE 70	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97SPHERE3027/N	F	**97SPHERE7027/N**	**LED LAMP**	3000	Neutral	Warm White	A+ A++→A
97SPHERE3064/N	F	**97SPHERE7064/N**	**LED LAMP**	5500	Neutral	Cold White	A+ A++→A
97SPHERE30RGB/N	F	**97SPHERE70RGB/N**	**LED LAMP**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions TYPE30: DxH(mm): 300x265; TYPE70: DxH (mm): 700x680

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





JOUR
97JOUR27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP JOUR

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97JOUR27/NE	F	LED lamp	3000	Neutral	Warm White	A+ A++→A
97JOUR64/NE	F	LED lamp	5500	Neutral	Cold White	A+ A++→A
97JOURRGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 300X300X350

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



TOWER
97TOWER27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP TOWER

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97TOWER27/NE	F	LED lamp	3000	Neutral	Warm White	A+ A++→A
97TOWER64/NE	F	LED lamp	5500	Neutral	Cold White	A+ A++→A
97TOWERRGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 330x1770

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







FELICE
97FELICERGB/NE

LED IP65 MADE IN ITALY DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE LAMP FELICE

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97FELICERGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 450x1540

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



SHANGHAI
97SHANGHAI27/NE

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP SHANGHAI

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SHANGHAI27/NE	F	LED lamp	3000	Neutral	Warm White	A+ A++>A
97SHANGHAI64/NE	F	LED lamp	5500	Neutral	Cold White	A+ A++>A
97SHANGHAIRGB/NE	F	LED lamp	RGBW	Neutral	RGBW	A+ A++>A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 430x230

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



BOCCA
97BOCCARGB/NE

LED IP65 MADE IN ITALY DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE WALL LAMP BOCCA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BOCCARGB/NE	F	LED wall lamp	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 400x85x400

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ICE ROCK
97ICEROCK27/NE

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LAMP/CONTAINER ICE ROCK

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97ICEROCK27/NE	F	LED lamp/ container	3000	Neutral	Warm White	A+ A++→A
97ICEROCK64/NE	F	LED lamp/ container	5500	Neutral	Cold White	A+ A++→A
97ICEROCKRGB/NE	F	LED lamp/ container	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH: (mm): 580x430x500

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.


GOSSET
BELLAVISTA
GOSSET





STAIRS
97STAIRS27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE BOTTLES DISPLAY UNIT STAIRS

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97STAIRS27/NE	F	LED bottles display unit	3000	Neutral	Warm White	A+ A++→A
97STAIRS64/NE	F	LED bottles display unit	5500	Neutral	Cold White	A+ A++→A
97STAIRSRGB/NE	F	LED bottles display unit	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 600X340X340

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



MALLORCA WORKSTATION
CORNER
97MALLORCAC27/N



MALLORCA WORKSTATION

97MALLORCA27/N

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE BAR MALLORCA

Catalogue number WORKSTATION	Product category	Catalogue number CORNER	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97MALLORCA27/N	F	**97MALLORCAC27/N**	3000	Neutral	Warm White	A+ A++→A
97MALLORCA64/N	F	**97MALLORCAC64/N**	5500	Neutral	Cold White	A+ A++→A
97MALLORCARGB/N	F	**97MALLORCACRGB/N**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant

Light source: Rechargeable LED bases

Dimensions WORKSTATION: LxWxH (mm): 1700x920x1100; CORNER WORKSTATION: LxWxH (mm): 1810x800x1100





RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

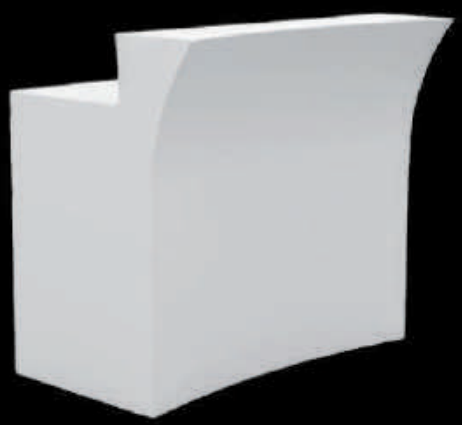

BALI
97BALIRGB/NE

LED IP65 MADE IN ITALY DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE BAR BALI

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BALIRGB/NE	F	LED bar	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 1200x1100x800

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.


Clementine





LAGOS
97LAGOS/BI

IP65 MADE IN ITALY

UNTIL SUPPLY LAST

LAGOS

Catalogue number BAR STOOL - Without Light	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in
97LAGOS/BI	F	Stool	Without	White	Not illuminated
97LAGOS/70	F	Stool	Without	Cherry	Not illuminated
97LAGOS/78	F	Stool	Without	Turtle-dove	Not illuminated
97LAGOS/84	F	Stool	Without	Anise	Not illuminated
97LAGOS/89	F	Stool	Without	Turquoise	Not illuminated

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Dimensions: DxWxH (mm): 400x470x750

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



MALAGA
97MALAGA27/NE

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE TABLE MALAGA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97MALAGA27/NE	F	LED table	3000	Neutral	Warm White	A+ A++⇨A
97MALAGA64/NE	F	LED table	5500	Neutral	Cold White	A+ A++⇨A
97MALAGARGB/NE	F	LED table	RGBW	Neutral	RGBW	A+ A++⇨A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type
At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 670x1100 | PMMA included

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.




FAIRTRADE
CAFÉ



BERMUDA
97BERMUDARGB/NE

LED IP65 MADE IN ITALY DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE TABLE BERMUDA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97BERMUDARGB/NE	F	LED table	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type
At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 800x740 | PMMA included

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



IBIZA

97IBIZARGB/NE

LED | IP65 | MADE IN ITALY | DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE TABLE IBIZA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97IBIZARGB/NE	F	LED table	RGBW	Neutral	RGBW	A+ A+→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 600x1140 | PMMA included

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





JEWEL 60 IP65
97JEWEL27/NE



KUBO IP54
97KUBORGB/N

LED IP54 IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE TABLES JEWEL & KUBO*

Catalogue number TYPE JEWEL60	Product category	Catalogue number TYPE KUBO	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97JEWEL27/NE	F		LED table	3000	Neutral	Warm White	A+ A++⇒A
97JEWEL64/NE	F		LED table	5500	Neutral	Cold White	A+ A++⇒A
97JEWELRGB/NE	F	**97KUBORGB/N**	LED table	RGBW	Neutral	RGBW	A+ A++⇒A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: JEWEL: Resin KUBO: LLDPE | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases
Dimensions LxWxH (mm): KUBO: 400x400x380; JEWEL60: 600x600x600

* Year Total Warranty: 2+0

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







VARNA
97VARNARGB/NE

LED IP65 MADE IN ITALY DIMMABLE

UNTIL SUPPLY LAST

RECHARGEABLE TABLE VARNA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97VARNARGB/NE	F	LED Table	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH (mm): 600x740

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



BORNEO
97BORNEO/BI

IP65 MADE IN ITALY

UNTIL SUPPLY LAST

BORNEO

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in
97BORNEO/BI	F	Table	Without	White	Not illuminated
97BORNEO/70	F	Table	Without	Cherry	Not illuminated
97BORNEO/78	F	Table	Without	Turtle-dove	Not illuminated
97BORNEO/84	F	Table	Without	Anise	Not illuminated
97BORNEO/89	F	Table	Without	Turquoise	Not illuminated

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Dimensions: LxWxH (mm): 400x85x400

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







SALERNO
97SALERNOS27/NE



SALERNO
97SALERNO27/NE

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE SOFA & ARMCHAIR SALERNO

Catalogue number SOFA	Product category	Catalogue number ARMCHAIR	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SALERNOS27/NE	F	**97SALERNO27/NE**	3000	Neutral	Warm White	A+ A++→A
97SALERNOS64/NE	F	**97SALERNO64/NE**	5500	Neutral	Cold White	A+ A++→A
97SALERNOSRGB/NE	F	**97SALERNORGB/NE**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 1590x830x800

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LISBOA
97LISBOA27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE LED ARMCHAIR LISBOA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97LISBOA27/NE	F	LED Armchair	3000	Neutral	Warm White	A+ A++→A
97LISBOA64/NE	F	LED Armchair	5500	Neutral	Cold White	A+ A++→A
97LISBOARGB/NE	F	LED Armchair	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: LxWxH (mm): 740X700X800

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







CANCUN
97CANCUN27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE PYLON CANCUN

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97CANCUN27/NE	F	LED pylon	3000	Neutral	Warm White	A+ A++→A
97CANCUN64/NE	F	LED pylon	5500	Neutral	Cold White	A+ A++→A
97CANCUNRGB/NE	F	LED pylon	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 400X600

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

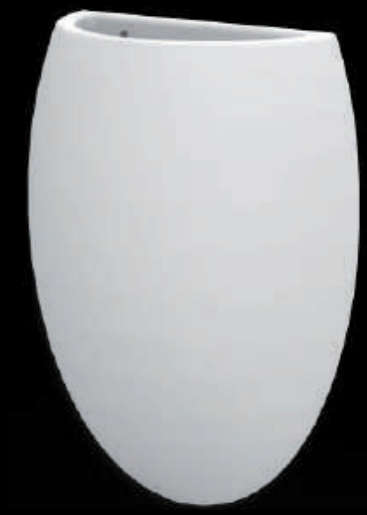

GENEVA
97GENEVA27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POT GENEVA

Catalogue number	Product category	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97GENEVA27/NE	F	LED flower pot	3000	Neutral	Warm White	A+ A++→A
97GENEVA64/NE	F	LED flower pot	5500	Neutral	Cold White	A+ A++→A
97GENEVARGB/NE	F	LED flower pot	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions: DxH: (mm): 400X600

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







NICE
97NICE10527/N

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POT NICE

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97NICE10527/N	F	**LED flower pot**	3000	Neutral	Warm White	A+ A++→A
97NICE10564/N	F	**LED flower pot**	5500	Neutral	Cold White	A+ A++→A
97NICE105RGB/N	F	**LED flower pot**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin |Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions : LxWxH (mm): 500x500x1050

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.





SYDNEY
97SYDNEY27/N

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POT SYDNEY

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97SYDNEY27/N	F	**LED flower pot**	3000	Neutral	Warm White	A+ A++→A
97SYDNEY64/N	F	**LED flower pot**	5500	Neutral	Cold White	A+ A++→A
97SYDNEYRGB/N	F	**LED flower pot**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin |Shockproof | Frost and heat resistant | UV Resistant| Inside pot not included | Light source: Rechargeable LED bases | Dimensions DxH (mm): 510x1050

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



BERN
97BERN27/N

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POT BERN

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97BERN27/N	F	**LED flower pot**	3000	Neutral	Warm White	A+ A++→A
97BERN64/N	F	**LED flower pot**	5500	Neutral	Cold White	A+ A++→A
97BERNRGB/N	F	**LED flower pot**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions LxWxH (mm): 500x500x480

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.







FLORENCE
97FLORENCE27/N

LED | IP65 | MADE IN ITALY | DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POT FLORENCE

Catalogue number TYPE 65	Product category	Type	Light source colour temp. (K)	Body colour	Glowing in	Energy class
97FLORENCE27/N	F	**LED flower pot**	3000	Neutral	Warm White	A+ A++→A
97FLORENCE64/N	F	**LED flower pot**	5500	Neutral	Cold White	A+ A++→A
97FLORENCERGB/N	F	**LED flower pot**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.

Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Inside pot not included | Light source: Rechargeable LED bases | Dimensions DxH (mm): 650x700

RoHS COMPLIANT | CE | 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



SIENA
97SIENA27/NE



ELBA
97ELBA27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POTS SIENA & ELBA

Catalogue number SIENA	Product category	Catalogue number ELBA	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97SIENA27/NE	F	**97ELBA27/NE**	**LED flower pot**	3000	Neutral	Warm White	A+ A++→A
97SIENA64/NE	F	**97ELBA64/NE**	**LED flower pot**	5500	Neutral	Cold White	A+ A++→A
97SIENARGB/NE	F	**97ELBARGB/NE**	**LED flower pot**	RGBW	Neutral	RGBW	A+ A++→A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions SIENA: LxWxH (mm): 740x780x610 | Dimensions ELBA: LxWxH (mm): 570x330x610

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.


HOME



LUGANO
97LUGANO27/NE



LUSON
97LUSON27/NE

LED IP65 MADE IN ITALY DIMMABLE RGBW

UNTIL SUPPLY LAST

RECHARGEABLE FLOWER POTS LUGANO & LUSON

Catalogue number LUGANO	Product category	Catalogue number LUSON	Type	Light source colour temp (K)	Body colour	Glowing in	Energy class
97LUGANO27/NE	F	**97LUSON27/NE**	LED flower pot	3000	Neutral	Warm White	A+ A++⇨A
97LUGANO64/NE	F	**97LUSON64/NE**	LED flower pot	5500	Neutral	Cold White	A+ A++⇨A
97LUGANORGB/NE	F	**97LUSONRGB/NE**	LED flower pot	RGBW	Neutral	RGBW	A+ A++⇨A

Rechargeable LED



Remote control



Charger



All glowing products are equipped with remote control and charger German type

At our website www.elmarkholding.eu you would find a video clip showing each product lighted.
Material: Resin | Shockproof | Frost and heat resistant | UV Resistant | Light source: Rechargeable LED bases | Dimensions LUSON: LxWxH (mm): 900x290x770 | Dimensions LUGANO: LxWxH (mm): 610x280x770

RoHS COMPLIANT CE 3+2 standard +extended 5 YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ENERGY EFFICIENCY LABELS

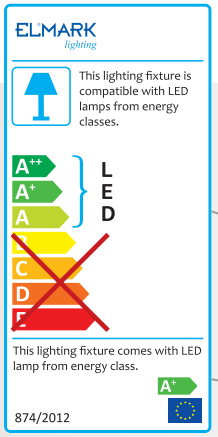

The information in brackets at the centre of the label indicates which lamps may be used for the luminaire. In this case, the product is only compatible with lamps with an energy efficiency rating of better than B.

If lamps are included with the luminaire, their energy classes are indicated at the bottom of the label.

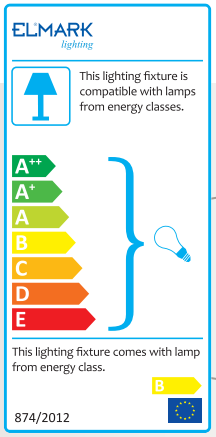

The information in brackets at the centre of the label indicates which lamps (which EEI) may be used for the luminaire. In this case, the product is compatible with lamps with all energy efficiency ratings.

If lamps are included with the luminaire, their energy classes are indicated at the bottom of the label.

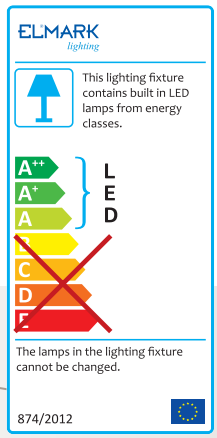

This label indicates that the luminaire is sold with built-in LED lamps that cannot be replaced by the consumer himself.

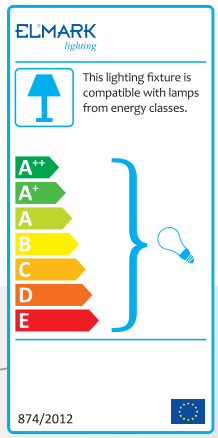

This label indicates that no lamps are included with the luminaire. Consumers are free to choose their preferred lamp within the indicated energy classes.

INDICATES, WHICH LAMPS MAY BE USED FOR THE LUMINAIRE.

A++→A

The product is compatible with LED boards with energy efficiency - A... A++. The Luminaire contains highly efficient LED boards (cannot be replaced by the end consumer)

A+ A++→A

The product is compatible with LED boards with an energy efficiency rating - A...A++. The Luminaire contains highly efficient lamp A+.

A A++→E

The product is compatible with lamps with an energy efficiency rating - E... A++.
The Luminaire contains highly efficient lamp A.

B A++→B

The product is compatible with lamps with an energy efficiency rating - B... A++.
The Luminaire contains highly efficient lamp B.

A++→B

The product is compatible with lamps with an energy efficiency rating - B... A++.

A++→C

The product is compatible with lamps with an energy efficiency rating - C... A++.

A++→D

The product is compatible with lamps with an energy efficiency rating - D... A++.

A++→E

The product is compatible with lamps with an energy efficiency rating - E... A++.

A++ A+ A

incl. efficient LED lamps

B C

incl. efficient fluorescent lamps

D E

incl. halogen lamps

HOW TO USE OUR CATALOGUE



VEGA

410

AREA LIGHTING

VEGA

Catalogue number	Model	Watt (W)	Lamp	Whole fixture lumens (lm)	Colour temp. (K)	Socket	Colour body	Length (mm)	Width (mm)	Height (mm)	Energy class
989007LED	VEGA J-78	5.5	LED	440	4000	R7s	white	200	145	120	A+ A++-A
989010LED	VEGA J-118	7.5	LED	700	4000	R7s	white	250	210	230	A+ A++-A
989009LED	VEGAJ-78	5.5	LED	440	4000	R7s	grey	200	145	120	A+ A++-A
989012LED	VEGA J-118	7.5	LED	700	4000	R7s	grey	260	210	230	A+ A++-A
989008LED	VEGAJ-78	5.5	LED	440	4000	R7s	black	200	145	120	A+ A++-A
989011LED	VEGA J-118	7.5	LED	700	4000	R7s	black	250	210	230	A+ A++-A
989017LED	VEGA J-78 with sensor	5.5	LED	440	4000	R7s	white	210	145	120	A+ A++-A
989019LED	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	white	260	210	230	A+ A++-A
989018LED	VEGA J-78 with sensor	5.5	LED	440	4000	R7s	grey	210	145	120	A+ A++-A

incl. highly efficient LED lamps from energy class A+
This luminaire can be used with lamps from the indicated energy classes.

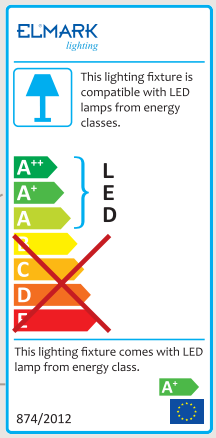



LED PEAR

303

LAMPS

LED PEAR

Catalogue number	Watt (W)	LED lamp lumens (lm)	Colour temp. (K)	Colour of light	Beam angle	Length (mm)	Diameter (mm)	Energy class
99LED588	12	960	4000	white	240°	127	67	A+
99LED587	12	960	2700	warm white	240°	127	67	A+
99LED582	12	960	4000	white	180°	127	67	A+
99LED581	12	960	2700	warm white	180°	127	67	A+
99LED721	15	1200	4000	white	180°	153	80	A+
99LED722	15	1200	2700	warm white	180°	153	80	A+

Energy efficiency labels

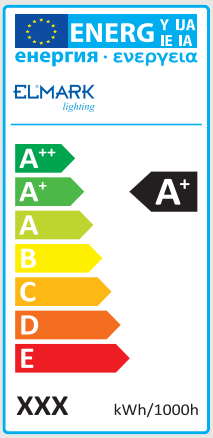

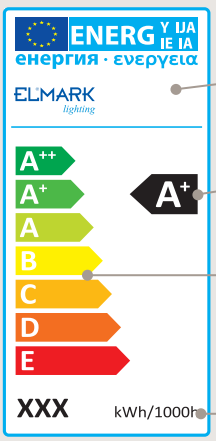

Supplier's name or trade mark
Supplier's model identifier

Energy efficiency class of the appliance

Coloured arrows are used to differentiate energy efficient from less energy efficient products: dark green indicates a highly efficient product and red a low efficiency product.

Annual energy consumption in kWh

SYMBOLS USED IN THE CATALOGUE

Protection class

The protection class indicates to what extent the lamp is protected against electric shock. All lamps in this catalogue are at least protected with the protection class 1 - a higher class is specified in the information box of the respective lamp.

protection class 1:
protective earthing

protection class 2:
protective insulation

protection class 3:
protective low voltage

Protection rating

The protection rating ensures the operational safety of luminaires. The first number specifies the extent of the protection against the ingress of foreign bodies; the second number identifies the humidity protection grade. All luminaires in this catalogue are at least protected with the rating IP20 – a higher rating is specified in the information box of the luminaire.

IP 20 IP 21 IP 30 IP 44
IP 54 IP 64 IP 65 IP 67

Beam angle

The beam angle describes the „light cone" emitted by a directional illuminant. It corresponds to the angle at which the luminous intensity is 50% of the centre beam intensity. An illuminant is called directional if at least 80% of its light output is within a cone with an angle of 120°.

36° 60° 90° 120°
160° 180° 300° 120° SENSOR

Average lifetime

The average lifetime of illuminants describes the time after which 50% of a number of illuminants has failed. For LED illuminants, the average lifetime is defined by a lumen maintenance of 70%.

30000h Average lifetime

Colour rendering index

Colour rendering index (CRI) is a measure of a light source's ability to show object colours "realistically" or "naturally". Can take values from 0 to 100.

Ra>70 Ra>80 Ra≥80 Ra≥82

Dimmable

Light sources labelled as "dimmable" can be dimmed with a suitable commercially available dimmer. The dimmable range for LED might be restricted. If the sign is crossed the illuminant is not dimmable.

Dimmable Non-dimmable

Warm-up time (60 %) (s)

Time for warming the lamp up to 60% of its full luminous flux (if the time is less than 1 second, it can be indicated as „instant full light").

INITIAL LIGHT < 0,05 s
INITIAL LIGHT < 2 s

Number of switches

Number of commutations until the untimely failure of lamp.

10000 >100000 >10000

Mercury content

The content of Mercury in the lamp. If there is Mercury, this is shown as follows <X.X mg.

Hg < X.X mg

SMD LED

SMD is a type of LED module that use Surface mount technology (SMT) to mount LED chips on printed circuit boards (PCB). SMD LED modules are widely used for backlighting, home illumination, shop-windows, advertising, automobile interior lighting, Christmas lights etc.

SMD SMD 3014 SMD 3528 SMD 5050

COB LED

COB (Chips on Board) , is a new technology of LED packaging for LED light engine. Multi LED chips are packaged together as one lighting module. When it light up, it looks like a lighting panel.

COB COB BRACKET Type of diode

High power LED

HIGH POWER LED - a certain number of single diodes with small power - usually 1W, connected in a specific way, and mounted in one body covered by optics (lens). They are used in light sources and lighting fixtures with small beam angle and high luminous intensity.pe of diode

High power

LAMP BASE


E14


E27


E40


GU10


G4


GU5.3


G9


G13


G5


G12


R7s


Rx7s


G24d


G23


2G11

IMPORTANT: LED luminaires and lamps must not be connected in an electrical circuit, together with luminaires for discharge lamps

- EU directive compatibility mark
- Mounting on the normal flammable base
- Restriction of Hazardous Substances Directive
- Electromagnetic compatibility
- Adapted for 230V power supply
- Adapted for 230V direct current power supply
- Adapted for 230V via suitable power supply (transformer/ballast/driver)
- Adapted for 12V power supply
- Adapted for 12V direct current power supply
- Adapted for 12V alternating current power supply
- Adapted for 12V alternating/direct current power supply
- Power supply frequency
- Power supply (transformer/ballast/driver) included
- Power supply (transformer/ballast/driver) not included
- The plug is included in the set
- Light source power
- Light source current

- PLC LED lamp
- PLC non - integrated compact fluorescent lamp 2 pin
- PLC non - integrated compact fluorescent lamp
- Compact fluorescent lamp
- GU10 LED lamp
- GU10 halogen bulb
- MR16 LED lamp
- MR-16 halogen bulb
- G-9 halogen bulb
- JC halogen bulb
- MH-7 metal halide lamp
- MH-40 metal halide lamp
- T5 linear fluorescent lamp
- T5 linear fluorescent lamp included in the product
- T8 linear LED lamp
- T8 linear fluorescent lamp
- T8 linear fluorescent lamp included in the product

- Minimum distance from the illuminated object
- Ground mounting
- Wall mounting
- Ceiling mounting
- Wall and ceiling mounting
- For outdoor use
- For indoor use
- For outdoor and indoor use
- Fixed fitting
- Movable fitting
- Reel length
- Triple rail terminal block 2.5mm²
- Triple rail terminal block 2.5mm²
- Switch ON / OFF
- Do not touch with bare hands

COLOUR TEMPERATURE

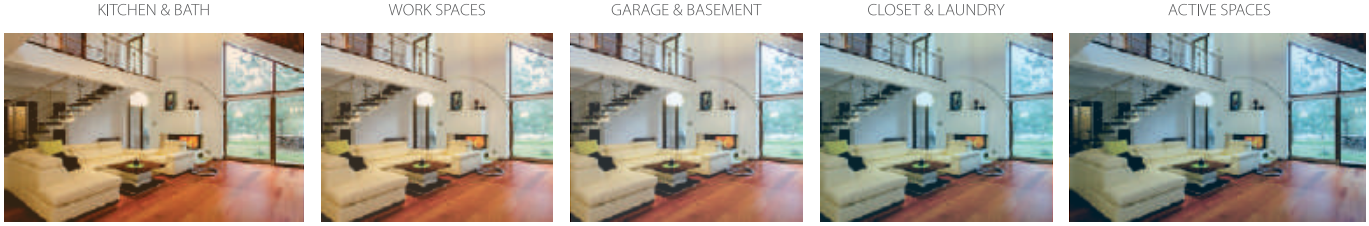

3000K
warm white colour
warm colour tone

3500K
natural white colour
natural colour tone

4100K
neutral white colour
neutral colour tone

5000K
sunshine colour
cool colour tone

6500K
daylight colour
cold colour tone

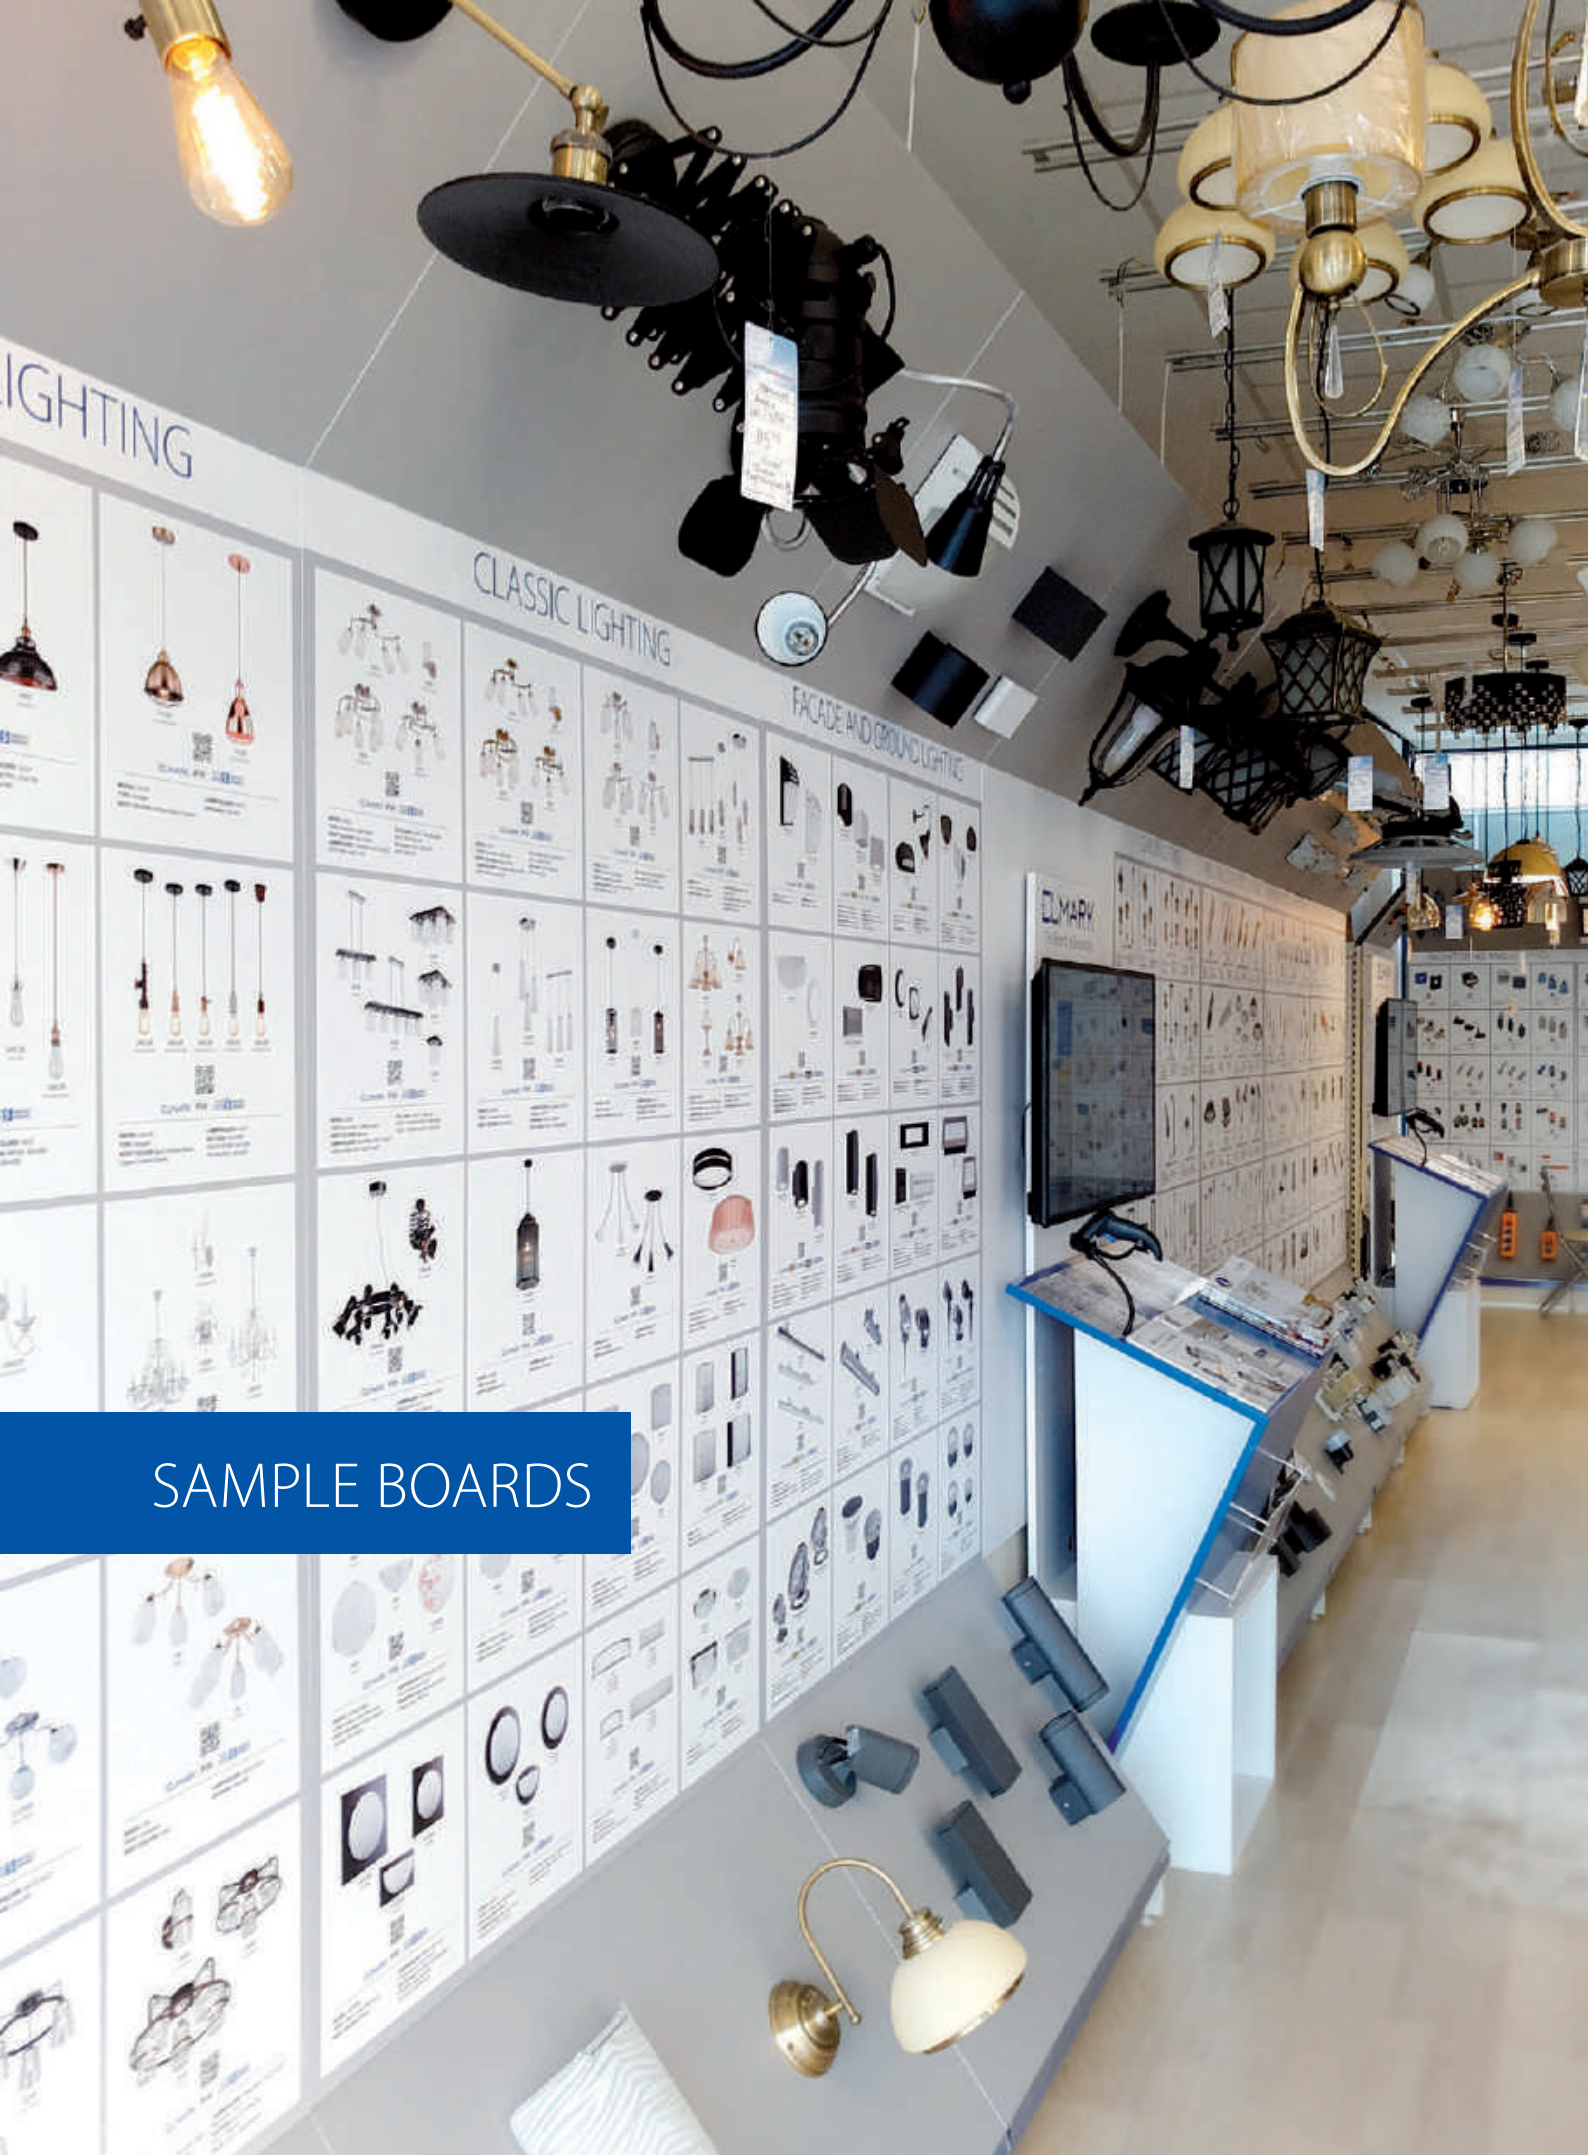

SAMPLE BOARDS



1. Modern & Lux Lighting
Cat. number: 800510



2. Modern & Lux Lighting
Cat. number: 800511



3. Design & Crystal Lighting
Cat. number: 800512



4. Design & Vintage Lighting
Cat. number: 800513



5. Vintage & Classic Lighting
Cat. number: 800514



6. Classic Lighting
Cat. number: 800515



7. Table, Floor & Spot
Cat. number: 800516



8. LED Panels
Cat. number: 800517



9. Spotlights
Cat. number: 800518



10. Luminaires & Bathroom
Cat. number: 800519



11. LED Profiles & LED Strips
Cat. number: 800520

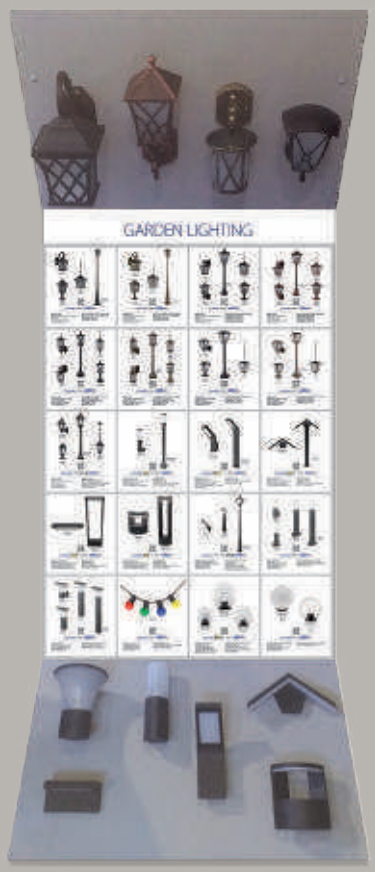

12. Garden Lighting
Cat. number: 800521



13. Facade And Ground Lighting
Cat. number: 800522



14. Waterproof & Flood Lights
Cat. number: 800523



15. Industrial, Solar Lights & Sensors
Cat. number: 800524



16. LED Bulbs
Cat. number: 800525



17. LED Bulbs
Cat. number: 800526



18. Circuit breakers
Cat. number: 800527



19. Contactors & Protection Devices
Cat. number: 800528



20. Control & Protection
Cat. number: 800529



21. Monitoring & Control
Cat. number: 800530



22. Installation
Cat. number: 800531

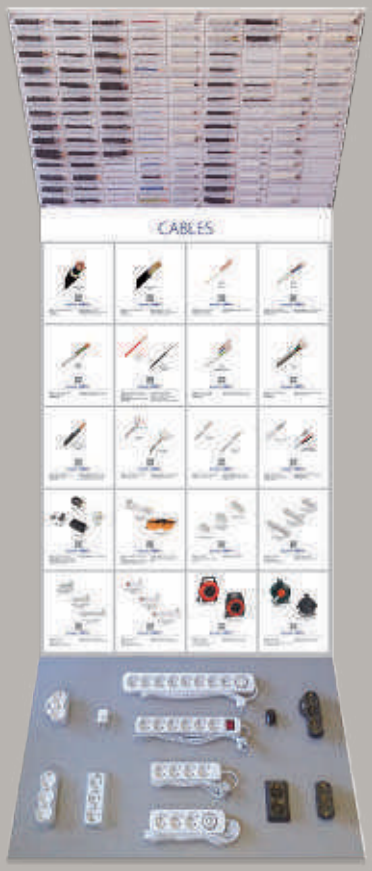

23. Cables
Cat. number: 800532



24. Cable Accessories
Cat. number: 800533



25. Cable Accessories & Tools
Cat. number: 800534



26. Tools & Accessories
Cat. number: 800535



27. Smart & Home Control
Cat. number: 800536

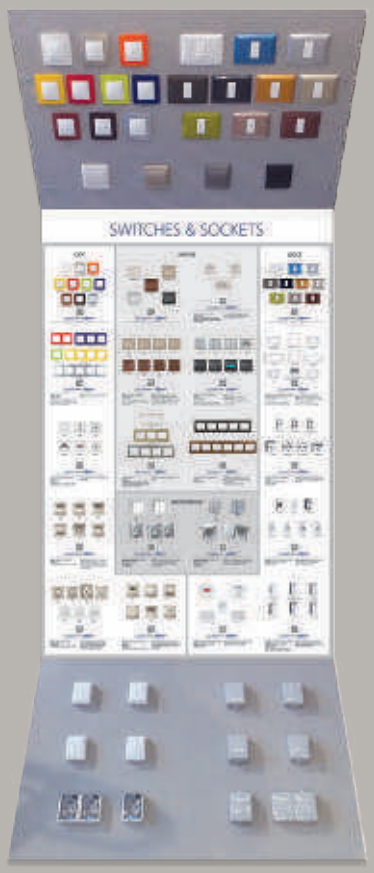

28. Switches & Sockets
Cat. number: 800537



29. Ventilation
Cat. number: 800539



30. Flashlights & Tools
Cat. number: 800541



31. LED Furniture
Cat. number: 800542

LIGHTING
CLASSIC LIGHTING
FACADE AND GROUND LIGHTING
ELMARK

ELMARK®
www.elmarkholding.eu

ELMARK FRANCHISE

OPEN YOUR OWN ELECTRICAL STORE

ONLY 10,000€ * INVESTMENT



* ELMARK reserves its right to determine its own franchising policy regarding each country.

ESTABLISHED BRAND

EASY START

LOW INVESTMENT

REGISTER NOW

OUR RESPONSIBILITIES FUNDED BY ELMARK

- Design and equip your store
- Define product portfolio
- Manage inventory and availability
- Plan your stock orders
- Deliver your stock orders
- Advertise your store

YOUR RESPONSIBILITIES FUNDED BY YOU

- *Choose and rent the property*
- *Hire and lead the store staff*
- *Attract, serve and retain clients*

THE BENEFITS YOU GAIN:

TRAINING PROGRAM

Our training program is developed to transform you into a successful owner of your ELMARK store.

We provide PAPER / ONLINE / IN-STORE training that will cover all aspects of your business, up-to-date information about ELMARK, new products, the introduction of new sales techniques, trends in global and local trade.

COMMERCIAL SUPPORT

It is your flying start,a successful store and business concept, store design, training, marketing support and what is more the exclusive opportunity to distribute ELMARK products across the defined territory at exclusive prices. The dedicated franchise manager will walk beside you, answer your questions, suggest proven beneficial practices, he will guide and protect you.

"There is one rule that is common for the success across all markets around the world – to offer quality goods at balanced prices and to follow a consistent, straightforward and 'win-win' commercial policy"

Jelez Georgiev, CEO

TRAINING PROGRAM

As a member of ELMARK family you have a significant buying and negotiating power thus saving money on equipment, supplies and marketing activities

DESIGN & MERCHANDISING

We aim to provide a meaningful end-to-end customer experience and we regard the exterior and interior of our stores of great importance to the positive influence on our clients. The concept of the store aims to guarantee the effectiveness of ELMARK product presentation and decision making.

All ELMARK stores bear unified identity, easily recognized by our clients worldwide.

We provide full support in setting up your ELMARK store, funded by ELMARK.

MARKETING

We identify and understand our customers, their habits and motivation. You will benefit timely, innovative and attention-aware advertising campaigns that connect with customers and deepen their relationship with ELMARK brand and our products.






ELMARK
www.elmarkholding.eu

DISPLAY WORKSTATION



Cat. number: 800249

DISPLAY ALL ELMARK PRODUCTS

and latest marketing campaigns

GAIN MORE SALES

and optimize your day-to-day operations

SCAN ANY QR CODE ON THE CATALOGUE OR ON THE BOARD WITH SAMPLES

CHECK AVAILABILITY AND DELIVERY TERMS

ADD TO BASKET

LEARN ABOUT ALL CURRENT ELMARK ADVERTISEMENTS

SIZE	Length (m)	Width (m)	Height (m)	Weight (kg)
	0,91	0,67	2	52

E-BUSINESS PLATFORM

LOWER OPERATING COSTS

FASTER ORDER FULFILLMENT

REACH NEW CUSTOMERS

A SEAMLESS PLATFORM

from ordering, payment, shipping and tracking

TO 24/7 CUSTOMER SERVICE

and technical support



ELMARK®

The Brand of Electricity

Mobile app for users on the GO!

1. Download the App
2. Scan the QR code in the catalogue for product information
3. Order quick & easy

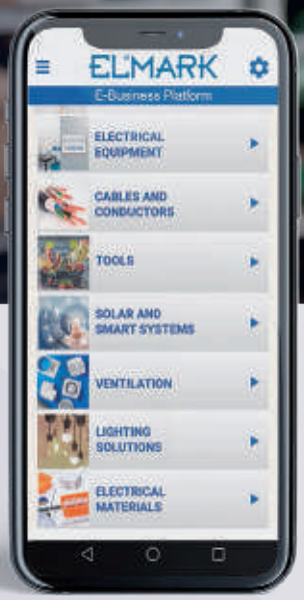

ELMARK Store

/For all customers/

- Shopping without registration
- Discounts with registration
- All benefits of the site
- Scan a QR code & buy a product

*Visit **elmarkstore.eu** or download ELMARK Store from:*

GET IT ON Google Play

Download on the App Store

BUSINESS partners

- Designers & Projectors
- Construction companies
- Installation companies
- Electrical & lighting traders

*Visit **elmarkholding.eu** or download ELMARK BUSINESS from:*

GET IT ON Google Play

Download on the App Store